Figure 6a reproduction: minimum vs provider-default settings

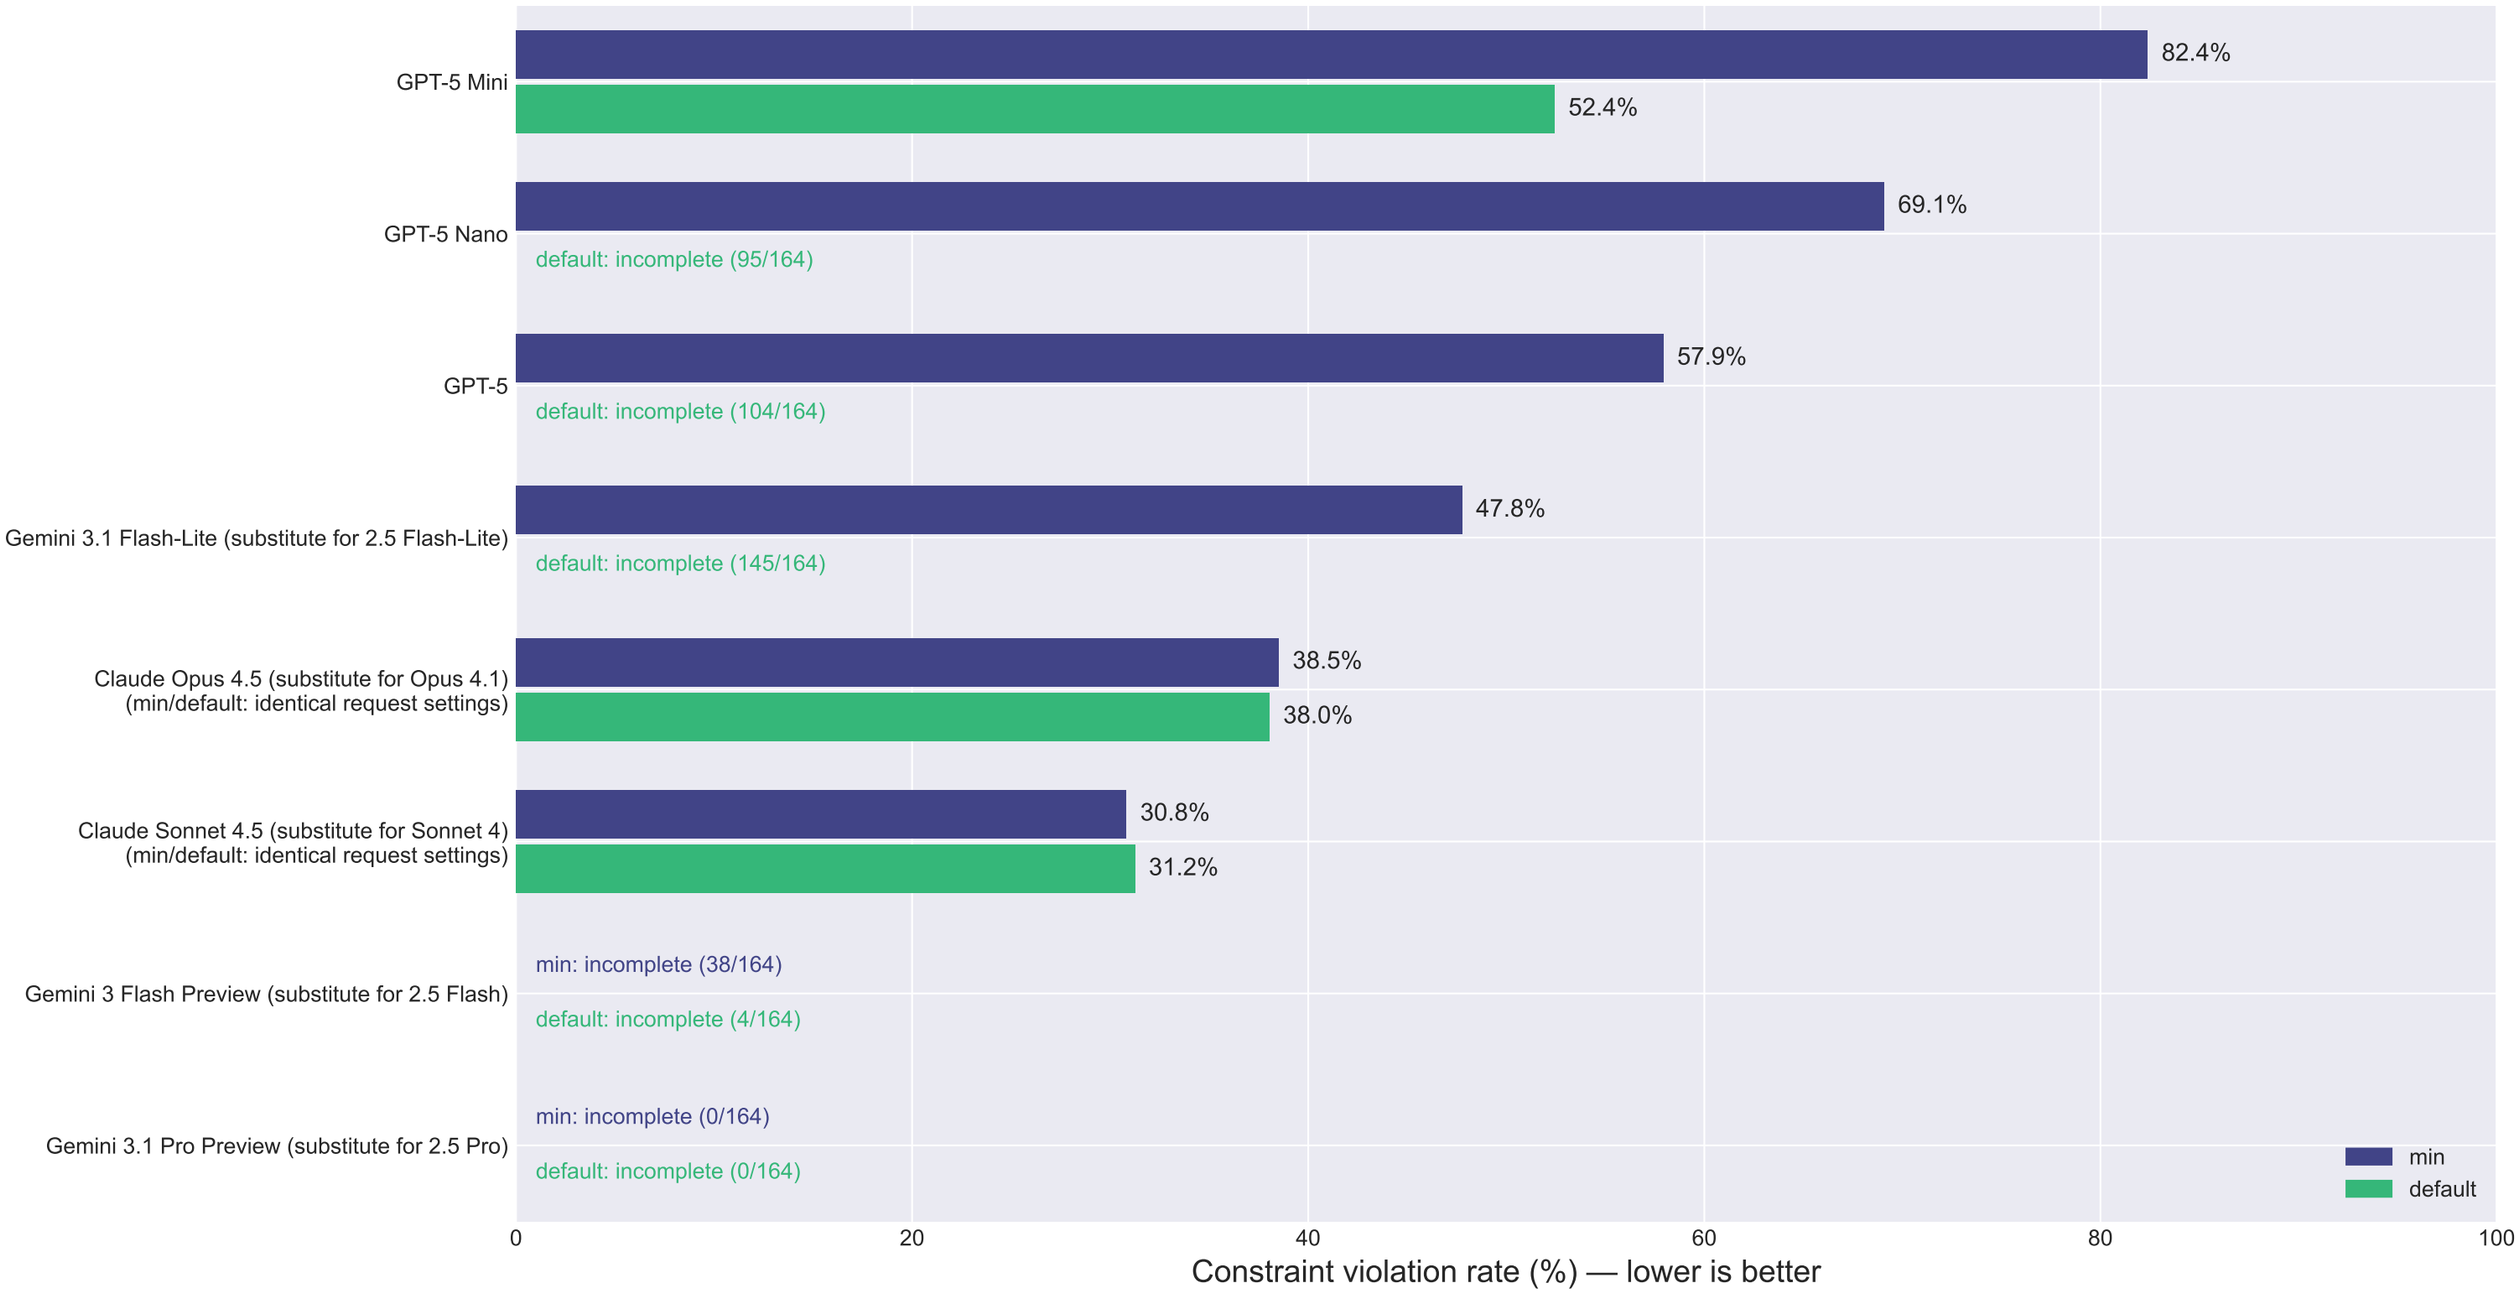

Rates require 164/164 responses; malformed replies excluded. Incomplete conditions show counts only.
Claude min/default send identical parameters; bars are independent repeated samples, not different reasoning budgets.
Mini uses system/user roles in both runs; other pairs use user-only roles. Explicit-budget candidates are excluded.
Gemini and Claude successors are labeled substitutes. Exact author inference/aggregation settings remain unverified.