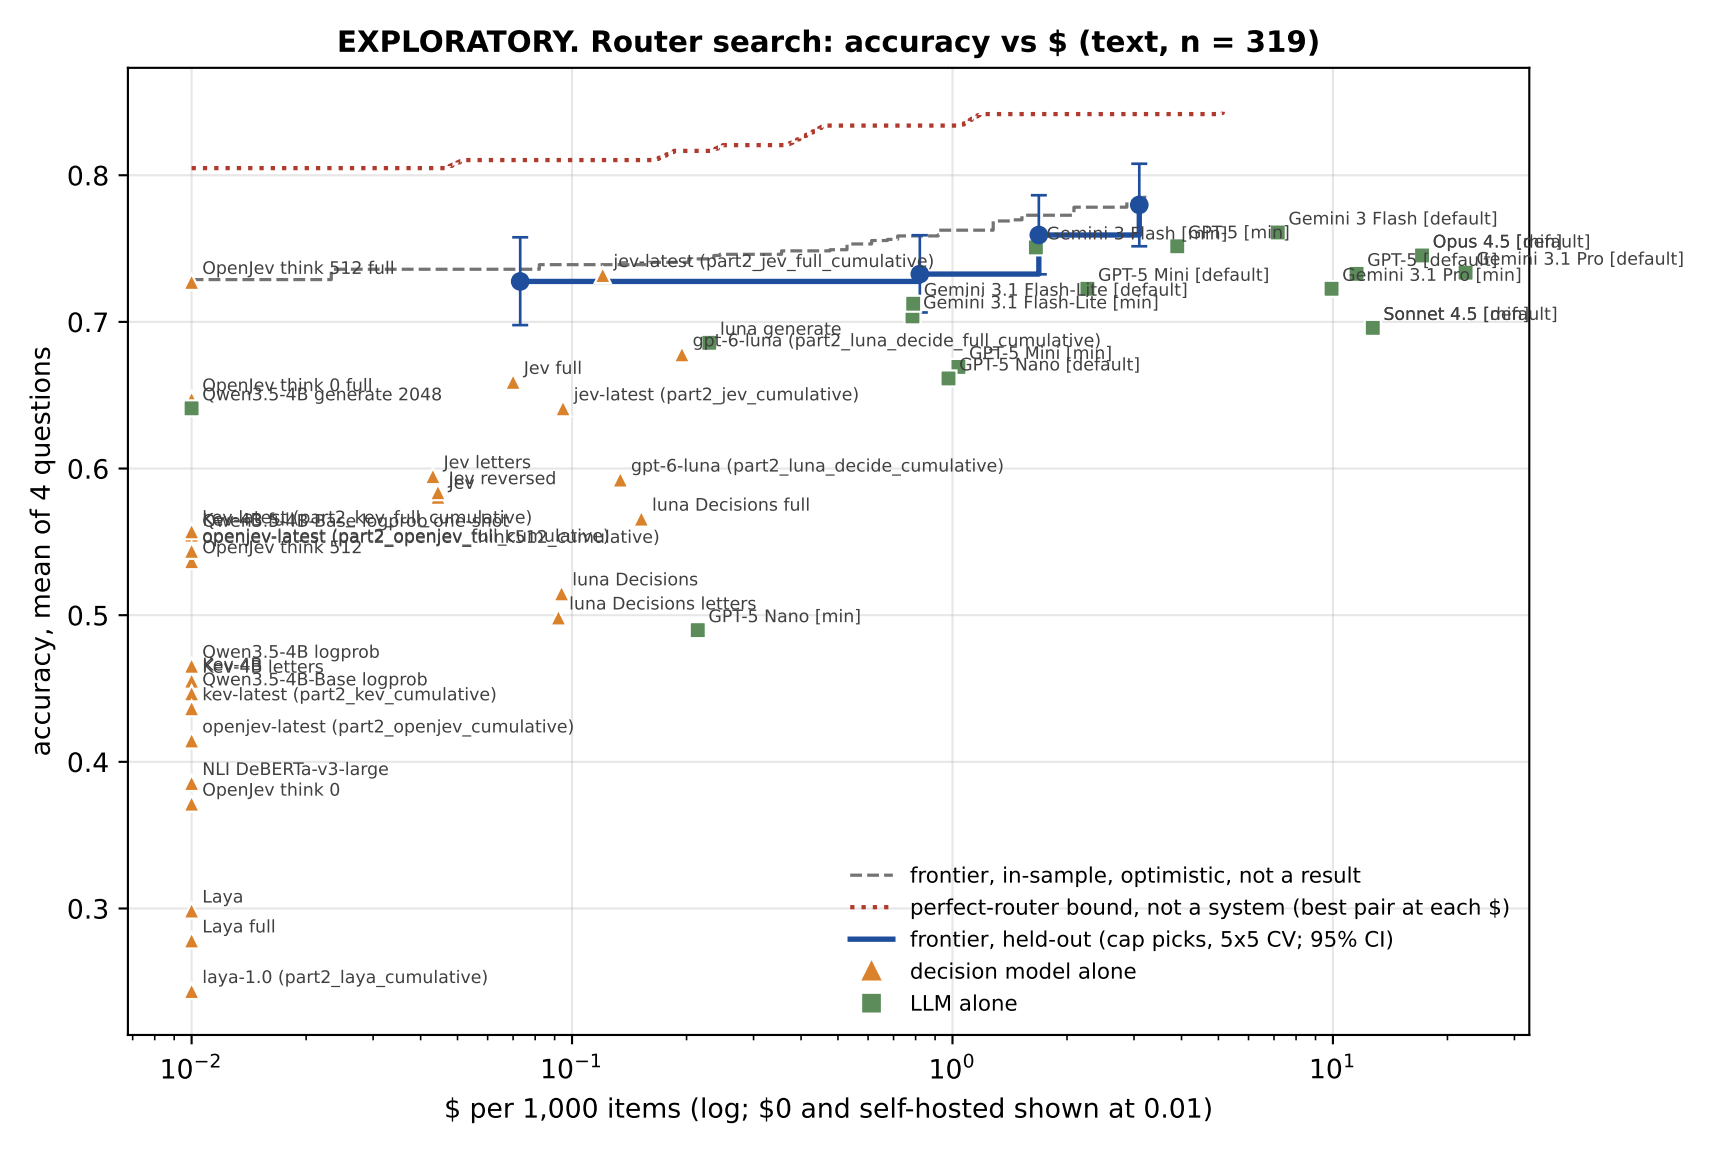
EXPLORATORY. Router search: accuracy vs $ (text, n = 319)
accuracy, mean of 4 questions
$ per 1,000 items (log; $0 and self-hosted shown at 0.01)
0.8
0.7
0.6
0.5
0.4
0.3
10^{-2}
10^{-1}
10^{0}
10^{1}
frontier, in-sample, optimistic, not a result
perfect-router bound, not a system (best pair at each $)
frontier, held-out (cap picks, 5x5 CV; 95% CI)
decision model alone
LLM alone
OpenJev think 512 full
jev-latest (part2_jev_full_cumulative)
luna generate
gpt-6-luna (part2_luna_decide_full_cumulative)
Jev full
OpenJev think 0 full
Qwen3.5-4B generate 2048
jev-latest (part2_jev_cumulative)
Jev letters
Jev reversed
Jev
gpt-6-luna (part2_luna_decide_cumulative)
luna Decisions full
Qwen3.5-4B-Base logprob one-shot
openjev-latest (part2_openjev_full_k512_cumulative)
OpenJev think 512
luna Decisions
luna Decisions letters
GPT-5 Nano [min]
Qwen3.5-4B logprob
Kev-4B letters
Qwen3.5-4B-Base logprob
kev-latest (part2_kev_cumulative)
openjev-latest (part2_openjev_cumulative)
NLI DeBERTa-v3-large
OpenJev think 0
Laya
Laya full
laya-1.0 (part2_laya_cumulative)
Gemini 3 Flash [default]
Gemini 3 Flash [min]
GPT-5 [min]
Opus 4.5 [default]
GPT-5 [default]
Gemini 3.1 Pro [default]
Gemini 3.1 Pro [min]
GPT-5 Mini [default]
Gemini 3.1 Flash-Lite [default]
Gemini 3.1 Flash-Lite [min]
Sonnet 4.5 [default]
GPT-5 Mini [min]
GPT-5 Nano [default]