



- Lab#6 a. Using HTML and CSS, create a bouncing loader animation.**
b. Create a photo gallery with CSS Flex.
c. Apply the Flex property on flex container and flex child.

TAGS USED	ATTRIBUTES USED	DESCRIPTION
<HTML>	—	Defines the root of an HTML document.
<HEAD>	—	Contains metadata, title, styles, and other information about the webpage.
<TITLE>	—	Defines the title of the webpage shown in the browser tab.
<BODY>	BGCOLOR, TEXT, BACKGROUND	Contains the visible content of the webpage. BGCOLOR sets background color, TEXT sets text color, and BACKGROUND sets a background image.
<H1>, <H2>, <H3>, <H4>, <H5>, <H6>	ALIGN	Defines headings from largest (H1) to smallest (H6). ALIGN specifies the alignment of the heading.
	FACE, SIZE, COLOR	Changes the font style, size, and color of text.
<P> (Paragraph)	—	Defines a paragraph of text.
<U> (Underline)	—	Underlines the enclosed text.
<HR> (Horizontal Rule)	WIDTH, COLOR, ALIGN	Creates a horizontal line. WIDTH sets its width, COLOR sets its color, and ALIGN sets its alignment.
 (Break Line)	—	Inserts a line break in the webpage.

Final Outcome:

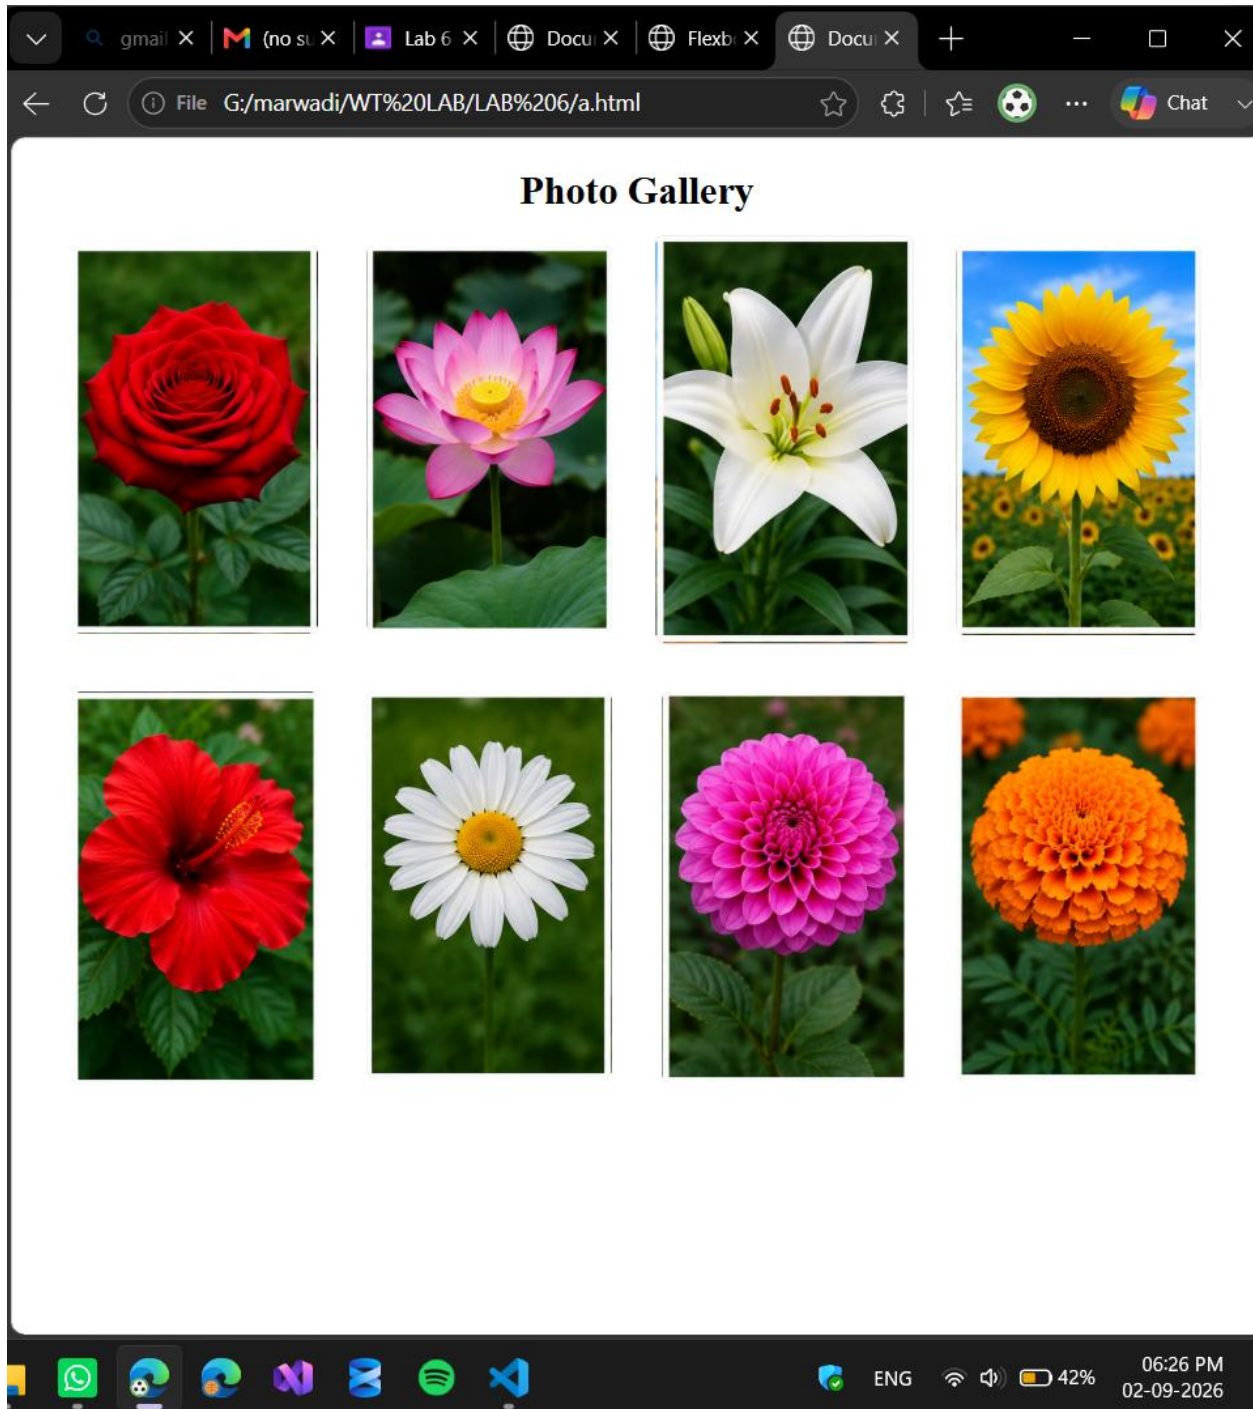

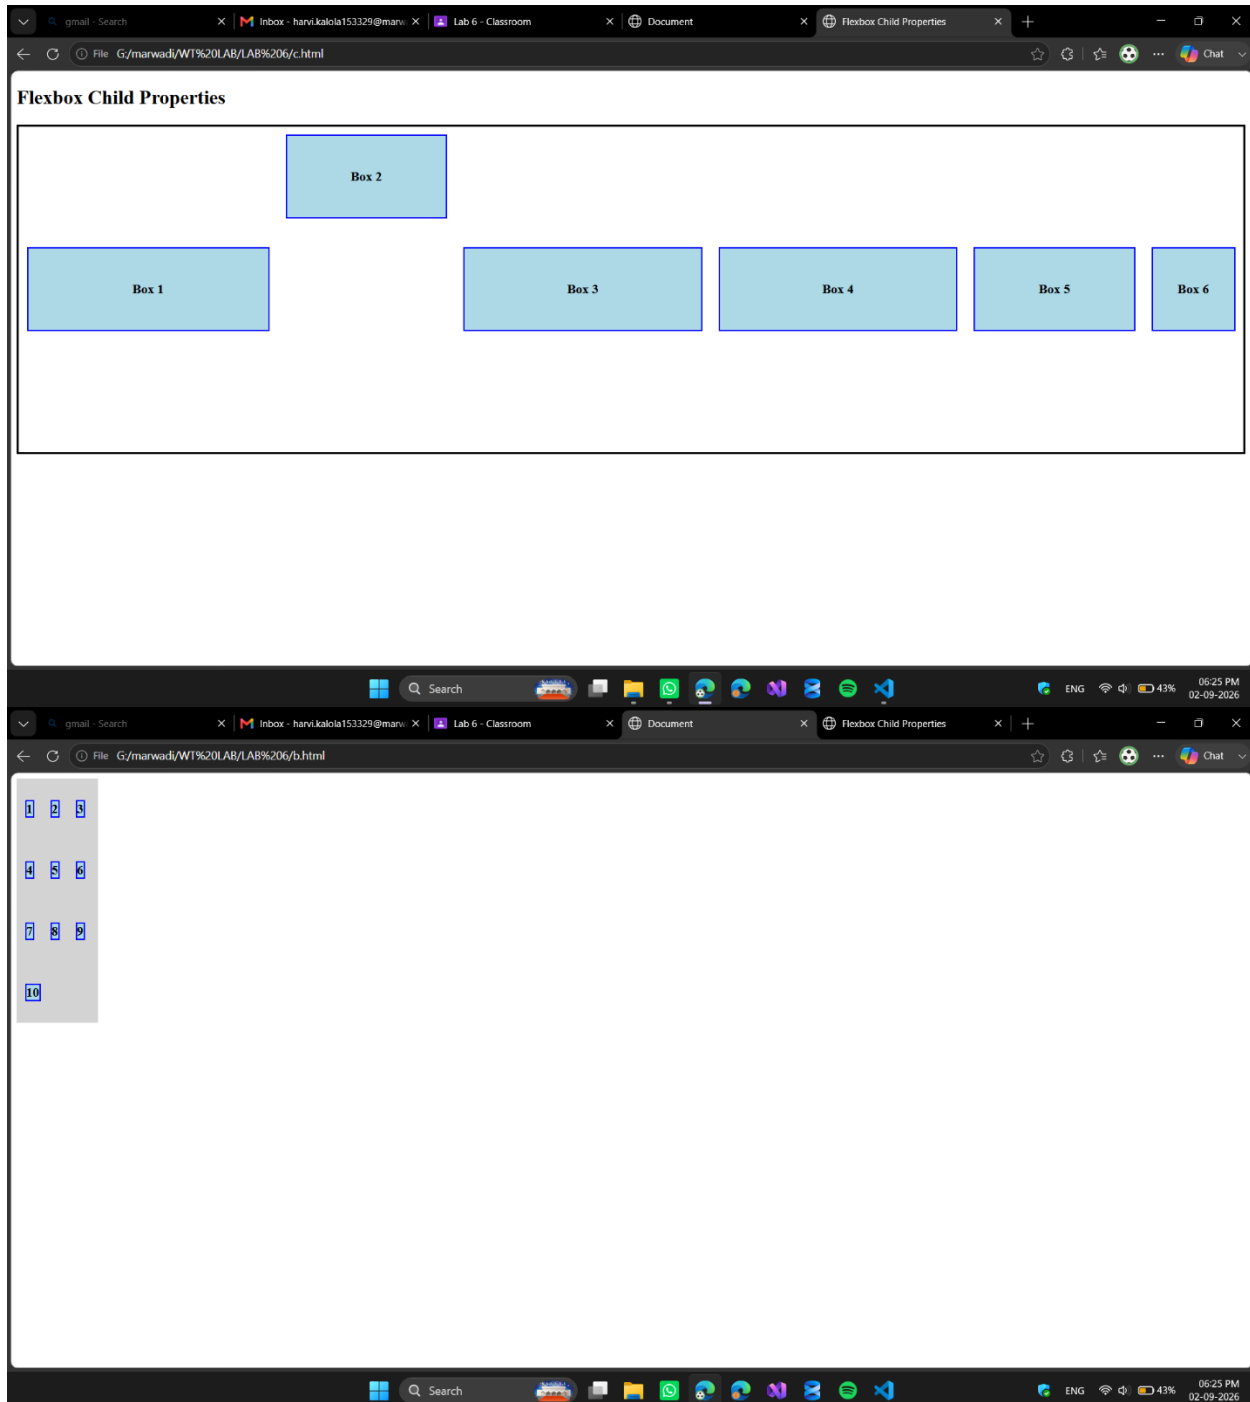




Marwadi
University
Marwadi Chandarana Group



FACULTY OF ENGINEERING AND TECHNOLOGY

Department of Computer Engineering
01CE1306 – Web Technology – Lab #6

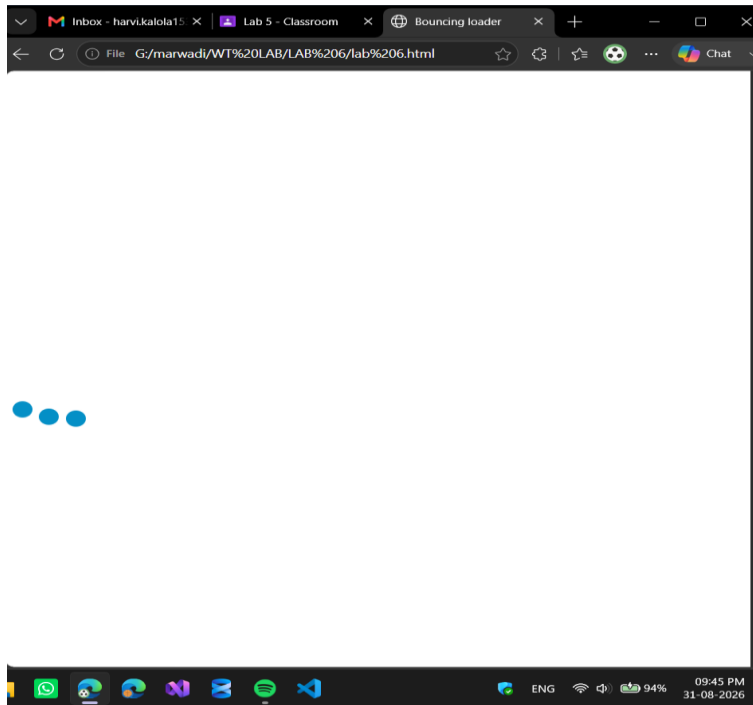

Code Snippet: a. Using HTML and CSS, create a bouncing loader animation

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Bouncing loader</title>
  <style>
    .loader div {
      height: 20px;
      width: 20px;
      background-color: rgb(4, 143, 198);
      border-radius: 50%;
      animation: bounce 0.6s infinite alternate;
    }

    .loader div:nth-child(2) {
      animation-delay: 0.2s;
    }
    .loader div:nth-child(3) {
      animation-delay: 0.4s;
    }
    @keyframes bounce {
      to {
        transform: translateY(20px);
      }
    }

    .loader {
      display: flex;
      justify-content: space-between;
      width: 10%;
      height: 800px;
      align-items: center;
    }
  </style>
</head>
<body>
```

```
<div class="loader">
  <div></div>
  <div></div>
  <div></div>
</div>
</body>
</html>
```

Code Snippet: b. Create a photo gallery with CSS Flex.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
  <style>

  h2{
    text-align: center;
  }
  .photo
  {
    width:20%;
  }
  .photo img{
    width:100%;
    background-color:lightgray;
    border-radius: 5px;
  }
  .photo img:hover
  {
    transform: scale(1.05);
  }
  .gallery
  {
    display:flex;
    gap:30px;
    flex-wrap: wrap;
    justify-content: center;
```

```
}
@media (max-width:700px) {
  .photo
  {
    width: 40%;
  }
}
@media (max-width:400px) {
  .photo
  {
    width: 80%;
  }
}
</style>
</head>
<body>
<h2>Photo Gallery</h2>
<div class="gallery">

  <div class="photo"></div>
  <div class="photo"></div>
  <div class="photo"></div>
  <div class="photo"></div>
  <div class="photo"></div>
  <div class="photo"></div>
  <div class="photo"></div>
  <div class="photo"></div>

</div>
</body>
</html>
```

Code Snippet: c. Apply the Flex property on flex container and flex child.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
  <style>
    .box
    {
      border: 2px solid blue;
      margin: 10px;
      background-color: lightblue;
      text-align: center;
      font-weight: bold;
    }
    .container
    {
      display: flex;
      flex-direction: row;
      justify-content: flex-start;
      background-color: lightgrey;
      height: 300px;
      width: 100px;
      align-items: flex-start;
      flex-wrap: wrap;
      align-content: space-around;
    }
  </style>
</head>
<body>
  <div class="container">
    <div class="box">1</div>
    <div class="box">2</div>
    <div class="box">3</div>
    <div class="box">4</div>
    <div class="box">5</div>
    <div class="box">6</div>
    <div class="box">7</div>
    <div class="box">8</div>
```



```
<div class="box">9</div>
<div class="box">10</div>
</div>
</body>
</html>
```

```
<!DOCTYPE html>
<html>
<head>
<title>Flexbox Child Properties</title>

<style>
.container {
    display: flex;

    height: 400px;
    border: 3px solid black;
    align-items: center;
}
.box {
    width: 100px;
    height: 100px;
    margin: 10px;
    background-color: lightblue;
    border: 2px solid blue;
    text-align: center;
    line-height: 100px;
    font-weight: bold;
}
.box1 {

    flex-grow: 1;
    flex-basis: 200px ;
    flex-shrink: 10;
}
.box2 {
    flex-grow:1;
    align-self: flex-start;
}
```



```
.box3 {  
    flex-grow: 2;  
}  
  
.box4 {  
    flex-grow: 2;  
}  
.box5 {  
  
    flex-grow: 1;  
}  
.box6{  
    flex-shrink: 9;  
}  
  
</style>  
</head>  
  
<body>  
  
    <h2>Flexbox Child Properties</h2>  
  
    <div class="container">  
  
        <div class="box box1">Box 1</div>  
        <div class="box box2">Box 2</div>  
        <div class="box box3">Box 3</div>  
        <div class="box box4">Box 4</div>  
        <div class="box box5">Box 5</div>  
        <div class="box box6">Box 6</div>  
  
    </div>  
  
</body>  
</html>
```