


```
In [1]: %load_ext gnuplot_kernel
```

```
In [2]: %gnuplot inline pngcairo size 640,480 font "Palatino,16"
```

```
In [3]: %%gnuplot
plot sin(x)
set output 'gnuplot.eps'
set terminal postscript eps size 6.4,4.8
replot
```

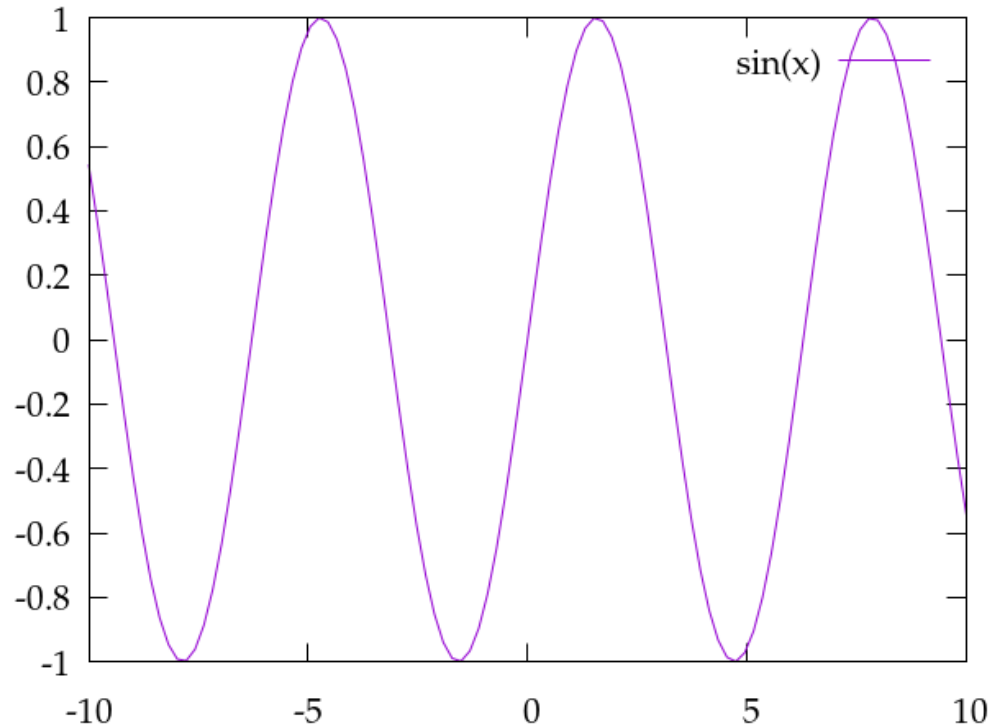

```
set output '/tmp/gnuplot-inline-1548190487.9400332.768350337636.png'
plot sin(x)
set output 'gnuplot.eps'
set terminal postscript eps size 6.4,4.8
```

```
Terminal type is now 'postscript'
Options are 'eps enhanced defaultplex \
  leveldefault monochrome colortext \
  dashlength 1.0 linewidth 1.0 pointscale 1.0 butt noclip \
  nobackground \
  palfuncparam 2000,0.003 \
  noadobeglyphnames \
  size 6.40in, 4.80in "Helvetica" 14 fontscale 1.0 '
set output '/tmp/gnuplot-inline-1548190487.940138.210004552980.png'
replot
unset output
```

```
In [4]: %%bash
ls -la gnuplot.eps
-rw-r--r-- 1 esternin LinuxEmployees 0 Jan 22 15:43 gnuplot.eps
```

```
In [5]: %%gnuplot postscript eps size 6.4,4.8
```

```
In [6]: %%gnuplot
set output 'gnuplot.eps'
plot cos(x)

set output 'gnuplot.eps'
plot cos(x)
```

```
In [7]: %%bash
ls -la gnuplot.eps
-rw-r--r-- 1 esternin LinuxEmployees 25927 Jan 22 15:54 gnuplot.eps
```