

# High-Dimensional Semi-Quantum Cryptography

Hasan Iqbal, Walter O. Krawec

Computer Science and Engineering, UConn



## Objectives

# Can we have unconditional communication security with limited uantum resource?

- Bridge the gap between classical and quantum realm.
- Use less expensive uantum hardwares.
- Fallback option for fully-fledged quantum key distribution.

#### Motivation

- Perfect security is impossible with all-classical capabilities but possible with quantum resources.
- High-dimensional QKD offers better protection.
- Using HD-resources in SQKD provides advantages.

# What is Quantum Key Distribution

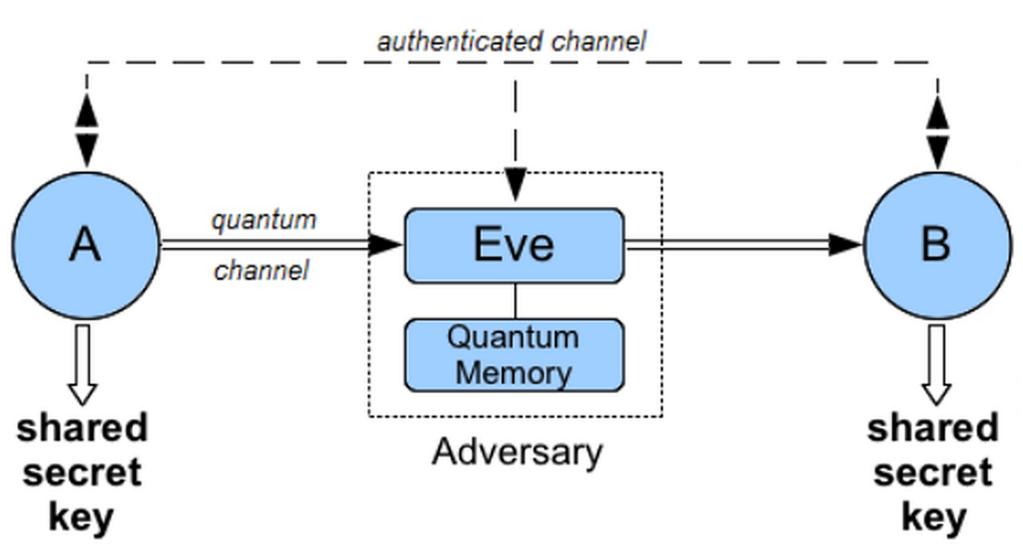


Figure: Quantum Key Distribution

- Alice (A) sends her friend Bob (B) information via Qubits through Quantum channel.
- Adversary Eve (E) can attack the channel in various ways.
- A and B communicates classically to produce a shared key.
- The key is secure as long as E does not know 'too much' about it.

## What is High-Dimensional SQKD

- High-Dimensional qudits instead of traditional qubits.
- More information transmitted in each iteration.
- Robust against quantum cloning.
- Better noise resistance.

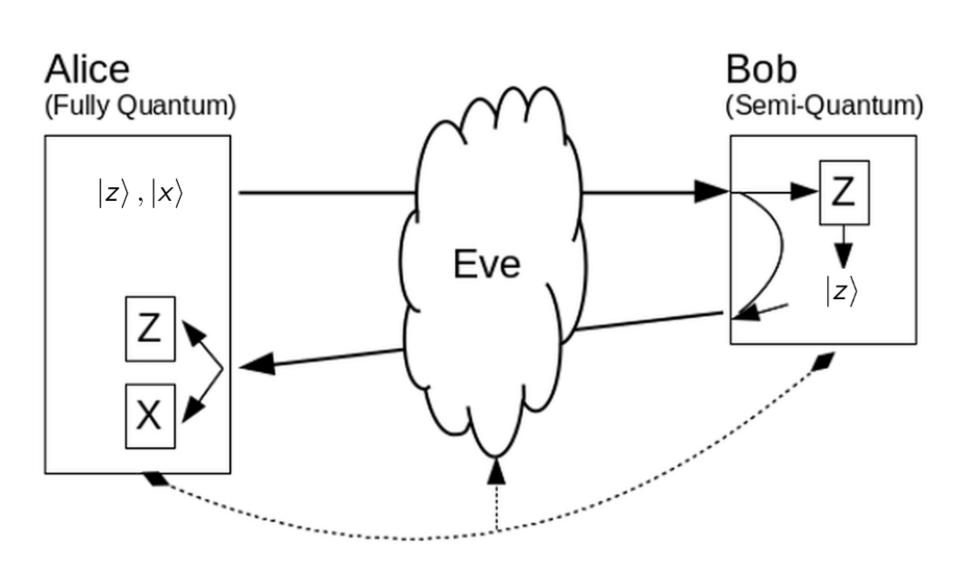


Figure: HD-SQKD

### Reduction

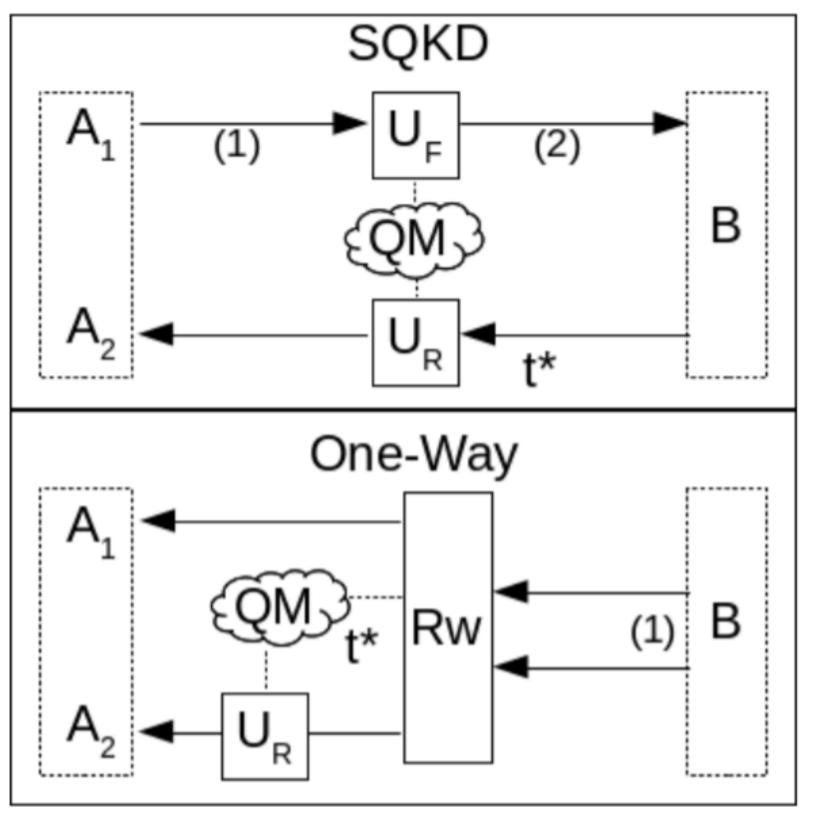


Figure: Convert two-way attack to one-way

# **Important Result**

High-dimensional SQKD offers the best key-rate so far. Proof technique developed here is applicable to other quantum key distribution protocols.

# **Simplified Protocol**

#### **HD-SQKD**

### **OW-SQKD**

or Meas

- 1. A prepares  $|z\rangle$  or  $|x\rangle$ , 1. Bob prepares and sends sends to Bob two states depending on his choice of whether MR
- 2. Eve attacks the forward 2. Eve attacks only once channel
- 3. Bob measures/resends 3. Alice measures in two or reflects basis
- 4. Eve attacks the reverse channel

# 5. Alice measures returning qubits.

#### **Evaluation**

- Noise tolerance: How much disturbance in the channel can the protocol withstand.
- How does it compare to a famous fully quantum HD-QKD protocol.

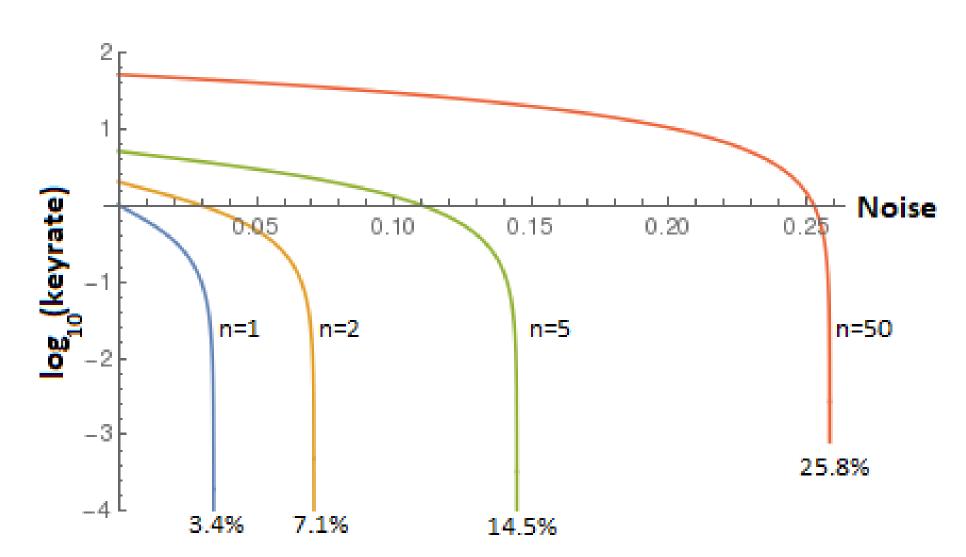


Figure: Noise Tolerance in different dimensions

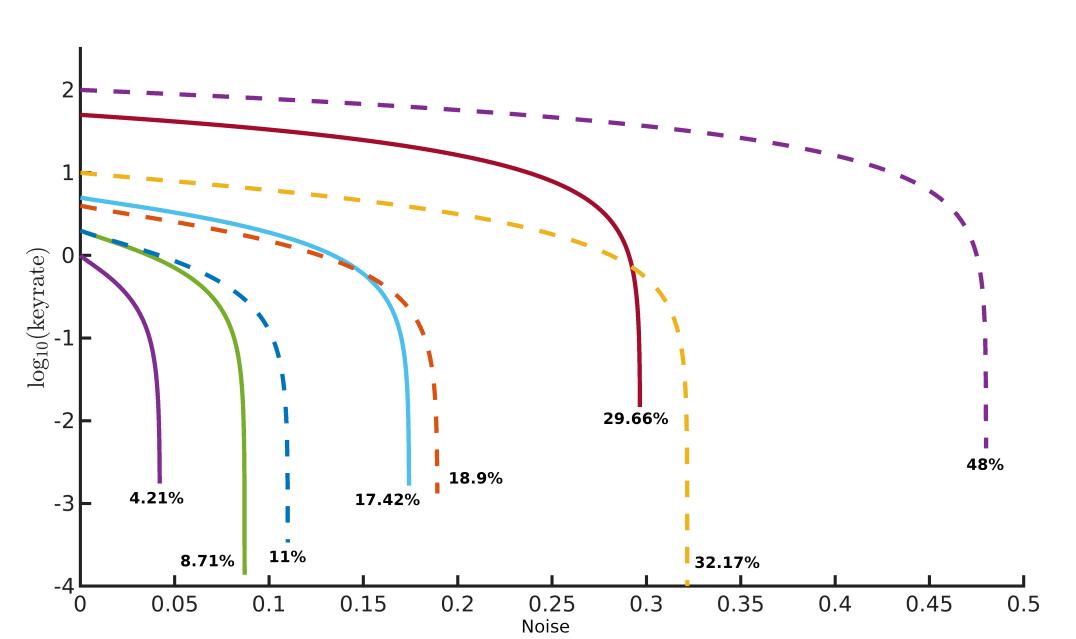


Figure: Noise vs Key rate: HD-SQKD vs HD-BB84

### Conclusion

- We have proposed a new HD-SQKD protocol.
- Performed an information theoratic-security analysis.
- Showed how to reduce a two-way protocol to one way.
- Proved that Qudits can indeed benefit SQKD model.
- Applying this proof technique to other protocols would be quite interesting.

#### References

[1] Michel Boyer, Dan Kenigsberg, and Tal Mor. Quantum key distribution with classical bob. In 2007 First International Conference on Quantum, Nano, and Micro Technologies (ICQNM'07), pages 10–10. IEEE, 2007.

[2] Charles H Bennett and Gilles Brassard.

Quantum cryptography: public key distribution and coin tossing.

Theor. Comput. Sci., 560(12):7–11, 2014.

[3] Hasan Iqbal and Walter O Krawec.

High-dimensional semi-quantum cryptography.

arXiv preprint arXiv:1907.11340, 2019.

#### **Contact Information**

• Email: hasan.iqbal@uconn.edu

• Phone: +1 (312) 975 7006