

ORIGINAL ARTICLE OPEN ACCESS

An Adaptive, Closed-Loop CNN-LSTM Framework for Real-Time DoS/DDoS Detection and Mitigation in Software-Defined Networks under Concept Drift

Tahir Ali¹ | Hasan Mahmood¹ | Muddasar Naeem²  | Asad Hussain³ | Shumayla Yaqoob⁴ | Antonio Coronato²  | Farman Ullah⁵

¹Department of Electronics Quaid-i-Azam University Islamabad, Pakistan | ²Artificial Intelligence and Robotics Lab, Università Giustino Fortunato, Benevento, Italy | ³Department of Computer Science, University of Reading, Reading, UK | ⁴Faculty of Computing and Information Technology (FCIT) Sohar University, Sohar, Oman | ⁵College of Information Technology (CIT) United Arab Emirates University, Al Ain, UAE |

Correspondence: Farman Ullah (farman@uaeu.ac.ae)

Received: 20 January 2023 | **Revised:** 21 January 2023 | **Accepted:** 22 January 2023

Keywords: Software-defined networking | DDoS detection and mitigation | Concept drift | Online learning | Cross-dataset generalization | Hybrid CNN-LSTM

ABSTRACT

Software-Defined Networking (SDN) centralizes control to make networks easier to operate, but the same centralization turns the controller into an attractive target for Denial-of-Service and Distributed Denial-of-Service (DoS/DDoS) attacks. Learning-based detectors for this problem have been proposed in large numbers, yet most share three weaknesses that limit their value in practice: they are trained once and then frozen, so accuracy decays when traffic shifts; they stop at raising an alert and never act on the network, so the claimed real-time benefit is never measured; and they are validated on the same dataset used for training, which says little about unseen traffic. This work treats those three issues as the problem to solve. We retain a compact CNN-LSTM model, in which the convolutional layers capture spatial structure in flow records and the recurrent layers model their temporal behavior, and build three capabilities around it. First, the detector adapts online: a drift detector monitors the live error rate and triggers short incremental updates, while a replay buffer preserves earlier knowledge and limits forgetting. Second, the detector runs in closed loop with the controller, installing OpenFlow rules to drop or rate-limit malicious sources so that the cost of mitigation can be measured rather than assumed. Third, the model is evaluated across datasets, trained on CICDDoS2019 and tested on the SDN-specific InSDN dataset and on live traffic from a Mininet, POX, and Open vSwitch testbed instrumented with sFlow. To keep the results trustworthy, class balancing is confined to the training folds and performance is reported on the natural class distribution using PR-AUC, the Matthews correlation coefficient, and per-class recall alongside accuracy. On CICDDoS2019 the model, with roughly 80,000 parameters, detects attacks at [XX]% accuracy and an F1-score of [XX]%; under simulated concept drift it recovers within [XX] incremental updates where a static model degrades; and in the testbed it suppresses the controller's Packet-In load within [XX] ms of attack onset while preserving legitimate throughput.

1 | Introduction

Software-Defined Networking (SDN) is a major advancement in modern network architecture, which separates the control plane from the data plane [1]. This separation allows centralized network control, simplifying configuration, automation, and management. In this architecture as shown in Figure 1, the control plane decides how the traffic flows, while the data plane handles the actual forwarding of packets. As a result, SDN has widespread

adoption in data centers, enterprise environments, and cloud infrastructures where scalability and flexibility are in high demand. [2].

Despite its benefits, the centralized architecture of SDN introduces significant security challenges. The SDN controller acts as the brain of the network [3] and becomes a single point of failure for attackers [4]. It is particularly vulnerable to DoS/DDoS attacks, which aim to exhaust system resources by flooding the controller with fake flow requests to disturb traffic volume [5].

This is an open access article under the terms of the [Creative Commons Attribution-NonCommercial](https://creativecommons.org/licenses/by-nc/4.0/) License, which permits use, distribution and reproduction in any medium, provided the original work is properly cited and is not used for commercial purposes.

© 2026 The Author(s). *International Journal of Intelligent Systems* published by Wiley Periodicals LLC.

The DoS attacks originate from a single source, and DDoS attacks harness large numbers of compromised devices across multiple locations, making them harder to detect and mitigate [4]. These attacks compromise service availability, leading to network downtime, financial loss, and credibility damage. Such attacks are also often used to divert attention from more advanced breaches. The DDoS attacks are growing exponentially, both in frequency and sophistication. From early disruptions in 1999 and 2000, the scale of attacks has escalated dramatically, driven partly by the proliferation of Internet of Things (IoT) botnets [6].

Furthermore, emergence of low-rate, hard-to-detect attacks such as Shrew DDoS further complicates the detection efforts within SDN environments [7]. The volume of IoT traffic continues to rise, and the AI detection mechanism is showing promise in detecting these sophisticated threats, making them a key focus in the development of resilient, SDN-aware security solutions [8]. The evolution of DDoS attacks over the past two decades reflects a significant increase in scale, automation, and technical sophistication as shown in Table 1. These statistics highlight the growing complexity of modern threats in SDN environments.

The limitations of current DDoS detection approaches in SDN highlight the need for more robust solutions. Static rule-based systems use fixed rules and cannot adopt new attack patterns [9]. Traditional machine learning (ML) methods often suffer from high false positive rates (FPR) and lack real-time scalability [10]. Many ML models, such as random forest (RF), support vector machines (SVM), decision tree (DT), logistic regression (LR), naive bayes (NB), and k-Nearest neighbors (K-NN), are evaluated solely in simulated environments [11] or with outdated datasets [12]. These datasets often lack diversity and do not reflect the latest attack strategies or real-time traffic variations. These gaps emphasize the need for adaptive and lightweight solutions tested in real-world environments.

A large body of work already applies machine learning and deep learning to DDoS detection in SDN, and much of it reports near-perfect accuracy. Three weaknesses, however, keep recurring once these models are taken seriously as something to deploy. The first is that they are trained once, offline, and then left unchanged. When the traffic mix moves or a new attack variant appears, accuracy slips quietly until an operator notices and re-trains the model by hand. The second is that the pipeline usually ends at the moment of classification. A model announces that an attack is in progress but does nothing to the network, so the real-time advantage that is so often claimed is never actually measured on the control plane. The third is evaluation: training and testing are drawn from the same dataset, which reveals little about how a detector copes with traffic it has not seen.

This paper is built around those three gaps rather than around the network architecture. We keep a compact CNN-LSTM model of roughly 80,000 parameters because it is inexpensive to run next to a controller and because its convolutional and recurrent halves are a natural fit for the spatial and temporal structure of flow records. The contribution is what we wrap around it: the model is allowed to adapt to drift while it runs, it is connected to a mitigation path inside the SDN control plane so that its decisions take effect, and it is tested on data that did not come from its training set.

The evaluation is organized to test these three claims rather than a single accuracy number. The model is first trained on CICDDoS2019 [13], a benchmark that spans modern DDoS types across

several protocols, including HTTP flood, UDP flood, TCP SYN flood, DNS amplification, and LDAP reflection. Generalization is then probed by testing the trained model on the SDN-specific InSDN dataset and on live captures from an emulated testbed, so that training and evaluation no longer come from the same source. The testbed itself uses Mininet with a POX controller, Open vSwitch for forwarding, and sFlow for traffic export, and it is where the closed-loop behavior is measured: on a positive detection the controller installs OpenFlow rules to drop or rate-limit the offending source. Concept drift is studied by presenting attack families as a stream and comparing a static model against the adaptive one. Throughout, class balancing with SMOTE and random undersampling [14] is applied only inside the training folds to avoid leakage into the test set, and adaptive learning-rate scheduling and early stopping are used during training.

On CICDDoS2019 the detector separates benign from malicious traffic with high accuracy at a low false positive rate, and reported on the natural class distribution rather than a rebalanced test set. More importantly for the argument of this paper, the adaptive variant recovers after drift where a frozen model loses accuracy, the model retains useful performance when moved to InSDN and to live testbed traffic, and the closed-loop defense reduces the controller's Packet-In load shortly after an attack begins while leaving legitimate flows largely undisturbed. Exact figures are reported in Section 5.

The main contributions of this work are as follows:

- We make the detector adapt online. A drift detector watches the prediction error on the live stream and triggers short incremental updates to the CNN-LSTM model, while a replay buffer of earlier flows guards against catastrophic forgetting. This removes the manual-retraining assumption that underlies most prior SDN detectors and lets the model track changing traffic without being rebuilt from scratch.
- We close the loop between detection and the network. Once a source is flagged, the POX controller installs OpenFlow rules to drop or rate-limit it, and we report the operational cost of doing so: controller load, the drop in Packet-In messages, the time from onset to mitigation, per-flow inference latency, and the effect on legitimate throughput. This turns the common “real-time” claim into measured behavior on the control plane.
- We test generalization across datasets instead of within one. The model is trained on CICDDoS2019 and evaluated on the SDN-specific InSDN dataset and on live testbed captures, both with and without a brief adaptation step, which shows how well it transfers to traffic it was not trained on.
- We rebuild the evaluation protocol to remove flaws that inflate reported results. Class balancing is confined to the training folds, performance is reported on the natural (imbalanced) test distribution using PR-AUC, the Matthews correlation coefficient, and per-class recall in addition to accuracy, and the model is compared against deep-learning baselines re-implemented under identical splits with their parameter counts and inference latency reported.

The rest of the paper is organized as follows Section II Related work. Section III shows the proposed CNN-LSTM model, the description of the dataset, features selection, and training approach.

TABLE 1 | Evolution of Major DDoS Attacks and Emerging Threat Trends

Year	Incident or Campaign	Attack Characteristics	Target and Impact	Technical Significance
2007	Estonia Cyberattacks	Coordinated large-scale botnet-based DDoS	Government, banking, and media disruption	Early example of state-level cyber warfare
2012	Operation Ababil	Sustained application-layer DDoS campaign	Major U.S. financial institutions	Prolonged financial-sector service disruption
2013	Spamhaus DNS Amplification	Reflection/amplification attack (300 Gbps)	Anti-spam organization infrastructure	Rise of DNS amplification techniques
2016	Mirai Botnet Attack	IoT-driven volumetric DNS-targeted attack	Dyn DNS provider; global websites offline	Turning point toward IoT-based DDoS
2018	GitHub Memcached Attack	1.35 Tbps amplification attack	GitHub platform disruption	First terabit-scale DDoS attack
2020	COVID-19 Era Surge	Increased reflection and multi-vector attacks	Cloud platforms and remote services	Expanded digital attack surface
2023	HTTP/2 Hyper-Volumetric Attack	201 million requests per second (RPS)	Global web infrastructure	Record-breaking application-layer DDoS
2024	3.45 Tbps Mega Attack	Multi-vector terabit-scale attack	Enterprises worldwide	Largest reported bandwidth-based DDoS
2025	AI-Enhanced DDoS Campaigns	Adaptive botnets using automated traffic patterns	Cloud-native infrastructures	Emergence of AI-assisted attack strategies
2026	IoT-Edge Distributed Attacks	Encrypted, ultra-distributed edge-based traffic	SDN/5G environments	Shift toward low-latency, encrypted attack vectors

The experimental set up and SDN testbed structure are described in Section IV. Section V is a discussion on the results and performance evaluation. Finally, Section VI provides the conclusion.

2 | Related Work

Over the past decade, the landscape of Internet-connected devices and cloud-based infrastructure has contributed to a significant rise in Distributed Denial-of-Service (DDoS) attacks. These attacks pose severe threats to SDN environments. The centralized control and programmability of SDN offer enhanced flexibility and scalability, but also introduce vulnerabilities [15]. In response, seekers have explored a wide range of detection techniques, ranging from traditional ML models to advanced DL and hybrid architectures, to effectively overcome these threats. Despite substantial progress, key challenges remain in achieving real-time detection, lightweight deployment, and robust generalization across diverse traffic patterns. This related work presents a structured explanation of DDoS detection strategies in SDN, organized into traditional ML-based models, DL approaches, and hybrid frameworks [16, 17]. This organization provides clarity and reveals the landscape of networking, guiding seekers toward understanding both the strengths and limitations of existing approaches in literature while setting the stage for the proposed lightweight and high-performance solution proposed in the work.

2.1 | Conventional Rule-Based Techniques for DDoS Detection

Since the conventional DDoS detection techniques in SDN environments historically rely on straightforward mechanisms, such as signature-based filtering, threshold-based monitoring, and static rule application [18]. These approaches gained popularity

due to their low computational tasks and ease of implementation. However, their effectiveness is often constrained to known attack patterns and static network behavior, making them inadequate in the face of evolving and dynamic threats.

Signature-based and rule-driven systems are employed in [19, 18, 20], which demonstrate a reasonable success against well-documented attacks. In these methods, predefined rules (signatures) based on traffic volume, frequency, and packet header patterns are used to identify malicious flows. While they are effective in static environments, these systems may easily be damaged [21] and fail to adapt to new or hidden attack vectors, especially those crafted to bypass static detection logic. However, attackers can manipulate packet attributes or distribute attack loads across multiple sources to avoid detection by such simplistic rules [4]. Threshold-based anomaly detection, as discussed in [22], presents a marginal improvement by identifying traffic patterns that exceed the defined limits. However, the rigidity of fixed thresholds leads to poor performance in fluctuating traffic conditions, a common characteristic of SDN networks, particularly in cloud and IoT-integrated infrastructures. The inability to dynamically recalibrate thresholds causes a surge in false positives during legitimate traffic spikes and delays detection during low-and-slow attack patterns. Another drawback of these traditional approaches is their lack of scalability. As SDN environments grow in size and complexity, the volume of traffic and control plane interactions increases significantly. Static mechanisms struggle to cope with such a scale without introducing latency or degrading detection accuracy. These methods lack the contextual awareness to detect multi-vector or robust attacks that evolve or utilize varying protocols, ports, and payloads to blend with normal traffic.

In essence, while traditional detection techniques laid the groundwork for securing SDN, their limitations in adaptability, scalability, and accuracy make them insufficient against modern DDoS threats [23]. These shortcomings have paved the way for the integration of ML and intelligent systems that can learn from

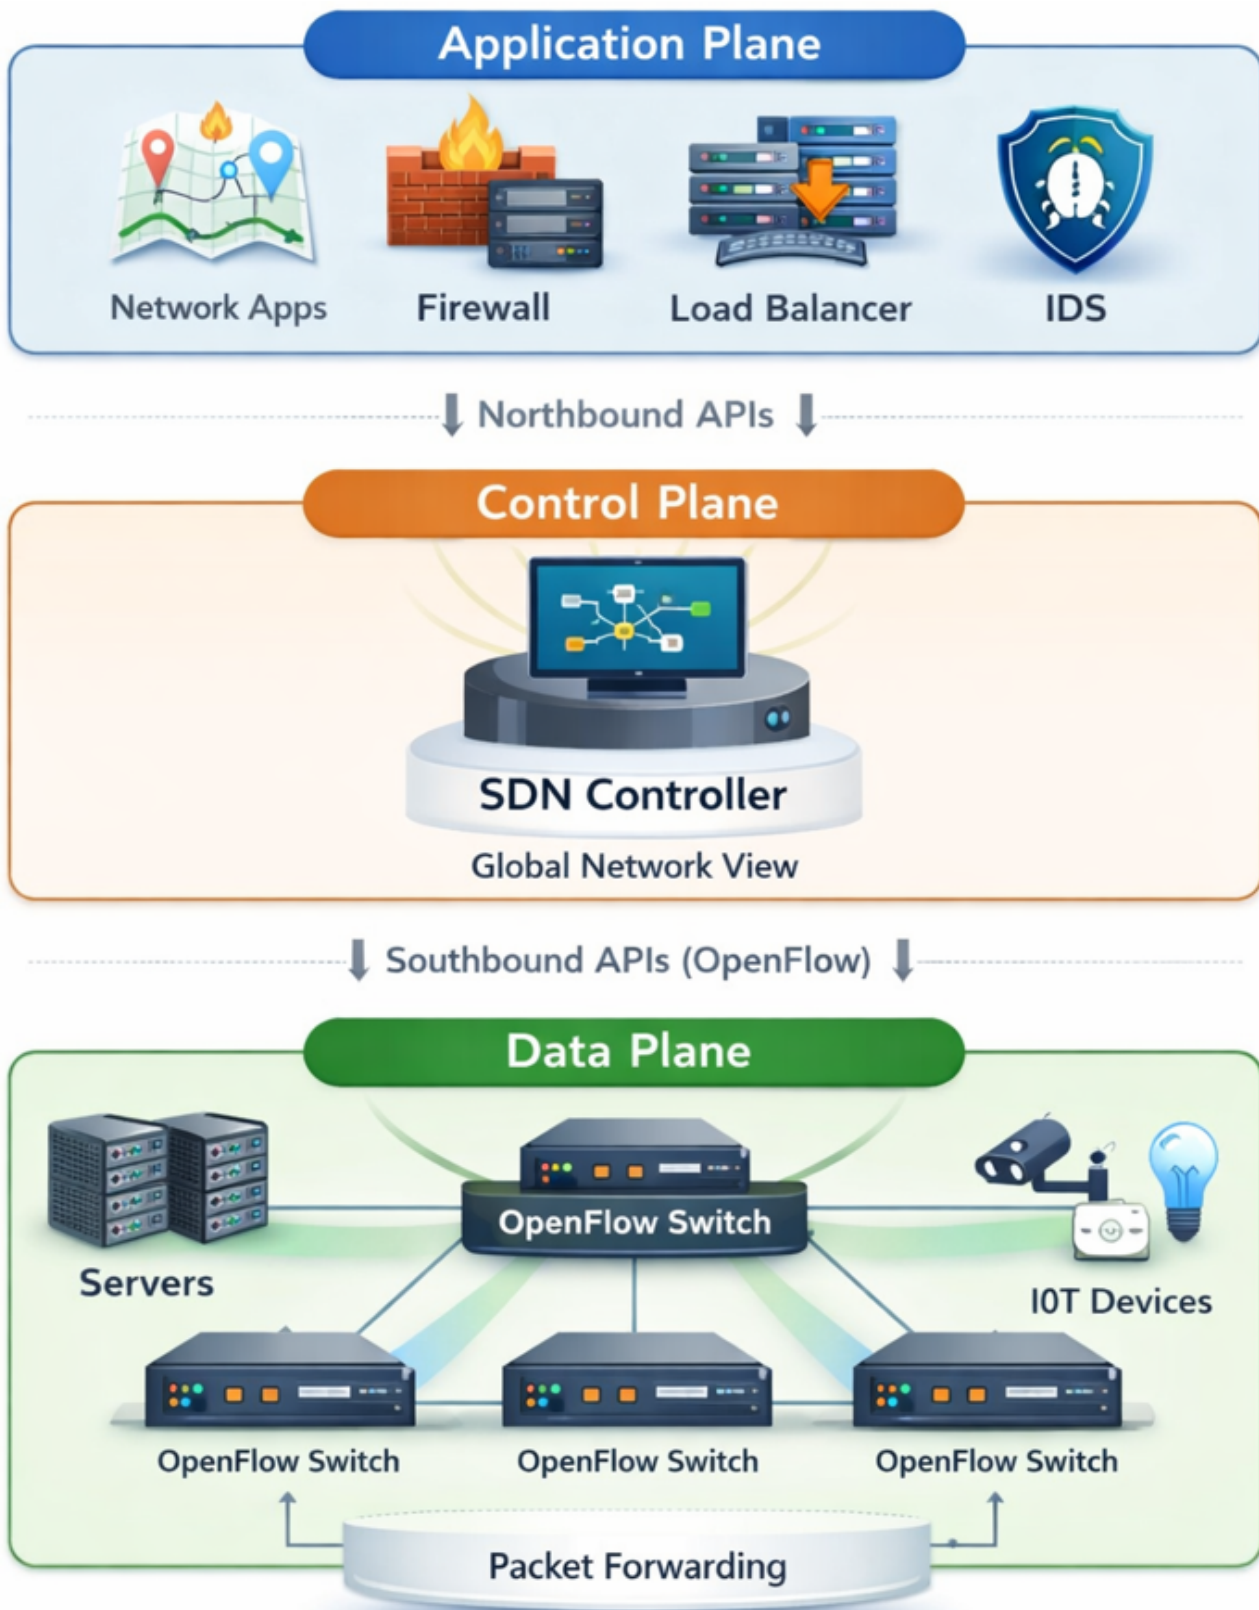


FIGURE 1 | Basic architecture of Software-Defined Networking (SDN), illustrating the separation of the application plane, control plane, and data plane with northbound and southbound communication interfaces.

data, adapt to new behaviors, and offer real-time protection with higher precision.

2.2 | Classical ML Techniques for DDoS Detection

In order to address the inflexibility and limited generalization of traditional detection methods, researchers began incorporating classical ML algorithms for DDoS detection in SDN environments. In [11], the DT, RF, SVM, LR, NB, and k-NN are offered the advantage of learning patterns from historical traffic data, allowing for more adaptive and intelligent detection mechanisms. The work in [24] employed a hybrid of K-Means clustering and DT to identify DDoS attacks, showing promising results on the NSL-KDD dataset. This combination enabled unsupervised clustering of traffic behaviors followed by supervised classification, while effective in academic settings [25]. The reliance of the model on the NSL-KDD dataset, a benchmark criticized for its age and lack of relevance to modern attack vectors, limits its real-world applicability. In [26], the authors conducted a comparative analysis of multiple ML classifiers, including SVM, LR, NB, and k-NN. Although it highlighted the variability in performance across algorithms, the study lacked tailored feature engineering and lack to exploit SDN-specific attributes such as flow table dynamics or controller-switch interaction patterns.

In [27], researchers tested several classifiers such as RF, DT, SVM, and NB in a simulated SDN setup, showcasing decent accuracy levels. Yet, the simulations used simplified assumptions about attack traffic and did not fully replicate the complexity or volatility of live SDN deployments. Moreover, none of these methods accounted for latency or computational overhead in a real-time detection scenario—an essential consideration for SDN controllers operating under stringent performance constraints [26]. While models, such as RF and SVM, have proven robust across various domains, their effectiveness in DDoS detection heavily depends on the availability of high-quality labeled datasets. As demonstrated in [28] and [29], many ML-based systems achieve high accuracy on curated datasets but perform poorly in production due to data drift, imbalanced class distributions, and unrecognized traffic behaviors [30]. Additionally, classical ML models generally lack temporal context, rendering them less effective in detecting robust or intermittent DDoS attacks that evolve.

A common limitation among these approaches is their static nature; models are often trained offline and require retraining to adapt to new attack signatures. This makes them less suitable for dynamic SDN environments, where rapid changes in topology and traffic behavior demand real-time adaptability [31]. While classical ML marked a significant improvement over static rule-based detection, it falls short in scalability, context-awareness, and continuous learning, setting the stage for more sophisticated DL and hybrid approaches.

2.3 | DL Techniques for DDoS Detection

With the growing complexity of DDoS attacks and the dynamic nature of SDN traffic, classical ML approaches have shown significant limitations, particularly in their reliance on handcrafted features and lack of temporal modeling. The DL models have emerged as powerful alternatives, capable of automatically extracting hierarchical features and capturing temporal dependencies in network traffic. This has made DL particularly attractive for DDoS detection in SDN environments. Several studies [32, 33, 34, 35] have utilized CNN, LSTM, recurrent neural networks (RNNs), and gated recurrent units (GRU) to model sequential

traffic patterns and detect anomalies. For instance, the work in [3] implemented a hybrid CNN-LSTM architecture that achieved over 99% accuracy in detecting slow DDoS attacks. The CNN layers extracted spatial features from traffic flows, while LSTM captured temporal relationships, making it effective for detecting long-duration and low-rate attacks that often evade classical methods.

In [33], the authors compared individual and hybrid DL models such as GAN, CNN, LSTM, and MLP, reporting high accuracy across multiple metrics, including precision and recall. GAN is particularly useful in generating adversarial samples for training, improving the robustness of detection. However, GAN-based approaches can be computationally intensive and may introduce instability during training. Studies such as [34] and [35] incorporate attention mechanisms and Bidirectional (Bi) BiLSTM-CNN structures to further enhance performance. These models can dynamically focus on the most relevant parts of the input sequence, which improves detection in multi-vector attack scenarios. In [35], for instance, an attention-based BiLSTM-CNN model outperformed ten baseline methods across various datasets, indicating the strength of deep architectures in modeling complex attack behaviors.

Due to the strong performance of DL-based methods, they may face challenges. It often requires significant computational resources and large volumes of labeled training data, which may not always be available. Moreover, their black-box nature poses interpretability concerns for network administrators seeking transparency in decision-making. Many models [36, 29, 37] that report excellent performance on benchmark datasets, such as CICDDoS2019 or CICIDS2017, may not generalize well in real-time deployments, particularly in edge computing scenarios with limited resources.

In summary, DL models offer substantial improvements in accuracy, flexibility, and temporal awareness over classical ML techniques. It is particularly well-suited for detecting sophisticated, evolving DDoS patterns in SDN environments. Nevertheless, their deployment must be balanced with considerations of computational cost, interpretability, and dataset diversity to ensure practical effectiveness.

2.4 | Hybrid Techniques for DDoS Detection

Recognizing the individual limitations of standalone ML and DL techniques, recent research has increasingly turned toward hybrid models and multi-stage frameworks to enhance DDoS detection in SDN environments. These hybrid approaches aim to integrate the strengths of various models, such as the feature extraction capabilities of CNNs, the temporal learning of LSTM/GRU, and the interpretability of classical ML classifiers, to build more robust and adaptive solutions.

Numerous studies [38, 39, 40, 29, 37, 43, 41, 22, 36] explore these hybrid strategies with promising results. The work in [39] proposed a hybrid DL model combining CNN and LSTM, which achieves accuracy above 99.8% on the CICDDoS2019 dataset. By leveraging CNN for spatial pattern detection and LSTM for sequential learning, the model effectively captured volumetric and slow-rate attacks that often go undetected by simpler classifiers. Other studies [40, 29, 37] consider this further by incorporating attention mechanisms, dimensionality reduction techniques, and model optimization steps such as quantization and pruning.

TABLE 2 | Comparison of DDoS Detection Models in SDN (Model-Level Analysis)

Reference	Model Type	Used Model / Technique	Addressed Problem	Strength	Limitation
[24]	ML	K-Means + KNN	DDoS in SDN	Simple clustering-based detection	No real-time validation
[26]	ML	LR, NB, KNN, SVM, DT, RF	TCP Flood	High RF accuracy	Simulation-only dataset
[32]	Hybrid DL	CNN + LSTM	Slow DDoS	Captures spatial-temporal patterns	High computational cost
[33]	DL	GAN, CNN, LSTM, MLP	Adversarial DDoS	Robust to adversarial traffic	Complex training
[27]	ML	RF, SVM, KNN, DT	SDN DDoS	Comparative ML evaluation	Limited performance reporting
[19]	Rule-based	SDNWISE Rule Matching	Flow rule attacks	Lightweight rule processing	No accuracy metric
[34]	ML	SVM, Neural Networks	SDN DoS	Strong classification capability	Dataset-dependent validation
[38]	Hybrid TL	LSTM, GRU, SVM	DDoS detection	Transfer learning integration	Limited scalability analysis
[39]	Hybrid DL	CNN + LSTM	Large-scale DDoS	Very high accuracy	Heavy architecture
[20]	ML	RF, DT, XGBoost, SVM	Multi-vector DDoS	Ensemble comparison	Low RF performance
[35]	DL	Attention + BiLSTM-CNN	SDN DDoS	Attention-enhanced learning	No deployment validation
[36]	Hybrid DL	CNN + LSTM + Attention	SDN DDoS	Multi-stage feature learning	Computational complexity
[40]	Hybrid DL	CNN + LSTM	Time-aware DDoS	Strong temporal modeling	Uses older dataset
[29]	Hybrid DL	CNN + LSTM	SDN DDoS	High detection performance	Resource intensive
[41]	ML + Edge	RF + RFE	IoT/Edge DDoS	Lightweight + Edge-ready	Feature selection dependent
[22]	Ensemble DL	RNN, LSTM, HTM, CNN	Real-time DDoS	Ensemble robustness	High complexity
[42]	Hybrid DL	CNN + LSTM + AE	Integrated SDN security	Autoencoder integration	Not lightweight
Proposed Model	Lightweight Hybrid	CNN + LSTM (8 Features)	Real-time SDN DDoS	High accuracy + Efficient	Feature-reduction dependent

These enhancements not only improved accuracy but also reduced computational overhead, making such frameworks more suitable for real-time SDN deployments, including at the network edge.

More comprehensive systems, used in [43] and [22], proposed multi-component pipelines. For instance, [44] presented a layered model integrating LSTM, CNN, stacked autoencoders, and checkpoint networks to ensure fault tolerance and maintain detection integrity even in degraded conditions. Similarly, [22] combined multiple tools, including recursive feature elimination (RFE), density-based spatial clustering of applications with noise (DBSCAN) clustering, (auto-regressive integrated moving average) is a statistical model for time series forecasting (ARIMA), and rule-based decision logic to build a resilient and interpretable anomaly detection system.

The hybrid models tend to offer improved detection performance and generalization capabilities, but they also introduce new challenges. The complexity of integrating diverse algorithms can lead to increased system overhead and difficulty in tuning hyperparameters. Furthermore, some solutions depend on customized datasets or controlled simulation environments, raising concerns

about their generalization and reproducibility in real-world SDN networks [19, 43].

Hybrid frameworks represent a pragmatic path forward, offering a balanced compromise between performance, robustness, and flexibility, particularly critical in SDN architectures that are inherently programmable and adaptive. As shown in [22], where an ensemble of RNN, LSTM, HTM, and CNN was employed, combining diverse neural architectures can significantly enhance the resilience and accuracy of detection systems across multiple datasets and traffic patterns.

2.5 | Comparative Analysis of DDoS Detection Techniques

In order to evaluate the effectiveness of our proposed model, we conduct a comprehensive comparison with existing DDoS detection techniques in SDN environments. The results of this analysis are summarized in Table 2 and 3, which highlights key differences across model type, datasets, performance metrics, and real-time applicability.

TABLE 3 | Dataset, Feature Engineering and Deployment Characteristics

Reference	Dataset Used	Used Features	Preprocessing	Light-weight	Real-Time
[24]	NSL-KDD	KDD statistical features	Normalization	No	No
[26]	Simulated TCP traffic	Flow statistics	Feature scaling	No	No
[32]	Synthetic slow DDoS	Spatial-temporal features	Data reshaping	No	No
[33]	CICDDoS2019	Deep extracted features	Adversarial training	No	No
[27]	NSL-KDD	KDD features	Feature selection	No	No
[19]	Simulated SDN Logs	Flow-rule attributes	Rule matching	Yes	No
[34]	GitHub SDN-DoS Dataset	Flow-based features	Normalization	No	No
[38]	Custom traffic data	Time-series features	Transfer learning prep.	No	No
[39]	CICDDoS2019	70+ flow features	Standard scaling	No	No
[20]	CICDDoS2019	Selected important features	Feature ranking	No	No
[35]	Kaggle DDoS sets	Attention-weighted features	Data normalization	No	No
[36]	CICDDoS2019	Hybrid spatial-temporal	Feature extraction	No	No
[40]	KDD Cup'99	KDD statistical features	Scaling	No	No
[29]	CICDDoS2019	Flow + temporal features	Normalization	No	No
[41]	UNSW-NB15, BoT-IoT	Reduced subset (RFE)	Feature elimination	Yes	✓
[22]	CICDDoS2019	Ensemble-selected features	Aggregation	No	No
[42]	CICDDoS2019	Autoencoder-derived features	Dimensionality reduction	No	No
Proposed Model	CICDDoS2019 + SDN Testbed	8 Spatial-Temporal Features	Feature reduction + Normalization	Yes	Yes

The proposed model significantly outperforms prior approaches in terms of accuracy, precision, recall, and FPR. While conventional ML models such as DT, RF, and SVMs [24, 26, 27] perform well on static benchmark datasets such as NSL-KDD, they often suffer from limited applicability and elevated FPR in dynamic SDN environments.

Many DL techniques mentioned in [35, 28, 40] achieve high accuracy levels (often exceeding 99%), yet they typically lack architectural diversity or do not effectively address dimensionality reduction and noise filtration. These limitations reduce their robustness in handling slow-rate and evolving DDoS attack patterns.

In contrast, the proposed hybrid architecture integrates CNN, LSTM, and autoencoders to capture both spatial and temporal characteristics in network traffic, which simultaneously reduces input dimensionality to eliminate redundant or noisy features. This layered approach enhances detection capability and minimizes the risk of overfitting.

As shown in Table 2 and 3, the proposed model outperform well in both detection accuracy and precision, recall and F1 -score, and the false-positive rate (FPR) is remarkably low. Furthermore, unlike most of the current methods, it attains lightweight functionality as well as real-time functionality, thus highlighting its feasible application in SDN-based DDoS mitigation. These results surpass recent state-of-the-art methods, including [19] and [24], which often either omit critical metrics or fall short in precision and FPR despite reporting high accuracy. Moreover, unlike many existing solutions, the proposed model is lightweight and real-time deployable, making it suitable for integration with SDN controllers in practical network environments. This real-time capability, coupled with superior performance and reduced computational overhead, highlights the proposed viability of the model for real-world DDoS mitigation in SDN.

3 | Proposed Methodology

This section explains the systematic approach adopted for designing, training, and validating the proposed model for DDoS detection in SDN environments. The methodology follows a structured process that includes data collection and preprocessing, hybrid model architecture, model training and validation, performance evaluation, and real-time testing in an SDN setup. Each of these steps ensures that the model is both effective and suitable for deployment in real environments, with a focus on scalability, efficiency, and high detection accuracy.

3.1 | Data Collection and Preprocessing

The proposed model is trained using the CICDDoS2019 dataset [13], a contemporary benchmark that captures realistic DDoS attack scenarios across multiple protocols, including SYN, UDP, HTTP floods, and DNS amplification. The dataset offers a wide range of flow-based features representing traffic behavior essential for identifying both benign and malicious patterns.

Before preprocessing, an initial data analysis is performed to understand the distribution of traffic classes, detect anomalies, and identify relevant features. This step highlights the presence of significant class imbalance and redundancy in features. Based on this analysis, eight traffic features are carefully selected to reduce dimensionality while preserving key behavioral indicators for effective detection.

A structured preprocessing pipeline is then applied to prepare the data for DL. Column names are cleaned for consistency, and missing or infinite values are handled to eliminate distortions. Label values are standardized by mapping benign to 0 and malicious to 1, enabling binary classification.

Class imbalance, which can bias the model toward dominant classes, is addressed using the synthetic minority over-sampling

technique (SMOTE) to generate synthetic samples of the minority class. This helps balance the dataset and ensures the model learns to detect both benign and malicious traffic effectively. The dataset is then split into training and testing sets using stratified sampling, followed by standardization using z-score normalization. Finally, the data is reshaped into a 3D structure compatible with the CNN-LSTM architecture.

Preprocessing is essential not just for cleaning the data but also for enhancing model performance. It ensures consistent feature scaling, balanced class distribution, and structured input format factors critical to achieving reliable convergence and robust detection accuracy. Without this stage, even a well-designed model may fail to learn meaningful patterns or generalize to real-world traffic.

3.2 | Feature Selection and Justification

Feature selection is an essential part in designing efficient and accurate DDoS detection systems [45], especially in SDN environments. Many features are irrelevant or redundant in high-dimensional traffic datasets, which can degrade the performance of ML/DL models [46]. By selecting discriminative features, we reduce computational complexity, avoid overfitting, and improve generalization. Moreover, SDN environments require real-time response to network threats [47]. Therefore, effective and lightweight feature sets enhance both scalability and deployment feasibility.

The proposed model is trained and contains over 85 traffic features generated via CICFlowMeter [48]. These features are extracted from flow-level metadata, similar to NetFlow-style records, which summarize network communications using packet header information. From this large dataset, we selected eight key features based on a combination of domain knowledge, correlation analysis, and exploratory data analysis (EDA). These features are primarily drawn from the network (Layer 3) and transport (Layer 4) layers of the OSI model and capture essential aspects of traffic behavior such as session duration, packet sizes, and transmission rates.

Several selected features (Figure 2), such as ACK Flag Count and Init_Win_bytes_forward, are specific to the TCP protocol and provide insight into connection-level behaviors. Others, such as Flow Duration and Flow Packets/s, are protocol-agnostic and reflect general flow characteristics. This combination allows our model to detect both volumetric and complex DDoS attacks across different protocol types. The selected features are summarized in Table 4.

We used the Pearson correlation coefficient for feature relevance to measure the linear dependence between pairs of features. The coefficient is computed using the following formula:

$$r_{XY} = \frac{\sum_{i=1}^n (X_i - \bar{X})(Y_i - \bar{Y})}{\sqrt{\sum_{i=1}^n (X_i - \bar{X})^2 \sum_{i=1}^n (Y_i - \bar{Y})^2}} \quad (1)$$

In this equation, r_{XY} denotes the Pearson correlation coefficient between two variables X and Y ; X_i and Y_i represent the individual values of X and Y at the i -th observation; $\bar{X}$ and $\bar{Y}$ are the respective means of X and Y ; and n is the total number of observations. This expression is the centered (mean-subtracted) form of the Pearson product-moment correlation coefficient, which is algebraically equivalent to the raw-score version commonly found

in statistical literature [49]. The coefficient r_{XY} ranges from -1 to 1 , indicating the strength and direction of the linear relationship between the two variables. A value of r_{XY} close to 0 suggests a weak or no linear correlation, whereas values near -1 or 1 indicate strong negative or positive linear correlation, respectively. In our analysis, features exhibiting a high degree of correlation (i.e., $|r_{XY}| > 0.9$) are considered redundant and subsequently excluded from further processing [50].

We also applied information-theoretic measures [51], such as information gain, to assess the discriminative power of each feature. The information gain (IG) between a feature X and the target variable Y is defined as:

$$IG(Y | X) = H(Y) - H(Y | X) \quad (2)$$

Here, $IG(Y | X)$ denotes the information gain obtain about the target variable Y given knowledge of the feature X ; $H(Y)$ represents the entropy of Y , and $H(Y | X)$ is the conditional entropy of Y given X . Entropy $H(Y)$ quantifies the uncertainty or unpredictability in Y and is defined as:

$$H(Y) = - \sum_{y \in Y} p(y) \log p(y) \quad (3)$$

In this equation, Y is the set of possible outcomes of y , and $p(y)$ is the probability of outcome y . The conditional entropy $H(Y | X)$ similarly measures the expected uncertainty in Y after observing X . Information gain thus captures the reduction in uncertainty about the target variable when a given feature is known. Higher values indicate more informative features. This analysis helped identify features that maximally reduced class uncertainty. The correlation and entropy-based assessments ensured that the selected features are independent and informative, ideal for training deep learning models.

Prior studies have also validated the effectiveness of these features in identifying various DDoS variants, including volumetric, protocol abuse, and slow-rate attacks, particularly in SDN environments.

3.3 | Attack Flow and Detection Strategy

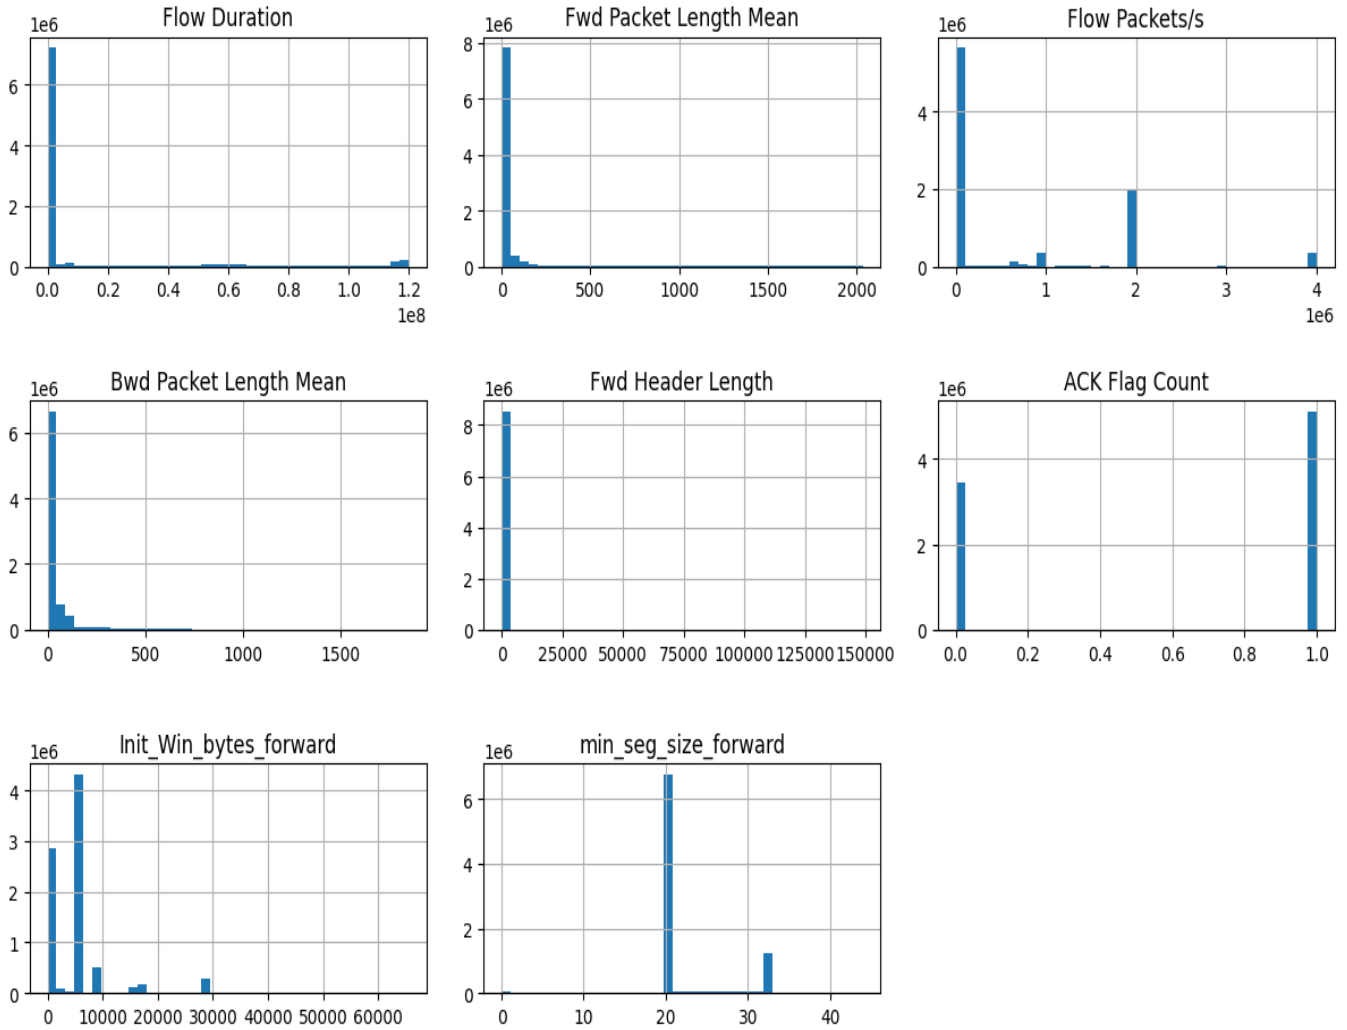
SDN introduces a logically centralized control plane, which makes it highly flexible but also vulnerable to DoS/DDoS attacks [52]. In such attacks, adversaries flood the OpenFlow switch with a high volume of new flow requests. Each of these requests triggers a Packet-In message to the SDN controller, eventually leading to excessive control plane load, flow table flood, and controller resource exhaustion.

Figure 3 presents an overview of the attack flow and the integration of the proposed detection model. Both legitimate users and malicious attackers generate traffic toward the OpenFlow switch. While legitimate traffic follows normal patterns, attackers flood the switch with malicious packets. The overwhelmed switch forwards many Packet-In messages to the controller, resulting in performance degradation or controller unavailability.

The proposed CNN-LSTM detection engine is integrated near the controller to analyze real-time traffic statistics. By capturing both temporal and spatial traffic patterns, the model effectively distinguishes between normal and malicious flows, enabling early detection of potential DoS/DDoS attacks. This detection capability serves as a critical first step toward enhancing SDN resilience and facilitating the response of the operator on the spot.

TABLE 4 | Selected Features and Justification for DDoS Detection in SDN

Feature	What it Measures	Why It Is Used Here
Flow Duration	Total time a flow lasts	Long durations may indicate persistent attack flows such as Slowloris or low-rate DDoS
Fwd Packet Length Mean	Average size of forward packets	Helps identify anomalies in application-layer DDoS traffic patterns
Flow Packets/s	Packet transmission rate	High packet rates are common in volumetric DDoS attacks
Bwd Packet Length Mean	Average size of backward packets	Reflects client-server response imbalance typical in flooding
Fwd Header Length	Total header size of forward packets	Abnormal header sizes may signal spoofing or crafted attack packets
ACK Flag Count	Number of ACK flags	High ACK counts may indicate TCP ACK flooding
Init_Win_bytes_forward	Initial TCP window size	Detects abnormal TCP configuration used in volumetric attacks
min_seg_size_forward	Minimum segment size	Irregular segment size helps detect slow or probing attacks

Feature Distributions**FIGURE 2** | Distribution Plots of Selected Features

3.4 | CNN-LSTM Model Architecture

The core of the proposed methodology lies in a compact hybrid architecture that combines CNN and LSTM networks. This integration enables the model to learn spatial and temporal features essential for accurate DoS/DDoS detection in an SDN Environment.

The model begins with an input layer that receives preprocessed sequential traffic data, structured in the form of timesteps and feature dimensions. The CNN block follows, consisting of a 1D convolutional layer with 64 filters and a kernel size of 2, activated by ReLU [53]. This layer captures local spatial patterns in the traffic flow. The batch normalization is applied immediately after to normalize activations and speed up convergence during training.

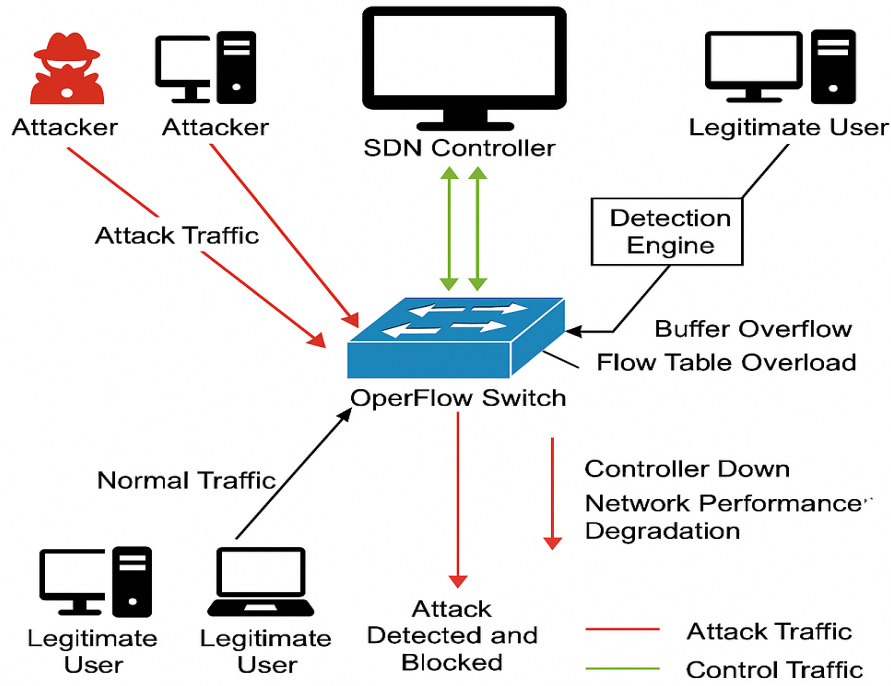


FIGURE 3 | System Architecture of the Proposed CNN-LSTM DDoS Detection Framework in Software-Defined Networking

Mathematically [54, 55], the one-dimensional (1D) convolution operation applied to an input sequence x with a convolution kernel w of size k is defined as:

$$y_t = \sum_{i=0}^{k-1} w_i \cdot x_{t+i} \quad (4)$$

In this equation, y_t denotes the output value at position t in the resulting feature map; x_{t+i} is the input value at position $t + i$; w_i is the i -th element (weight) of the convolution kernel w ; and k is the size (or width) of the kernel, determining the number of input values involved in each convolution operation. The summation iteratively multiplies each kernel weight with a corresponding input value within the receptive field and accumulates the result to produce the output at each position t . This operation allows the model to learn local patterns in sequential data, making it particularly effective in tasks such as time series analysis or natural language processing.

Next, the LSTM block includes two stacked LSTM layers. The first LSTM layer (L1) is configured with 50 units and `return_sequences=True`, allowing it to retain the full sequence structure. The second LSTM layer (L2), also with 50 units but `return_sequences=False`, condenses the sequential output into a fixed-length vector, learning deeper temporal dependencies in the traffic data.

The LSTM unit is governed by the following set of equations, where x_t is the input vector at time step t , h_{t-1} is the hidden state from the previous time step, and σ and $\tanh$ represent the sigmoid and hyperbolic tangent activation functions, respectively [56]:

$$f_t = \sigma(W_f \cdot [h_{t-1}, x_t] + b_f) \quad (5)$$

$$i_t = \sigma(W_i \cdot [h_{t-1}, x_t] + b_i) \quad (6)$$

$$\tilde{C}_t = \tanh(W_C \cdot [h_{t-1}, x_t] + b_C) \quad (7)$$

$$C_t = f_t * C_{t-1} + i_t * \tilde{C}_t \quad (8)$$

$$o_t = \sigma(W_o \cdot [h_{t-1}, x_t] + b_o) \quad (9)$$

$$h_t = o_t * \tanh(C_t) \quad (10)$$

In these equations, f_t , i_t , and o_t denote the forget gate, input gate, and output gate activations at time step t , respectively. The cell candidate $\tilde{C}_t$ is a temporary update to the memory content, modulated by the input gate. The cell state C_t is the internal memory that carries long-term information, updated by combining the retained previous state C_{t-1} (weighted by the forget gate f_t) with the new candidate $\tilde{C}_t$ (weighted by the input gate i_t). The hidden state h_t represents the output of the LSTM unit at time t , calculated by applying the output gate o_t to the activated cell state. The terms W_f , W_i , W_C , and W_o are learnable weight matrices associated with each gate and the cell candidate, while b_f , b_i , b_C , and b_o are the corresponding bias vectors. The concatenation of h_{t-1} and x_t ensures that the gate decisions consider both the past context and the current input.

The output of the LSTM block is passed to a fully connected (FC) block. This block includes a dense layer with 64 units activated by ReLU and a dropout layer with a 0.5 drop rate to reduce overfitting. The final layer is a sigmoid-activated dense layer with one unit, used to perform binary classification: distinguishing normal traffic (label 0) from DoS/DDoS attacks (label 1).

The output layer computes the predicted probability $\hat{y}$ using the sigmoid activation function [57], which maps the input to a value between 0 and 1, suitable for binary classification tasks:

$$\hat{y} = \sigma(z) = \frac{1}{1 + e^{-z}} \quad (11)$$

In this equation, $\hat{y}$ represents the predicted probability of the model for the positive class, and $\sigma(z)$ denotes the sigmoid function applied to the input z . The variable z is the weighted sum of the inputs to the output neuron, typically calculated as $z = \sum_i w_i x_i + b$, where w_i are the learned weights, x_i are the input features from the previous layer, and b is the bias term. The sigmoid function smoothly squashes this linear combination into a bounded output in the range (0, 1), enabling probabilistic interpretation.

The proposed lightweight architecture comprises approximately 80,000 trainable parameters, which include the weights and biases learned during the training process. It operates on eight key traffic features, ensuring fast inference, reduced computational overhead, and suitability for deployment in real-time, resource-constrained SDN environments as shown in Figure 4. In Figure 4 color scheme of legend is used to identify various components such as blue represents model layers, yellow for hyperparameter and green denotes activation operations.

3.5 | Model Training and Testing

After preprocessing, the cleaned and balanced dataset is split into training and testing sets using an 80:20 ratio, with stratified sampling to preserve class distribution. The model is compiled using the Adam optimizer [58], an adaptive gradient-based optimization algorithm that combines the advantages of the adaptive gradient algorithm (AdaGrad) and root mean square propagation (RMSProp) by maintaining per-parameter learning rates and leveraging first and second-order moment estimates of gradients. This facilitates faster and more stable convergence during training, particularly in the presence of sparse or noisy data. The binary cross-entropy is used as the loss function, which is appropriate for the binary classification task of distinguishing between benign and attack traffic. Key performance metrics: accuracy, precision, recall, and F1-score are used during training to evaluate detection effectiveness and overall model robustness.

In order to avoid overfitting, early stopping is employed, halting training if the validation loss does not improve over successive epochs. Additionally, ReduceLROnPlateau is used to reduce the learning rate when validation performance stagnates, ensuring better convergence and helping the model escape local minima [59]. Following training, performance is evaluated on the test set using the same metrics, providing insights into the capability of the model to detect DDoS traffic in previously unseen data. This process ensures that the model not only learns from the training set but also generalizes well to real-world traffic patterns.

3.6 | Performance Evaluation Metric

Once the model is trained, its performance is thoroughly evaluated using the testing subset. The key performance metrics, including accuracy, precision, recall, F1-score, and FPR, are used to quantify the ability of the hybrid model to differentiate between malicious and benign traffic. These metrics provide a balanced

view of detection effectiveness and reliability, which is essential in real-time SDN deployment, where a high false positive rate (FPR) can lead to operational inefficiencies. Model predictions are categorized into four outcomes: true positives (TP), where DDoS attacks are correctly identified; true negatives (TN), where benign traffic is correctly classified; false positives (FP), where benign traffic is incorrectly flagged as a DDoS attack; and false negatives (FN), where DDoS traffic is incorrectly classified as benign. These classification outcomes form the basis for evaluating the performance of the model using precision, recall, F1-score, and accuracy.

The evaluation metrics are computed as follows:

$$\text{Accuracy} = \frac{TP + TN}{TP + TN + FP + FN} \quad (12)$$

$$\text{Precision} = \frac{TP}{TP + FP} \quad (13)$$

$$\text{Recall} = \frac{TP}{TP + FN} \quad (14)$$

$$\text{F1-Score} = 2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} \quad (15)$$

$$\text{FPR} = \frac{FP}{FP + TN} \quad (16)$$

These metrics allow for a comprehensive analysis of the behavior of the model. High precision indicates fewer FPR, while high recall ensures that actual attacks are successfully detected. The F1-score balances both precision and recall, particularly in imbalanced data scenarios. The low FPR is especially critical in SDN deployments, as excessive false positives can degrade trust and operational stability.

3.7 | Real-Time Testing in SDN Environment

The proposed model is tested on an emulated SDN environment using Mininet, which is a network emulator that allows for the creation of virtual SDN networks. The POX controller [60] is used as the SDN controller to manage flow rules, and Open vSwitch is employed for packet forwarding. The sFlow is used to capture and monitor the traffic from the SDN switch, which is then preprocessed and classified by the trained CNN-LSTM model.

In this testbed, normal traffic is generated using simple ping scripts, while malicious traffic is simulated using SYN flood scripts [61]. This allows for testing the ability of the model to distinguish between benign and malicious traffic in a live network environment. The performance of the proposed model is evaluated in terms of its response time, scalability, and ability to correctly classify traffic under varying network conditions. This experimental setup confirms the effectiveness and scalability of the model for real-time DDoS detection in SDN.

The proposed methodology presents a robust and scalable framework for DDoS detection in SDN environments. By combining the spatial analysis capabilities of the CNN with the temporal analysis power of the LSTM, the model achieves high accuracy in detecting both immediate and sustained DDoS attacks. The use of real-time testing in SDN setups further validates the applicability of the model for emulated network environments. Through careful preprocessing, model design, training, and evaluation, the proposed methodology offers an efficient, lightweight, and high-performance solution for DDoS detection, providing an effective mechanism for SDN-based networks.

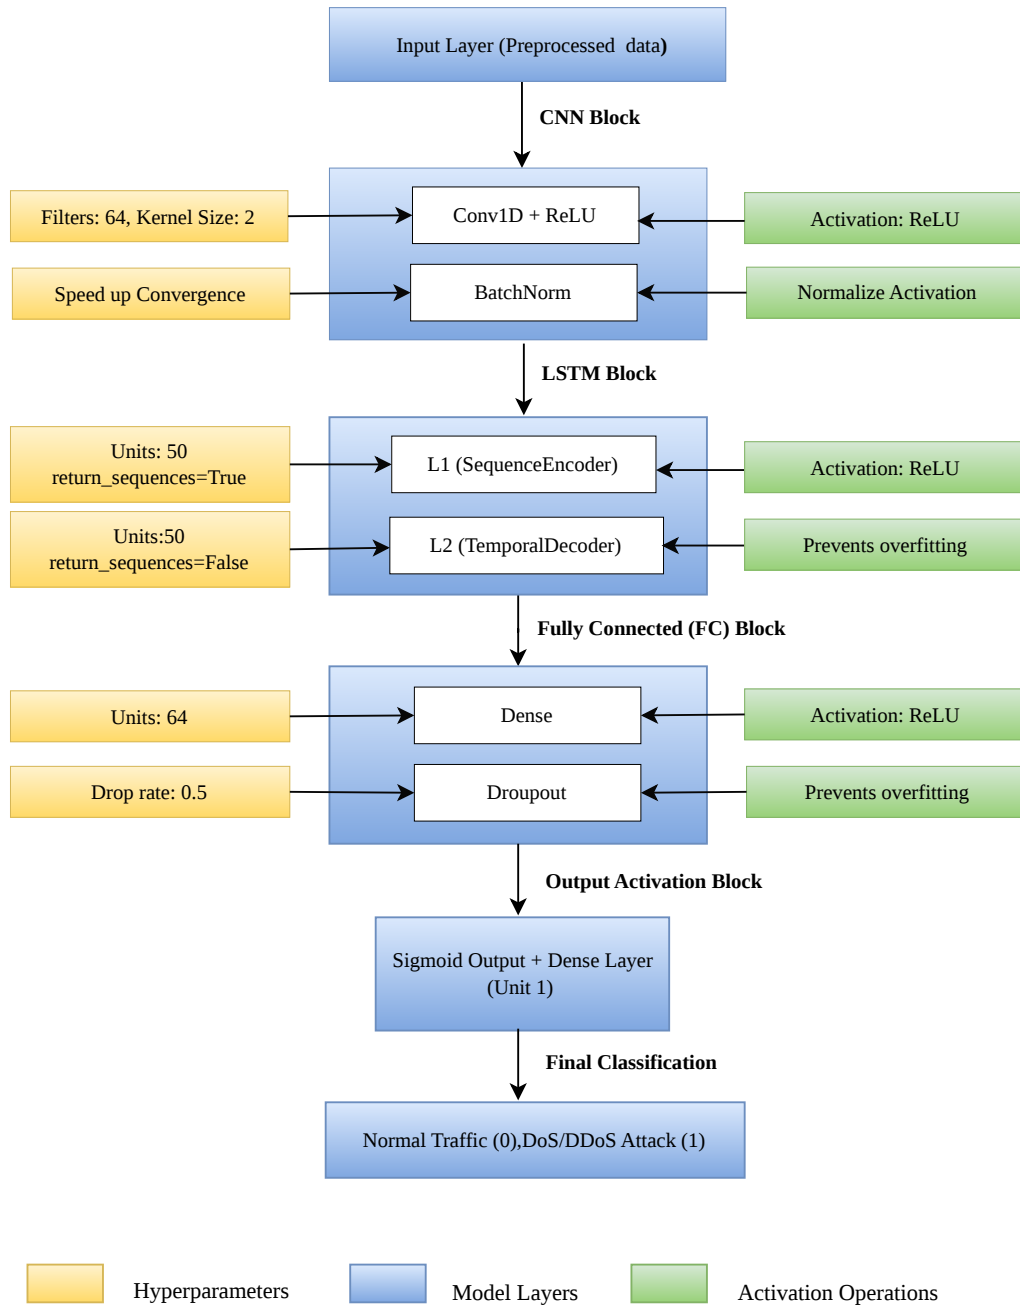


FIGURE 4 | Proposed lightweight CNN-LSTM architecture for real-time DoS/DDoS detection in Software-Defined Networks (SDN)

4 | Experimental Setup

In order to evaluate the proposed hybrid CNN-LSTM model in a practical environment, a virtual SDN testbed is implemented. While offline analysis provides foundational insights, real-time validation is crucial for assessing the effectiveness of the model in detecting dynamic and evolving DDoS attacks. The experimental setup consists of a virtualized SDN environment using mininet (v2.3.1b4) [62] to emulate network topology and traffic.

A POX controller (v0.7.0) [63] manages the OpenFlow switches, with Open vSwitch (v2.13.8) [64] acting as the data plane element. Real-time traffic monitoring is enabled through the sFlow integration.

Model training is performed offline using the CICDDoS2019 dataset. After training, the CNN-LSTM model is deployed within the controller environment to classify live traffic flows as benign or malicious. The feature vectors are extracted in real time from

sFlow traffic [65], preprocessed, and passed to the model for inference. The mininet simulates legitimate and malicious traffic, including the SYN flood attacks generated via custom scripts. This setup enables flexible and repeatable experiments under varying traffic conditions.

The entire testbed runs on a Windows 10 Pro host system using VMware Workstation 17 Pro, with Ubuntu 20.04.6 LTS as the guest OS. The controller logic and the CNN-LSTM model operate within the Ubuntu environment for consistency. Python 3.8.10 is used for development. The key libraries include TensorFlow, Scikit-learn, NumPy, Pandas, and imbalanced-learn. Table 5 provides a summary of the hardware and software specifications used in the testbed.

5 | Results and Discussion

This section provides the evaluation and analysis of the proposed CNN-LSTM based DDoS detection model in SDN. The CNN-LSTM model is trained with the CICDDoS2019 dataset and tested using real-time data collected from Open vSwitch with sFlow. The results are first evaluated by comparing the proposed model with machine learning and deep learning models from two related studies. Then, the confusion matrix and Receiver Operating Characteristic (ROC) curve are used to evaluate the classification results. Next, followed by a class distribution analysis to evaluate the model balancing and prediction accuracy. Finally, the results are discussed in detail to interpret them and demonstrate the efficiency and effectiveness of the proposed method to detect DDoS attacks in SDN.

5.1 | Performance Evaluation and Comparison with Baseline Models

In order to evaluate the performance of the proposed CNN-LSTM model, several widely recognized classification metrics are employed, including accuracy, precision, recall, F1-score, and FPR. These metrics are crucial for understanding how well the model distinguishes between benign and malicious traffic in the SDN environment. In Figure 5, 6 comparison carried out between proposed and existing ML and DL method (RF, SVM, DT, CNN-AD, KNN) from baseline papers [66], [67]. The proposed model achieved an exceptional 99.5% accuracy, indicating it correctly classified nearly all of the network capture traffic. The 99.3% precision signifies that the model accurately identified malicious traffic while minimizing the misclassifications of benign traffic as attacks. The Recall is 99.5%, which reflects the ability of the hybrid model to detect almost all actual DDoS attack traffic, ensuring high detection sensitivity. The F1-score, which balances precision and recall, is calculated to be 99.4%, confirming that both metrics are well-optimized. Furthermore, the FPR is extremely low at 0.076%, demonstrating that the model rarely misclassifies normal traffic as malicious, a key feature for avoiding disruptions in real-world SDN environments.

In Figure 7, F1-score comparison is carried out between proposed and existing ML, DL baseline models by exploiting CICDDoS2019 dataset. The baseline model with the worst performance was Naïve Bayes (NB) with an F1-score of 71.1%, suggesting that it is not the best choice for modeling network traffic patterns.

Machine learning models such as RF(P1), SVM and DT(P1) exhibited moderate performance ranging from 91.1% to 94.9%, whereas KNN and the deep learning approach CNN-AD had better performance with F1-scores of 96.5% and 97.4%, respectively. The improved baseline algorithms (second configuration) boosted the performance, with DT(P2) and RF(P2) reaching 97.9% and 99.1%, respectively, highlighting the influence of model optimization and feature treatment. The proposed CNN-LSTM model, on the other hand, recorded the highest F1-score of 99.4%, exceeding all the baseline algorithms, including the top-performing baseline (RF(P2)), thus demonstrating the success of the proposed hybrid model in achieving better detection accuracy and dependability for DDoS attack classification.

5.2 | Optimization Analysis of the Proposed Model

The Figure 8 shows results of the CNN-LSTM model for different optimizers and batch sizes on the CICDDoS2019 dataset. Adam optimizer outperformed the SGD, with the best accuracy (99.5%) and F1-score (99.4%) observed using batch size 64, while with batch size 128, the accuracy and F1 were slightly lower, but still had competitive values (99.40% and 99.25%, respectively). On the other hand, the SGD optimizer achieved relatively lower performance with accuracy 99.10% and 98.70%, and F1-score 98.85% and 98.40% for the batch sizes 64 and 128, respectively. In summary, the findings show that the proposed CNN-LSTM model achieves the best and more consistent results with the Adam optimizer and a smaller batch size, exhibiting its effectiveness and efficiency in detecting DDoS attacks.

5.3 | Classification Performance Analysis Using Confusion Matrix and ROC Curve

The confusion matrix, shown in Figure 9, presents a detailed evaluation of the classification performance of the proposed hybrid model, highlighting how the model predicts benign and malicious traffic. The matrix provides insights into the ability to correctly identify false positives and false negatives. In this case, the model correctly identified 4,281,867 instances of normal traffic as benign (true negatives), while misclassifying 2,884 normal traffic instances as attack traffic (false positives). On the other hand, the model successfully identified 4,283,641 attack instances as attacks (True Positives) and misclassified 1,110 attack instances as normal traffic (False Negatives).

The ROC curve, depicted in Figure 10, is another essential evaluation tool that visualizes the ability of the CNN-LSTM to distinguish between normal and attack traffic across different threshold settings. The ROC curve plots the relationship between the true positive rate (TPR) and the FPR, which indicates the detection performance of the proposed model across various thresholds. In this evaluation, the area under the ROC curve is found to be 0.99. This AUC indicates that the CNN-LSTM model performs exceptionally well at differentiating between attack and normal traffic. A higher AUC signifies a better model, as it demonstrates the high sensitivity of the model in detecting actual DDoS attacks (high TPR) while minimizing the misclassification of benign traffic (low FPR). Such reliable performance is essential for SDN environments, where detection accuracy directly impacts both the security and the stability of the network.

No.	Category	Details
Hardware Setup		
1	Processor	Intel(R) Core(TM) i9-9880H CPU @ 2.30GHz
2	Installed RAM	32.0 GB
3	System Type	64-bit OS, x64-based processor
4	Storage	1 TB SSD
5	GPU	4 GB VRAM GPU
Operating System Setup		
6	Host OS	Windows 10 Pro, Version 22H2
7	Guest OS	Ubuntu 20.04.6 LTS
Virtualization Setup		
8	Software	VMware Workstation 17 Pro, Build-23775571
SDN Tools and Controllers		
9	Mininet Version	2.3.1b4
10	Open vSwitch Version	2.13.8 (DB Schema 8.2.0)
11	OpenFlow Version	Verified via Open vSwitch
12	POX Controller Version	POX 0.7.0 (gar) / CPython (3.10.12)
13	Monitoring Integration	sFlow for NetFlow statistics
Traffic Simulation		
14	Normal Traffic	ICMP and TCP flows between Mininet hosts
15	Attack Traffic	SYN flood packets via scripted attack nodes
ML and DL Frameworks		
16	Python Version	Python 3.8.10
17	Libraries	TensorFlow, Scikit-learn, Pandas, NumPy, Imbalanced-learn
Dataset Used		
18	Dataset	CICDDoS2019

TABLE 5 | Hardware and Software Setup for SDN-Based DDoS Detection Experiment

5.4 | Class Distribution Analysis

The distribution of predicted classes in the real-time SDN traffic predictions. Its predictions show nearly equal proportions of normal and attack traffic, with both classes exceeding 4.2 million instances. This balanced prediction distribution indicates that the model does not exhibit bias toward either class, neither over-predicting attacks nor under-predicting them. This consistency in predictions is essential for practical deployment in real-world SDN environments, as it ensures that the model is capable of handling imbalanced traffic flows without triggering FPR or missing potential threats. By maintaining a stable and reliable classification pattern, the model demonstrates its ability to handle high-throughput data flows and make accurate decisions even under varying network conditions. The consistency of class distribution further validates the robustness of the CNN-LSTM hybrid model in real-time DDoS detection scenarios.

5.5 | Discussion

The experimental results showcase the optimal performance of the CNN-LSTM hybrid model for DDoS detection in SDN environments. The proposed model achieves high values in accuracy, precision, recall, and F1-score, demonstrating its reliability and effectiveness in classifying both benign and malicious traffic. The low FPR further emphasizes the model's potential for real-time deployment, minimizing disruptions caused by misclassified normal traffic. The confusion matrix and ROC curve analysis confirm that the model successfully detects DDoS attacks with minimal misclassification. The ROC score of 0.99 further reinforces its outstanding performance in distinguishing between attack and normal traffic.

Moreover, the consistent class distribution in the predictions highlights the model's ability to handle diverse traffic patterns without bias. This capability is crucial for maintaining network stability and security in real-world SDN environments, where detection systems must adapt to varying traffic conditions without introducing FPR or missing attacks. The results indicate that the CNN-LSTM hybrid model is well-suited for high-throughput

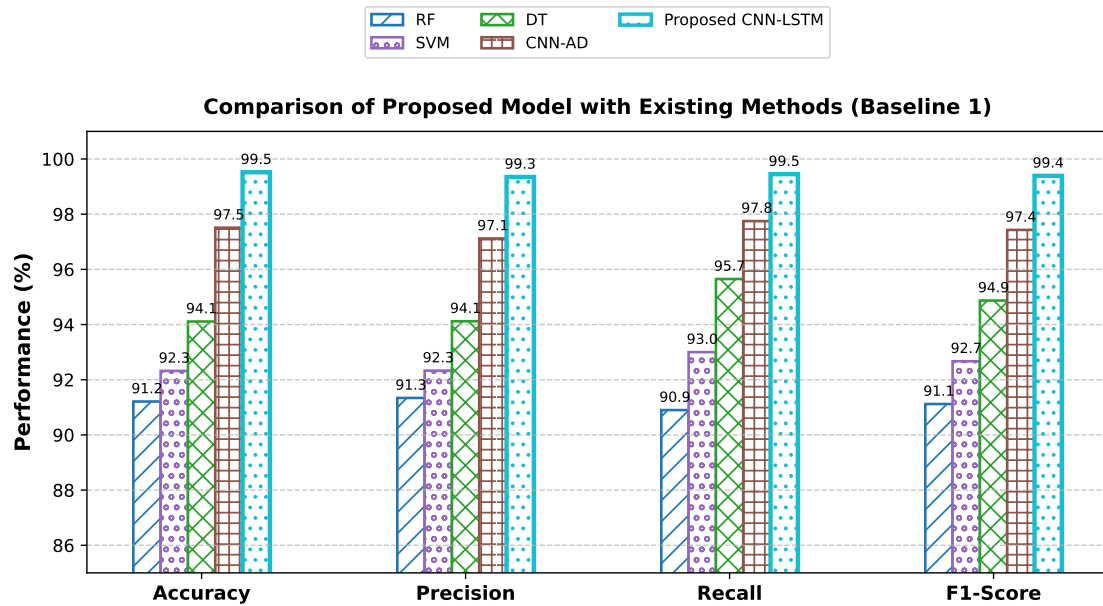


FIGURE 5 | Performance comparison of the proposed CNN-LSTM model with baseline machine learning and deep learning methods reported in [67] (Baseline 1) in terms of accuracy, precision, recall, and F1-score on the CICDDoS2019 dataset.

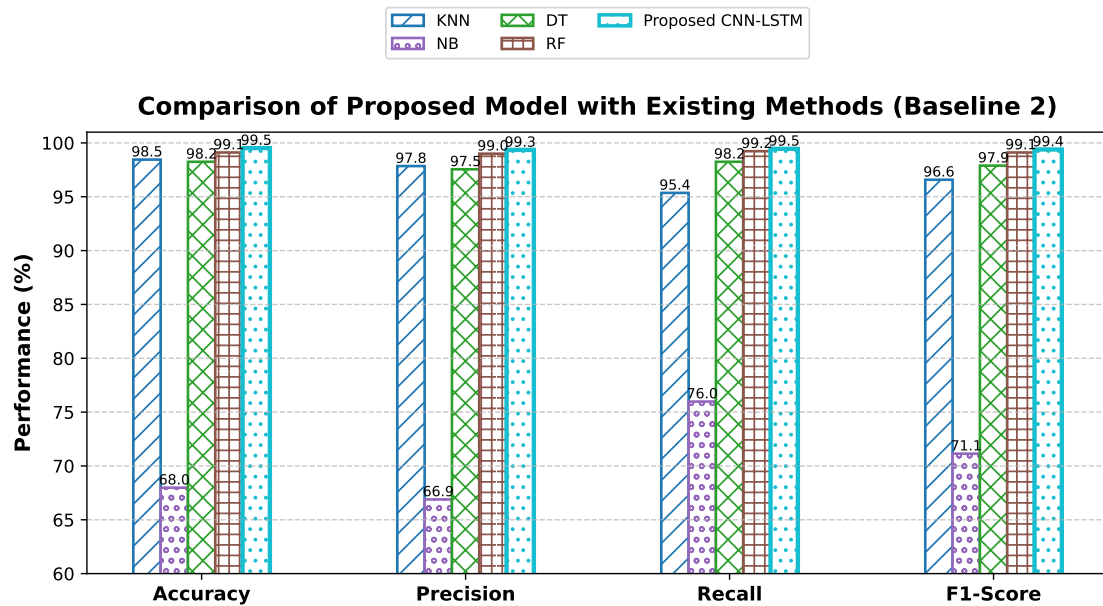


FIGURE 6 | Performance comparison of the proposed CNN-LSTM model with baseline machine learning and deep learning methods reported in [66] (Baseline 2) in terms of accuracy, precision, recall, and F1-score on the CICDDoS2019 dataset.

SDN environments, offering an efficient and reliable solution for real-time DDoS detection.

The proposed CNN-LSTM model provides an effective solution for DDoS attack detection in SDN networks. The high detection

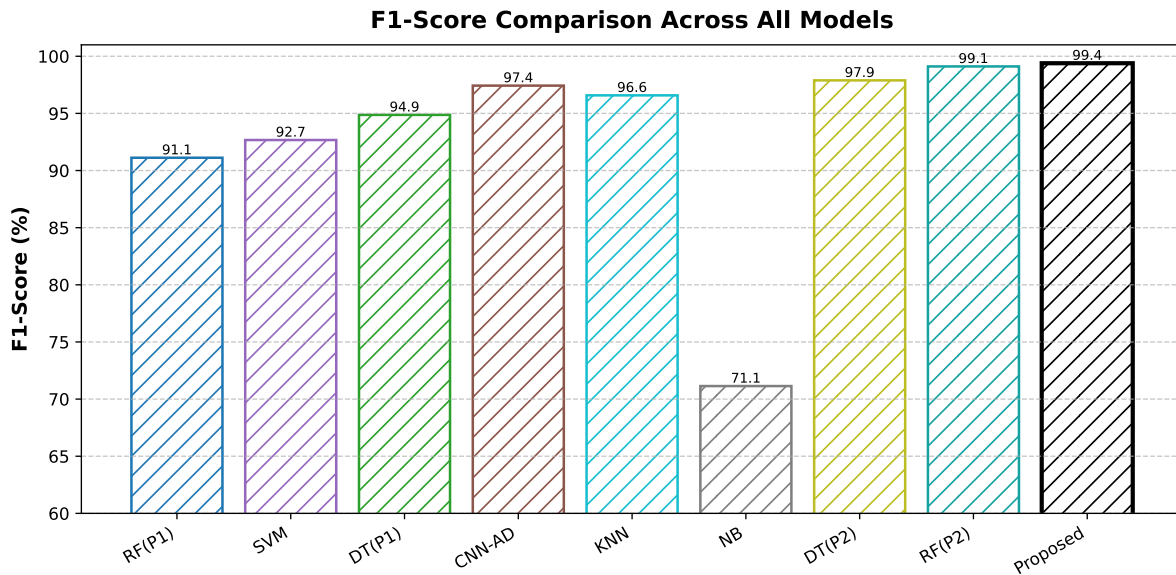


FIGURE 7 | F1-score comparison of the proposed CNN-LSTM model with machine learning and deep learning models reported in Baseline 1 [67] and Baseline 2 [66] on the CICDDoS2019 dataset.

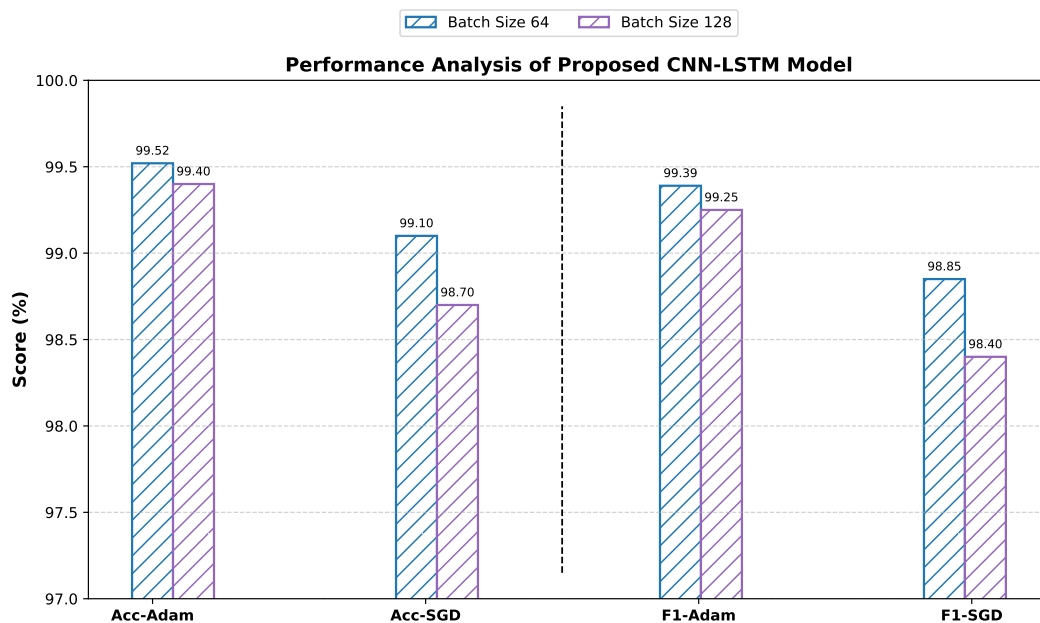


FIGURE 8 | Performance analysis of the proposed CNN-LSTM model under different optimizers (Adam and SGD) and batch sizes (64 and 128) in terms of accuracy and F1-score on the CICDDoS2019 dataset.

accuracy, low FPR, and consistent performance across various evaluation metrics underscore its potential for practical deployment. Future work can explore the model's scalability with different types of DDoS attacks and under varying traffic loads to further assess its performance in large-scale SDN environments.

6 | Conclusion

SDN enhances network adaptability through centralized control, but this architectural paradigm also introduces a critical vulnerability: the SDN controller becomes a high-value target for DDoS attacks. In order to detect this risk, we propose a lightweight hybrid framework that synergizes CNN for spatial feature extraction with LSTM networks for temporal pattern recognition. The proposed model, comprising 80,000 parameters and leveraging eight

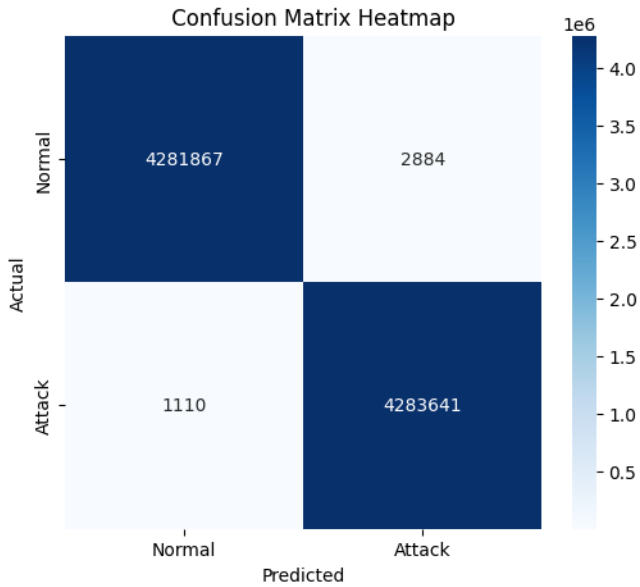


FIGURE 9 | Confusion matrix for DDoS detection model performance

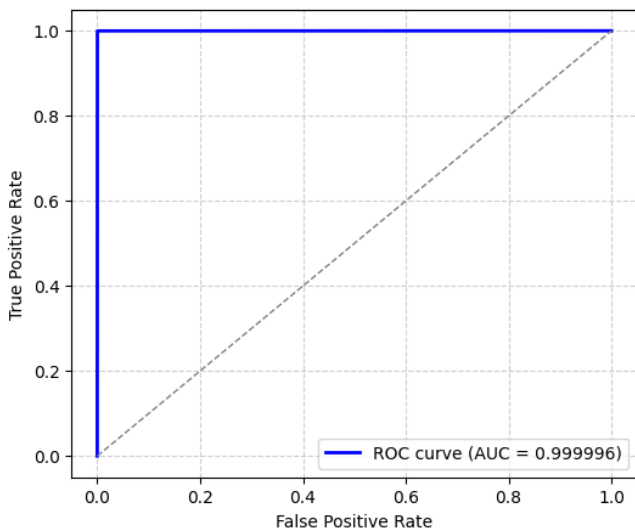


FIGURE 10 | ROC curve for DDoS Detection Model Performance

discriminative flow-level features, achieves exceptional detection performance while maintaining a low computational performance. This lightweight model is trained on the CICDDoS2019 dataset and is evaluated in a Mininet SDN testbed (utilizing POX, Open vSwitch, and sFlow for real traffic export). The model integrates a balanced data sampling strategy, early stopping, and adaptive learning rates for robust training. Experimental results demonstrate 99.5% accuracy, F-1 score 99.4 % and FPR 0.076%, while ensuring efficient processing suitable for real-time deployment on commodity hardware. In contrast to existing approaches focused solely on offline evaluation or computationally intensive architectures. The proposed framework is optimized for practical deployment and validated using captured SDN traffic to assess operational readiness. Furthermore, proposed model optimization

is validated through various optimizers and batch sizes where we got the better results for Adam and batch size 64. This work delivers a scalable, high-accuracy, and resource-efficient DDoS detection solution, with all implementation assets from data preprocessing to real-time inference open-source for further research. Our proposed hybrid deep learning approach bridges the gap between theoretical research and operational SDN security, strengthening the foundation for next-generation programmable network defense.

The Data Availability Statement

The data can be obtained from the corresponding author upon request.

Author Contributions Statement

All authors contributed equally.

Funding Statement

This work is funded by the BIG DATA ANALYTICS CENTER, UAEU, under grant # : G00004997.

Conflicts of Interest

The authors declare no conflicts of interest. The funders had no role in the design of the study, in the analyses of the writing of the manuscript, or in the decision to publish the results.

References

- Sanjeev Singh, and Rakesh Kumar Jha. "A survey on Software Defined Networking: Architecture for next generation network." *Journal of Network and Systems Management* 25 (2017): 321–374.
- Sajad Khorsandroo, Adrián Gallego Sánchez, Ali Saman Tosun, José M Arco, and Roberto Doriguzzi-Corin. "Hybrid SDN evolution: A comprehensive survey of the state-of-the-art." *Computer Networks* 192 (2021): 107981.
- Manish Paliwal, Deepti Shrimankar, and Omprakash Tembhurne. "Controllers in SDN: A review report." *IEEE access* 6 (2018): 36256–36270.
- Lubna Fayeze Eliyan, and Roberto Di Pietro. "DoS and DDoS attacks in Software Defined Networks: A survey of existing solutions and research challenges." .
- Anderson Bergamini De Neira, Burak Kantarci, and Michele Nogueira. "Distributed denial of service attack prediction: Challenges, open issues and opportunities." *Computer Networks* 222 (2023): 109553.
- Metehan Gelgi, Yueting Guan, Sanjay Arunachala, Maddi Samba Siva Rao, and Nicola Dragoni. "Systematic Literature Review of IoT Botnet DDOS Attacks and Evaluation of Detection Techniques." *Sensors* 24, no. 11 (2024): 3571.
- Harshdeep Singh, Vishnu Vardhan Baligodugula, and Fathi Amsaad. 2023. "Shrew distributed Denial-of-Service (DDoS) attack in IoT applications: A survey." In *IFIP International Internet of Things Conference*, 97–103. Springer.
- Bindu Bala, and Sunny Behal. "AI techniques for IoT-based DDoS attack detection: Taxonomies, comprehensive review and research challenges." *Computer Science Review* 52 (2024): 100631.
- Daniele Brighenti, Jalolliddin Yusupov, Alejandro Molina Zarca, Fulvio Valenza, Riccardo Sisto, Jorge Bernal Bernabe, and Antonio Skarmeta. "Automatic, verifiable and optimized policy-based security enforcement for SDN-aware IoT networks." *Computer Networks* 213 (2022): 109123.
- Tariq Emad Ali, Yung-Wey Chong, and Selvakumar Manickam. "Machine learning techniques to detect a DDoS attack in SDN: A systematic review." *Applied Sciences* 13, no. 5 (2023): 3183.
- Malti Bansal, Apoorva Goyal, and Apoorva Choudhary. "A comparative analysis of K-nearest neighbor, genetic, support vector machine, decision tree, and long short term memory algorithms in machine learning." *Decision Analytics Journal* 3 (2022): 100071.
- Youdi Gong, Guangzhen Liu, Yunzhi Xue, Rui Li, and Lingzhong Meng. "A survey on dataset quality in machine learning." *Information and Software Technology* 162 (2023): 107268.
- Mandula China Pentu Saheb, M Srikanth Yadav, Sallagundla Babu, Jeevana Jyothi Pujari, and Jeevan Babu Maddala. 2021. "A review of DDoS evaluation dataset: CICDDoS2019 dataset." In *International Conference on Energy Systems, Drives and Automations*, 389–397. Springer.
- AP Ratnasari. "Performance of random oversampling, random undersampling, and SMOTE-NC methods in handling imbalanced class in classification models." *International Journal of Scientific Research and Management* 12, no. 4 (2024): 494–501.
- Amal A Alahmadi, Malak Aljabri, Fahd Alhaidari, Danyah J Alharthi, Ghadi E Rayani, Leena A Marghalani, Ohoud B Alotaibi, and Shurooq A Bajandouh. "DDoS attack detection in IoT-based networks using machine learning models: a survey and research directions." *Electronics* 12, no. 14 (2023): 3103.
- Ankit Kumar Jain, Hariom Shukla, and Diksha Goel. "A comprehensive survey on DDoS detection, mitigation, and defense strategies in software-defined networks." *Cluster Computing* 27, no. 9 (2024): 13129–13164.
- Sait Melih Doğan, Aynur Koçak, and Mustafa Alkan. "Detection and mitigation of cyber-attacks in software defined networks using machine learning/deep learning: a systematic literature review, research challenges and future directions." *International Journal of Information Security* 24, no. 5 (2025): 209.
- Nemalikanti Anand, MA Saifulla, Raveendra Babu Ponnuru, Goutham Reddy Alavalapati, Rizwan Patan, and Amir H Gandomi. "Securing Software Defined Networks: A Comprehensive Analysis of Approaches, Applications, and Future Strategies against DoS Attacks." . *IEEE Access*.
- J. Bhayo, R. Jafaq, A. Ahmed, S. Hameed, and S. A. Shah. "A time-efficient approach toward DDoS attack detection in IoT network using SDN." *IEEE Internet of Things Journal* 9, no. 5 (2021): 3612–3630.
- C. Fan, N. M. Kaliyamurthy, S. Chen, H. Jiang, Y. Zhou, and C. Campbell. "Detection of DDoS Attacks in Software Defined Networking Using Entropy." *Applied Sciences* 12, no. 1 (2021): 370.
- Yassine Maleh, Youssef Qasmaoui, Khalid El Gholami, Yassine Sadqi, and Soufyane Mounir. "A comprehensive survey on SDN security: threats, mitigations, and future directions." *Journal of Reliable Intelligent Environments* 9, no. 2 (2023): 201–239.
- Ruikui Ma, Qiuqian Wang, Xiangxi Bu, and Xuebin Chen. "Real-time detection of DDoS attacks based on random forest in SDN." *Applied Sciences* 13, no. 13 (2023): 7872.
- Abdinasir Hirsi, Mohammed A Alhartomi, Lukman Audah, Adeb Salh, Nan Mad Sahar, Salman Ahmed, Godwin Okon Ansa, and Abdullahi Farah. "Comprehensive analysis of ddos anomaly detection in software-defined networks." *IEEE Access* 13 (2025): 23013–23071.
- L. Tan, Y. Pan, J. Wu, J. Zhou, H. Jiang, and Y. Deng. "A New Framework for DDoS Attack Detection and Defense in SDN Environment." *IEEE Access* 8 (2020): 161908–161919.
- H Lv, and Y Ding. "A hybrid intrusion detection system with K-means and CNN+ LSTM." *ICST Trans. Scalable Inf. Syst* 11 (2024): 1–12.
- F. Khashab, J. Moubarak, A. Feghali, and C. Bassil. 2021, June). "DDoS Attack Detection and Mitigation in SDN Using Machine Learning." In *2021 IEEE 7th International Conference on Network Softwarization (NetSoft)*, 395–401. IEEE.
- M. W. Nadeem, H. G. Goh, V. Ponnusamy, and Y. Aun. "DDoS Detection in SDN Using Machine Learning Techniques." *Computers, Materials & Continua* 71, no. 1.
- V. Hnamte, and J. Hussain. "Enhancing Security in Software-Defined Networks: An Approach to Efficient ARP Spoofing Attacks Detection and Mitigation." *Telematics and Informatics Reports* 14 (2024): 100129.
- Z. Xu 2025. "Deep Learning Based DDoS Attack Detection." In *ITM Web of Conferences*, Vol 70, 03005. EDP Sciences.
- Abdul Sattar Palli, Jafreezal Jaafar, Manzoor Ahmed Hashmani, Heitor Murilo Gomes, Aeshah Alsughayyir, and Abdul Rehman Gilal. "Combined effect of concept drift and class imbalance on model performance during stream classification."

31. Abdullah H Alqahtani. “An incremental hybrid adaptive network-based IDS in Software Defined Networks to detect stealth attacks.” . *arXiv preprint arXiv:2404.01109*.
32. B. Nugraha, and R. N. Murthy. 2020, November). “Deep Learning-Based Slow DDoS Attack Detection in SDN-Based Networks.” In *2020 IEEE Conference on Network Function Virtualization and Software Defined Networks (NFV-SDN)*, 51–56. IEEE.
33. M. P. Novaes, L. F. Carvalho, J. Lloret., and M. L. Proença Jr. “Adversarial Deep Learning Approach Detection and Defense Against DDoS Attacks in SDN Environments.” *Future Generation Computer Systems* 125 (2021): 156–167.
34. J. D. Gadze, A. A. Bamfo-Asante, J. O. Agyemang, H. Nunoo-Mensah., and K. A. Opare. “An Investigation into the Application of Deep Learning in the Detection and Mitigation of DDoS Attack on SDN Controllers.” *Technologies* 9, no. 1 (2021): 14.
35. I. Priyadarshini, P. Mohanty, A. Alkhayat, R. Sharma., and S. Kumar. “SDN and Application Layer DDoS Attacks Detection in IoT Devices by Attention-Based Bi-LSTM-CNN.” *Transactions on Emerging Telecommunications Technologies* 34, no. 11 (2023): e4758.
36. Nawar Shaheed, Jumaah., and Asghar Tajoddin Ashkafaki. “Hybrid Ensemble Deep Learning Framework for Efficient DDoS Attack Detection in Software-Defined Networks.” *Journal of Electrical Systems* 20, no. 10s (2024): 6552–6561.
37. H. Min, Z. Yang, H. Sun., and P. Zhang. 2023, December). “DDoS Attack Detection Model Based on CNN-LSTM.” In *Fourth International Conference on Signal Processing and Computer Science (SPCS 2023)*, Vol 12970, 1014–1018. SPIE.
38. H. Polat, M. Türkoğlu, O. Polat., and A. Şengür. “A Novel Approach for Accurate Detection of the DDoS Attacks in SDN-Based SCADA Systems Based on Deep Recurrent Neural Networks.” *Expert Systems with Applications* 197 (2022): 116748.
39. H. Elubeyd, and D. Yiltas-Kaplan. “Hybrid Deep Learning Approach for Automatic DoS/DDoS Attacks Detection in Software-Defined Networks.” *Applied Sciences* 13, no. 6 (2023): 3828.
40. Beenish Habib, and Farida Khursheed. “Time-based DDoS attack detection through hybrid LSTM-CNN model architectures: An investigation of many-to-one and many-to-many approaches.” *Concurrency and Computation: Practice and Experience* 36, no. 9 (2024): e7996.
41. N. U. Ain, M. Sardaraz, M. Tahir, M. W. Abo Elsoud., and A. Alourani. “Securing IoT Networks Against DDoS Attacks: A Hybrid Deep Learning Approach.” *Sensors* 25, no. 5 (2025): 1346.
42. Asha Varma Songa, and Ganesh Reddy Karri. “An integrated SDN framework for early detection of DDoS attacks in cloud computing.” *Journal of Cloud Computing* 13, no. 1 (2024): 64.
43. A. Nazir, J. He, N. Zhu, S. S. Qureshi, S. U. Qureshi, F. Ullah, A. Wajahat., and M. S. Pathan. “A Deep Learning-Based Novel Hybrid CNN-LSTM Architecture for Efficient Detection of Threats in the IoT Ecosystem.” *Ain Shams Engineering Journal* 15, no. 7 (2024): 102777.
44. Thura Jabbar Khaleel, and Nadia Adnan Shiltagh. “DDoS attack detection using hybrid (CCN and LSTM) ML model.” *Iraqi Journal for Computers and Informatics* 49, no. 2 (2023): 53–61.
45. Usham Sanjota Chanu, Khundrakpam Johnson Singh., and Yambem Jina Chanu. “A dynamic feature selection technique to detect DDoS attack.” *Journal of Information Security and Applications* 74 (2023): 103445.
46. Nitin Rane, Saurabh Choudhary., and Jayesh Rane. “Machine learning and deep learning: A comprehensive review on methods, techniques, applications, challenges, and future directions.” . *Techniques, Applications, Challenges, and Future Directions*.
47. Marcos VO de Assis, Luiz F Carvalho, Joel JPC Rodrigues, Jaime Lloret., and Mario L Proença Jr. “Near real-time security system applied to SDN environments in IoT networks using convolutional neural network.” *Computers & Electrical Engineering* 86 (2020): 106738.
48. Basheer Husham Ali, Nasri Sulaiman, SAR Al-Haddad, Rodziah Atan., and Siti Lailatul Mohd Hassan. 2022. “DDos detection using active and idle features of revised cicflowmeter and statistical approaches.” In *2022 4th International Conference on Advanced Science and Engineering (ICOASE)*, 148–153. IEEE.
49. Kai Mei, Meifang Tan, Zhihui Yang., and Shaoyue Shi. 2022. “Modeling of feature selection based on random forest algorithm and pearson correlation coefficient.” In *Journal of Physics: Conference Series*, Vol 2219, 012046. IOP Publishing.
50. Ruikui Ma, Xuebin Chen., and Ran Zhai. “A DDoS attack detection method based on natural selection of features and models.” *Electronics* 12, no. 4 (2023): 1059.
51. Mousa Alalhareth, and Sung-Chul Hong. “An improved mutual information feature selection technique for intrusion detection systems in the Internet of Medical Things.” *Sensors* 23, no. 10 (2023): 4971.
52. Kun Wang, Yu Fu, Xueyuan Duan., and Taotao Liu. “Detection and mitigation of DDoS attacks based on multi-dimensional characteristics in SDN.” *Scientific Reports* 14, no. 1 (2024): 16421.
53. Emad Ul Haq Qazi, Abdulrazaq Almorjan., and Tanveer Zia. “A one-dimensional convolutional neural network (1D-CNN) based deep learning system for network intrusion detection.” *Applied Sciences* 12, no. 16 (2022): 7986.
54. Jayanth Koushik. “Understanding convolutional neural networks.” . *arXiv preprint arXiv:1605.09081*.
55. Ilaria Cacciari, and Anedio Ranfagni. “Hands-on Fundamentals of 1D Convolutional Neural Networks—A Tutorial for Beginner Users.” *Applied Sciences* (2076-3417) 14, no. 18.
56. Ivan Malashin, Vadim Tynchenko, Andrei Gantimurov, Vladimir Nelyub., and Aleksei Borodulin. “Applications of Long Short-Term Memory (LSTM) Networks in Polymeric Sciences: A Review.” *Polymers* 16, no. 18 (2024): 2607.
57. Shiv Ram Dubey, Satish Kumar Singh., and Bidyut Baran Chaudhuri. “Activation functions in deep learning: A comprehensive survey and benchmark.” *Neurocomputing* 503 (2022): 92–108.
58. Diederik P. Kingma, and Jimmy Ba. “Adam: A Method for Stochastic Optimization.” . *arXiv preprint arXiv:1412.6980*.
59. Vanlalruata Hnamte, Ashfaq Ahmad Najar, Hong Nhung-Nguyen, Jamal Hussain., and Manohar Naik Sugali. “DDoS attack detection and mitigation using deep neural network in SDN environment.” *Computers & Security* 138 (2024): 103661.
60. Franco Jaraba, Gautam Mahajan, Jay Jani, Robert Ipu., and Sergey Butakov. “Exploring current solutions against DDoS attacks in SDN environment.” *Procedia Computer Science* 238 (2024): 127–134.
61. Tapadhir Das, Osama Abu Hamdan, Shamik Sengupta., and Engin Arslan. 2022. “Flood control: Tcp-syn flood detection for software-Defined Networks using openflow port statistics.” In *2022 IEEE International Conference on Cyber Security and Resilience (CSR)*, 1–8. IEEE.
62. Dhruvkumar Dholakiya, Tanmay Kshirsagar., and Amit Nayak. “Survey of mininet challenges, opportunities, and application in software-defined network (SDN).” . *Information and Communication Technology for Intelligent Systems: Proceedings of ICTIS 2020, Volume 2* (2021): 213–221.
63. Altuğ Çil, and Mehmet Demirci. “A comparative analysis of software-defined network controllers in terms of network forensics processes and capabilities.” *Sigma Journal of Engineering and Natural Sciences* 42, no. 2 (2024): 425–437.
64. Achmad Basuki, Kasyful Amron., and Primantara Hari Trisnawan. “Penerapan Dynamic Flow Removal untuk Mencegah Flow Table Overflow pada Software-Defined Networking.” *Jurnal Teknologi Informasi dan Ilmu Komputer (JTIIK)* 9, no. 6.
65. sFlow.org 2024. “sFlow Protocol.” <https://sflow.org/>, Accessed: 2025-05-24.

66. Kamal Saluja, Susama Bagchi, Vikas Solanki, Muhammad Numan Ali Khan, Esha Dhamija,, and Sanjoy Kumar Debnath. 2024. "Exploring robust ddos detection: A machine learning analysis with the cicddos2019 dataset." In *2024 IEEE 5th India Council International Subsections Conference (INDISCON)*, 1–6. IEEE.
67. D Narmadha et al. 2024. "Detection of distributed denial of service attack on controller in software defined network." In *2024 IEEE International Conference on Smart Power Control and Renewable Energy (ICSPCRE)*, 1–6. IEEE.
68. Abdulmuneem Bashaiwth, Hamad Binsalleeh,, and Basil AsSadhan. "An explanation of the LSTM model used for DDoS attacks classification." *Applied Sciences* 13, no. 15 (2023): 8820.
69. Amreen Anbar 2023. "Classification of DDoS Attack with Machine Learning Architectures and Exploratory Analysis." MS thesis, The University of Western Ontario (Canada).
70. Caroline Panggabean, Chandrasekar Venkatachalam, Priyanka Shah, Sincy John, P Renuka Devi,, and Shanmugavalli Venkatachalam. 2024. "Intelligent DoS and DDoS Detection: A Hybrid GRU-NTM Approach to Network Security." In *2024 5th International Conference on Smart Electronics and Communication (ICOSEC)*, 658–665. IEEE.
71. Christian Czosseck, Rain Ottis,, and Anna-Maria Talihärm. "Estonia after the 2007 cyber attacks: Legal, strategic and organisational changes in cyber security." *International Journal of Cyber Warfare and Terrorism (IJCWT)* 1, no. 1 (2011): 24–34.
72. David Gillman, Yin Lin, Bruce Maggs,, and Ramesh K Sitaraman. "Protecting websites from attack with secure delivery networks." *Computer* 48, no. 4 (2015): 26–34.
73. Manos Antonakakis, Tim April, Michael Bailey, Matt Bernhard, Elie Bursztein, Jaime Cochran, Zakir Durumeric, J Alex Halderman, Luca Invernizzi, Michalis Kallitsis, et al. 2017. "Understanding the Mirai botnet." In *26th USENIX security symposium (USENIX Security 17)*, 1093–1110.
74. NETSCOUT Systems Inc. 2021. "2021 Threat Intelligence Report." , NETSCOUT. Accessed: 2025-05-07.
75. Hanan Sharif, Sardar Usman, Muhammad Hasnain, et al. "A machine learning based approach for the detection of DDoS attacks on internet of things using CICDDoS2019 dataset-PortMap." *Lahore Garrison University research journal of computer science and information technology* 8, no. 2.

Supporting Information

Additional supporting information can be found online in the Supporting Information section.