

Table of Contents


Activity 1: Download Prerequisites	2
Activity 2: Creating DNS Look up zone.....	2
Activity 3: Build a Virtual Machine.....	5
Activity 4: Install Ubuntu Operating System.....	6
Activity 5: Install webmin	9
Activity 6: Update Software	11
Activity 7: Install Citadel.....	12
Activity 8: Configure Firewall to allow Port 25,80,443, and 504	15
Activity 9: Configure DHCP Reservations	16
Activity 10: Configure Citadel.....	17
Activity 11: Setup Users	18
Activity 12: Testing.....	19

Activity 1: Download Prerequisites


1. Download a suitable version of Ubuntu Server (<https://ubuntu.com/download/server>)
ubuntu-24.04.2-live-server-amd64.iso

Activity 2: Creating DNS Look up zone

1. Open the Server and navigate to Tools then DNS and right on Forward lookup zones and click new zones and name domain name as *ACME.EDU*.

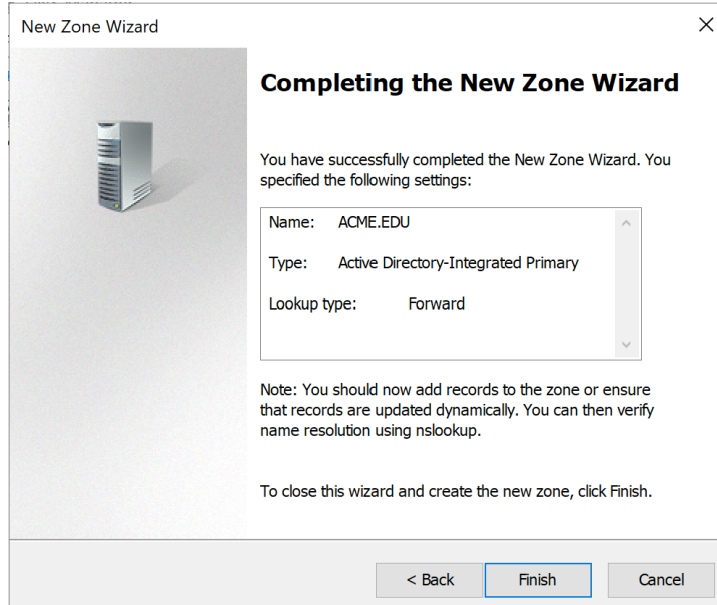

2. Navigate to Reverse lookup zones and click new zones and name domain name as follows (address should be 192.168.4)

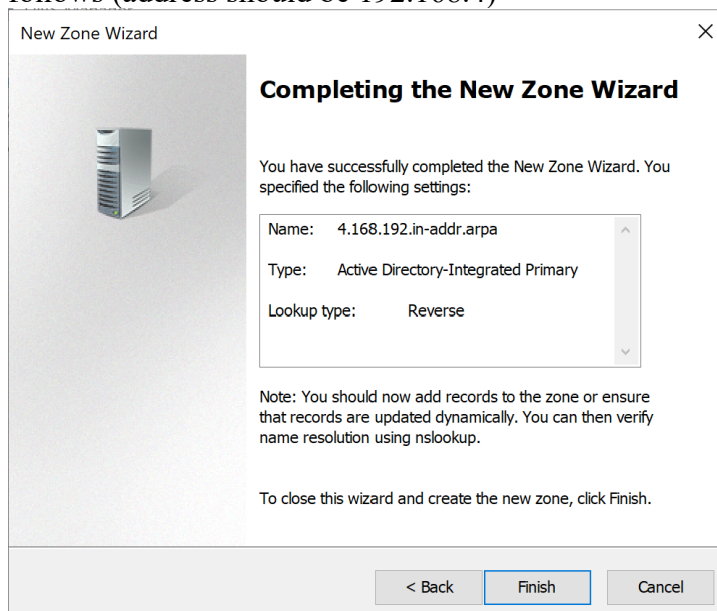

3. Created a new host for ACME.EDU by right clicking ACME.EDU and select new host and named as *AcmePCEm01* and fill other details as follows.

The screenshot shows the DNS Manager console with the 'ACME.EDU' zone selected. The 'New Host' dialog box is open, showing the following details:

- Name (uses parent domain name if blank): AcmePCEm01
- Fully qualified domain name (FQDN): AcmePCEm01.ACME.EDU.
- IP address: 192.168.4.35
- ☒ Create associated pointer (PTR) record
- ☐ Allow any authenticated user to update DNS records with the same owner name

Below the dialog box, the DNS Manager console displays a table of DNS records:

Name	Type	Data	Timestamp
(same as parent folder)	Start of Authority (SOA)	[1], acmepdc01.ad.acme.ed...	static
(same as parent folder)	Name Server (NS)	acmepdc01.ad.acme.edu.	static
AcmePCEm01	Host (A)	192.168.4.35	
(same as parent folder)	Mail Exchanger (MX)	[10] AcmePCEm01.Acme.Edu	


4. Crated New Resource Record to the ACME.EDU.

The screenshot shows the DNS Manager console with the 'ACME.EDU' zone selected. The 'New Resource Record' dialog box is open, showing the following details:


- Mail Exchanger (MX)
- Host or child domain: (blank)
- Fully qualified domain name (FQDN): ACME.EDU.
- Fully qualified domain name (FQDN) of mail server: AcmePCEm01.Acme.Edu (with a 'Browse...' button)
- Mail server priority: 10

The dialog box has 'OK', 'Cancel', and 'Help' buttons at the bottom.


5. Created a Pointer (PTR) 192.168.4.35 to the 4.168.192.in-addr.arpa.

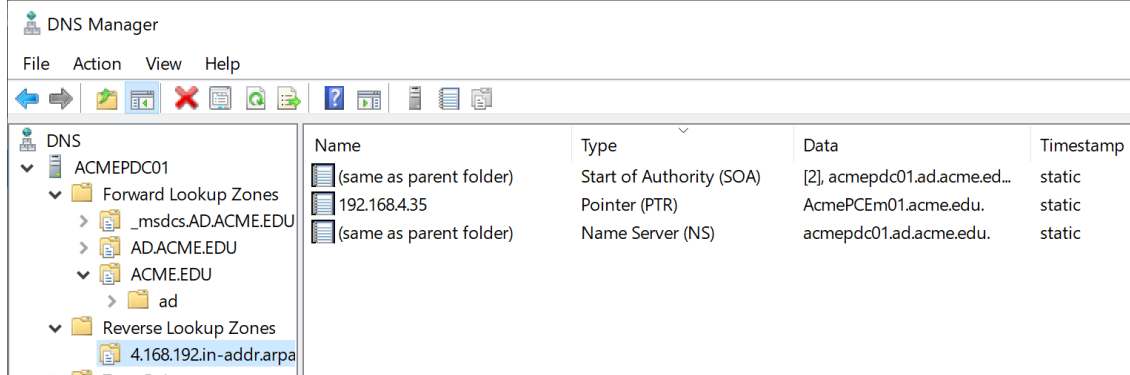

6. Created new Host to AD.ACME.EDU and name as *AcmePDEm01*.

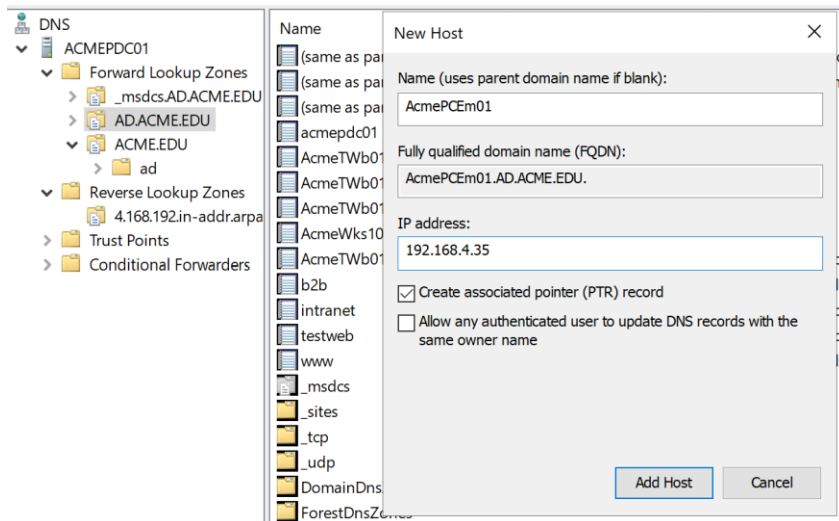

7. Crated New Resource Record to the AD.ACME.EDU and name as *webmail*.

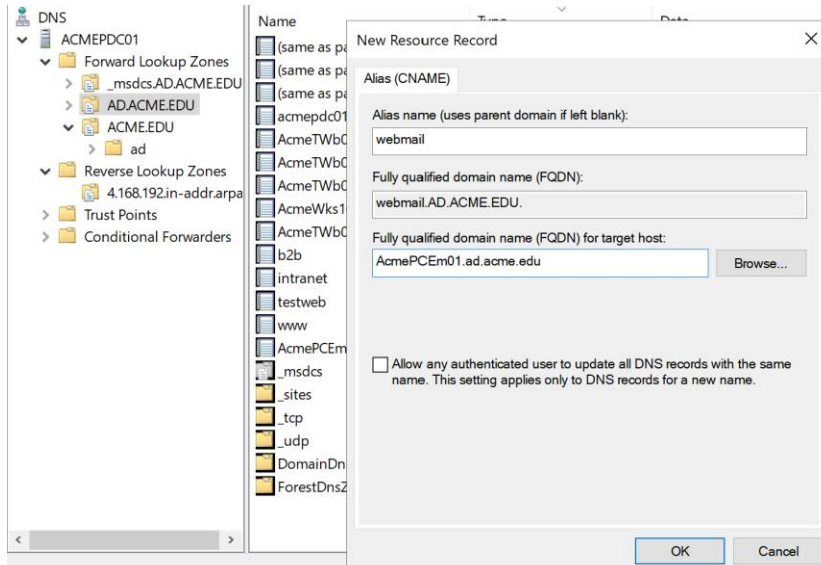

8. The details of the AD.ACME.EDU are as follows.

DNS					
ACMEPDC01 Forward Lookup Zones _msdcs.AD.ACME.EDU AD.ACME.EDU ACME.EDU ad Reverse Lookup Zones 4.168.192.in-addr.arpa Trust Points Conditional Forwarders	Name	Type	Data	Timestamp	
	(same as parent folder)	Start of Authority (SOA)	[60], acmepdc01.ad.acme.edu.	static	
	(same as parent folder)	Name Server (NS)	acmepdc01.ad.acme.edu.	static	
	(same as parent folder)	Host (A)	192.168.4.31	4/1/2025 1:00:00 PM	
	_msdcs				
	_sites				
	_tcp				
	_udp				
	AcmePCEm01	Host (A)	192.168.4.35		
	acmepdc01	Host (A)	192.168.4.31	static	
	AcmeTWb01	Host (A)	192.168.4.45	static	
	AcmeTWb01Apache	Alias (CNAME)	AcmeTWb01.ad.acme.edu.	static	
	AcmeTWb01v0	Host (A)	192.168.4.46	static	
	AcmeTWb01v1	Host (A)	192.168.4.47	static	
	AcmeWks1001	Host (A)	192.168.4.125	4/1/2025 1:00:00 PM	
	b2b	Alias (CNAME)	AcmeTWb01v0.ad.acme.edu.	static	
DomainDnsZones					
ForestDnsZones					
intranet	Alias (CNAME)	AcmeTWb01.ad.acme.edu.	static		
testweb	Alias (CNAME)	AcmeTWb01.ad.acme.edu.	static		
webmail	Alias (CNAME)	AcmePCEm01.ad.acme.edu			
www	Alias (CNAME)	AcmeTWb01v1.ad.acme.edu.	static		

Activity 3: Build a Virtual Machine

1. The details of the virtual machine are as follows.

New Virtual Machine Wizard
 ✕

Ready to Create Virtual Machine
 Click Finish to create the virtual machine. Then you can install Ubuntu 64-bit.

The virtual machine will be created with the following settings:

Name:	AcmePCEm01
Location:	C:\Virtual Machines\Acme\AcmePCEm01
Version:	Workstation 17.5 or later
Operating System:	Ubuntu 64-bit
Hard Disk:	120 GB
Memory:	4096 MB
Network Adapter:	NAT
Other Devices:	2 CPU cores, CD/DVD, USB Controller, Sound Card


Customize Hardware...

< Back
Finish
Cancel


2. Setup LAN Segment to AcmeBusiness and attached *ubuntu-24.04.2-live-server-amd64.iso* file location to the CD/DVD.

Activity 4: Install Ubuntu Operating System

1. Switch ON new virtual machine. As soon as you power-on the VM, you need to mouse click on the black screen until your mouse pointer disappears (indicating that input is now going into the virtual machine). Once the hand appears, you need to rapidly start clicking the spacebar. Click *Try or Install Ubuntu Server*.

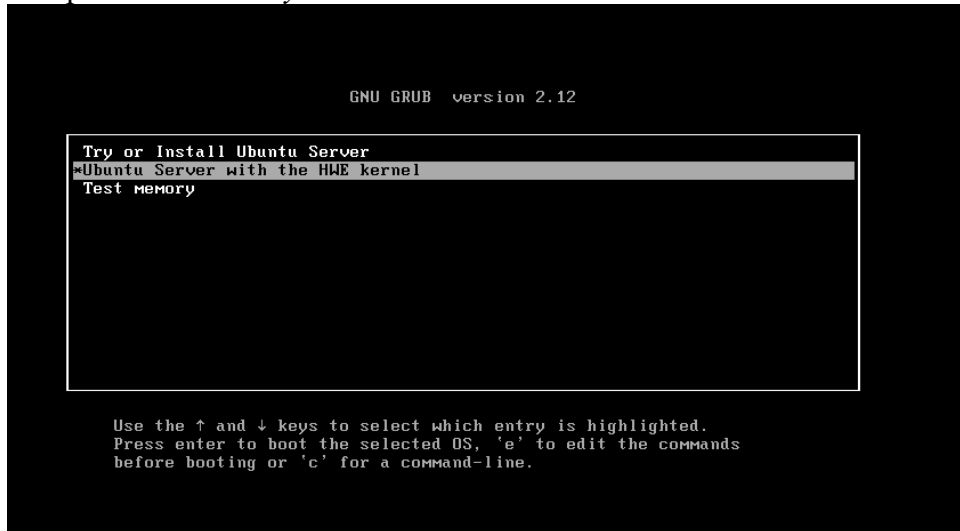

2. Choose the type of installation window, select Ubuntu Server and click Done.

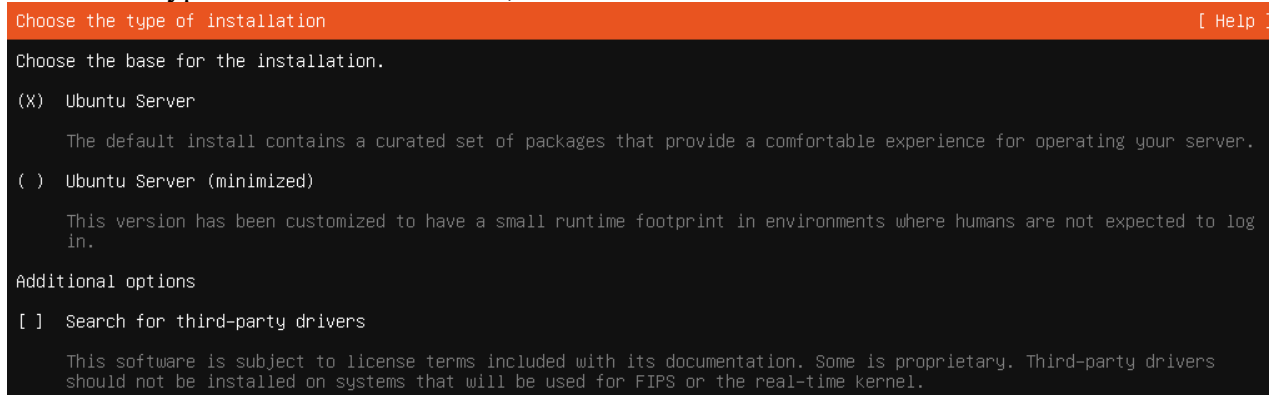

3. Under Network Configuration select en33 eth – and go to Edit IPv4 configuration window and click save and then click Done.
Subnet – 192.168.4.0/24
Address – 192.168.4.35
Gateway – 192.168.4.1
Name Server – 192.168.4.31

Edit ens33 IPv4 configuration

IPv4 Method: [Manual ▼]

Subnet: 192.168.4.0/24

Address: 192.168.4.35

Gateway: 192.168.4.1

Name servers: 192.168.4.31
IP addresses, comma separated

Search domains:
Domains, comma separated

[Save]
[Cancel]

Network configuration
[Help]

Configure at least one interface this server can use to talk to other machines, and which preferably provides sufficient access for updates.

NAME	TYPE	NOTES
[ens33	eth	- ▶]
static	192.168.4.35/24	
00:0c:29:cd:c5:17 / Intel Corporation / 82545EM Gigabit Ethernet Controller (Copper) (PRO/1000 MT Single Port Adapter)		

[Create bond ▶]

- During selecting Password window type Password as *Password01*
- Reboot windows select Reboot now and allow a system for a couple of minutes to complete the reboot and then press enter to get the login page, login as *administrator* and then type the login password as *Password01*

```

Ubuntu 24.04.2 LTS acmepcem01 tty1
acmepcem01 login: administrator
Password:
Welcome to Ubuntu 24.04.2 LTS (GNU/Linux 6.8.0-57-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Tue Apr  1 07:36:31 PM UTC 2025

System load:  0.15               Processes:    246
Usage of /:   10.7% of 57.7GB    Users logged in:  0
Memory usage: 7%                IPv4 address for ens33: 192.168.4.35
Swap usage:  0%

Expanded Security Maintenance for Applications is not enabled.

48 updates can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

administrator@acmepcem01:~$

```

6. Type *sudo passwd root* command to change the root password and type *Password01* as new password and retype the same to confirm the changing of password.

```
administrator@acmepcem01:~$ sudo passwd root
[sudo] password for administrator:
New password:
Retype new password:
passwd: password updated successfully
administrator@acmepcem01:~$ _
```


Activity 5: Install webmin

1. Type `sudo -s` command to get root level and type `curl -o setup-repos.sh https://raw.githubusercontent.com/webmin/webmin/master/setup-repos.sh` to copy the URL and start the download setup file.

```
root@acmepcem01:/home/administrator# curl -o setup-repos.sh https://raw.githubusercontent.com/webmin/webmin/master/setup-repos.sh
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
100  722  100  722    0     0  4666      0 --:--:-- --:--:-- --:--:-- 4688
```

2. Type `sh setup-repos.sh` command and then `Y` to confirm setup webmin release repository to install webmin.

```
root@acmepcem01:/home/administrator# sh setup-repos.sh
Setup Webmin releases repository? (y/N) y
  Downloading Webmin developers key ..
  .. done
  Installing Webmin developers key ..
  .. done
  Cleaning up package priority configuration ..
  .. done
  Setting up Webmin releases repository ..
  .. done
  Cleaning repository metadata ..
  .. done
  Downloading repository metadata ..
  .. done
Webmin and Usermin can be installed with:
  apt-get install --install-recommends webmin usermin
root@acmepcem01:/home/administrator# _
```


3. Configure firewall settings and allow port 10000, 22 and enable ufw.

```
root@acmepcem01:/home/administrator# ufw allow 10000
Rules updated
Rules updated (v6)
root@acmepcem01:/home/administrator# ufw allow 22
Rules updated
Rules updated (v6)
root@acmepcem01:/home/administrator# ufw enable
Firewall is active and enabled on system startup
root@acmepcem01:/home/administrator#
```

4. Install webmin using `apt-get install --install-recommends webmin usermin -y` command.

```
root@acmepcem01:/home/administrator# apt-get install --install-recommends webmin -y_
```

5. Test the browser by entering <http://webminad.acme.edu> or 192.168.4.35:10000

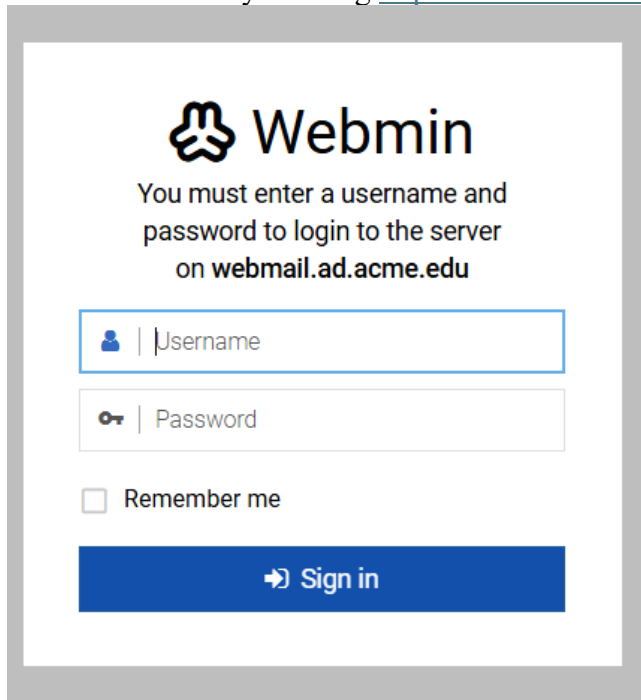


The image shows the Webmin login page. At the top, there is a Webmin logo (a stylized cloud with three dots) followed by the text "Webmin". Below this, a message states: "You must enter a username and password to login to the server on webmail.ad.acme.edu". There are two input fields: the first is labeled "Username" with a user icon, and the second is labeled "Password" with a key icon. Below these fields is a checkbox labeled "Remember me". At the bottom, there is a blue button with a right-pointing arrow and the text "Sign in".

6. Login to webmin as *administrator* and password *Password01*


Activity 6: Update Software

1. From the webmin dash board, select System then Software package Updates.

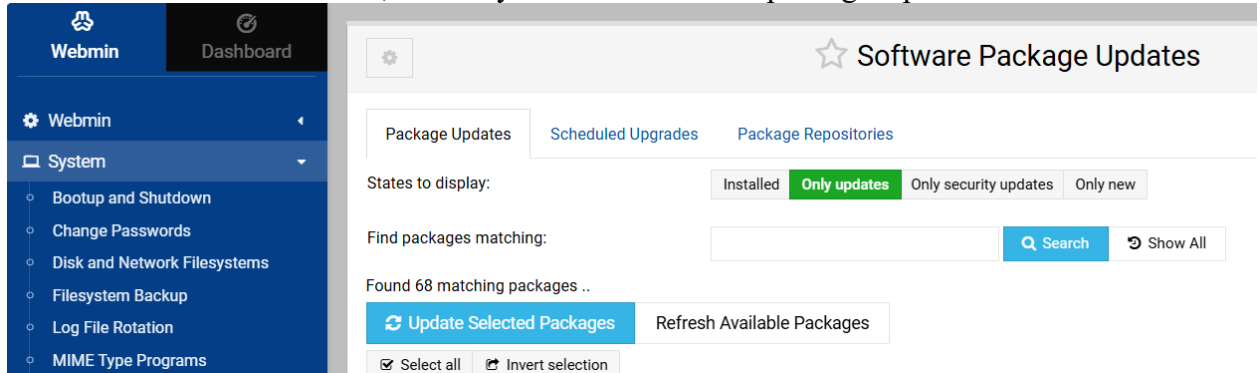


The screenshot shows the Webmin interface. On the left, the 'System' menu is expanded, showing options like 'Bootup and Shutdown', 'Change Passwords', 'Disk and Network Filesystems', 'Filesystem Backup', 'Log File Rotation', and 'MIME Type Programs'. The main content area is titled 'Software Package Updates'. It has tabs for 'Package Updates', 'Scheduled Upgrades', and 'Package Repositories'. Under 'Package Updates', there are filters for 'States to display': 'Installed', 'Only updates' (selected), 'Only security updates', and 'Only new'. A search bar is present with a 'Search' button and a 'Show All' link. Below the search bar, it says 'Found 68 matching packages ..'. There are two buttons: 'Update Selected Packages' and 'Refresh Available Packages'. At the bottom, there are checkboxes for 'Select all' and 'Invert selection'.

2. Then Select and press Install now button to update selected softwares.

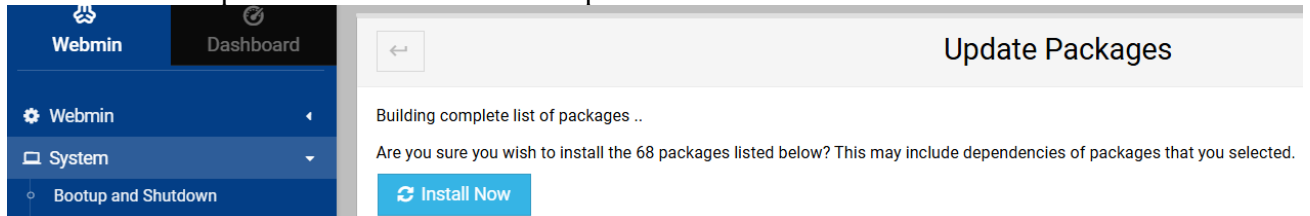

The screenshot shows the 'Update Packages' page in Webmin. The left sidebar is the same as the previous screenshot. The main content area has a title 'Update Packages'. Below the title, it says 'Building complete list of packages ..'. A message asks: 'Are you sure you wish to install the 68 packages listed below? This may include dependencies of packages that you selected.' There is a blue 'Install Now' button.

3. Go to System, Bootup and Shutdown then below the right side click Reboot system button, next window selects Reboot system button again to reboot the system.

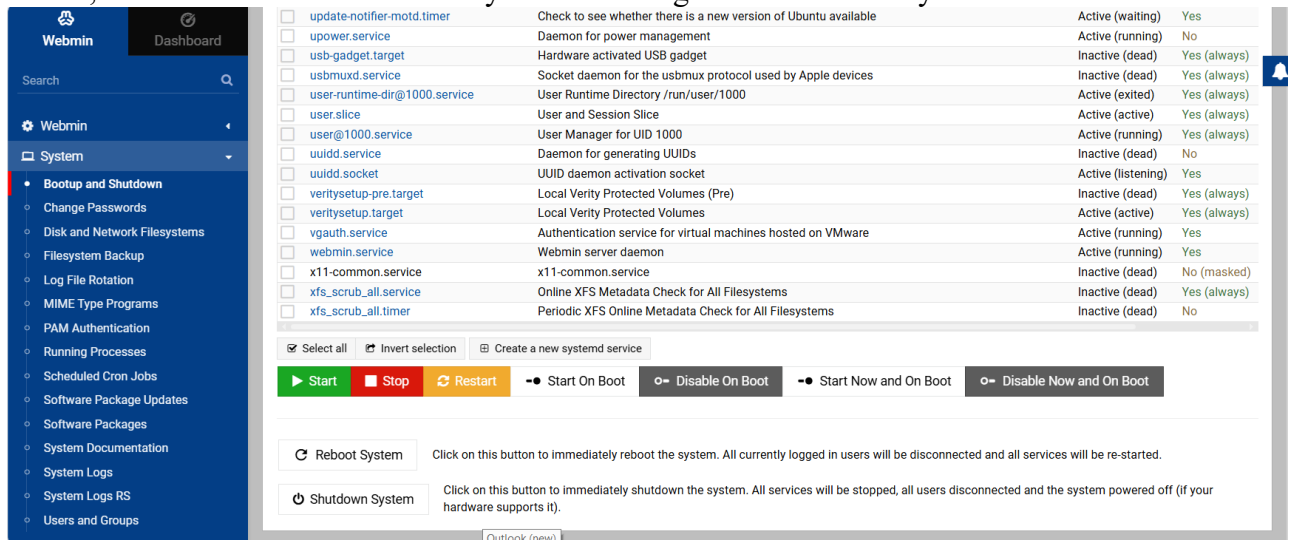


The screenshot shows the 'Bootup and Shutdown' page in Webmin. The left sidebar is expanded to 'Bootup and Shutdown'. The main content area has a table of services. Below the table, there are buttons for 'Start', 'Stop', 'Restart', 'Start On Boot', 'Disable On Boot', 'Start Now and On Boot', and 'Disable Now and On Boot'. At the bottom, there are buttons for 'Reboot System' and 'Shutdown System'.

Service	Description	Status	Restart
update-notifier-motd.timer	Check to see whether there is a new version of Ubuntu available	Active (waiting)	Yes
upower.service	Daemon for power management	Active (running)	No
usb-gadget.target	Hardware activated USB gadget	Inactive (dead)	Yes (always)
usbmuxd.service	Socket daemon for the usbmux protocol used by Apple devices	Inactive (dead)	Yes (always)
user-runtime-dir@1000.service	User Runtime Directory /run/user/1000	Active (exited)	Yes (always)
user.slice	User and Session Slice	Active (active)	Yes (always)
user@1000.service	User Manager for UID 1000	Active (running)	Yes (always)
uuid.service	Daemon for generating UUIDs	Inactive (dead)	No
uuid.socket	UUID daemon activation socket	Active (listening)	Yes
veritysetup-pre.target	Local Verity Protected Volumes (Pre)	Inactive (dead)	Yes (always)
veritysetup.target	Local Verity Protected Volumes	Active (active)	Yes (always)
vgauth.service	Authentication service for virtual machines hosted on VMware	Active (running)	Yes
webmin.service	Webmin server daemon	Active (running)	Yes
x11-common.service	x11-common.service	Inactive (dead)	No (masked)
xfs_scrub_all.service	Online XFS Metadata Check for All Filesystems	Inactive (dead)	Yes (always)
xfs_scrub_all.timer	Periodic XFS Online Metadata Check for All Filesystems	Inactive (dead)	No

Activity 7: Install Citadel

1. Go to webmin Tools, Terminal and sign as administrator.

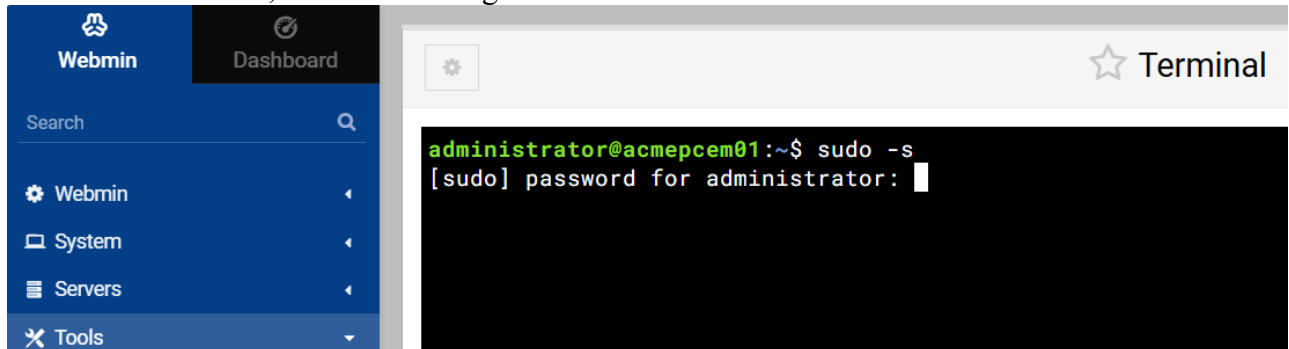

2. Type command `curl https://easyinstall.citadel.org/install | bash` to get installation setup from web for Citadel. Then answer `Y` to accept the installation

```
root@acmepcem01:/home/administrator# curl https://easyinstall.citadel.org/install | bash
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total   Spent    Left   Speed
100 20478  100 20478    0     0  51291      0  --:--:-- --:--:-- --:--:--  51323
Welcome to Citadel Easy Install
We will perform the following actions:

Installation:
- Download/install supporting libraries (if needed)
- Download/install Citadel (if needed)
- Download/install WebCit (if needed)

Configuration:
- Configure Citadel
- Configure WebCit

Perform the above installation steps now? Y
```

3. End of the terms and conditions type `Y` to accept them.

```
END OF TERMS AND CONDITIONS

Do you accept the terms of this license?
If you do not accept the General Public License, Easy Install will exit.
Enter Y or Yes to accept: Y
```

4. Type `Y` for both questions to download the easy installation.

```
This is a NEW Citadel installation.
Installation will now begin.
Do you want Easy Install to attempt to install your OS dependencies? Y
libssl-dev libstdc++-13-dev libtsan2 libubsan1 lto-disabled-list m4 make zlib1g-dev
0 upgraded, 67 newly installed, 0 to remove and 0 not upgraded.
Need to get 88.3 MB of archives.
After this operation, 319 MB of additional disk space will be used.
Do you want to continue? [Y/n] Y
```

5. The installation runs for several minutes.
6. Type login as *administrator* and password as *Password01*
7. Citadel user id unchanged and keep as root, select enter to confirm it.

```
Citadel Server setup

<Citadel User ID:>

Citadel needs to run under its own user ID. This would
typically be called "citadel", but if you are running Citadel
as a public site, you might also call it "bbs" or "guest".
The server will run under this user ID. Please specify that
user ID here. You may specify either a user name or a numeric
UID.

This is currently set to:
root
Enter new value or press return to leave unchanged:
█
```

8. Keep port listening unchanged and press enter.

```
<Listening address for the Citadel server:>

Please specify the IP address which the server should be listening to.
You can name a specific IPv4 or IPv6 address, or you can specify
"*" for "any address", ":::" for "any IPv6 address", or "0.0.0.0"
for "any IPv4 address". If you leave this blank, Citadel will
listen on all addresses. This can usually be left to the default unless
multiple instances of Citadel are running on the same computer.
This is currently set to:
*
Enter new value or press return to leave unchanged:
█
```

9. Server port number unchanged, keep 504 and press enter.

```
Citadel Server setup

<Server port number:>

Specify the TCP port number on which your server will run.
Normally, this will be port 504, which is the official port
assigned by the IANA for Citadel servers. You will only need
to specify a different port number if you run multiple instances
of Citadel on the same computer and there is something else
already using port 504.

This is currently set to:
504
Enter new value or press return to leave unchanged:
█
```

10. Under Authentication method to user unchanged and press Enter to Keep 0 (Default).

```
Citadel Server setup

<Authentication method to use:>

Please choose the user authentication mode. By default Citadel will use its own internal user accounts database. If you choose Host, Citadel users will have accounts on the host system, authenticated via /etc/passwd or a PAM source. LDAP chooses an RFC 2307 compliant directory server, the last option chooses the nonstandard MS Active Directory LDAP scheme.
Do not change this option unless you are sure it is required, since changing back requires a full reinstall of Citadel.
0. Self contained authentication
1. Host system integrated authentication
2. External LDAP - RFC 2307 POSIX schema
3. External LDAP - MS Active Directory schema

For help: http://www.citadel.org/authmodes.html

ANSWER "0" UNLESS YOU COMPLETELY UNDERSTAND THIS OPTION.

This is currently set to:
0
Enter new value or press return to leave unchanged:
█
```

11. Enter port numbers for HTTP (80) and HTTPS (443).


```
Citadel Server setup

<Restarting Citadel server to apply changes>
Stopping all WebCit instances
WebCit is a built-in Web service for the Citadel system.
If you are NOT running any other web server on this host,
you can run WebCit on ports 80 and 443. Otherwise you must
select other ports, such as 8080, 8443, etc.

What HTTP port do you want to use for WebCit? 80
What HTTPS port do you want to use for WebCit? 443
Created symlink /etc/systemd/system/multi-user.target.wants/webcit-http.service → /etc/systemd/system/webcit-http.service.
Created symlink /etc/systemd/system/multi-user.target.wants/webcit-https.service → /etc/systemd/system/webcit-https.service.

25046 ?      Ssl      0:00 /usr/local/citadel/citserver
25229 ?      Ssl      0:00 /usr/local/webcit/webcit -p80 uds /usr/local/citadel
25277 ?      Rs       0:00 /usr/local/webcit/webcit -s -p443 uds /usr/local/citadel
All finished! You are ready to log in.
root@acmepcem01:/home/administrator# █
```

12. Open a new tab and type *webmail.ad.acme.edu*, when login screen appear login as *administrator* and password as *Password01*

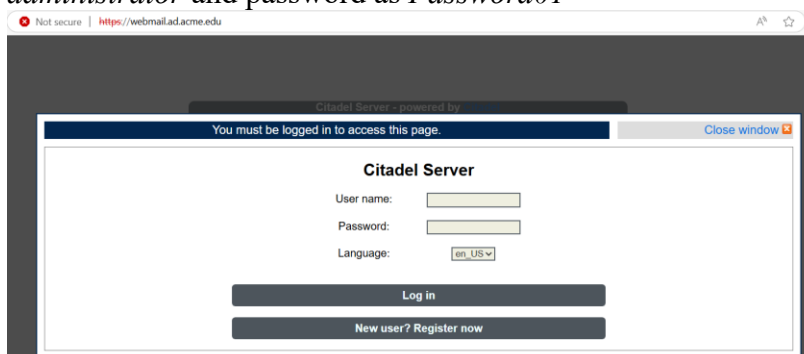

Activity 8: Configure Firewall to allow Port 25,80,443, and 504

1. Configure firewall settings and allow port 25, 443 (https), 80 (http), and 504.

```
root@acmepcem01:/home/administrator# ufw allow 25
Rule added
Rule added (v6)
root@acmepcem01:/home/administrator# ufw allow https
Rule added
Rule added (v6)
root@acmepcem01:/home/administrator# ufw allow htt
ERROR: Could not find a profile matching 'htt'
root@acmepcem01:/home/administrator# ufw allow 504
Rule added
Rule added (v6)
root@acmepcem01:/home/administrator# ufw allow http
Rule added
Rule added (v6)
```

2. Check ufw status.

```
root@acmepcem01:/home/administrator# ufw status
Status: active

To Action From
--
10000 ALLOW Anywhere
22 ALLOW Anywhere
25 ALLOW Anywhere
443 ALLOW Anywhere
504 ALLOW Anywhere
80/tcp ALLOW Anywhere
10000 (v6) ALLOW Anywhere (v6)
22 (v6) ALLOW Anywhere (v6)
25 (v6) ALLOW Anywhere (v6)
443 (v6) ALLOW Anywhere (v6)
504 (v6) ALLOW Anywhere (v6)
80/tcp (v6) ALLOW Anywhere (v6)

root@acmepcem01:/home/administrator#
```


Activity 9: Configure DHCP Reservations

1. Go to Tools and DHCP, select IPv4 and right click Reservations and click New Reservation.

Reservation Name – AcmePCE01

IP address - 192.168.4.35

Description – Acme.edu email server

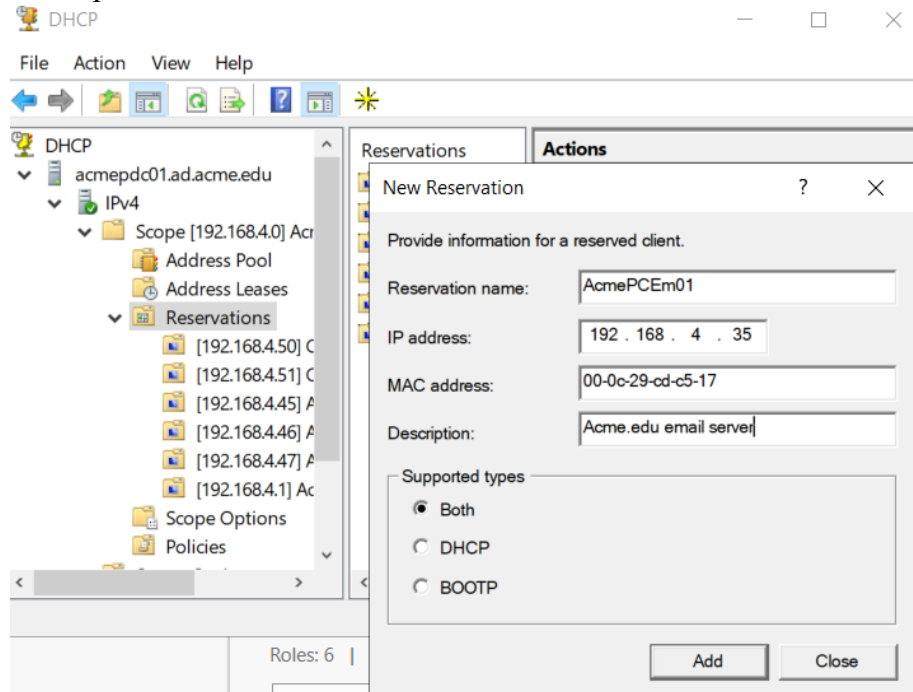

2. Click add and close the DHCP window.

Activity 10: Configure Citadel

1. Go to Administration then click Global Configuration under Edit site-wide-configurations. After making changes click save changes.

Site configuration

General Settings SMTP IMAP4 Pop3 Indexing/Journaling Access Directory Auto-purger

General site configuration items

Change Login Logo

Node name

Fully qualified domain name

Human-readable node name

Paginator prompt (for text mode clients)

Geographic location of this system

Name of system administrator

Default timezone for unzoned calendar items

Change Logout Logo

acmepcem01

acmepcem01.acme.edu

Citadel Server

<more>

East Grand fFirks, MN

administrator

America/Chicago

Save changes Cancel

2. Tick Disable self-service user account creation; Hint: do not select both! under Access.

General Settings SMTP IMAP4 Pop3 Indexing/Journaling Access Directory Auto-purger

Access controls and site policy settings

Allow administrators to zap (forget) rooms ☐

Quarantine messages from problem users ☐

Name of quarantine room Trashcan

Name of room to log pages (null)

Allow anonymous guest access ☐

Initial access level for new users 4 - Network User

Access level required to create rooms 3 - Local User

Automatically grant room administrator status to users who create private rooms ☐

Automatically grant room administrator status to users who create BLOG rooms ☒

Restrict access to Internet mail ☐

Disable self-service user account creation; Hint: do not select both! ☒

Require registration for new users ☐

Save changes Cancel

3. Add Acme.edu to the Local host aliases.

System Administration Menu

Local host aliases

(domains for which this host receives mail)

Acme.edu Delete

Add

4. Go to the server and logging as administrator and shutdown the email server (sudo shutdown -h now).

Activity 11: Setup Users

1. Go to Administration then click Add users under Edit site-wide-configurations. After making changes click save changes.

Username	Password	Primary Internet e-mail address	Access-level
MMcMaan	Password01	Mary.McMannacme.edu	4 – Network User
CWikers	CWikers	Carol.Wikersacme.edu	4 – Network User
CChristi	Password01	Craig.Christiacme.edu	4 – Network User
JAwsome	Password01	Jon.Awsome acme.edu	4 – Network User
SecTest	Password01	Security.Testingacme.edu	4 – Network User
HKodippilige	Password01	Hashan.Kodippiligeacme.edu	6 – Network User

Edit user account: MMcMann

User name:	MMcMann
Password	
Permission to send Internet mail	☒
Primary Internet e-mail address	Mary.McMannacme.edu
Internet e-mail aliases	
Number of logins	0
Messages submitted	0
Access level	4 - Network User
User ID number	3
Date and time of last login	Tue Apr 8 18:34:34 2025
Auto-purge after this many days	0
Save changes Cancel	

2. All the users are as follows.

Edit or Delete users

To edit an existing user account, select the user name from the list and click 'Edit'.

admin

administrator
MMcMann
CWikers
CChristi
JAwsome
SecTest
HKodippilige

3. Close the window.

Activity 12: Testing

1. Login to webmail as MMcMann go to mail server send a test mail to CWikers.

Mail

Make this my start page
Logged in as MMcMann
View as: Bulletin Board

✓ Send message
📧 Save to Drafts
📎 Attachments: 0
⚠ Cancel
👤 Contacts

from: MMcMann ▾ <mmcmann@acmecpm01.acme.edu> *in Mail*
To: Carol.Wikers@acme.edu
CC: Security.Testing@acme.edu
BCC: _____
Subject: Test HR message

B *I* U ABC [List Icons] [Quote Icon] [Link Icon] [Image Icon] [Video Icon] [Audio Icon] [HTML Icon]

This is a HR message. Please reply ASAP.

Thank You!

-Mary

2. Login to Webmin as CWilkers and check the email. (PW- CWilkers)



Mail

1 new of 1 messages

Make this my start page
Logged in as CWilkers

Search:

View as: Mail Folder

 Ungoto
  Refresh message list
  Delete
  Write mail
  Skip this room
  Goto next room

Subject	Sender	Date
Test HR message	MMcMann	19:05

 Ungoto
  Refresh message list
  Delete
  Write mail
  Skip this room
  Goto next room

Subject	Sender	Date
Test HR message	MMcMann	19:05

Tue Apr 08 2025 19:05:21 UTC from [MMcMann](#) to Carol.Wilkers@acme.edu
CC:Security.Testing@acme.edu

Subject: Test HR message

[Reply] [ReplyAll] [Forward] [Move] [Delete] [Headers] [Print]

This is a HR message. Please reply ASAP.

Thank You!

-Mary

3. Reply all from CWilkers.

The screenshot shows an email client window. The header bar includes a search bar and a 'New' button. The email list shows a message from 'CWilkers' to 'MMcMann' with the subject 'Test HR message'. The email is open, showing the body text: 'Hi Mary, I received your message, and reply as requested.' Below this is a large redacted area. The email is dated 'Tue Apr 08, 2025, 19:05:21 UTC from MMcMann'. The email body also contains 'Thank You!' and '-Mary'.

4. Send an instant message to CWilkers again.

Send an instant message to: MMcMann

Enter message text:

Hi Carol, are you at your desk?

Send message

5. Continue the conversation.

MMcMann

MMcMann: Hi Mary, are you at your desk?

CWilkers: Hi Mary, yes I am

MMcMann: Cool



6. Close all the windows.