


# Using HTMX To Make Interactive Elements In Drupal

DrupalCamp England 2026

# Philip Norton

- Developer at Code Enigma
- Writer at `#! code`  
([www.hashbangcode.com](http://www.hashbangcode.com))
- NWDUG co-organiser

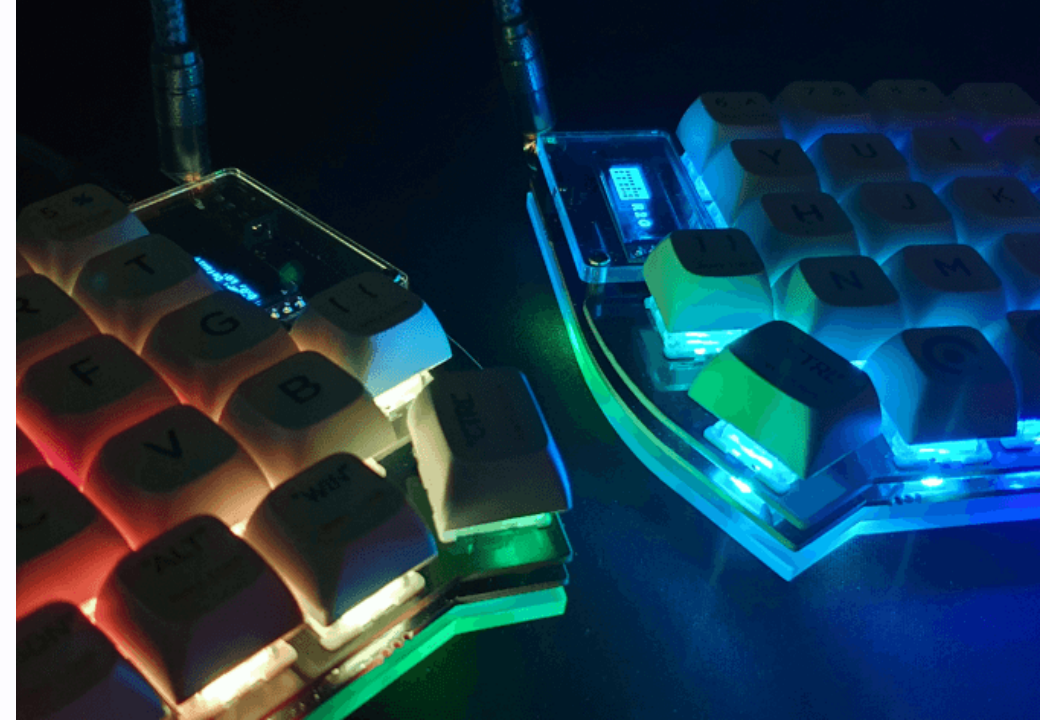

# Source Code

- Talk is available at:  
<https://github.com/hashbangcode/>  
or via QR code.
- All code seen can be found  
at <http://bit.ly/>
- More resources at  
[www.hashbangcode.com](http://www.hashbangcode.com)



# Using HTMX To Make Interactive Elements In Drupal

# HTMX In Drupal

- HTMX added to Drupal in 11.3 as a core component.
- This is the new standard for ajax requests.

# What is HTMX?

- JavaScript framework.
- Gives access to ajax and CSS Transision.
- Small - 16K (minified and gzipped).
- Uses HTML attributes.
- Plugins extend functionality.
- Platform agnostic.

# Adding HTMX

- Download and include the JavaScript file.

```
<script src="js/htmx.min.js"></script>
```

- There are CDN options available.

# HTMX Attributes

- 11 attributes are commonly used.
- There are another 20-30 that add more functionality.

For example:

```
<button  
  hx-put="index.php"  
  hx-target="#request-output"  
>Submit</button>
```



# HTMX Attributes

```
<button  
  hx-put="index.php"  
  hx-target="#request-output"  
>Submit</button>  
<div id="request-output"></div>
```

This example will:

- `hx-put` = Send a "put" request to the `index.php` path.
- `hx-target` = Write the response in the element with the ID "request-output".

# HTMX Requests

- All requests from HTMX will have the 'hx-request' header.
- Certain attributes will add further headers to the request.

# Responder Class In PHP

A simple class to respond to HTMX requests.

```
class Htmx {  
    public static function isHtmxRequest(): bool {  
        return isset($_SERVER['HTTP_HX_REQUEST']) && $_SERVER['HTTP_HX_REQUEST'] === 'true';  
    }  
  
    public static function isPut(): bool {  
        return $_SERVER['REQUEST_METHOD'] === 'PUT';  
    }  
}
```

# Responding To The Put Request

We detect the hx-request header and the correct HTTP method and respond.

```
if (Htmx::isHtmxRequest() && Htmx::isPut()) {  
    echo '<p>Button clicked at ' . date('r') . ' .</p>';  
}
```

The div now looks like this:

```
<div id="request-output" class=""><p>Button clicked at Sun, 08 Feb 2026 16:00:23 +0000.</p></div>
```

# CSS Transitions

- HTMX adds classes to elements during different events.
- `htmx-added` is added to new content before it is added to the page.
- We can use these classes to animate what HTMX is doing with CSS transitions.

# CSS Transitions

The following will fade in a bit of content inside the `request-output` element as it is loaded into the page.

```
#request-output p {  
    opacity: 1;  
    transition: opacity 1s ease-in;  
}  
#request-output p.htmx-added {  
    opacity: 0;  
}
```

# Configuring HTMX

- It is possible to configure HTMX via a number of settings.
- The preferred way to do with is via a metatag.

```
<meta name="htmx-config" content='{ "defaultSwapStyle": "outerHTML" }'>
```

# Configuring HTMX

- Configuration options can be set through JavaScript.

```
<script>  
htmx.config.defaultSwapStyle = 'outerHTML';  
</script>
```



## examples

- website counter
- comment form
- form validator
-

# HTMX in drupal

# HTMX in drupal

The standard usage of HTMX in Drupal is to use the `data-hx-` prefix for attributes.

Eg:

```
<button  
  data-hx-put="index.php"  
  data-hx-target="#request-output"  
>Submit</button>  
<div id="request-output"></div>
```

# libraries

use attributes in the same way

# HTMX Routes

## examples

- load a page via htmx
- block config forms





# Example Links

- [Link to website](#)
- [Link to slide](#)

# Page without a footer

- Nope, no footer.


# Small Text Slide


This is small text.

# Talk template with image

- Something.

Philip Norton [hashbangcode.com](http://hashbangcode.com)  
[fosstodon.org@hashbangcode](mailto:fosstodon.org@hashbangcode)  
[fosstodon.org@philipnorton42](mailto:fosstodon.org@philipnorton42)

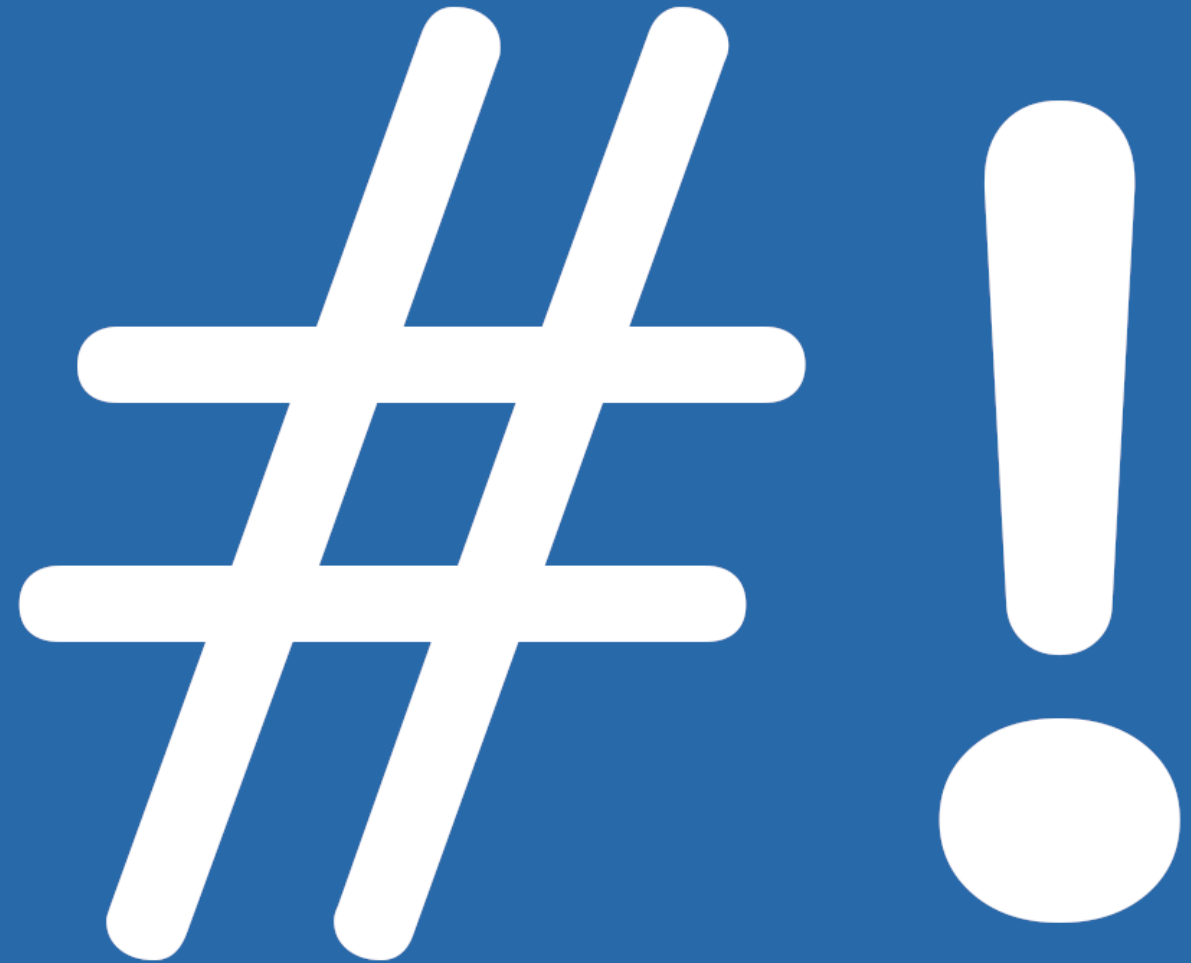

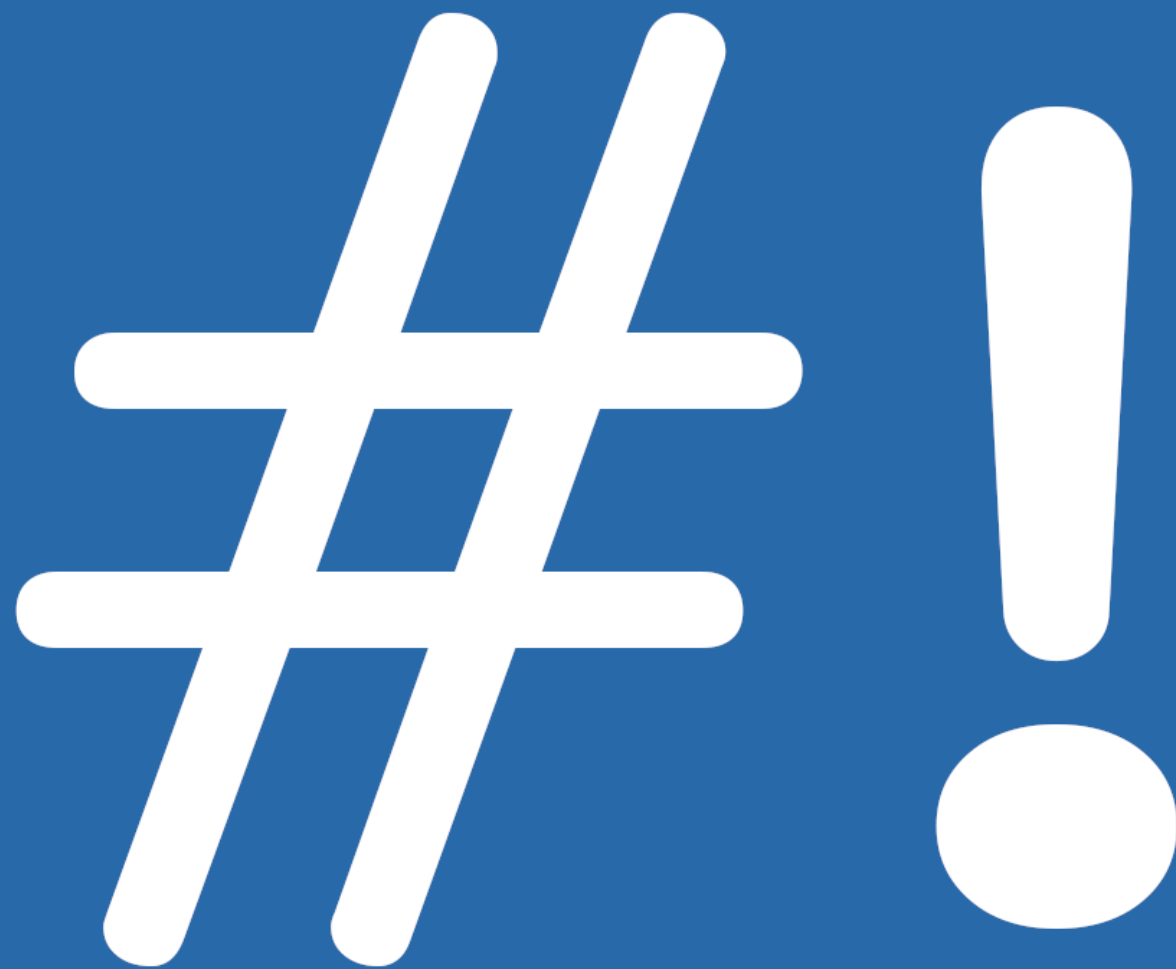

# Resources

- [Storybook](#)
- [Storybook Module](#)
- [Drupal Documentation on SDC](#)
- [Drupal 11: Using Storybook To Preview Single Directory Components](#)

# Questions?

- Slides:

<https://github.com/hashbangcode/storybook-talk>



# Thanks!

- Slides:

[https://github.com/hashbangcode  
storybook-talk](https://github.com/hashbangcode/storybook-talk)

