


Using HTMX To Make Interactive Elements In Drupal

DrupalCamp England 2026

Philip Norton

- Developer at Code Enigma
- Writer at `#! code`
(www.hashbangcode.com)
- NWDUG co-organiser

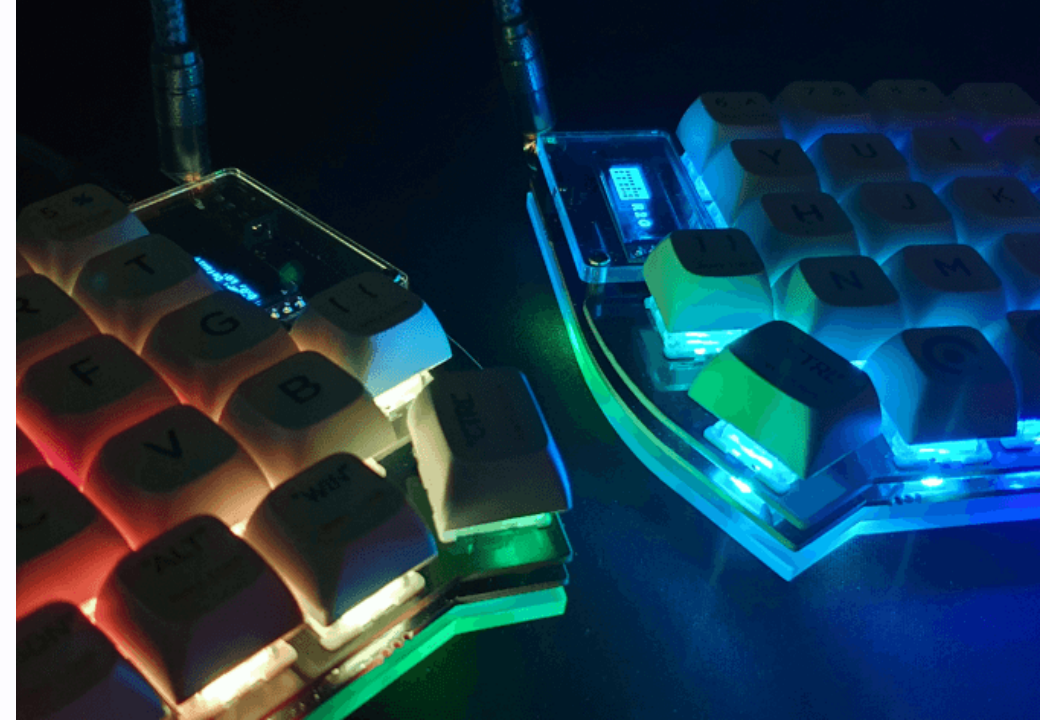

Source Code

- Talk is available at:
<https://github.com/hashbangcode/>
or via QR code.
- All code seen can be found
at <http://bit.ly/>
- More resources at
www.hashbangcode.com



Using HTMX To Make Interactive Elements In Drupal

HTMX In Drupal

- HTMX added to Drupal in 11.3 as a core component.
- This is the new standard for ajax requests.

HTMX

What is HTMX?

- JavaScript framework.
- Gives access to ajax and CSS Transitions.
- Small - 16K (minified and gzipped).
- Uses HTML attributes.
- Plugins extend functionality.
- Platform agnostic.

Adding HTMX

- Download and include the JavaScript file.

```
<script src="js/htmx.min.js"></script>
```

- There are CDN options available.

HTMX Attributes

- 11 attributes are commonly used.
- There are another 20-30 that add more functionality.

For example:

```
<button  
  hx-get="index.php"  
  hx-target="#request-output"  
>Submit</button>
```

HTMX Attributes

```
<button  
  hx-get="index.php"  
  hx-target="#request-output"  
>Submit</button>  
<div id="request-output"></div>
```

This example will:

- `hx-get` = Send a "get" request to the `index.php` path.
- `hx-target` = Write the response in the element with the ID "request-output".

HTMX Requests

- All requests from HTMX will have the 'hx-request' header.
- Certain attributes will add further headers to the request.

Responding To The Request

Your response should be in plain HTML.

We could respond with

```
<p>Button clicked!</p>
```

Which would be injected into our page like this.

```
<div id="request-output"><p>Button clicked!</p></div>
```

Responder Class In PHP

A simple class to respond to HTMX requests.

```
class Htmx {  
    public static function isHtmxRequest(): bool {  
        return isset($_SERVER['HTTP_HX_REQUEST']) && $_SERVER['HTTP_HX_REQUEST'] === 'true';  
    }  
  
    public static function isGet(): bool {  
        return $_SERVER['REQUEST_METHOD'] === 'GET';  
    }  
}
```

Responding To The Request

We detect the `hx-request` header and the correct HTTP method and respond.

```
if (Htmx::isHtmxRequest() && Htmx::isGet()) {  
    echo '<p>Button clicked at ' . date('r') . ' .</p>';  
}
```

The div now looks like this:

```
<div id="request-output"><p>Button clicked at Sun, 08 Feb 2026 16:00:23 +0000.</p></div>
```

HTTP Verbs

Different HTTP verbs are available.

- `hx-get` does a "get" request.
- `hx-post` does a "post" request.
- `hx-delete` does a "delete" request
- `hx-patch` does a "patch" request
- `hx-put` does a "put" request

Select

Select Out Of Band

Swap

Swap Out Of Band

Triggers

```
<div hx-post="index.php" hx-trigger="click">0</div>
```

```
<div hx-post="index.php" hx-trigger="once"></div>
```

```
<div hx-post="index.php" hx-trigger="revealed"></div>
```

```
<div hx-post="index.php" hx-trigger="load delay:500ms"></div>
```

```
<input hx-get="index.php" hx-trigger="input changed delay:1s" />
```

CSS Transitions

- HTMX adds classes to elements during different events.
- `htmx-added` is added to new content before it is added to the page.
- We can use these classes to animate what HTMX is doing with CSS transitions.

CSS Transitions

The following will fade in a bit of content inside the `request-output` element as it is loaded into the page.

```
#request-output p {  
  opacity: 1;  
  transition: opacity 1s ease-in;  
}  
#request-output p.htmx-added {  
  opacity: 0;  
}
```

Configuring HTMX

- It is possible to configure HTMX via a number of settings.
- The preferred way to do with is via a metatag.

```
<meta name="htmx-config" content='{ "defaultSwapStyle": "outerHTML" }'>
```

Configuring HTMX

- Configuration options can be set through JavaScript.

```
<script>  
htmx.config.defaultSwapStyle = 'outerHTML';  
</script>
```

examples

- fetch the time
- website counter
- comment form
- form validator
- infinite scroll

HTMX in drupal

HTMX in drupal

The standard usage of HTMX in Drupal is to use the `data-hx-` prefix for attributes.

Eg:

```
<button  
  data-hx-get="index.php"  
  data-hx-target="#request-output"  
>Submit</button>  
<div id="request-output"></div>
```

Drupal Libraries

- `core/htmx` - The core HTMX library.
- `core/drupal.htmx` - Additional scripts for Drupal.

Drupal Integration

- The `Htmx` class.
 - Wrapper around the Htmx libraries and attribute injection.

use attributes in the same way

The Htmx Class

HTMX Trait

HTMX Routes

examples

- load a page via htmx
- cascading date select with HTMX
- block config forms

Example Links

- [Link to website](#)
- [Link to slide](#)

Page without a footer

- Nope, no footer.


Small Text Slide


This is small text.

Talk template with image

- Something.

Philip Norton hashbangcode.com
fosstodon.org@hashbangcode
fosstodon.org@philipnorton42

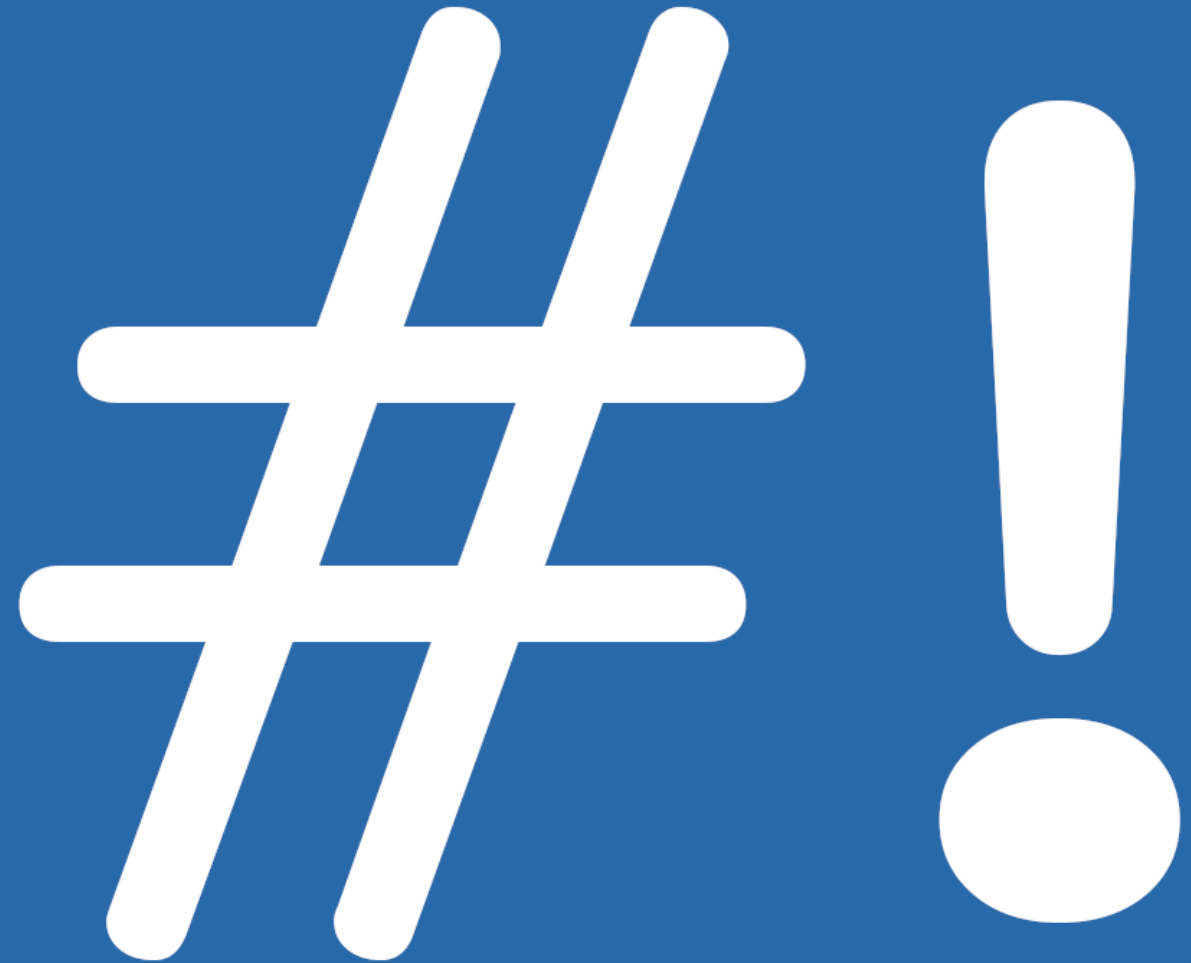

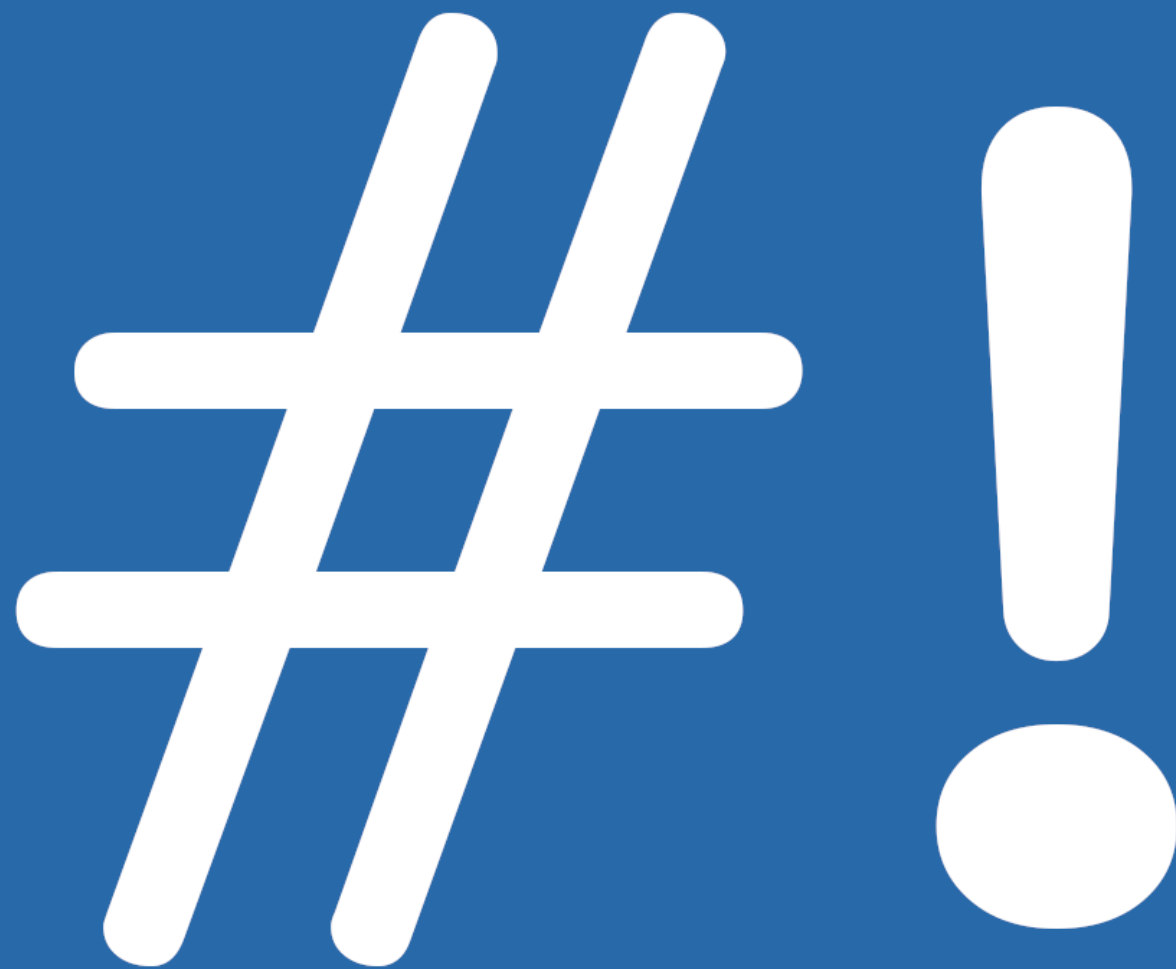

Resources

- htmx.org
- HTMX Labs

Questions?

- Slides:

<https://github.com/hashbangcode>
[htmx-talk](#)



Thanks!

- Slides:

<https://github.com/hashbangcode>
[htmx-talk](#)

