

IDS2Eval Scorecard

nsl-kdd

8 ok · 3 warning · 1 flag · 12 checks

REVIEW REQUIRED

- dedup_check

train duplicates: 0 (0.00%); test rows leaking a train feature-match: 0 (0.00%); test-internal duplicates: 0

ok
- label_conflict_check

no feature vector maps to more than one label

ok
- leakage_screen

no single feature or pair dominates importance (top1=14.2%, top2=25.6%)

ok
- one_rule_check

single rule 'same_srv_rate <= 0.495' reaches 63.4% test accuracy (84.0% train)

ok
- identity_column_flag

no id_like_columns configured

ok
- temporal_leakage_check

no schema.timestamp_column configured

ok
- homogeneity_test

12 classes tested; leakage signature (test significantly closer than control, p<0.05) in: ['smurf']

flag
- class_distribution_report

23 classes, train imbalance ratio (majority:minority) = 33670:1; classes below 1% of train: ['back', 'teardrop', 'warezclient', 'pod', 'guess_passwd', 'buffer_overflow', 'warezmaster', 'land', 'imap', 'rootkit', 'loadmodule', 'ftp_write', 'multihop', 'phf', 'perl', 'spy']

warning
- low_cardinality_warning

no id_like_columns configured

ok
- schema_fingerprint_check

no known extractor signature matched

ok
- data_integrity_check


1 constant/near-constant feature(s)

warning
- known_issue_lookup

The test set intentionally includes attack types absent from the training set, by design, to test generalization to unknown attacks rather than memorization; this project's own audit of the official partition finds 17 such test-only attack types. (Tavallaei et al. 2009, IEEE CISDA)

warning

Class distribution (log scale)

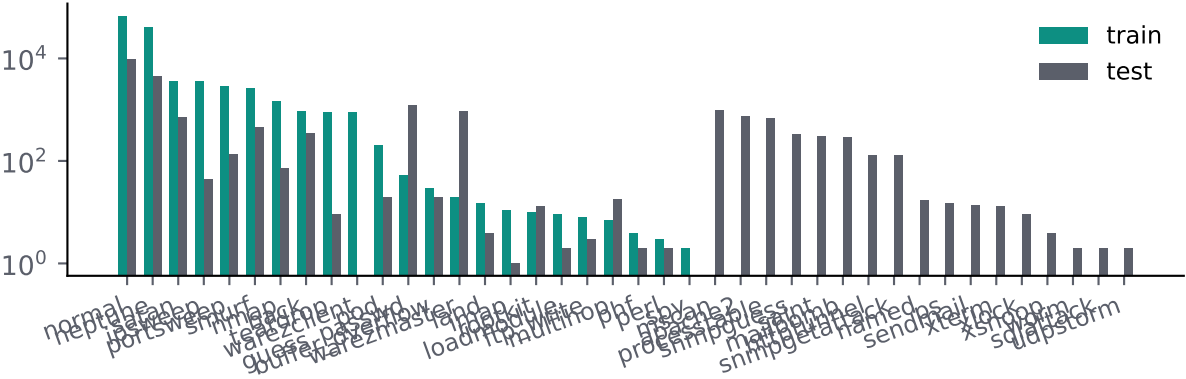

Top feature importances (leakage_screen)

