CertyIQ

CertyIQ

Premium exam material

Get certification quickly with the CertyIQ Premium exam material.
Everything you need to prepare, learn & pass your certification exam easily. Lifetime free updates
First attempt guaranteed success.

https://www.CertyIQ.com

About CertyIQ

We here at CertyIQ eventually got enough of the industry's greedy exam paid for. Our team of IT professionals comes with years of experience in the IT industry Prior to training CertIQ we worked in test areas where we observed the horrors of the paywall exam preparation system.

The misuse of the preparation system has left our team disillusioned. And for that reason, we decided it was time to make a difference. We had to make In this way, CertyIQ was created to provide quality materials without stealing from everyday people who are trying to make a living.

Doubt Support

We have developed a very scalable solution using which we are able to solve 400+ doubts every single day with an average rating of 4.8 out of 5.

https://www.certyiq.com

Mail us on - certyiqofficial@gmail.com

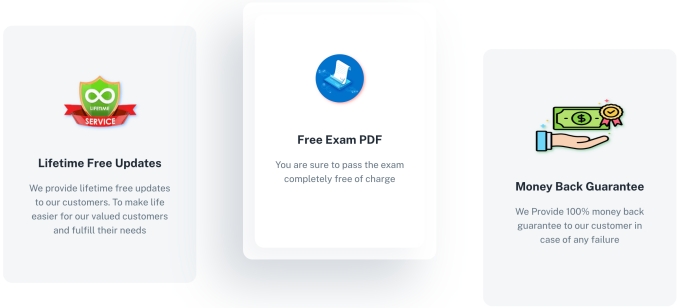

John

October 19, 2022

★★★★★

Thanks you so much for your help. I scored 972 in my exam today. More than 90% were from your PDFs!

Dana

September 04, 2022

★★★★★

Thanks a lot for this updated AZ-900 Q&A. I just passed my exam and got 974, I followed both of your Az-900 videos and the 6 PDF, the PDFs are very much valid, all answers are correct. Could you please create a similar video/PDF for DP900, your content/PDF's is really awesome. The team did a really good job. Thank You 😊.

Ahamed Shibly

2 months ago

★★★★★

Customer support is realy fast and helpful, I just finished my exam and this video along with the 6 PDF helped me pass! Definitely recommend getting the PDFs. Thank you!

October 22, 2022

★★★★★

Passed my exam today with 891 marks. Out of 52 questions, 51 were from certyiq PDFs including Contoso case study.
Thank You certyiq team!

Henry Rome

2 months ago

★★★★★

These questions are real and 100 % valid. Thank you so much for your efforts, also your 4 PDFs are awesome, I passed the DP900 exam on 1 Sept. With 968 marks. Thanks a lot, buddy!

Esmaria

2 months ago

★★★★★

Simple easy to understand explanations. To anyone out there wanting to write AZ900, I highly recommend 6 PDF's.Thank you so much, appreciate all your hard work in having such great content. Passed my exam Today - 3 September with 942 score.

Microsoft

(PL-400)

Microsoft Power Platform Developer

Total: **440 Questions**

Link: https://certyiq.com/papers/microsoft/pl-400

Question: 1 CertyIQ

A company manages capital equipment for an electric utility company. The company has a SQL Server database that contains maintenance records for the equipment.
Technicians who service the equipment use the Dynamics 365 Field Service mobile app on tablet devices to view scheduled assignments. Technicians use a canvas app to display the maintenance history for each piece of equipment and update the history.
Managers use a Power BI dashboard that displays Dynamics 365 Field Service and real-time maintenance data.
Due to increasing demand, managers must be able to work in the field as technicians.
You need to design a solution that allows the managers to work from one single screen.
What should you do?

A. Add the maintenance history app to the Field Service Mobile app.
B. Add the manager Power BI dashboard to the Field Service mobile app.
C. Create a new maintenance canvas app from within the Power BI management dashboard.
D. Add the maintenance history app to the Power BI dashboard.

Answer:

D

Explanation:

Power BI enables data insights and better decision-making, while Power Apps enables everyone to build and use apps that connect to business data. Using the

Power Apps visual, you can pass context-aware data to a canvas app, which updates in real time as you make changes to your report. Now, your app users can derive business insights and take actions from right within their Power BI reports and dashboards.

Why Other Options Are Incorrect:

A is incorrect: While adding the maintenance app to the Field Service Mobile framework is highly effective for technicians on tablets, it removes the managers from their core monitoring workspace (the Power BI dashboard), forcing them to change context to track high-level analytics.
B is incorrect: Embedding a full analytical Power BI dashboard into the Field Service mobile app does not natively give managers the interactive, real-time context-aware operational tools required to modify records on a single screen without complex layout overhead.
C is incorrect: Building a brand new canvas app adds unnecessary layout complexity and engineering work, violating the principle of reusing the functional app assets that are already created and available.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/powerapps-custom-visual

Question: 2 CertyIQ

HOTSPOT -
You work for a staffing company that helps employees fill temporary jobs. Available temporary jobs are categorized and listed on a secure area of the company's website.
The company wants to eliminate manual work that relates to job and candidate management. The company plans to invite employers with available jobs and job candidates to view jobs by sending personalized invitations. The company identifies the following requirements:
✑ Human resources team members from the staffing company must be able to access the jobs listing and post

available positions.
- Employers seeking temporary employees must also be able to access the jobs listing and post available positions.
- Approved job candidates must be notified about new positions for which they are qualified.
- Approved job candidate must have an option to accept a job assignment directly from a notification.

You need to perform a gap analysis against the features and capabilities of the Power Platform.
Which features should you implement? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Feature
Create the job listings portal.	Custom self-service portal for employers and a custom page for job candidates Custom self-service portal for both employers and job candidates Portal for job candidates and a custom self-service portal for employers Portal from blank for job candidates and employers
Create an app that lists available positions.	Canvas app with push notifications Model-driven app with push notifications Portal app with push notifications
Create the app for employers who are seeking temporary employees.	Entity from defined on the job custom entity Webform with target set to the job custom entity Web page defined on the job custom entity Web step with target set to the job custom entity
Create invitation parameters for job candidates.	Configure a value for the Assigned to Account option only. Configure a value for the Execute Workflow on Redeeming Contact option only. Configure values for Assigned to Account and Execute Workflow on Redeeming Contact. Leave both Assigned to Account and Execute Workflow on Redeeming Contact empty.
Create invitation parameters for approved job candidates.	Configure a value for the Assigned to Account option only. Configure a value for the Execute Workflow on Redeeming Contact option only. Configure values for Assigned to Account and Execute Workflow on Redeeming Contact. Leave both Assigned to Account and Execute Workflow on Redeeming Contact empty.

Answer:

Answer Area

Requirement	Feature
Create the job listings portal.	Custom self-service portal for employers and a custom page for job candidates **Custom self-service portal for both employers and job candidates** Portal for job candidates and a custom self-service portal for employers Portal from blank for job candidates and employers
Create an app that lists available positions.	Canvas app with push notifications **Model-driven app with push notifications** Portal app with push notifications
Create the app for employers who are seeking temporary employees.	Entity from defined on the job custom entity **Webform with target set to the job custom entity** Web page defined on the job custom entity Web step with target set to the job custom entity
Create invitation parameters for job candidates.	Configure a value for the Assigned to Account option only. **Configure a value for the Execute Workflow on Redeeming Contact option only.** Configure values for Assigned to Account and Execute Workflow on Redeeming Contact. Leave both Assigned to Account and Execute Workflow on Redeeming Contact empty.
Create invitation parameters for approved job candidates.	**Configure a value for the Assigned to Account option only.** Configure a value for the Execute Workflow on Redeeming Contact option only. Configure values for Assigned to Account and Execute Workflow on Redeeming Contact. Leave both Assigned to Account and Execute Workflow on Redeeming Contact empty.

Explanation:

Box 1: Custom self-service portal for both employers and job candidates

If you select an environment that contains customer engagement, you can create the following portals:

- Customer self-service portal: A customer self-service portal enables customers to access self-service knowledge, support resources, view the progress of their cases, and provide feedback.

- Partner portal: A partner portal allows every organization with resellers, distributors, suppliers, or partners to have real-time access to every stage of shared activities.

- Employee self-service portal: An employee self-service portal creates an efficient and well-informed workforce by streamlining common tasks and empowering every employee with a definitive source of knowledge.

Box 2: Model-driven app with push notifications

Compared to canvas apps, model-driven apps in PowerApps are based on underlying data " specifically, the data stored in Common Data Service (CDS).

Box 3: Webform with target set to the job custom entity

Box 4: Configure a value for the Execute Workflow on Redeeming Contact option only.

Execute Workflow on Redeeming Contact: A workflow process to be executed when the invite is redeemed. The workflow will be passed the redeeming contact as the primary entity.

Box 5: Configure the value for the Assigned to Account option only.

Assign to Account: An account record to be associated as the redeeming contact's parent customer when the invite is redeemed.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/portals/portal-templates https://global.hitachi-solutions.com/blog/canvas-vs-model-driven-apps https://docs.microsoft.com/en-us/powerapps/maker/portals/configure/invite-contacts#invitation-attributes

Question: 3 CertyIQ

HOTSPOT -
You create a suite of Power Platform-based order management canvas apps for a bakery that has five retail stores. Each store uses a tablet device to manage inventory and process orders.
You need to make the following changes to the original order tracking app:
When an online order for delivery is received, send the order to the bakery that is located closest to the order destination.

- When an online order for pickup is received, require store staff to enter an estimated time in an app. Staff must prepare the order and then use the app to notify the customer when the order is ready.
- Allow the store manager to personalize the company's corporate weekly newsletter and add store-specific specials.

You must minimize the amount of custom code and configuration required to implement the solution.
What should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Implementation option
Determine which store is closest to the order destination.	Power Automate flow Plug-in Logic app
Estimate the time required to prepare an order and notify the customer.	New screen in an existing order canvas app New canvas app New logic app
Send the newsletter by email to customers.	Power Automate flow triggered from an email button Power Automate flow triggered manually Power Automate UI flow triggered from an email button

Answer:

Answer Area

Requirement	Implementation option
Determine which store is closest to the order destination.	Power Automate flow Plug-in Logic app
Estimate the time required to prepare an order and notify the customer.	New screen in an existing order canvas app New canvas app New logic app
Send the newsletter by email to customers.	Power Automate flow triggered from an email button Power Automate flow triggered manually Power Automate UI flow triggered from an email button

Explanation:

Box 1: Power Automate flow -

Do you want to get the user's location whose location is closest to the current device, then use key is to use Bing Map connector.

The Bing Map connector is available in the following products and regions:

Service	Class	Regions
Logic Apps	Standard	All Logic Apps regions except the following: - Azure China regions
Power Automate	Standard	All Power Automate regions except the following: - US Government (GCC High) - China Cloud operated by 21Vianet
Power Apps	Standard	All Power Apps regions except the following: - US Government (GCC High) - China Cloud operated by 21Vianet

Box 2: New screen in an existing canvas app

Box 3: Power Automate flow triggered manually

Reference:

https://docs.microsoft.com/sv-se/connectors/bingmaps/

Question: 4 CertyIQ

A company has an application that provides API access. You plan to connect to the API from a canvas app by using a custom connector.
You need to request information from the API developers so that you can create the custom connector.
Which two types of files can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. YAML
B. WSDL
C. OpenAPI definition
D. Postman collection

Answer:

CD

Explanation:

OpenAPI definitions or Postman collections can be used to describe a custom connector.

Why Other Options Are Incorrect

A is incorrect: While an OpenAPI definition can be written using YAML formatting syntax, a raw, generic **YAML** extension file cannot be natively ingested as a direct custom connector blueprint template without matching the rigid OpenAPI schema structure.

B is incorrect: WSDL (Web Services Description Language) files are XML-based documents used exclusively to map legacy **SOAP web services** rather than the modern RESTful HTTP web endpoints targeted by standard custom connectors.

Reference:

https://docs.microsoft.com/en-us/connectors/custom-connectors/faq

Question: 5 CertyIQ

You plan to create a canvas app to manage large sets of records. Users will filter and sort the data.
You must implement delegation in the canvas app to mitigate potential performance issues.
You need to recommend data sources for the app.
Which two data sources should you recommend? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. SQL Server
B. Common Data Service
C. Azure Data Factory
D. Azure Table Storage

Answer:

AB

Explanation:

When you are creating reports from large data sources (perhaps millions of records), you want to minimize network traffic.

Working with large data sets requires using data sources and formulas that can be delegated. It's the only way to keep your app performing well and ensure users can access all the information they need. Delegation is supported for certain tabular data sources only.

These tabular data sources are the most popular, and they support delegation:

- Common Data Service
- SharePoint
- SQL Server

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/delegation-overview

Question: 6 CertyIQ

HOTSPOT -
A client is deploying Dynamics 365 Finance without any third-party add-ons.
You need to select the appropriate solutions for the client.
What should you select? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Scenario	Solution
Warehouse employees can use mobile devices to scan barcodes by using Dynamics 365 Finance.	Out-of-the-box / Logic apps / Power Automate / Common Data Service
The location of field technicians can be communicated with a text message from Dynamics 365 Field Service.	Common Data Service / Workflow / Power Automate

Answer:

Answer Area

Scenario	Solution
Warehouse employees can use mobile devices to scan barcodes by using Dynamics 365 Finance.	**Out-of-the-box** / Logic apps / Power Automate / Common Data Service
The location of field technicians can be communicated with a text message from Dynamics 365 Field Service.	Common Data Service / Workflow / **Power Automate**

Explanation:

Box 1: Out-of-the-box -

Technicians can use the Field Service (Dynamics 365) mobile app to scan barcodes.

Box 2: Power Automate -

Administrators can replace Dynamics 365 workflows with Power Automate flows for Field Service Mobile processes like geofencing, geofence alerts, and push notifications.

By using Power Automate for Field Service Mobile processes, you can:

Connect and run workflows within Dynamics 365 and between other outside applications.

Delete records and schedule jobs.

Perform robust approvals.

Reference:

https://docs.microsoft.com/en-us/dynamics365/field-service/mobile-power-app-system-barcode-scanning
https://docs.microsoft.com/en-us/dynamics365/field-service/mobile-workflow-to-flow

Question: 7 CertyIQ

DRAG DROP -
A company uses Microsoft 365. You are developing a model-driven app.
The app must meet the following requirements:
- Use SharePoint Online for document storage.
- Send emails by using Exchange Online.

You need to configure integrations.
What should you configure? To answer, drag the appropriate configuration options to the correct requirements. Each configuration option may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

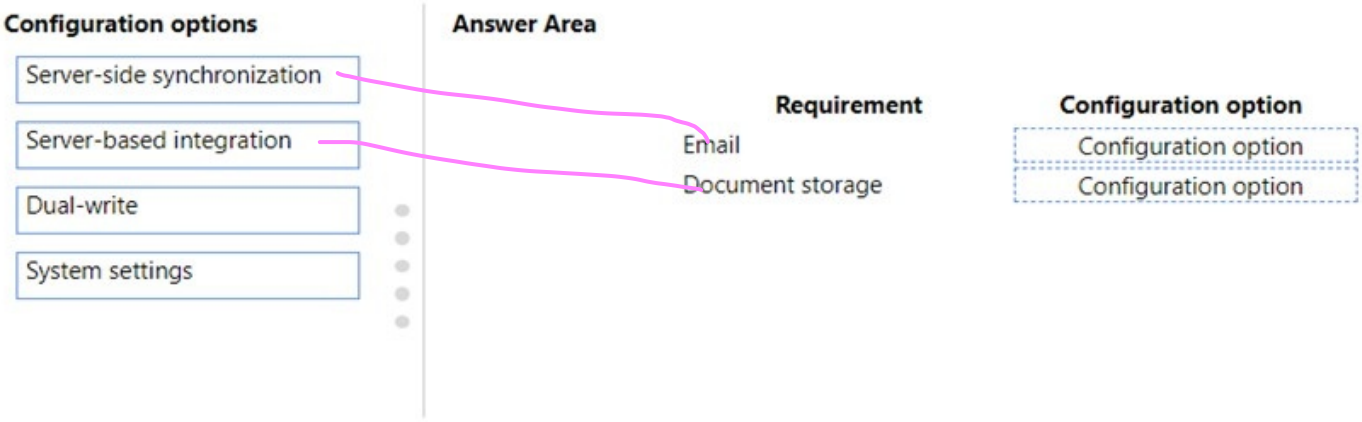

Answer:

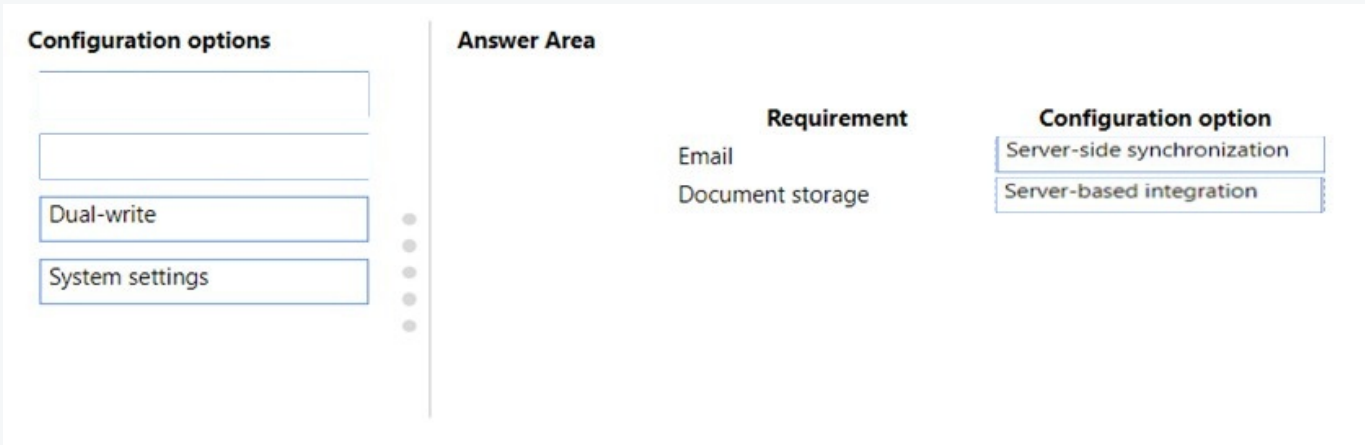

Explanation:

Box 1: Server-side syncrhonization

Configure default email processing and synchronization: set server-side synchronization to be the default configuration method for newly created users.

Box 2: Server-side integration.

If your organization is already using document management with Microsoft Dynamics CRM List Component, you must switch to server-based SharePoint integration.

If your organization has not deployed document management, when a System Administrator logs in an alert

message will be displayed to enable server-based

SharePoint integration.

Question: 8 CertyIQ

A company plans to create an order processing app. When orders are created, the app will perform complex business logic and integrate with several external systems.
Orders that have a large number of line items may take up to six minutes to complete. Processing for each order must be completed in one operation to avoid leaving records in an incomplete state.
You need to recommend a solution for the company.
What should you recommend?

A. an asynchronous workflow that uses a custom workflow activity

B. a real-time workflow that uses a custom action

C. a webhook that connects to an Azure Function

D. an asynchronous plug-in

Answer:

B

Explanation:

Real-time Workflows roll back all changes if it fails. As the Workflow is going through the process itself, if it fails, it will roll back all of the prior steps taken.

Incorrect Answers:

A: With Background Workflows, actions will not roll back if it fails. All changes are up-to-date until the failure occurs. The workflow will stop at this point due to the failure.

Reference:

https://ledgeviewpartners.com/blog/what-are-the-differences-between-real-time-and-background-workflows-in-microsoft-dynamics-365-crm/

Question: 9 CertyIQ

HOTSPOT -
You work for a not-for-profit agency that manages business processes by using Power Platform custom entities.
Volunteer registration and onboarding are manual processes that include multiple related entities.
You need to implement a portal solution that replaces the manual processes.
Which modules should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Module
Create a portal by using a portal template	Starter portal Community portal Customer self-service portal
Manage volunteer registration	Entity form metadata Webform Webform step

Answer:

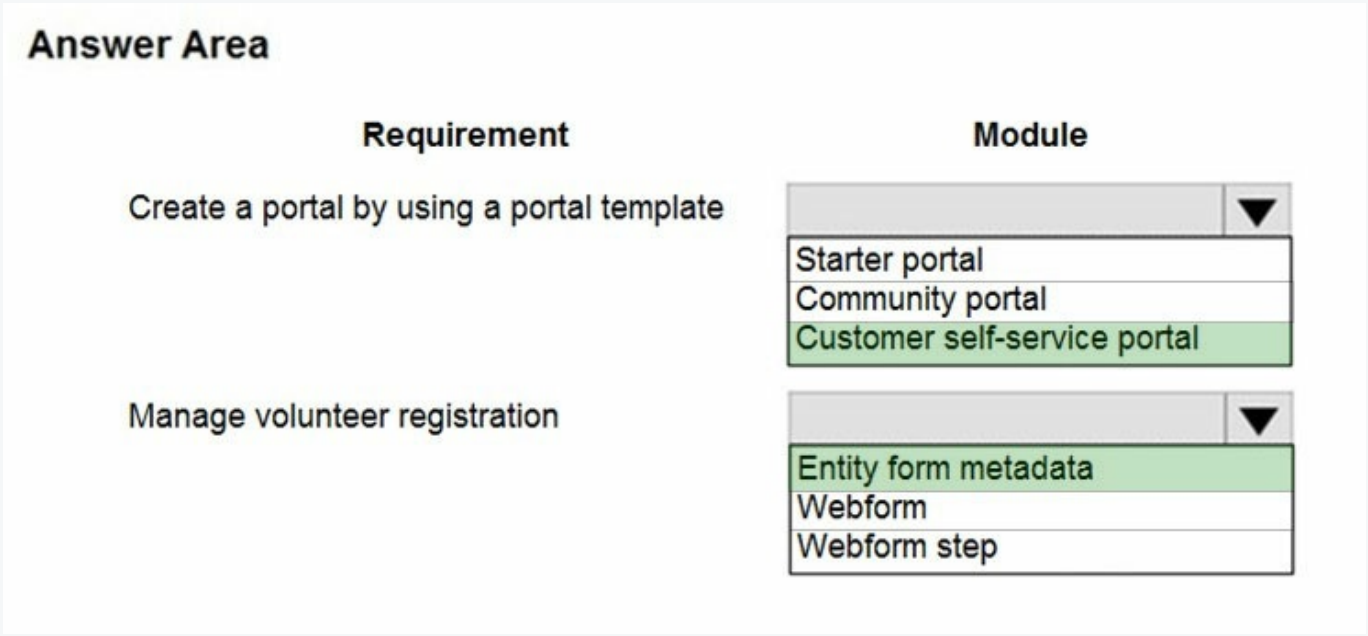

Explanation:

Box 1: Customer self-service portal

Customer self-service portal: A customer self-service portal enables customers to access self-service knowledge, support resources, view the progress of their cases, and provide feedback.

Incorrect Answers:

➪ Community portal: A community portal leverages peer-to-peer interactions between customers and experts to organically grow the catalog of available knowledge from knowledge base articles, forums, and blogs as well as providing feedback through comments and ratings.

➪ Starter portal: If you select an environment that contains Microsoft Dataverse, you can create a Dataverse starter portal. The Dataverse starter portal comes with the sample data for you to quickly get started. It also has the following built-in sample pages:

Default studio template -

Page with title -

Page with child links -

Box 2: Entity form metadata -

The Advanced Form Metadata contains additional behavior modification logic to augment or override the functionality of form fields that is otherwise not possible with native basic form editing capabilities.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/portals/portal-templates https://docs.microsoft.com/en-us/powerapps/maker/portals/configure/configure-web-form-metadata

Question: 10 CertyIQ

You are implementing custom business logic in a Power Apps portal.
You need to use Liquid templates to display dynamic content.
To which three entities can you include Liquid code? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Content snippet
B. Web page
C. Web template
D. Page template
E. Portal settings

Answer:

BCD

Explanation:

Liquid is an open-source template language integrated into portals. It can be used to add dynamic content to pages, and to create a wide variety of custom templates. Using Liquid, you can:

✑ Add dynamic content directly to the Copy field of a webpage or the content of a content snippet.

✑ Store source content by using web templates, entirely through configuration within Power Apps, for use throughout the Power Apps portals content management system.

✑ Render a website header and primary navigation bar, entirely through configuration within Power Apps.

Note: page is one of the available liquid objects.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/portals/liquid/liquid-overview
https://docs.microsoft.com/en-us/powerapps/maker/portals/liquid/liquid-objects#page

Question: 11 CertyIQ

DRAG DROP -
Teachers in a school district use Azure skill bots to teach specific classes. Students sign into an online portal to submit completed homework to their teacher for review. Students use a Power Virtual Agents chatbot to request help from teachers.

You need to incorporate the skill bot for each class into the homework bot.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

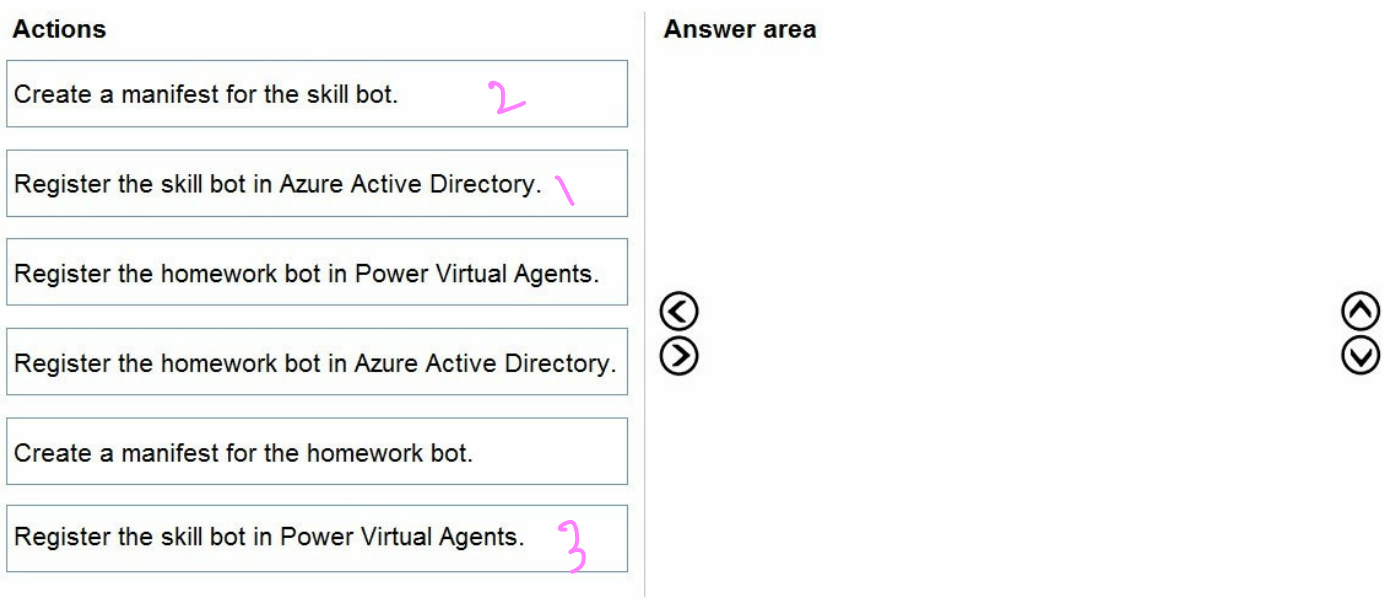

Answer:

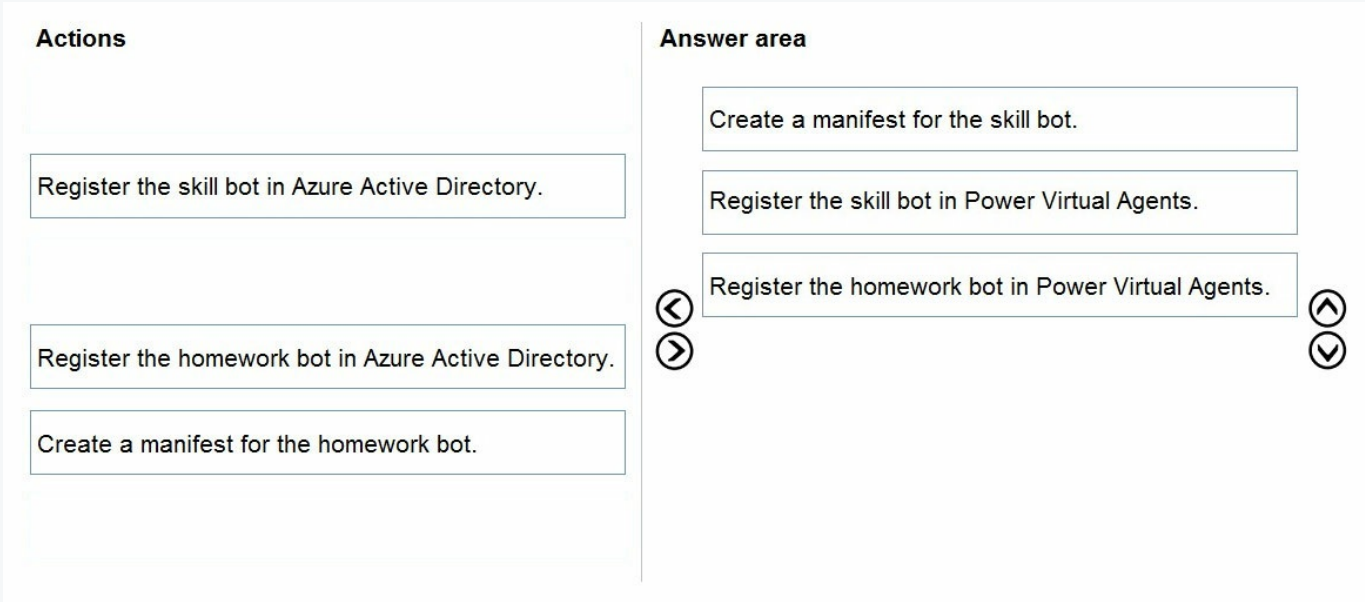

Explanation:

Step 1: Create a manifest for the skill bot

You can use skills to extend another bot. A skill is a bot that can perform a set of tasks for another bot.

A skill's interface is described by a manifest.

Step 2: Register the skill bot in Power Virtual Agents

Power Virtual Agents enables you to extend your bot using Microsoft Bot Framework skills.

First, create a Power Virtual Agents bot and create and deploy the skill using pro-code tools into your organization.

Next, register a skill in Power Virtual Agents.

Step 3: Register the homework bot in Power Virtual Agents

You can use your Power Virtual Agents bot as a skill with Bot Framework bots.

The Bot Framework and Power Virtual Agents bots must be deployed in the same tenant.

Reference:

https://docs.microsoft.com/en-us/azure/bot-service/skill-implement-skill https://docs.microsoft.com/en-us/azure/bot-service/skills-write-manifest

Question: 12 CertyIQ

A company is migrating from an on-premises Dynamics 365 installation to a Power Platform solution. You are creating plug-ins for the new solution.
You need to register the plug-ins.
Which isolation mode should you use?

A. None
B. Global Assembly Cache (GAC)
C. Sandbox
D. Disk

Answer: C

Explanation:
You will find options related to the isolation mode and location for the assembly. These refer to options that apply to on-premise deployments. Dataverse is not available for on-premises deployments, so you will always accept the default options of SandBox and Database for these options.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/register-plug-in

Question: 13 CertyIQ

An organization uses a public-facing Power Apps portal.
You need to change the layout of a specific web page.
What are two possible ways to achieve the goal? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Select the Portal Management app and then select Edit.
B. Select the Portal Management app and then select Play.
C. Select the portal app and then select Manage.
D. Select the portal app and then select Edit.

Answer:

AD

Explanation:

A: The Portal Management app lets you do advanced configuration actions on your portal.

1. Open the Portal Management app.

2. Go to Portals > Web Pages.

3. To edit an existing web page, select the web page name.

4. Enter appropriate values in the fields.

5. Select Save & Close.

D: To use the WYSIWYG editor:

1. Edit the portal to open it in Power Apps portals Studio.

2. Select the page on which you want to add the component.

3. Select an editable element on the canvas.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/portals/configure/web-page
https://docs.microsoft.com/en-us/powerapps/maker/portals/compose-page

Question: 14 CertyIQ

You are building a custom application in Azure to process resumes for the HR department.
The app will monitor submissions of resumes and parse the resumes.
You need to parse the resumes and save contact and skills information into the Common Data Service.
Which mechanism should you use?

A. Power Automate
B. Common Data Service plug-in
C. Web API
D. Custom workflow activity

Answer:

A

Explanation:

Improve operational efficiency with a unified view of business data by creating flows that use Dataverse (Common Data Service has been renamed to Microsoft

Dataverse as of November 2020).

For example, you can use Dataverse within Power Automate in these key ways:

Create a flow to import data, export data, or take action (such as sending a notification) when data changes.

Instead of creating an approval loop through email, create a flow that stores approval state in an entity, and then build a custom app in which users can approve or reject items.

Reference:

https://docs.microsoft.com/en-us/power-automate/common-data-model-intro

Question: 15 CertyIQ

DRAG DROP -
You are researching integrations with several external systems.
Each integration has different requirements.
You need to determine which data sources to use to meet each requirement.
What should you use? To answer, drag the appropriate data sources to the correct requirements. Each data source may be used once, more than one, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

Answer Area

Objects	Requirement	Object
Virtual entity	Support records that use an integer as a primary key.	
Custom connector	Ensure that data can be read and updated.	
	Ensure that data is available to all Microsoft Dataverse clients.	

Answer:

Answer Area

Objects	Requirement	Object
Virtual entity	Support records that use an integer as a primary key.	Virtual entity
Custom connector	Ensure that data can be read and updated.	Virtual entity
	Ensure that data is available to all Microsoft Dataverse clients.	Custom connector

Explanation:

Box 1: Virtual entity -

Initially, defining a virtual entity is the same as defining a custom entity: you specify the entity, attributes, and relationships for the new virtual entity type.

You can use GUIDs as primary keys in the external data source.

Box 2: Virtual entity -

Virtual entities enable the integration of data residing in external systems by seamlessly representing that data as entities in Microsoft Dataverse (Common Data

Service), without replication of data and often without custom coding. Virtual entities support create, updates and delete of data in the external system.

Box 3: Custom connector -

A custom connector is a wrapper around a REST API (Logic Apps also supports SOAP APIs) that allows Logic Apps, Power Automate, or Power Apps to communicate with that REST or SOAP API.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/virtual-entities/get-started-ve

Question: 16 CertyIQ

A Power Platform solution includes the following Web API call:
GET http://contoso.crm.dynamics.com/api/data/v9.1/RelationshipDefinitions?$select=SchemaName
You need to explain what this line of code is doing.
What does the code do?

A. Retrieve the list of relationships between tables.
B. Retrieve a list of tables that are related to each other.
C. Retrieve a list of one-to-many relationships with other tables.
D. Retrieve a list of tables that have more than one relationship.
E. Retrieve a list of many-to-many relationships with other tables.

Answer: A

Explanation:
Querying relationship metadata -
Entity relationships can be queried using the RelationshipDefinitions entity set. You can use a query like the following to get the SchemaName property for every relationship.
GET [Organization URI]/api/data/v9.0/RelationshipDefinitions?$select=SchemaName
The properties available when querying this entity set are limited to those in the RelationshipMetadataBase EntityType.
Note: You can retrieve relationship metadata in the context of a given entity much in the same way that you can query attributes. The ManyToManyRelationships, ManyToOneRelationships, and OneToManyRelationships collection-valued navigation properties can be queried just like the Attributes collection-valued navigation property.
However, entity relationships can also be queried using the RelationshipDefinitions entity set.

Reference:
https://docs.microsoft.com/en-us/power-apps/developer/data-platform/webapi/query-metadata-web-api
https://docs.microsoft.com/en-us/power-apps/developer/data-platform/webapi/reference/relationshipmetadatabase?view=dataverse-latest

Question: 17 CertyIQ

HOTSPOT
-
You create a Power Automate flow that retrieves data from the Microsoft Dataverse Account table.
The flow uses only a subset of Account table data.
You need to retrieve the required data.
How should you configure the Dataverse List Rows action? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

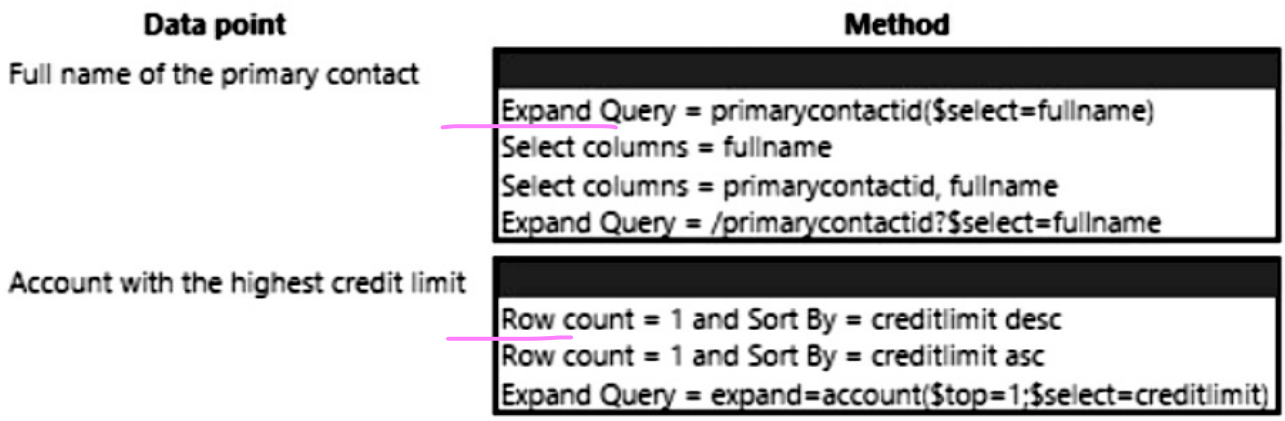

Answer:

Answer Area

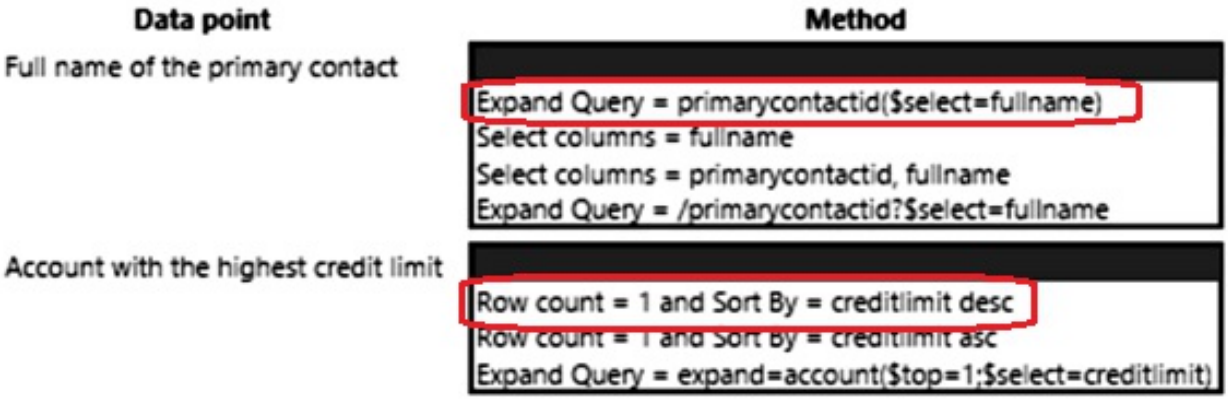

Explanation:

Full name of the primary contact: Expand Query = primarycontactid($select=fullname). This correctly navigates the lookup relationship and selects only the required field.

Account with the highest credit limit: Row count = 1 and Sort By = creditlimit desc. By sorting the creditlimit in descending (desc) order and limiting the result to the top row, you retrieve the highest credit limit entry efficiently.

Question: 18 CertyIQ

You are creating a canvas app to retrieve user sign in information from Microsoft Azure Active Directory (Azure AD) when someone searches for information about an end user.
You create an Azure Function to retrieve the required information by using JSON.
You need to ensure that the application functions correctly.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Create a Power Automate flow to import data.
B. Create a custom connector by using the Azure Function API.
C. Use app designer in the Power Platform admin center.
D. Use Azure Service Bus.
E. Create an API definition for the Azure Function.

Answer: BE

Explanation:

A. Create a Power Automate flow to import data is not necessary for the application to function correctly, as the application is already retrieving the user sign-in information from Azure AD by using JSON through an Azure Function.

C. Using app designer in the Power Platform admin center would not be necessary for this task as it is not used to retrieve user sign-in information from Azure AD.

D. Use Azure Service Bus is not necessary for this task as it is not used to retrieve user sign-in information from Azure AD.

To ensure that the application functions correctly, you should create a custom connector by using the Azure Function API. This will allow you to connect your canvas app to the Azure Function to retrieve the user sign-in information. Additionally, you need to create an API definition for the Azure Function, this will allow you to define the specific parameters and methods that your app will use to communicate with the Azure Function.

Question: 19 CertyIQ

DRAG DROP
-
A company is configuring Microsoft Power Virtual Agents and Power Automate flows that use model-driven apps.
The company has a website that uses Power Pages. You create Power Virtual Agents bot topics.
You must configure the following:
• Use a bot on the website.
• Create Bot Framework skills.
• Create a support request from the bot without human interaction.
You need to configure the website.

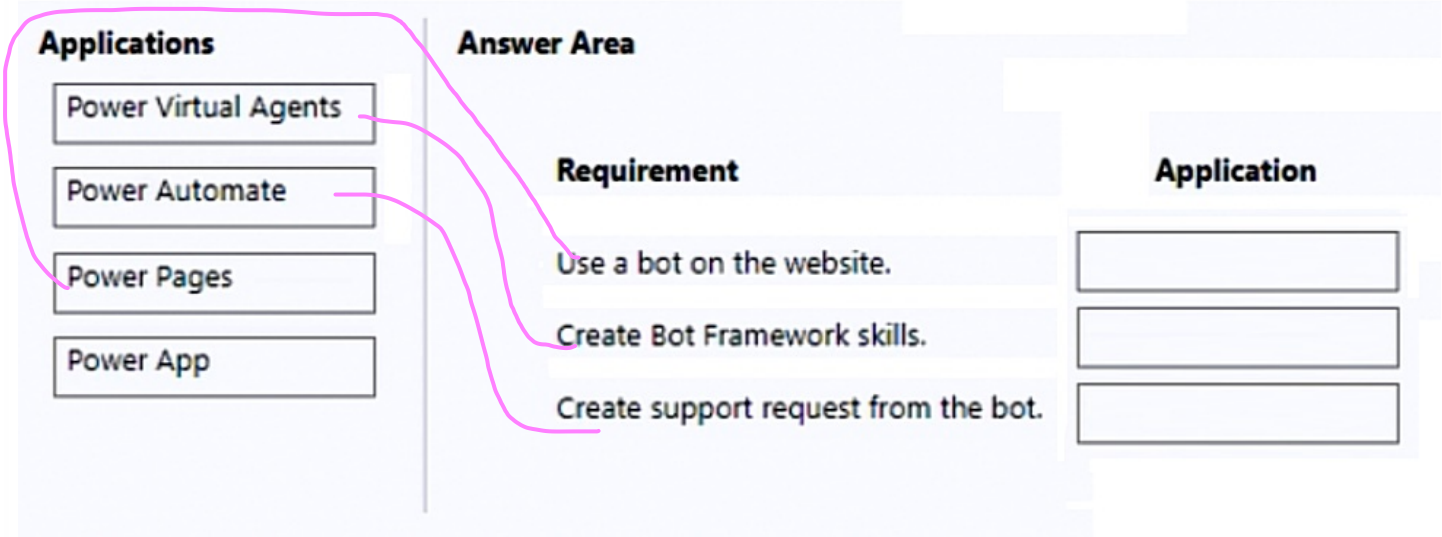

Answer:

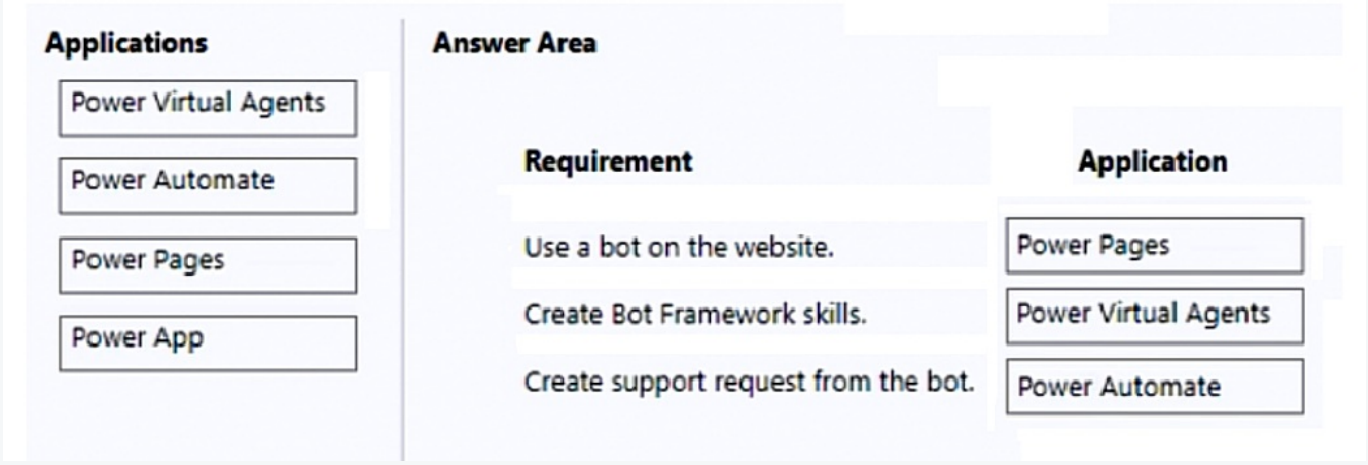

Explanation:

1)Power Pages 2) Power Virtual Agents 3) Power Automate

Use a bot on the website:

Embed the Power Virtual Agents bot into your website using Power Pages. You can do this by going to the Power Virtual Agents portal, selecting Channels, and then configuring the Custom Website channel.

Create Bot Framework skills:

Utilize the Bot Framework Composer to create skills that your bot can use. After developing the skills, register them with the Bot Framework and link them to your Power Virtual Agents bot via the Bot Framework Skills channel in Power Virtual Agents.

Create a support request from the bot without human interaction:

Design a topic in Power Virtual Agents that can handle support requests. Within this topic, add a Power Automate flow that creates the support request in your system. This flow will be triggered by the bot when the user interacts with the topic.

Question: 20 CertyIQ

You are configuring a custom connector for a web service. The web service is hosted in two different regions. The web service URL includes a common domain name and a unique sub-domain for each region.
The custom connector must allow the region to be entered for additional regions when creating the connection.
You need to create a policy template.
Which template type should you use?

A. Set HTTP header
B. Route request
C. Set host URL
D. Set query string parameter

Answer:

C

Explanation:

Set host URL. The custom connector needs to allow the region to be entered, and the URL includes a unique sub-domain for each region, so the host URL needs to be set dynamically based on the region entered by the

user. The template type "Set host URL" allows you to set the hostname of the request URL dynamically.

Why Other Options Are Incorrect

A is incorrect: Set HTTP header is used to inject custom header values (like custom Authorization rules or API metadata tags) into the outbound payload frame.

B is incorrect: Route request modifies the backend path routing rather than dynamically rewriting the primary base URL subdomains.

D is incorrect: Set query string parameter adds or alters parameters appended after the ? token in a web URL path string.

Question: 21 CertyIQ

You are a Power Apps maker creating a chat bot for a website.
The chat bot must recognize geographic attributes to enable additional functionality.
You need to recommend a feature.
What should you recommend?

A. Fallback topic
B. Power Automate Flow
C. Bot Service compliance
D. Slot filling

Answer:

D

Explanation:

Slot Filling is the Correct Choice

Entity Recognition: Slot filling relies on the use of entities. Entities are specialized data types (both built-in and custom) that allow the bot to identify and extract specific pieces of information from a user's input.

Geographic Capabilities: Power Virtual Agents (now part of Microsoft Copilot Studio) provides built-in entities for geographic data, including Country and City.

Intelligent Data Gathering: Slot filling allows the bot to "listen" for these geographic attributes within a user's initial message. If the user provides a location (e.g., "I'm looking for a store in Seattle"), the bot automatically populates the corresponding "slot" with that data, enabling it to skip redundant questions and immediately provide location-specific information.

Question: 22 CertyIQ

You develop and deploy a Power Apps solution.
The following changes must be made to the solution:
• Delete a column of data.
• Modify several views.
• Add several charts to dashboards.
You need to re-deploy the app.
What should you do?

A. Update the solution.

B. Upgrade the solution.

C. Create a new solution.

D. Patch the solution.

Answer:

B

Explanation:

Upgrade the solution. When you re-deploy a solution, the choice of action determines how the target environment handles components that exist in the old version but are missing from the new one: Upgrade (Recommended): This action replaces the previous solution with the new version and automatically deletes any components (such as a column, chart, or form) that are present in the old version but absent from the new one. It effectively "rolls up" previous patches and ensures the target environment's state is consistent with your latest development version. Update: This action replaces the solution but does not delete components that were removed in the new version. Those "deleted" columns or artifacts would remain in the target environment as "leftover" or "waste" components. Patch: A patch is typically used for minor changes to a specific component. Importantly, a patch cannot be used to delete components from the parent solution.

Question: 23 CertyIQ

You develop a model-driven app. You add the following users as members to the Sales Microsoft Azure Active Directory (Azure AD) security group: User1, User2, and User3.
The Sales Azure AD security group is linked to a pre-existing Microsoft Dataverse Azure AD security group team that is associated with the Sales security role. You assign each of the appropriate licenses to each user.
User1 is not listed in the Team Members subgrid for the app. User2 and User3 are listed in the subgrid.
You need to ensure that User1 can use the model-driven app.
What should you do?

A. Change the membership of the Sales Azure AD Security group to Dynamic User.

B. Change the membership type for User1 to Owner in the Azure AD security group.

C. Create an Owner team for the members of the Sales Azure AD group.

D. Ask User1 to sign into the model-driven app.

Answer: D

Explanation:

Ask User1 to sign into the model-driven app.

In many Power Apps environments, especially those using Dataverse with Azure AD (Microsoft Entra ID) security groups, the "Team Members" list in a model-driven app or the underlying Dataverse Team often does not update instantaneously for every individual user merely by being added to a security group.

Question: 24 CertyIQ

DRAG DROP
-

You are modifying a model-driven app for a bicycle company.
The app modifications must meet the following requirements:
• The order form must include a column that calculates payments based on how many years the customer wants to finance a bicycle.
• A pop-up box must remind the employee to validate the information entered before saving.
You must use out-of-the-box features before customizing the application.
What should you do?

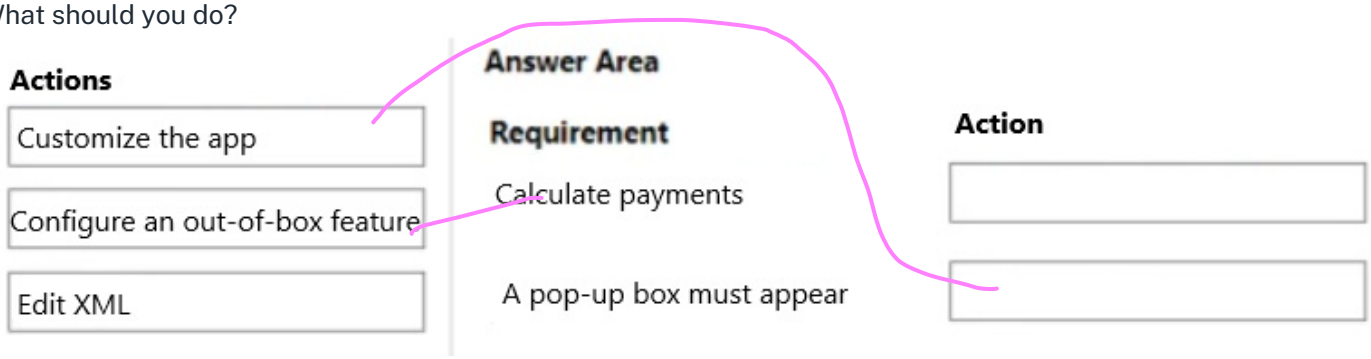

Answer:

Explanation:

Calculate payments: Configuring an out-of-the-box feature (like a calculated field or a Power Automate flow) is the preferred, low-code method.

Pop-up box: Editing XML (specifically the CommandBar or Ribbon XML) is the traditional way to add custom UI behaviors like alerts or dialogs in model-driven apps that aren't natively supported by standard configuration.

Question: 25 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.

Current environment -
•Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
•Pharmacies submit order requests through email.
•All information at customer locations is handwritten by customer representatives.
•Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
•Some accounts are referrals from other pharmacies.
•Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
•Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
•Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
•When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
•A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
•A field named Priority_Trigger must be created to trigger the Priority field.
•A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users -
•UserA must be able to create and publish Power Apps apps.
•UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
•UserC must be able to create apps connected to the systems and update the security roles and entities.
•Pharmacy representatives must only be able to run the apps and access their own records.
•Access to the accounting Power Apps app must be restricted to accounting team members.
•End users must have minimum access to the required systems.
•Only supervisors must be able to view phone numbers in the Accounts form.
•Developers must be able to create new apps for all users.
•Sales users must only have access to their own records.
Reporting -
Pharmacy orders must be displayed in four graphs as follows:
•Annual revenue over $100,000
•Annual revenues under $100,000
•Research facilities
•Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -
•Ensure that notifications are sent to the sales team when a lead is added by using Slack.
•Ensure that leads have a review stage added to the sales process.
•Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
•Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
•Fields for the doctor's name and phone number must be displayed in the customer record.
•The doctor entered on the customer's record must be validated against doctors that exist in the system.
•The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.
•The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app -
•A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
•Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
•When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits.
You need to create an application to deploy to other pharmacies.
What should you do?

A.Navigate to Customize the System and export everything to a managed solution.

B.Create packages for Package Deployer.

C.Create customizations with metadata in Organization Services.

D.Write a Web API to move customizations.

Answer: A

Explanation:

A. Navigate to Customize the System and export everything to a managed solution.

Managed Solutions: In the Power Platform, managed solutions are the standard, professional way to distribute applications, customizations, and configurations to other environments. They ensure that your application is "packaged" as a single unit, which is easy to import into other environments.

Controlled Updates: Managed solutions allow you to control how the application is updated in the target environments. They prevent users in the target environment from accidentally modifying or breaking your core customizations, ensuring a stable experience for every pharmacy.

Portability: This method captures all dependencies (entities, forms, views, charts, etc.) automatically, making it the most reliable way to ensure the application functions identically across different pharmacy environments.

Question: 26 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment -
•Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
•Pharmacies submit order requests through email.
•All information at customer locations is handwritten by customer representatives.
•Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
•Some accounts are referrals from other pharmacies.
•Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
•Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
•Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
•When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
•A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
•A field named Priority_Trigger must be created to trigger the Priority field.

•A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users -
•UserA must be able to create and publish Power Apps apps.
•UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
•UserC must be able to create apps connected to the systems and update the security roles and entities.
•Pharmacy representatives must only be able to run the apps and access their own records.
•Access to the accounting Power Apps app must be restricted to accounting team members.
•End users must have minimum access to the required systems.
•Only supervisors must be able to view phone numbers in the Accounts form.
•Developers must be able to create new apps for all users.
•Sales users must only have access to their own records.
Reporting -
Pharmacy orders must be displayed in four graphs as follows:
•Annual revenue over $100,000
•Annual revenues under $100,000
•Research facilities
•Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -
•Ensure that notifications are sent to the sales team when a lead is added by using Slack.
•Ensure that leads have a review stage added to the sales process.
•Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
•Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
•Fields for the doctor's name and phone number must be displayed in the customer record.
•The doctor entered on the customer's record must be validated against doctors that exist in the system.
•The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.
•The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app -
•A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
•Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
•When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits.
You need to create an application to deploy to other pharmacies.
What should you do?

A.Recreate customizations in a new environment.

B.Create packages for Package Deployer.

C.Create customizations with metadata in Organization Services.

D.Clone the solution.

Answer: B

Explanation:

B. Create packages for Package Deployer.

Complex Deployments: While a Managed Solution (Option A in your previous question) is the standard way to move customizations, Package Deployer is the industry-standard choice when you need to automate a more complex deployment process.

Pharmacy-Specific Needs: Pharmacy applications often require more than just importing a solution.

Question: 27 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage

your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment -
•Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
•Pharmacies submit order requests through email.
•All information at customer locations is handwritten by customer representatives.
•Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
•Some accounts are referrals from other pharmacies.
•Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
•Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
•Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
•When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
•A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
•A field named Priority_Trigger must be created to trigger the Priority field.
•A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users -
•UserA must be able to create and publish Power Apps apps.
•UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
•UserC must be able to create apps connected to the systems and update the security roles and entities.
•Pharmacy representatives must only be able to run the apps and access their own records.
•Access to the accounting Power Apps app must be restricted to accounting team members.
•End users must have minimum access to the required systems.
•Only supervisors must be able to view phone numbers in the Accounts form.
•Developers must be able to create new apps for all users.
•Sales users must only have access to their own records.
Reporting -
Pharmacy orders must be displayed in four graphs as follows:
•Annual revenue over $100,000
•Annual revenues under $100,000
•Research facilities
•Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -
•Ensure that notifications are sent to the sales team when a lead is added by using Slack.
•Ensure that leads have a review stage added to the sales process.
•Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
•Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
•Fields for the doctor's name and phone number must be displayed in the customer record.
•The doctor entered on the customer's record must be validated against doctors that exist in the system.
•The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.

•The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app -
•A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
•Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
•When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits.
You need to create an application to deploy to other pharmacies.
What should you do?

A.Clone the solution.

B.Create packages for Package Deployer.

C.Recreate customizations in a new environment.

D.Navigate to Customize the System and export everything to a managed solution.

Answer: B

Explanation:

B. Create packages for Package Deployer .

Automation of Complex Deployments: Unlike a standard solution export, which only moves the component definitions, Package Deployer allows you to orchestrate the entire deployment process. This includes importing one or more solutions, importing configuration data (like reference data required for the app to function), and running custom code to finalize the environment setup.

Question: 28 CertyIQ

A company develops a new Microsoft Dataverse plug-in that manages the Update message of an entity.
The plug-in logic requires access to the record columns before the operation starts and must compare the columns to post-update values.
You need to modify the design of the solution to access the information.
What should you do?

A.Add the code to the plug-in to read the record from the InputParameters collection.

B.Register a pre-image by using the Plug-in Registration Tool. Add the code to the plug-in to read the image from the PreEntityImages collection.

C.Register a post-image by using the Plug-in Registration Tool. Add the code to the plug-in to read the image from the PostEntityImages collection.

D.Add the code to the plug-in to query the data from Dataverse by using the API call based on the record ID.

Answer: B

Explanation:

Register a pre-image by using the Plug-in Registration Tool. Add the code to the plug-in to read the image from the Pre Entity Images collection.

Reference:

https://learn.microsoft.com/en-us/power-apps/developer/data-platform/register-plug-in#define-entity-images

Question: 29 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company designs data integration with an external system by using virtual tables.
You need to implement the virtual tables.
Solution: Implement an OData v4 provider as the data source.
Does the solution meet the goal?

A.Yes
B.No

Answer: A

Explanation:

A. Yes.

Why This Solution Meets the Goal

Microsoft Dataverse natively supports creating **virtual tables** (entities) to surface data from external systems without physically replicating or storing the records inside the Dataverse database.

Out-of-the-Box Provider: Dataverse includes a built-in, pre-installed **OData v4 Data Provider**.
Seamless CRUD Capabilities: If the external system supports the open-standard OData v4 web service connection, you can register it as a virtual table data source. This allows the system to dynamically execute Create, Read, Update, and Delete (CRUD) operations against the external data source at runtime.

Question: 30 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company designs data integration with an external system by using virtual tables.
You need to implement the virtual tables.
Solution: Assign record ownership to individual users.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

The solution does not meet the goal because virtual tables in Microsoft Dataverse do not support record ownership. Virtual tables are restricted to being organization-owned. Unlike standard Dataverse tables, they do not support user-owned security models, meaning features like assigning record ownership to individual users or applying ownership-based sharing are not supported. Because the data resides in an external system,

Dataverse cannot apply its native ownership-based security model to these individual virtual records. Correct Answer: B. No

Question: 31 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company designs data integration with an external system by using virtual tables.
You need to implement the virtual tables.
Solution: Use a table that has a GUID as its primary key.
Does the solution meet the goal?

A.Yes
B.No

Answer: A

Explanation:

yes, virtual tables need guides

If all the entities in external data source have an associated GUID primary key then we can implement the virtual entities for sure.

Reference:

https://learn.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/virtual-entities/get-started-ve?view=op-9-1

Question: 32 CertyIQ

DRAG DROP
-
A company is developing a Microsoft Dataverse plug-in.
The plug-in must create a follow-up task for a new account.
You add the code that receives context(IPluginExecutionContext) and service(IOrganizationService).
You need to create the remaining code to insert the follow-up task.
Which three code blocks should you use in sequence? To answer, move the appropriate code sequences from the list of sequences to the answer area and arrange in the correct order.

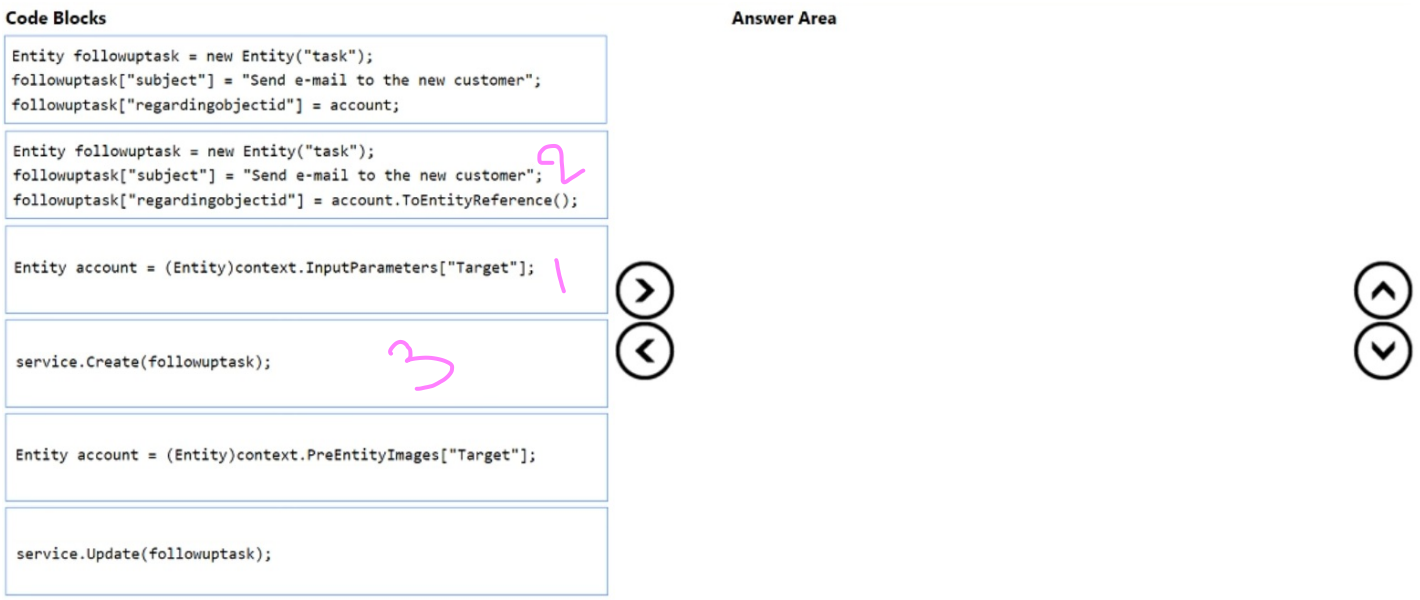

Answer:

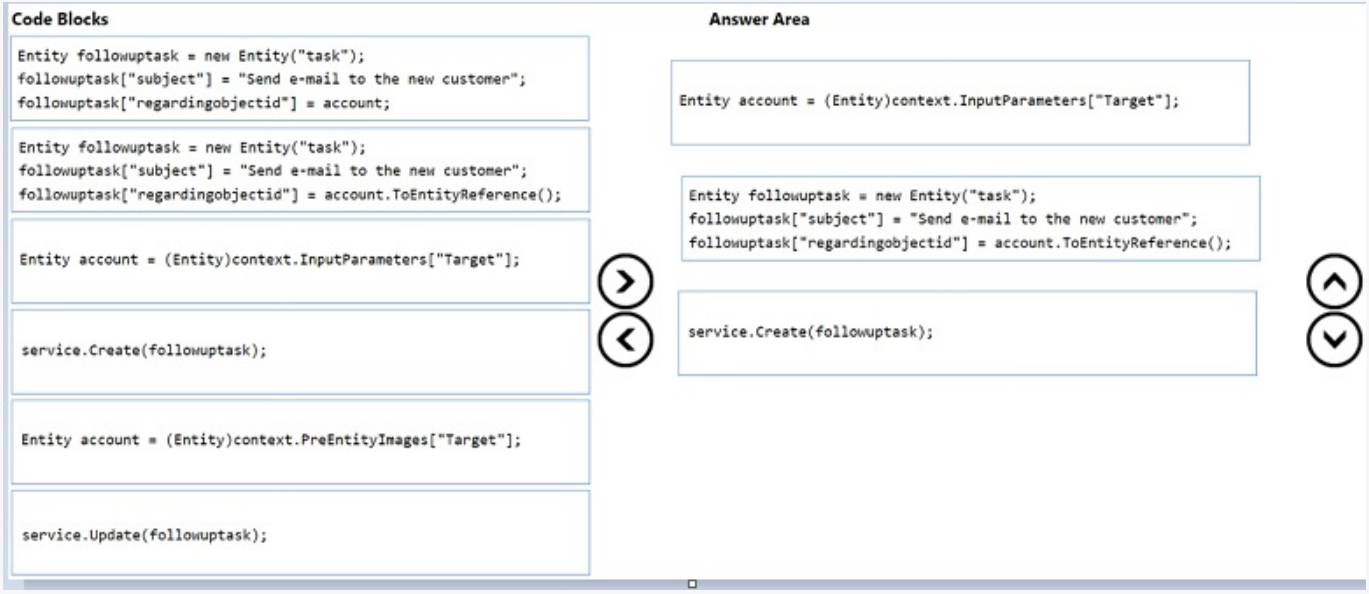

Explanation:

Entity account = (Entity)context.InputParameters["Target"];

Purpose: This retrieves the account record being processed by the plugin from the pipeline's InputParameters.

Entity followuptask = new Entity("task");

followuptask["subject"] = "Send e-mail to the new customer";

followuptask["regardingobjectid"] = account.ToEntityReference();

Purpose: This creates the task entity and sets the regardingobjectid by converting the account entity into an EntityReference, which is required for lookup fields.

service.Create(followuptask);

Purpose: This uses the IOrganizationService to persist the new task record to the database.

Question: 33 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company designs data integration with an external system by using virtual tables.
You need to implement the virtual tables.
Solution: Create a calculated column on the virtual table.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

An attribute on a virtual entity cannot be calculated or rollup. Any desired calculations must be done on the external side, possibly within or directed by the data provider.

Reference:

https://learn.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/virtual-entities/get-started-ve?view=op-9-1

Question: 34 CertyIQ

A company designs a Microsoft Dataverse Custom API to encapsulate business logic in it.
The Custom API business logic must be encapsulated in a way that does not allow the business logic behavior to be modified or canceled.
You need to set the parameter value of the custom API so it cannot be customized.
Which parameter value should you set?

A.Execute Privilege Name to prv_SdkMessageProcessingStep
B.Enabled for Workflow to No
C.Binding Type to Entity
D.Custom Processing Step to None

Answer: D

Explanation:

When the plug-in set for this custom API using CustomAPI.PluginTypeId is the only logic that occurs when this operation executes.

You won't allow another developer to register any more steps that can trigger other logic, modify the behavior of this operation, or cancel the operation.

Use this option when the custom API provides some capability that shouldn't be customizable.

Reference:

https://learn.microsoft.com/en-us/power-apps/developer/data-platform/custom-api

Question: 35 CertyIQ

A company has a model-driven app form. Many users use the form.
Users state that the form takes too long to fully load.
You need to evaluate the form design to improve loading performance.
Which three control types can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.timeline
B.quick view form
C.iFrame
D.lookup

Answer: BCD

Explanation:

B. Quick view form: These forms load data from a related record. If used excessively or configured inefficiently, they can significantly impact the initial load time of the main form. C. iFrame: iFrames load external content, which can cause delays in form rendering depending on the speed and responsiveness of the source page being loaded. It is often recommended to use asynchronous (lazy) loading to prevent them from blocking the main form. D. Lookup: While simple lookup fields are generally efficient, they can become performance issues if they are configured with complex filtering logic, have performance bottlenecks in the related entity, or are used in scenarios where they trigger unnecessary data retrieval during the initial form load.

Question: 36 CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The

company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment
-
Get Energy Fit Program
-
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment
-
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair:
oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements
-
Overview
-
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements
-
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application
-
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII.
oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters.
oRecords the details of the home improvements installed for the customer.
oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed.
oSend an approval to a senior manager to review and approve in Microsoft Teams.
oUpload the information to the API endpoint.
oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team.
oMust record the status on the funding application.
Suitability Assessment Tool
-
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The

new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting
-
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues
-
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to design the Planning Hub data model.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

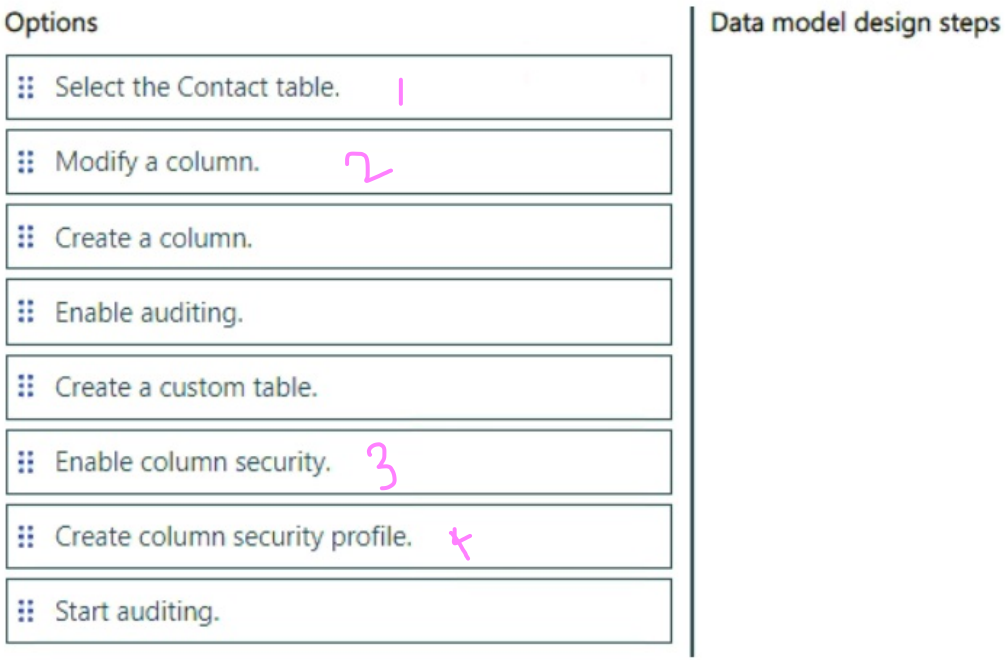

Answer:

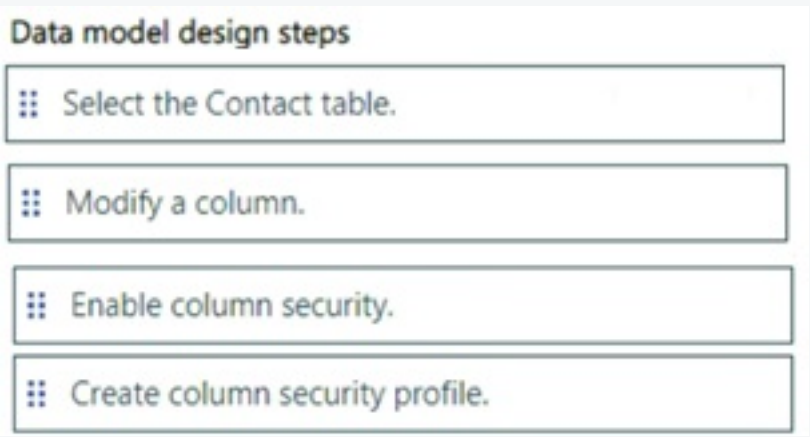

Explanation:

1. **Select the Contact table.**

Contact Table: This is the table in your data model that contains contact information. Selecting this table is the first step in applying any modifications or security settings to its columns.

2. **Modify a column.**

Modify a Column: This step involves making changes to a specific column within the Contact table. Modifications can include changing the data type, renaming the column, or applying transformations to the data. This ensures that the column is in the correct format and contains the necessary data for analysis.

3. **Enable column security.**

Enable Column Security: This step involves activating security settings at the column level. Column-level security restricts access to specific columns based on user roles or permissions. Enabling this feature ensures that sensitive information in the Contact table is only accessible to authorized users.

4. **Create column security profile.**

Create Column Security Profile: This step involves defining a security profile that specifies which users or roles have access to which columns. The profile can include rules and conditions that determine access levels, ensuring that sensitive data is protected and only visible to those who need it.

Question: 37 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment -
Get Energy Fit Program -
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments.

About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment -
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair: oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements -
Overview -
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements -
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application -
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII. oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters. oRecords the details of the home improvements installed for the customer. oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed. oSend an approval to a senior manager to review and approve in Microsoft Teams. oUpload the information to the API endpoint. oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team. oMust record the status on the funding application.
Suitability Assessment Tool -
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting -
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues -
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to implement the Suitability Assessment Tool.
What should you use?

A.Power App Component Framework (PCF) control

B.view

C.component library

D.form

Answer: C

Explanation:

C. component library.

Why This Is the Correct Choice

Based on the official Microsoft Power Platform PL-400 case study requirements, the **Suitability Assessment Tool** must be developed using modular components that can be easily shared and reused by other applications

Reusability across apps: A component library serves as a centralized repository for canvas app components. This allows developers to build low-code, modular blocks once and reuse them across multiple distinct applications effortlessly.
Low-code efficiency: While a **Power Apps Component Framework (PCF) control** also offers modularity, it requires custom code (TypeScript/HTML) and is typically reserved for advanced UI/UX requirements or custom data visualization that cannot be natively built using canvas controls

Question: 38 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment -
Get Energy Fit Program -
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.

•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment -
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair: oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements -
Overview -
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements -
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application -
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII. oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters. oRecords the details of the home improvements installed for the customer. oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed. oSend an approval to a senior manager to review and approve in Microsoft Teams. oUpload the information to the API endpoint. oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team. oMust record the status on the funding application.
Suitability Assessment Tool -
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting -
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues -
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to identify the Azure service to use for the Planning Hub application.
Which service should you use?

A.Logic App

B.Service Bus

C.Key Vault

D.Function

Answer: B

Explanation:

The Planning Hub application requires data integration and message-based communication between various components, including scheduling, customer details, and appointment tracking.Azure Service Bus is designed for reliable messaging and asynchronous processing, which is ideal for handling appointment scheduling and integration with multiple applications.It ensures decoupling between different services, making the architecture more scalable and resilient.

Question: 39 CertyIQ

DRAG DROP

-

A company is implementing business logic in a model-driven app. Employees import records from Microsoft Excel to create lead records.

The company has the following requirements:

•An existing phone number column must be formatted to only display numbers and periods.

•Three existing columns must be calculated to display the sum based on a percentage.

•The solution must not use custom development when possible.

You need to implement the business logic solution.

Which method should you use? To answer, move the appropriate solutions to the correct requirements. You may use each solution once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

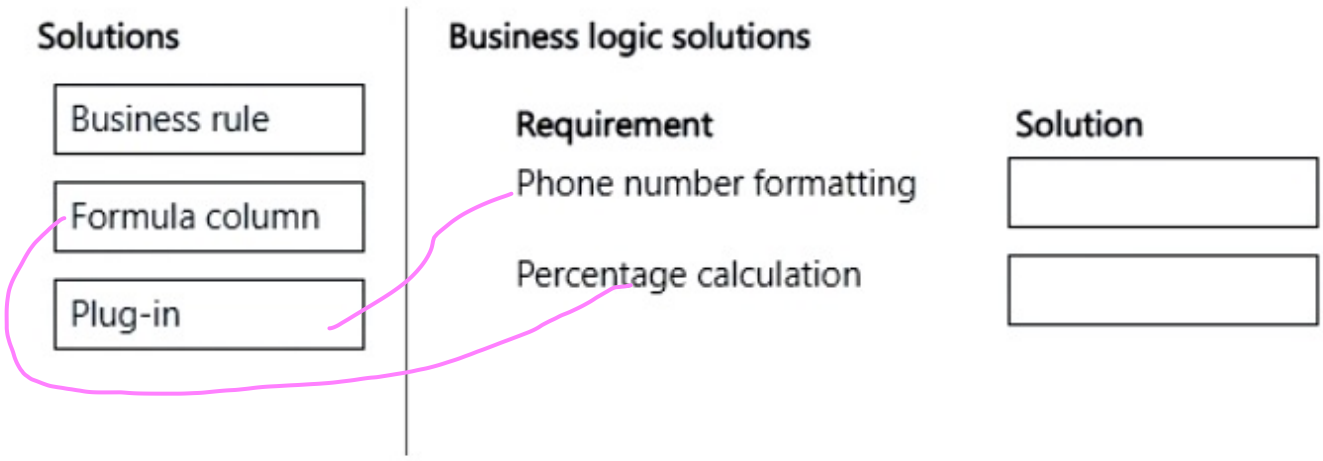

Answer:

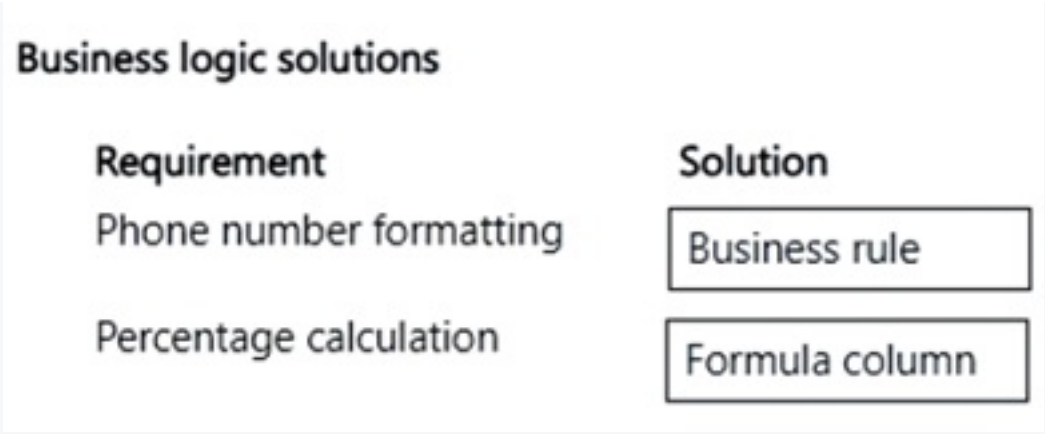

Explanation:

Phone number formatting: Business rule Business rules are commonly used to apply logic at the form level, such as formatting strings, setting field values, or validating input. While other methods like JavaScript or plugins exist, a business rule is a standard, low-code declarative way to handle simple UI-based logic like formatting. Percentage calculation: Formula column Formula columns (which use the Power Fx language) are the ideal solution for real-time, server-side calculations involving multiple columns. They allow you to perform arithmetic operations — such as dividing one value by another to derive a percentage — directly within the Dataverse table schema.

Question: 40 CertyIQ

You are creating a FetchXML query.
The query must return data from a table and return filtered data from a related table.
You need to configure the FetchXML query.
Which two elements should you use? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A.attribute
B.link-entity
C.alias
D.condition

Answer: BD

Explanation:

B. link-entity: This element is used to define the relationship and join between the primary entity and the related entity from which you want to retrieve data.

D. condition: This element is used to specify the criteria that the data must meet to be included in the results, allowing you to filter the data from the related table.

Question: 41 CertyIQ

You are testing security in a model-driven app. The business unit structure in the environment consists of a top-level business unit with three business units, named BusA, BusB, and BusC, directly under it.
BusA users must be able to view records in only their business unit.
You observe that BusA users have security roles from BusB and BusC assigned to them. The BusA users can view

records in those business units. All security role privileges are set to the Business Unit level.
You need to correct the problem with record access.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Turn off the feature that controls record ownership across business units.

B. Create a security role for BusA users in the parent business unit with privileges set to Business Unit level.

C. Move BusA users to the parent business unit. Assign security roles with Parent Child Business Units privileges.

D. Ensure security role privileges are set to User level.

Answer: BD

Explanation:

The issue is that BusA users are accessing records outside their business unit due to having security roles from BusB and BusC assigned. Since the security role privileges are set to the Business Unit level, the assigned roles from BusB and BusC allow BusA users to view records within those specific business units, even though the intention is for them to only view records in BusA.

Option B, "Create a security role for BusA users in the parent business unit with privileges set to Business Unit level," addresses this problem by isolating access based on the user's business unit. Even if they have roles from BusB and BusC, the new role in the parent business unit defines access scope based solely on the Business Unit level tied to BusA. The original roles attached to users from BusB and BusC would not have access to data within BusA's business unit. This new role provides them with the correct access for their own business unit.

Option D, "Ensure security role privileges are set to User level," further restricts record access. By changing the privilege level from Business Unit to User, the BusA users will only be able to access records they own or that are shared directly with them. This change effectively eliminates the unintended access to records in BusB and BusC, regardless of any roles inherited from those business units. The User level enforces a highly restrictive security model, ensuring that users can only interact with records explicitly assigned to them or shared with them. This is crucial for enforcing a principle of least privilege and minimizing the risk of unauthorized data access.

Option A is incorrect because there isn't a feature that controls record ownership across business units to be turned off. The security model operates on the level of privileges within the security roles that are assigned. Option C is incorrect because while moving users to the parent business unit and using Parent Child Business Units privileges could work, it would require redesigning the entire security model and potentially grant broader access than intended. It is simpler and more appropriate to limit the privileges through user level control instead of re-architecting the business unit structure and role assignments.

In conclusion, by creating a security role in the parent business unit (B) and ensuring privileges are set to User level (D), we can successfully restrict BusA users' access to records within their own business unit, resolving the security issue without unnecessary complexity or potential over-privileging.

Relevant documentation:

Security roles and privileges: https://learn.microsoft.com/en-us/power-platform/admin/security-roles-privileges
Business units in Dynamics 365: https://learn.microsoft.com/en-us/dynamics365/customerengagement/on-premises/admin/use-business-units-control-access-dynamics-365-apps

Question: 42 CertyIQ

HOTSPOT
-
You are creating a canvas app for users to interact with contact data in Microsoft Dataverse.
When users display contact data in the app, the following requirements must be met:
•By default, all contact data must be displayed, unless data is entered into a text input control; if so, then data must be filtered based on the last name of the contact.
•A new column must be added when retrieving the data source. The column must combine the Salutation and Full Name columns into a new column named Full Salutation.
•All data must be sorted in alphabetical order based on the surname of the contact.
You need to finalize the Microsoft Power Fx formula.
How should you complete the code segment? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Power Fx formula to return contact data

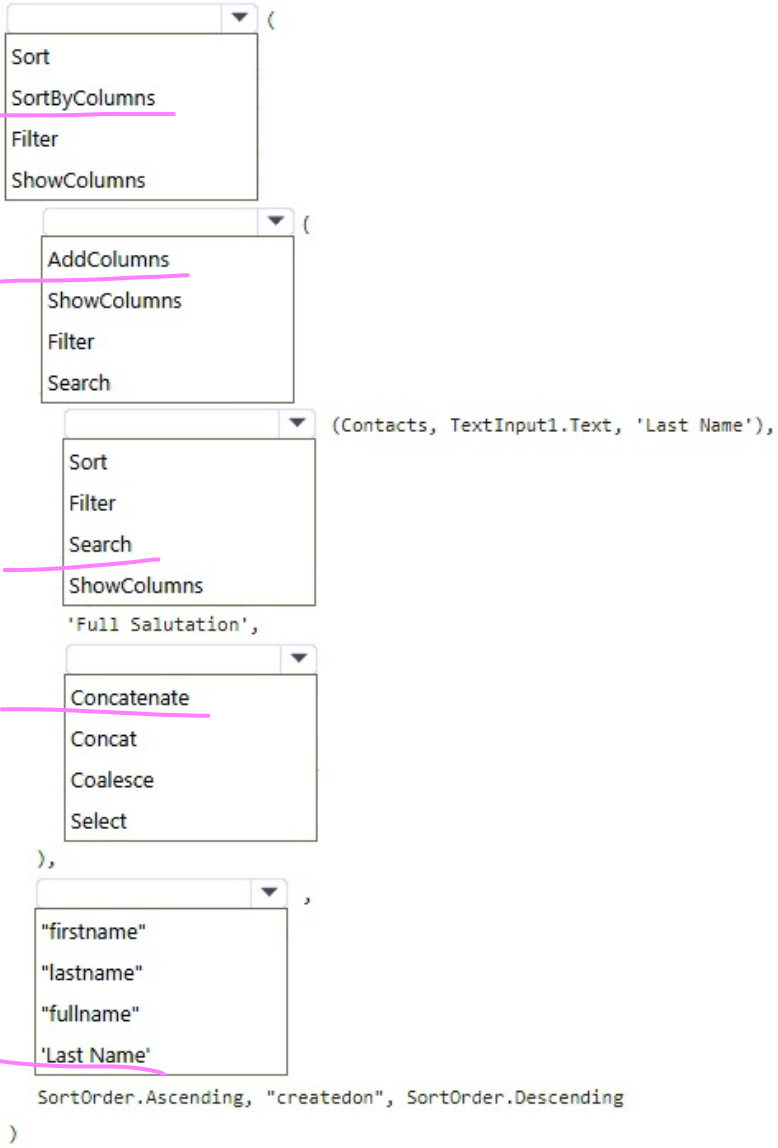

Answer:

Answer Area

Power Fx formula to return contact data

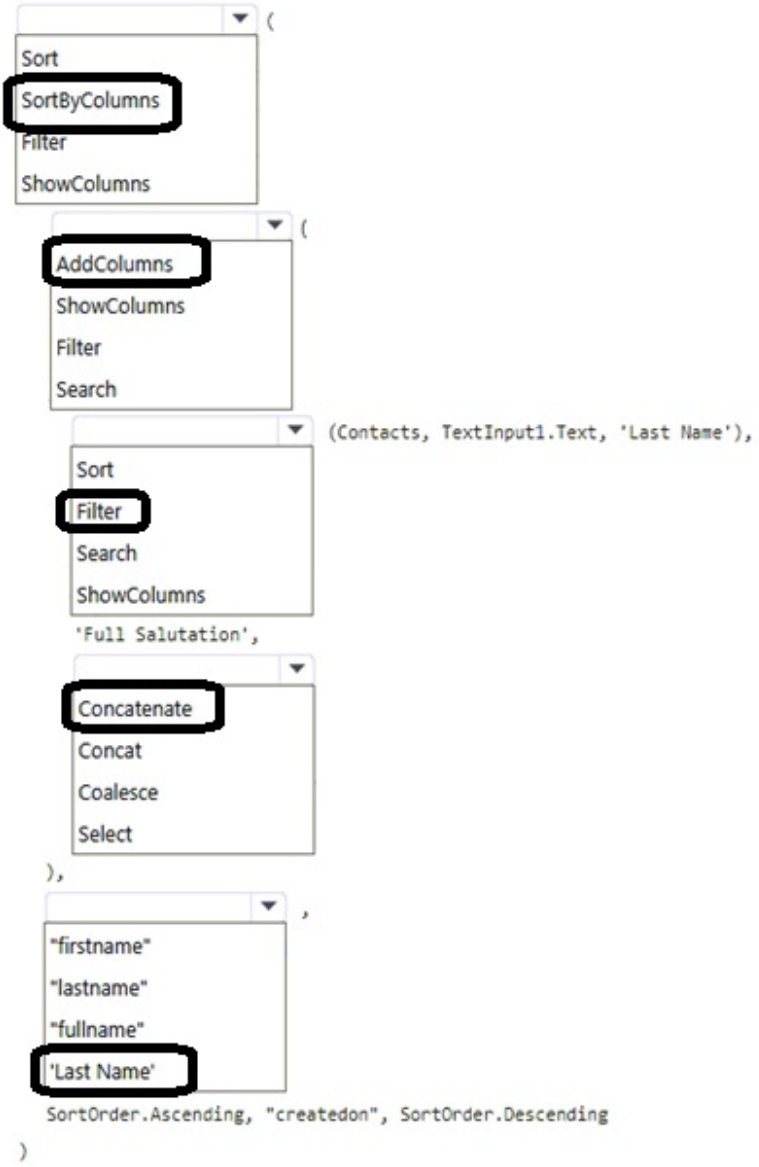

Explanation:

SortByColumns(AddColumns(Filter(Contacts, 'Full Salutation' = TextInput1.Text), "Full Name", Concatenate(firstname, " ", lastname)), "Last Name", SortOrder.Ascending, "createdon", SortOrder.Descending)

Question: 43 CertyIQ

You are developing a canvas app that connects to Microsoft Dataverse. You add the Accounts table as a data source to the app. You implement a gallery that will display information from the Accounts table.
The Accounts table is stored and cached locally as a collection named collAccounts. Data in the gallery must always display accounts that have a name value. The gallery uses the following Power Fx formula:

```
Filter(
    Sort(
        collAccounts,
        'Account Name',
        SortOrder.Descending
    ),
    IsBlank('Account Name') = false
)
```

You deploy the app to production.
Users report that the expected number of Account rows in the app does not appear.
You need to resolve the user issue.
How should you modify the Power Fx formula?

A. Sort(Accounts, 'Account Name', SortOrder.Descending)
B. Sort(collAccounts, 'Account Name', SortOrder.Descending)
C. Filter(Sort(Accounts, 'Account Name', SortOrder.Descending), IsBlank('Account Name') = false)
D. collAccounts

Answer: C

Explanation:

C. Filter(Sort(Accounts, 'Account Name', SortOrder.Descending), IsBlank('Account Name') = false)

This first sorts Accounts by Account Name descending, then filters out records where Account Name is blank.

Question: 44 CertyIQ

HOTSPOT
-
You are building a canvas app for a company to display data from a Microsoft SharePoint list named Tasks. The list stores project tasks, including due dates.
A collection named projectTasks is already declared in the app.
The company maintains over 100,000 tasks across projects
When users navigate to the main screen of the app or manually refresh the list, the main screen must display a list of all tasks that are beyond their due date.
Outbound network calls to SharePoint must be minimized.
You need to implement the functionality.
Which Power Fx formula should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

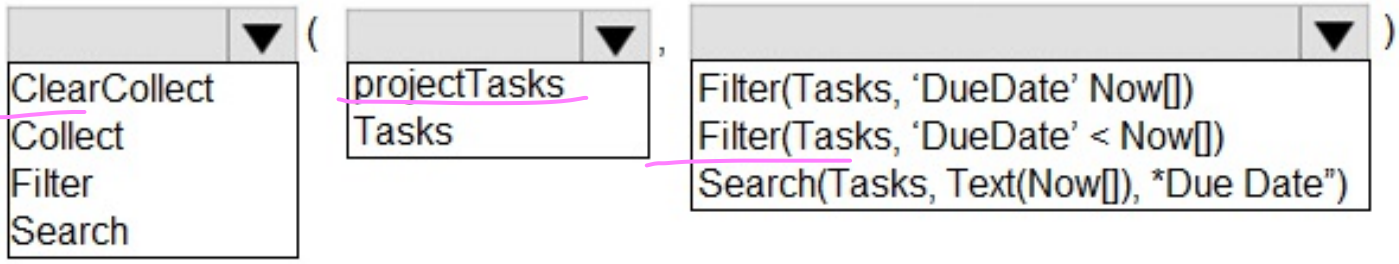

Answer:

Explanation:

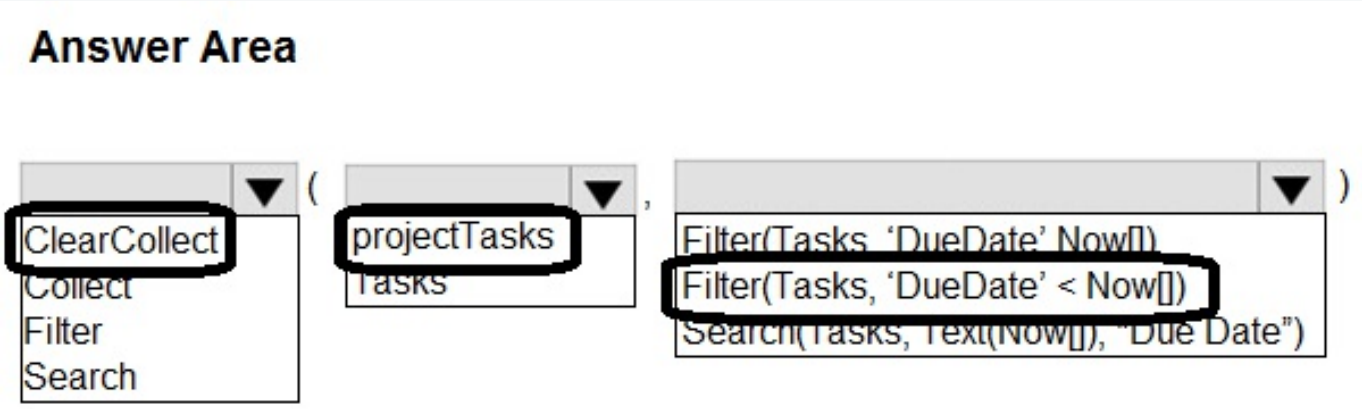

1. ClearCollect. ClearCollect() is used to: Clear an existing collection. Collect new records into it. Since the goal is to create and refresh a local collection (projectTasks), ClearCollect is the correct choice. Collect would append items without clearing. Filter and Search can't be used as the outer function because they don't create/overwrite a collection. 2. projectTasks. This is the name of the collection where filtered tasks will be stored. It becomes available for galleries and other controls to use. 3. Filter(Tasks, 'DueDate' < Now()). The goal is to retrieve overdue tasks. 'DueDate' < Now() returns tasks with due dates before the current date/time. This correctly filters all overdue tasks.

Question: 45 CertyIQ

HOTSPOT
-
You are implementing security features for a Dataverse plug-in that you created. The plug-in creates a Note whenever a user updates an Account row in Dataverse.
The plug-in has the following security requirements:
•Users must have edit-only restrictions for existing accounts that are not their own.
•The plug-in must always trigger successfully.
•All necessary privileges must be assigned to users within an existing Microsoft Teams site.
•The principle of least privilege must always be followed.
You need to implement the security features.
Which features should you implement? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Requirement	Feature
Privilege provided to edit accounts	Security role Business unit Microsoft Entra ID role Field security profile
Access level for the Account table	User Create User Update Business Unit Create Business Unit Update
Access level for the Notes table	User Append User Append To Business Unit Append Business Unit Append To
Team type to assign privileges to	Access Owner Microsoft Entra ID Office Group Microsoft Entra ID Security Group

Answer:

Explanation:

Answer Area

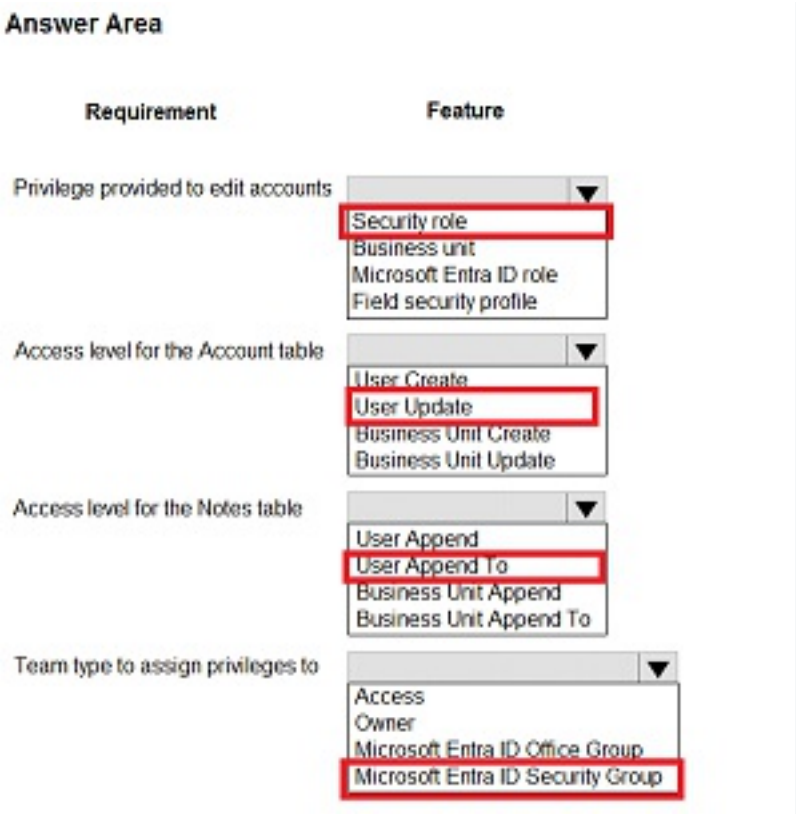

Privilege provided to edit accounts → Security role.

In Microsoft Dataverse / Dynamics 365 the ability to perform operations (Create, Read, Update, Delete, Append, Append To, Assign, Share) on an entity is granted through security roles. A security role contains the set of privileges and their scope (User / BU / Parent:Child BU / Organization). To give someone the ability to edit Account records you assign an Update privilege for the Account entity inside a security role — therefore the control that provides that privilege is a Security role.

Access level for the Account table → User Update.

The requirement shown implies users should be able to edit accounts they own (not all accounts across the org). The access level part of a privilege defines the scope.

User scope = the user can act on records they personally own.

Update = the ability to edit/update records.

So User Update means: users can update Account records that they own — the least-privilege option that satisfies “can edit accounts” without granting broader access.

Access level for the Notes table → User Append To.

Why / background on Append vs Append To:

Dataverse has two related privileges used when linking records: Append and Append To. To attach (link) record A to record B:

A needs the Append privilege,

B needs the Append To privilege.

For notes (annotations) commonly you need the correct append/append-to privileges on both sides so users can attach notes to records.

Choosing User Append To for the Notes table grants users the right, at the user scope, to have other records (like Notes) appended to the records they own. In practice this allows a user to attach notes to their own

records without giving organization-wide append rights. It aligns with the least-privilege principle and supports the common scenario: users can add notes to the records they own.

(If you need the full link behavior: ensure the complementary privilege is set on the counterpart entity so append/append-to pairing works — but the option shown in the screenshot is the correct small-scope privilege for notes.)

Team type to assign privileges to → Microsoft Entra ID Security Group.

To minimize administrative overhead for large user sets, it's best to assign privileges to groups that are centrally managed. In modern Microsoft environments, you can create teams backed by Microsoft Entra (Azure AD) security groups so membership maintenance is handled in Entra ID. That means:

Add/remove users from the Entra security group in Azure AD,

Those membership changes automatically affect Dataverse team membership and therefore privileges assigned to that team.

So choosing Microsoft Entra ID Security Group is the administrative-efficient option for assigning security roles/privileges to a set of users

Question: 46 CertyIQ

DRAG DROP
-
A company manages IoT sensors that transmit temperature, humidity, and other data points every second.
You must store the data in Dataverse.
Users will view the data in a model-driven app.
You need to determine where to store the IoT data and the sensor device configuration.
Which Dataverse table types should you use? To answer, move the appropriate Dataverse table types to the correct data. You may use each table type once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

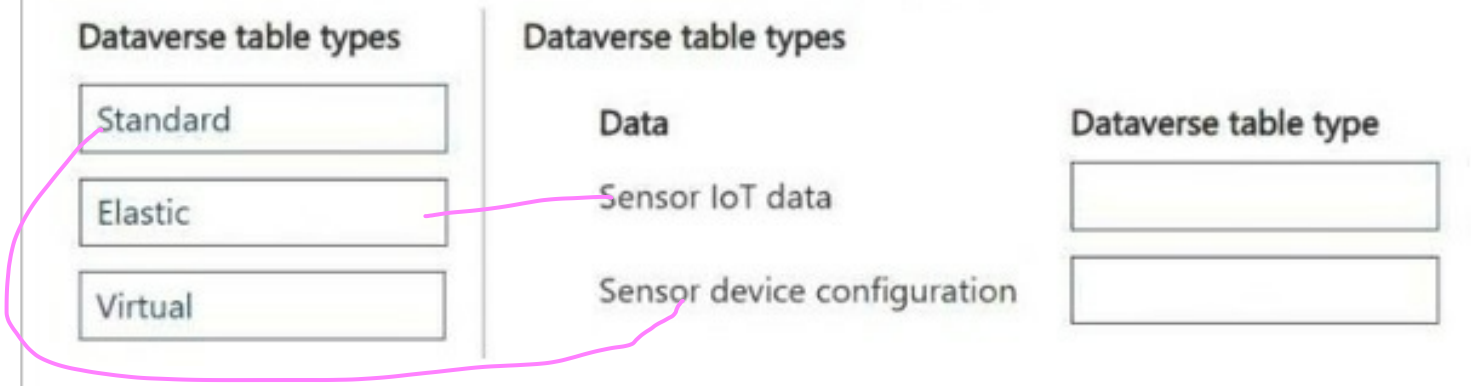

Answer:

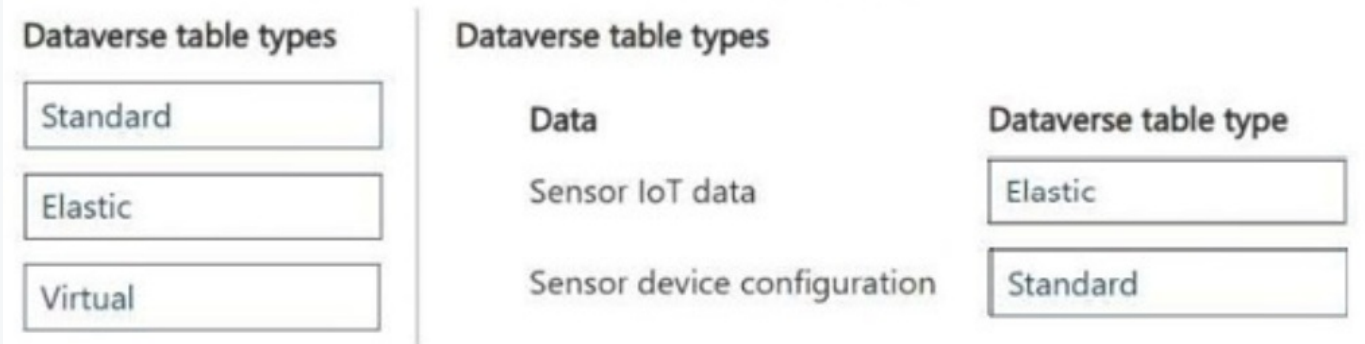

Explanation:

Elastic tables: These are designed for high-volume, rapidly growing data (e.g., Sensor IoT data). They are built on Azure Cosmos DB and provide massive scale.

Standard tables: These are best for relational data that requires traditional Dataverse capabilities like transactional integrity (e.g., Sensor device configuration).

Question: 47 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A university implements Dynamics 365 Sales. Several departments use opportunity records to bid for funding for projects within their own departments. You configure the system to ensure that each department can only work on their own records.
Employees in multiple departments often need to work together on an opportunity. Employees report that they are not able to see opportunities from other departments.
You need to ensure that employees from more than one department can work on the same opportunities when necessary.
Solution: Use position hierarchy security and define the two departments as positions.
Does the solution meet the goal?

A. Yes
B. No

Answer:

A

Explanation:

Two security models can be used for hierarchies, the Manager hierarchy and the Position hierarchy. The Position hierarchy allows data access across business units. If you are a financial organization, you may prefer the Manager hierarchy model, to prevent managers' accessing data outside of their business units.

However, if you are a part of a customer service organization and want the managers to access service cases handled in different business units, the Position hierarchy may work better for you.

Note: The hierarchy security model is an extension to the existing security models that use business units, security roles, sharing, and teams. It can be used in conjunction with all other existing security models. The hierarchy security offers a more granular access to records for an organization and helps to bring the maintenance costs down.

Reference:

https://docs.microsoft.com/en-us/power-platform/admin/hierarchy-security

Question: 48 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

A university implements Dynamics 365 Sales. Several departments use opportunity records to bid for funding for projects within their own departments. You configure the system to ensure that each department can only work on their own records.
Employees in multiple departments often need to work together on an opportunity. Employees report that they are not able to see opportunities from other departments.
You need to ensure that employees from more than one department can work on the same opportunities when necessary.
Solution: Create a security role that has organization-level access to opportunities. Give this security role to all members of the two departments who need access.
Does the solution meet the goal?

A. Yes
B. No

Answer:

B

Explanation:

Instead use position hierarchy security and define the two departments as positions.

Reference:

https://docs.microsoft.com/en-us/power-platform/admin/hierarchy-security

Question: 49 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A university implements Dynamics 365 Sales. Several departments use opportunity records to bid for funding for projects within their own departments. You configure the system to ensure that each department can only work on their own records.
Employees in multiple departments often need to work together on an opportunity. Employees report that they are not able to see opportunities from other departments.
You need to ensure that employees from more than one department can work on the same opportunities when necessary.
Solution: Use access team templates and give access to members in the two departments.
Does the solution meet the goal?

A. Yes
B. No

Answer: A

Explanation:

Yes. They allow for record-based sharing of information, in this case, opportunity records, among different teams or departments.

Each department can continue to work on their own records as per the existing setup. When employees from multiple departments need to work together on an opportunity, you can create an access team from the appropriate Access Team Template and add the relevant employees to the team. These team members will then have the necessary permissions to view and work on the shared opportunity records.

Question: 50 CertyIQ

DRAG DROP -
An international organization has a series of client-server applications that manage red light cameras and traffic violations across a wide geographic region. The daily volume of traffic violations is very high and growing.
You plan to use Microsoft Power Platform apps to manage the following types of data:
- Existing vehicle licensing data must be imported into Microsoft Dataverse and easily queried.
- Red light camera images must be stored in a repository for later analysis.
- Information about traffic violations must be stored and related to vehicle details.

You need to select data storage mechanisms for the new apps.
Which data storage mechanisms should you use? To answer, drag the appropriate data storage mechanisms to the correct data types. Each storage mechanism may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

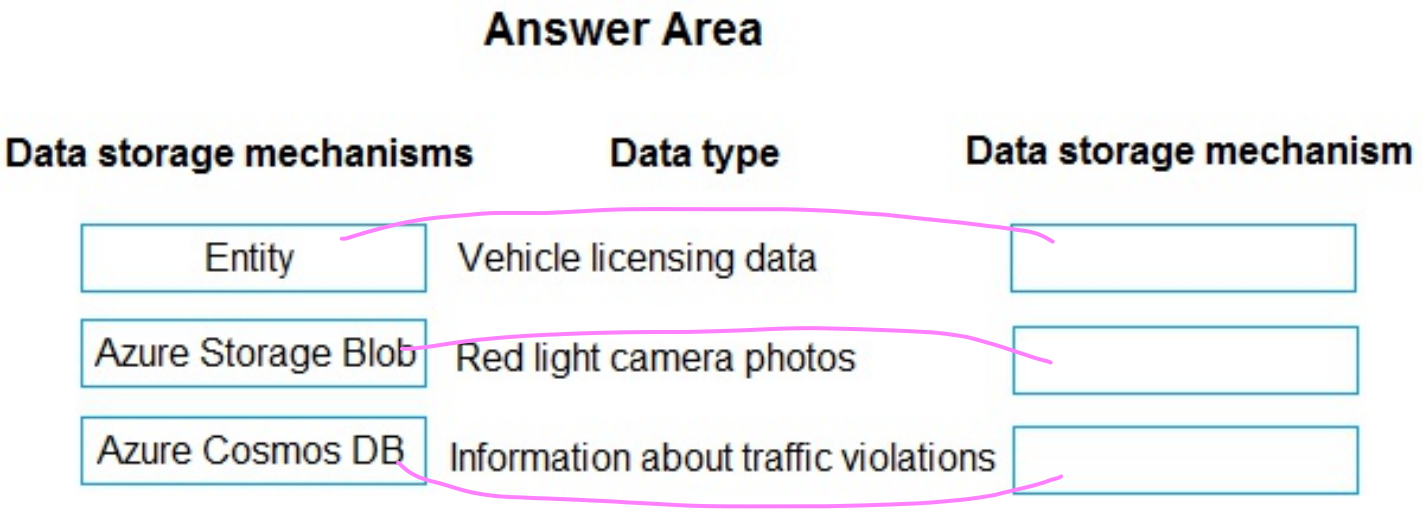

Answer:

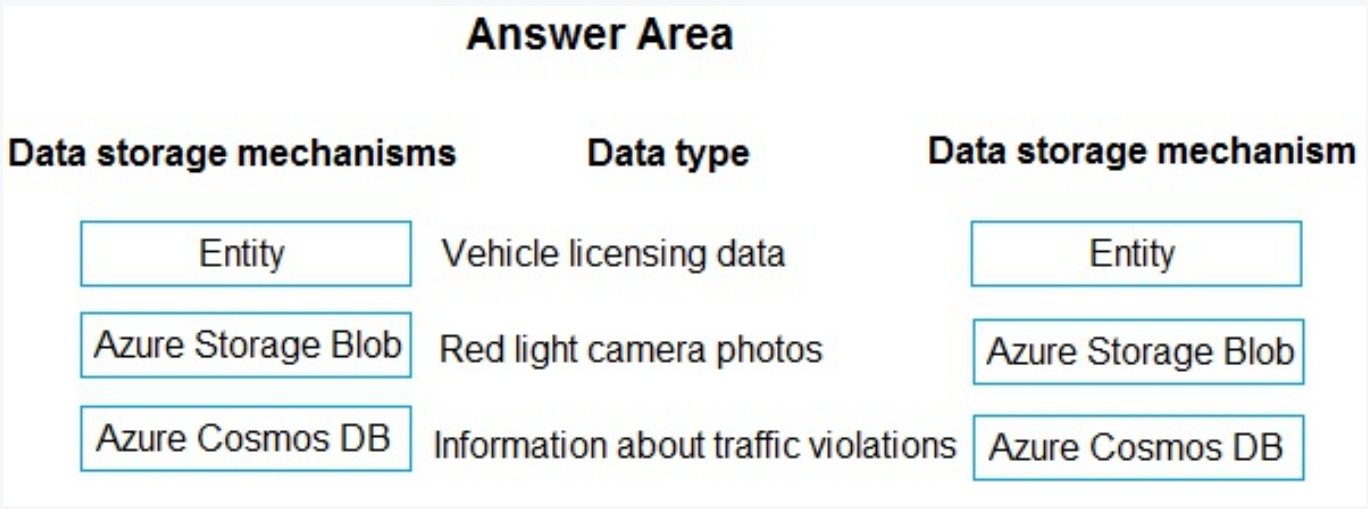

Explanation:

Box 1: Entity -

Existing vehicle licensing data must be imported into Microsoft Dataverse and easily queried.

Virtual tables (also known as virtual entities) enable the integration of data residing in external systems by seamlessly representing that data as tables in Microsoft

Dataverse, without replication of data and often without custom coding.

A virtual table is a definition of a table in the Dataverse platform without the associated physical tables for table instances created in the Dataverse database.

Instead during runtime, when a table instance is required, its state is dynamically retrieved from the associated external system.

The following data providers ship with Dataverse:

An OData v4 provider is included with the service and is installed by default. This provider supports create, read (retrieve, retrieve multiple), update and delete operations.

An Azure Cosmos DB -

Box 2: Azure Storage Blob -

Red light camera images must be stored in a repository for later analysis.

Use Azure Storage Blob for binary data.

Azure Blob storage stores massive amounts of unstructured object data, such as text or binary data.

Box 3: Azure Cosmos DB -

Information about traffic violations must be stored and related to vehicle details.

Reference:

https://docs.microsoft.com/en-us/power-apps/developer/data-platform/virtual-entities/get-started-ve
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blobs-introduction

Question: 51 CertyIQ

A financial institution that has a Dynamics 365 Sales environment requires that the account balance field from the account entity be visible to specific users only.
You need to set up the field security for the account balance field.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Set the field to Read-Only and then publish the entity
B. Set the field permission Allow Read to Yes and add the users to the members section
C. Create a security role and add the specific users to the role
D. Enable field security and then publish the entity
E. Create a field security profile

Answer: BDE

Explanation:
To implement field-level security, a system administrator performs the following tasks.
1. Enable field security on one or more fields for a given entity.
2. Associate one more existing security profiles, or create one or more new security profiles to grant the appropriate access to specific users or teams.
A security profile determines the following:
- Permissions to the secure fields
- Users and Teams
A security profile can be configured to grant user or team members the following permissions at the field

level:
- Read. Read-only access to the field's data.
- Create. Users or teams in this profile can add data to this field when creating a record.
- Update. Users or teams in this profile can update the field's data after it has been created.

Reference:
https://docs.microsoft.com/en-us/power-platform/admin/field-level-security

Question: 52 CertyIQ

HOTSPOT -
An organization uses Common Data Service.
The organization's IT helpdesk requires a single-page web application to monitor and manage Data Export Service.
The app must access Data Export Service securely. The app must also permit helpdesk users to perform a limited set of functions.
You need to create a single-page app.
Which options should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Option
Connect to the app securely	Use the Common Data Service user security role Use the sign-in credentials for Azure SQL Server Use the Environment Maker security role Register the app in Azure Active Directory
Monitor the status of data replication	Use FetchXML queries Use Profile operations Use Metadata operations Use T-SQL queries
Enable an entity for replication	Define an alternate key Enable Auditing Enable Change Tracking Set the data provider
Start or stop data replication	/crm/exporter/metadata/entities /crm/exporter/profiles/validate /crm/exporter/profiles/{id}/test /crm/exporter/profiles/{id}/activatedata
View information on records that fail to sync	Use Azure Storage Explorer Use FetchXML queries Use Profile operations Use T-SQL queries

Answer:

Answer Area

Requirement	Option
Connect to the app securely	Use the Common Data Service user security role Use the sign-in credentials for Azure SQL Server Use the Environment Maker security role **Register the app in Azure Active Directory**
Monitor the status of data replication	**Use FetchXML queries** Use Profile operations Use Metadata operations Use T-SQL queries
Enable an entity for replication	Define an alternate key Enable Auditing **Enable Change Tracking** Set the data provider
Start or stop data replication	/crm/exporter/metadata/entities /crm/exporter/profiles/validate /crm/exporter/profiles/{id}/test **/crm/exporter/profiles/{id}/activatedata**
View information on records that fail to sync	Use Azure Storage Explorer Use FetchXML queries **Use Profile operations** Use T-SQL queries

Explanation:

Box 1: Register the app in Azure Active Directory

Box 2: Use FetchXML queries -

The failure entries can be retrieved through the Get the failure details for a given Profile request. The response returns a URI to an Azure blob that contains the failure information. Each line has the following comma-separated fields (newlines added for clarity):

Entity: <entity-name>,

RecordId: <N/A | guid>,

NotificationTime: <datetime>,

ChangeType: <sync-type>,

FailureReason: <description>

Note: FetchXML is a proprietary XML based query language of Microsoft Dataverse used to query data using

either the Web API or the Organization service. It's based on a schema that describes the capabilities of the language. The FetchXML language supports similar query capabilities as query expressions.

Incorrect Answers:

The Data Export Service exposes a REST-based API that is divided into two groups: a set of Metadata operations for exploring Dataverse organizational structure, relationships, and connection information; and a set of Profiles operations for configuring and managing each data replication.

Box 3: Enable Change Tracking -

The entities that will be added to the Export Profile must be enabled with change tracking.

Box 4: /crm/exporter/ id /activatedata

profiles/ id /activatedata

Activate profile for data replication only.

Note: profiles/ id /activate -

Activate a profile, which starts replication of both the associated table definitions and data.

Box 5: Use Profile operations -

These failure entries can be retrieved through the Get the failure details for a given Profile request.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/data-export-service
https://docs.microsoft.com/en-us/power-platform/admin/replicate-data-microsoft-azure-sql-database
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/use-fetchxml-construct-query

Question: 53 CertyIQ

HOTSPOT -
A company has a Common Data Service (CDS) environment.
The following conditions must apply when accounts are reassigned:
✑ Ownership for completed tasks that are associated with the account must not change.
✑ Outstanding tasks must be reassigned to the new owner of the account.
You need to configure the relationship to meet the requirements.
Which settings should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Condition	Setting
Relationship Behavior type	Referential Referential, Restrict Delete Parental Configurable Cascading
Behavior for the assigned action	Cascade None Cascade All Cascade Active Cascade User-Owned

Answer:

Answer Area

Condition	Setting
Relationship Behavior type	Referential **Referential, Restrict Delete** Parental Configurable Cascading
Behavior for the assigned action	Cascade None Cascade All Cascade Active **Cascade User-Owned**

Explanation:

Box 1: Referential, Restrict Delete

Restrict: Prevent the Referenced table record from being deleted when referencing tables exist.

Box 2: Cascade User Owned -

Cascade User Owned: perform the action on all referencing table records owned by the same user as the referenced table record.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/configure-entity-relationship-cascading-behavior

Question: 54 CertyIQ

DRAG DROP -
A company has Common Data Service (CDS) environments for development, test, and production.
You have a model-driven app that consists of two solutions. The solutions include settings and reference data. You plan to move the solutions, app settings, and reference data from a development environment to a production environment.
You export each solution from the development environment as a zip file.
You run the Configuration Manager to export the settings and reference data as zip files.
You need to prepare the app and its settings for deployment.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.
Select and Place:

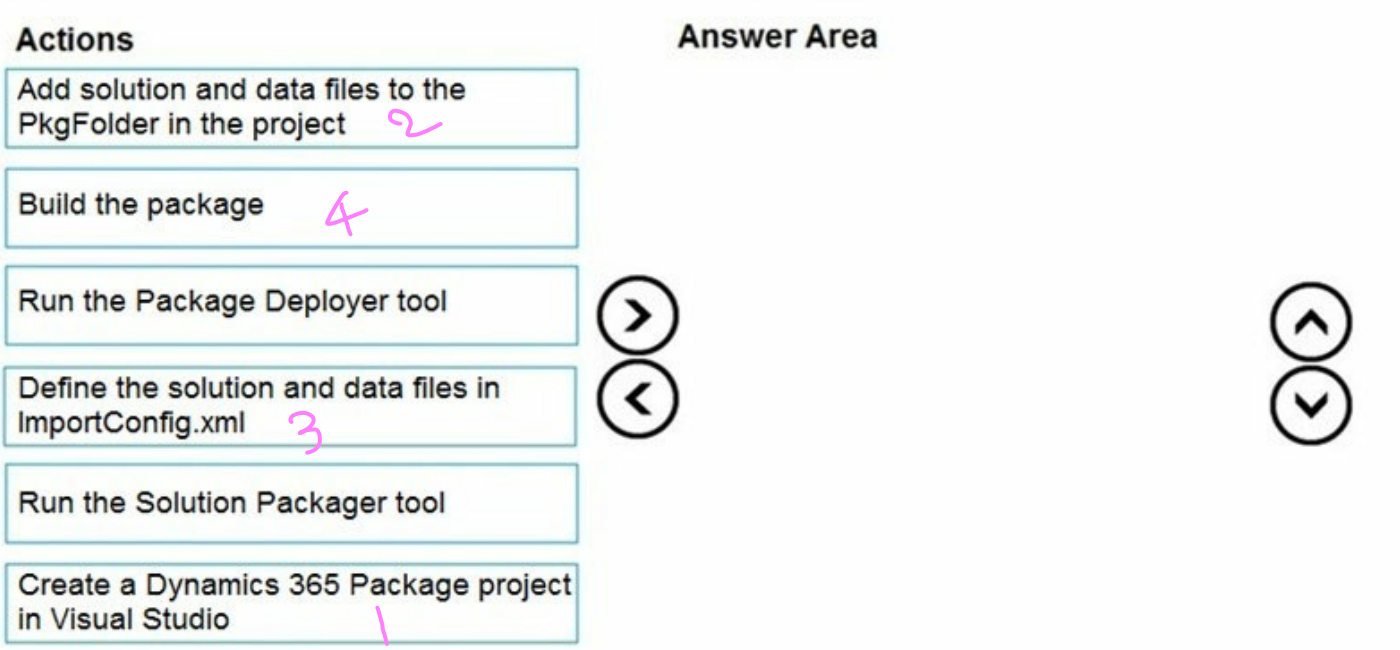

Answer:

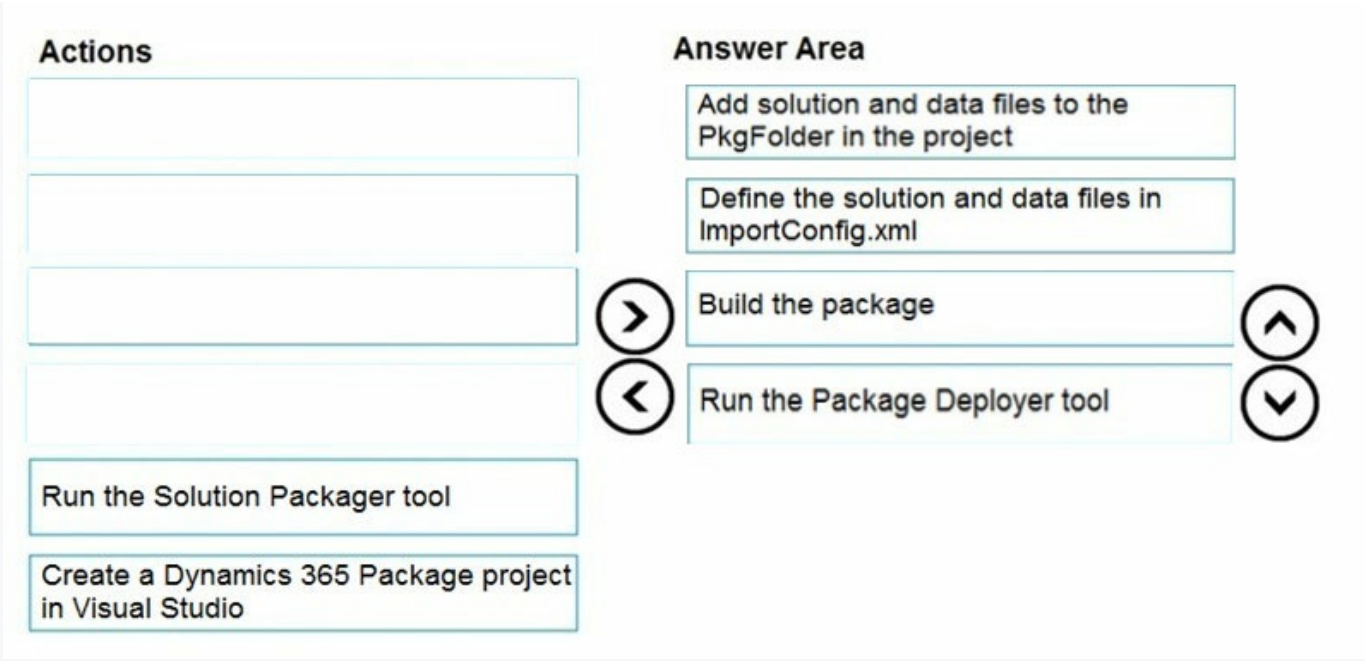

Explanation:

Step 1: Add your files to the project

In the Solutions Explorer pane, add your solutions and files under the PkgFolder folder.

For each file that you add under the PkgFolder folder, in the Properties pane, set the Copy to Output Directory value to Copy Always. This ensures that your file is available in the generated package.

Step 2: Define the solution and data files in ImportConfig.xml

Define the package configuration by adding information about your package in the ImportConfig.xml file available in the PkgFolder.

Step 3: Build the package -

Step4: Run the Package Deployer tool

After you create a package, you can deploy it on the Dataverse instance by using either the Package Deployer tool or Windows PowerShell.

Reference:

https://docs.microsoft.com/en-us/power-platform/alm/package-deployer-tool

Question: 55 CertyIQ

HOTSPOT -
You have a model-driven app that uses the Common Data Service (CDS). You create three custom entities that are in many-to-one parental relationships with the
Account entity.
You run a real-time workflow that assigns an account you own to another user. You receive the error message as shown in the Error Message exhibit. (Click the
Error Message tab.)

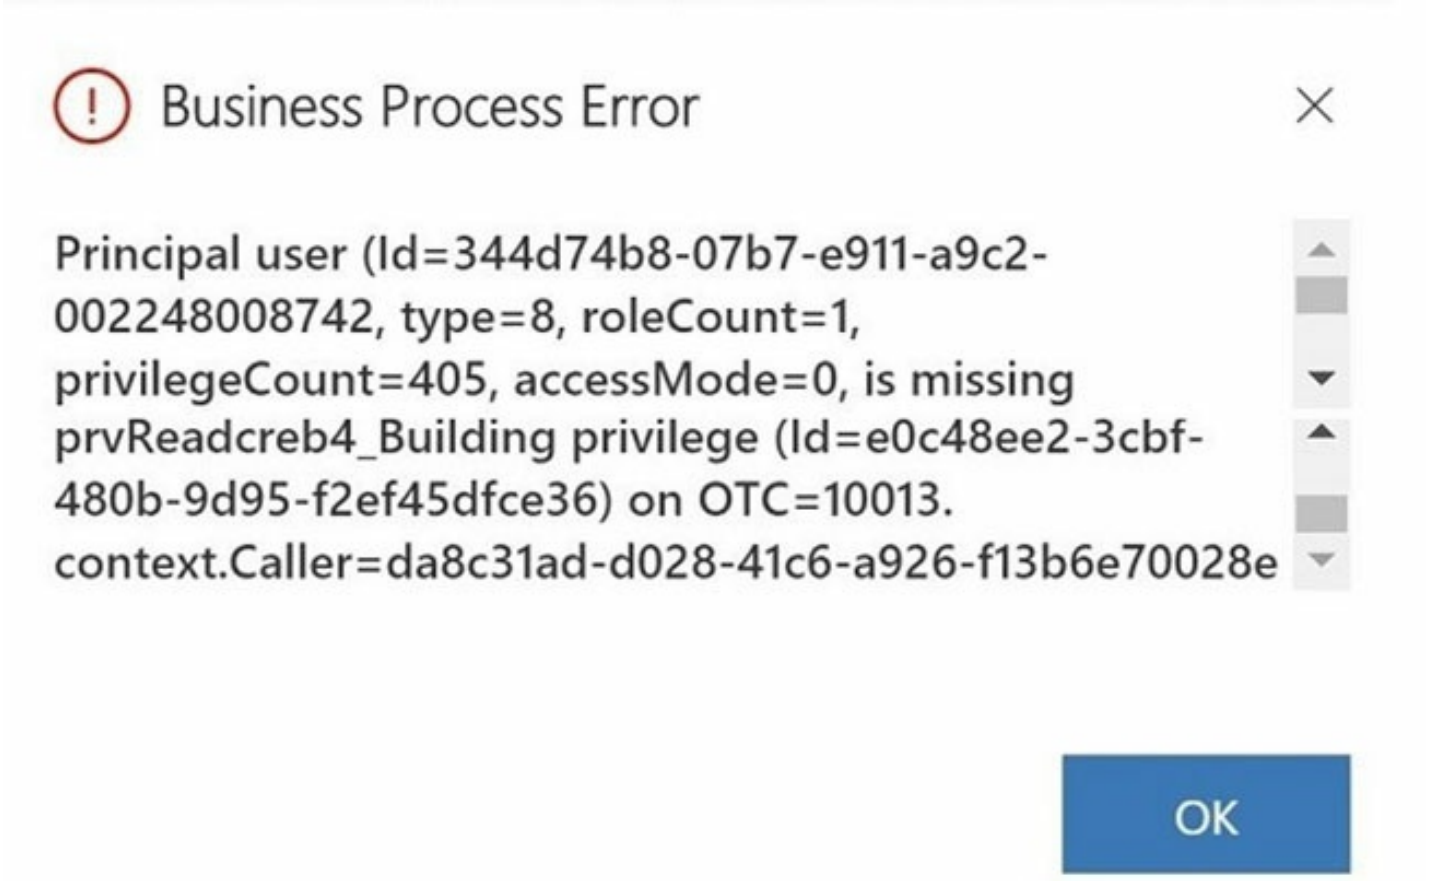

You check the security roles for the user as shown in the Manage User Roles exhibit. (Click the Manage User Roles tab.) You also check the privileges for that role as shown in the Common Data Service User Security Role exhibit. (Click the Security Role tab.)

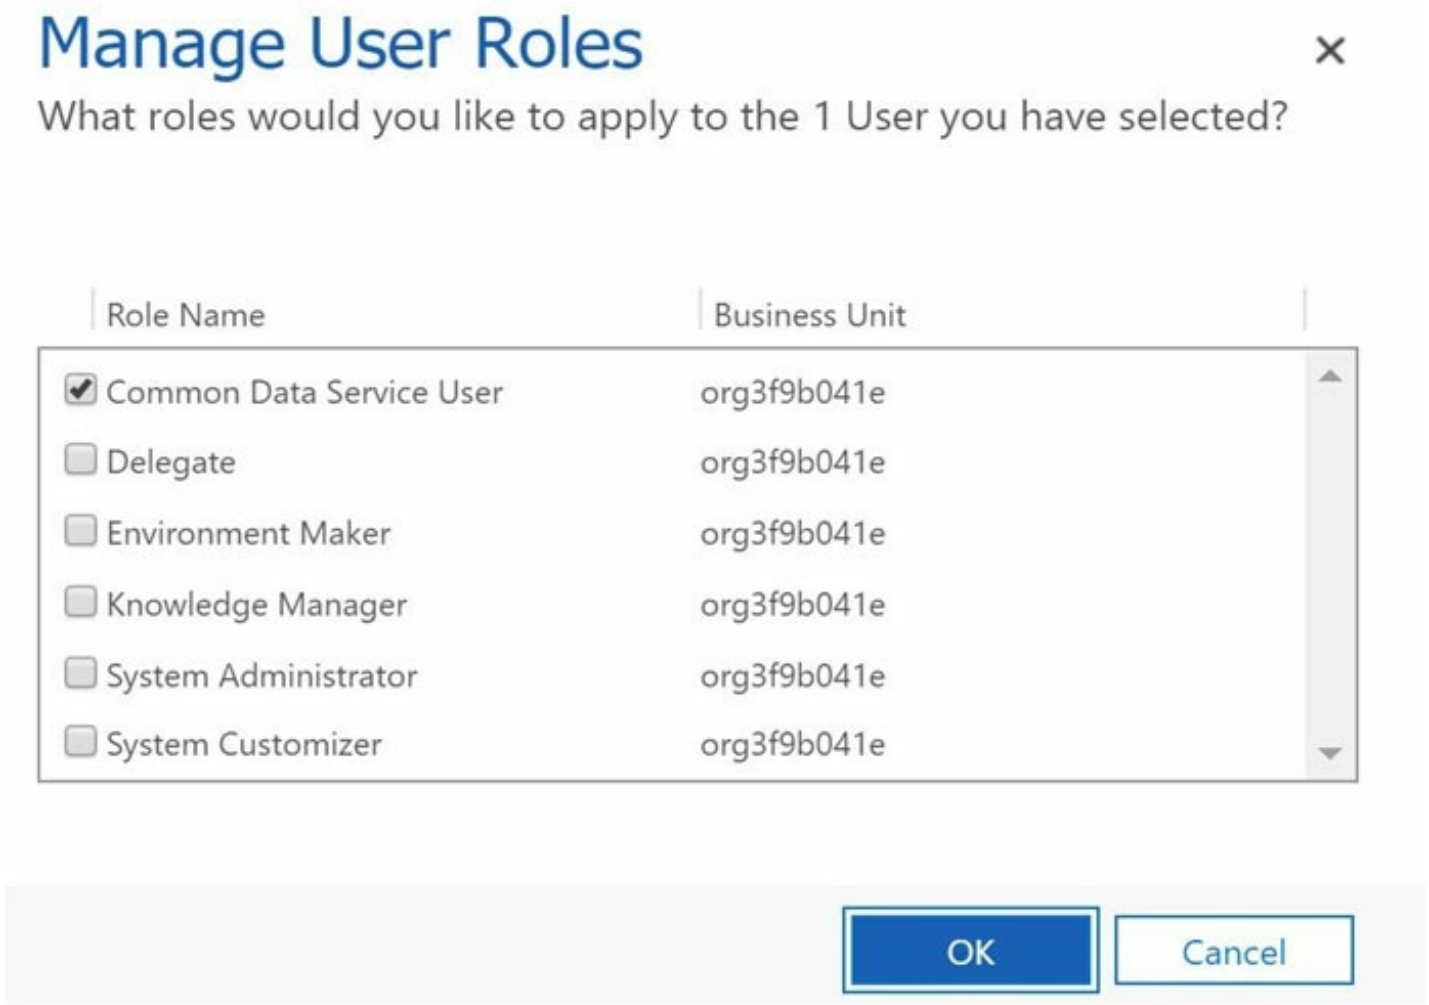

Security Role: Common Data Service User

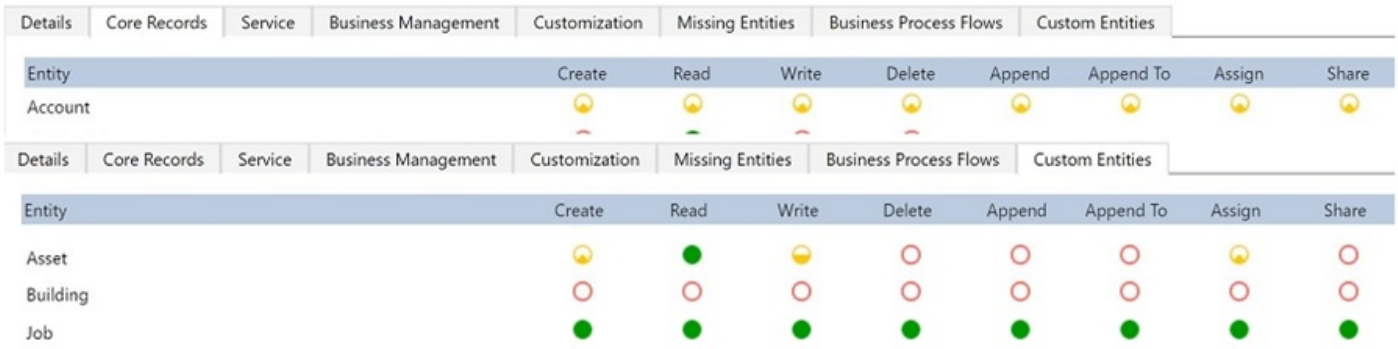

You need to prevent the error from recurring.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
Changing the **Append To** privilege on the Account entity to **Organization** prevents the error from recurring.	○	○
Adding the Environment Maker role to the user prevents the error from recurring.	○	○
Adding the system customizer role gives the user more access than needed to prevent the error from recurring.	○	○
Setting all the privileges for the Building entity to **User** prevents the error from recurring.	○	○

Answer:

Answer Area

Statements	Yes	No
Changing the **Append To** privilege on the Account entity to **Organization** prevents the error from recurring.	○	○
Adding the Environment Maker role to the user prevents the error from recurring.	○	○
Adding the system customizer role gives the user more access than needed to prevent the error from recurring.	○	○
Setting all the privileges for the Building entity to **User** prevents the error from recurring.	○	○

Explanation:

Box 1: No -

There is a read error.

Box 2: No -

Note: The Environment Maker role can create resources within an environment including apps, connections, custom connectors, gateways, and flows using Power

Automate.

Box 3: Yes -

The System Customizer role is similar to the System Administrator role which enables non-system administrators to customize Dynamics 365. A Customizer is a user who customizes entities, attributes and relationships.

Box 4: Yes

Question: 56

CertyIQ

DRAG DROP -
A company is creating a new system based on Microsoft Dataverse.
You need to select the features that meet the company's requirements.
Which options should you use? To answer, drag the appropriate options to the correct requirements. Each option may be used once, more than once, or not at all.
You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

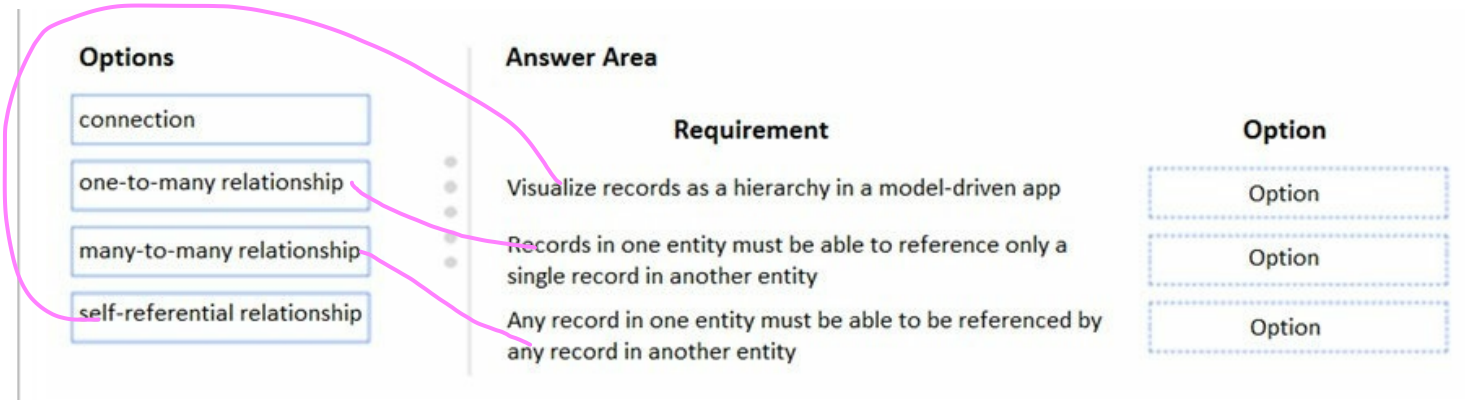

Answer:

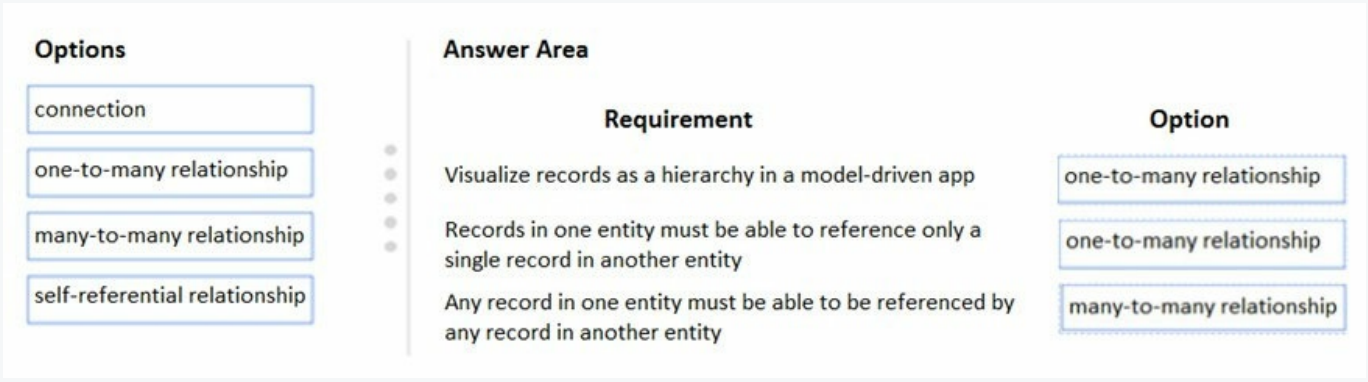

Explanation:

Box 1: one-to-many relationship -

Only one (1:N) self-referential relationship per table can be set as hierarchical. In a self-referential relationship the primary table and the related table must be of the same type.

Box 2: one-to-many relationship -

1:N (One-to-Many) - A table relationship where one table row for the Primary table can be associated to many other Related table rows because of a lookup column on the related table.

Note: The N:1 (many-to-one) relationship type exists in the user interface because the designer shows you a view grouped by tables. 1:N relationships actually exist between tables and refer to each table as either a Primary/Current table or Related table. The related table, sometimes called the child table, has a lookup column that allows storing a reference to a row from the primary table, sometimes called the parent table. A N:1 relationship is just a 1:N relationship viewed from the related table.

Box 3: many-to-many relationship

N:N (Many-to-Many) - A table relationship that depends on a special Relationship table, sometimes called an Intersect table, so that many rows of one table can be related to many rows of another table.

When viewing rows of either table in a N:N relationship you can see a list of any rows of the other table that are related to it.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/create-edit-entity-relationships
https://docs.microsoft.com/en-us/power-apps/maker/data-platform/visualize-hierarchical-data

Question: 57 CertyIQ

HOTSPOT -
A school district wants to standardize student information and student performance records. Students in the district are assigned to a specific school. Students are evaluated using class records.
When students move between schools in the middle of a school year, the student's current class history must be available to the administrators at the new school.
You need to configure Microsoft Dataverse tables to connect the class history records to their respective class records.
How should you configure the table? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Configuration setting	Value
Table ownership for the class record table.	Organization / User / User or Team / Team
Relationship of the class history table to the student table.	Many-to-one / One-to-many / Many-to-many
Behavior of the relationship between the class history table and the student table.	Parental / Referential / Custom

Answer:

Answer Area

Configuration setting	Value
Table ownership for the class record table.	Organization / User / User or Team / **Team**
Relationship of the class history table to the student table.	**Many-to-one** / One-to-many / Many-to-many
Behavior of the relationship between the class history table and the student table.	**Parental** / Referential / Custom

Explanation:

Box 1: Team -

'the student's current class history must be available to the administrators at the new school.'

Box 2: Many-to-one -

Box 3: Parental -

The N:1 (many-to-one) relationship type exists in the user interface because the designer shows you a view grouped by tables. 1:N relationships actually exist between tables and refer to each table as either a Primary/Current table or Related table. The related table, sometimes called the child table, has a lookup column that allows storing a reference to a row from the primary table, sometimes called the parent table. A N:1 relationship is just a 1:N relationship viewed from the related table.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/user-team-entities
https://docs.microsoft.com/en-us/powerapps/maker/data-platform/create-edit-entity-relationships#types-of-table-relationships

Question: 58 CertyIQ

HOTSPOT -
You are developing an app for a sales team to record contact details in Microsoft Dataverse.
The app must handle loss of network and save the data to Dataverse when reconnected.
The main screen of the app has a form to collect contact data and a button. The OnSelect property for the button has the following expression:

```
If(
  Connection.Connected,
  Patch(
    Contacts,
    Defaults(Contacts),
    {
      'First Name': DataCardValue_FirstName.Text, 'Last Name': DataCardValue_LastName.Text
    }
  );
  Navigate(ConfirmationScreen,ScreenTransition.Fade)
  ,
  ClearCollect(
  LocalRecord,
  {
    'First Name': DataCardValue_FirstName.Text, 'Last Name': DataCardValue_LastName.Text
  }
);
SaveData(LocalRecord, "LocalRecord");
Navigate(PendingScreen,ScreenTransition.Fade)
)
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
The expression saves the data to CDS when reconnecting after losing network connection.	○	○
The collection created by the Patch statement contains all contacts not saved to CDS.	○	○
The expression updates existing contacts in CDS.	○	○
The expression handles loss of connection to CDS.	○	○

Answer:

Answer Area

Statements	Yes	No
The expression saves the data to CDS when reconnecting after losing network connection.	○	○
The collection created by the Patch statement contains all contacts not saved to CDS.	○	○
The expression updates existing contacts in CDS.	○	○
The expression handles loss of connection to CDS.	○	○

Explanation:

1. The expression saves the data to CDS when reconnecting after losing network connection.

Answer: No
Explanation: The **Patch** function in Power Apps immediately attempts to save data to Dataverse. If the network connection is lost, the Patch operation will fail, and there is no built-in retry mechanism to save data when the connection is restored. Additional error handling or custom logic is required to manage reconnections.

2. The collection created by the Patch statement contains all contacts not saved to CDS.

Answer: No
Explanation: The Patch function updates or inserts records directly into Dataverse but does not inherently create a collection containing unsaved records. If such functionality is needed, the developer must explicitly handle unsaved records using custom logic (e.g., storing them in a local collection).

3. The expression updates existing contacts in CDS.

Answer: No
Explanation: While the **Patch** function can update records, this behavior depends on the provided arguments (e.g., the correct key or GUID). If the expression in question does not include a valid identifier for an existing record, it will not update the record. Therefore, the specific scenario in the question indicates this behavior does not occur.

4. The expression handles loss of connection to CDS.

Answer: Yes
Explanation: The expression likely includes logic to handle the loss of connection explicitly (e.g., using error handling or storing unsaved data temporarily). This ensures the application manages connection disruptions effectively, even though Power Apps and the Patch function do not natively provide reconnection handling.

References:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/offline-apps

Question: 59 CertyIQ

You are creating a new page for a Power Apps portal.
You need to display data from Microsoft Dataverse on the page.
What should you use?

A. Liquid
B. CSS
C. iFrame
D. Bootstrap

Answer:

A

Explanation:

Liquid is an open-source template language that is integrated natively into Microsoft Power Apps portals. It acts as a bridge between Dataverse and the HTML or text output that is sent to the browser. Liquid can be used to add dynamic content to pages and to create a variety of custom templates. Additionally, Liquid provides access only to the data and operations that are explicitly allowed by the portals.

Reference:

https://docs.microsoft.com/en-us/learn/modules/liquid-template-language/

Question: 60 CertyIQ

DRAG DROP -
You are creating a canvas app for a company. A security role has been created for sales representatives and a second security role has been created for sales managers.
The canvas app has the following requirements:
- Sales managers must be able to view the records of the salespeople in their business unit.
- Sales managers must be the only people who can view sales probability data in opportunity records.
- Sales representatives and new hires assigned to the same territory share access to sales records.

You need to assign permissions for the app.
Which security options should you use? To answer, drag the appropriate security options to the correct scenarios. Each security option may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

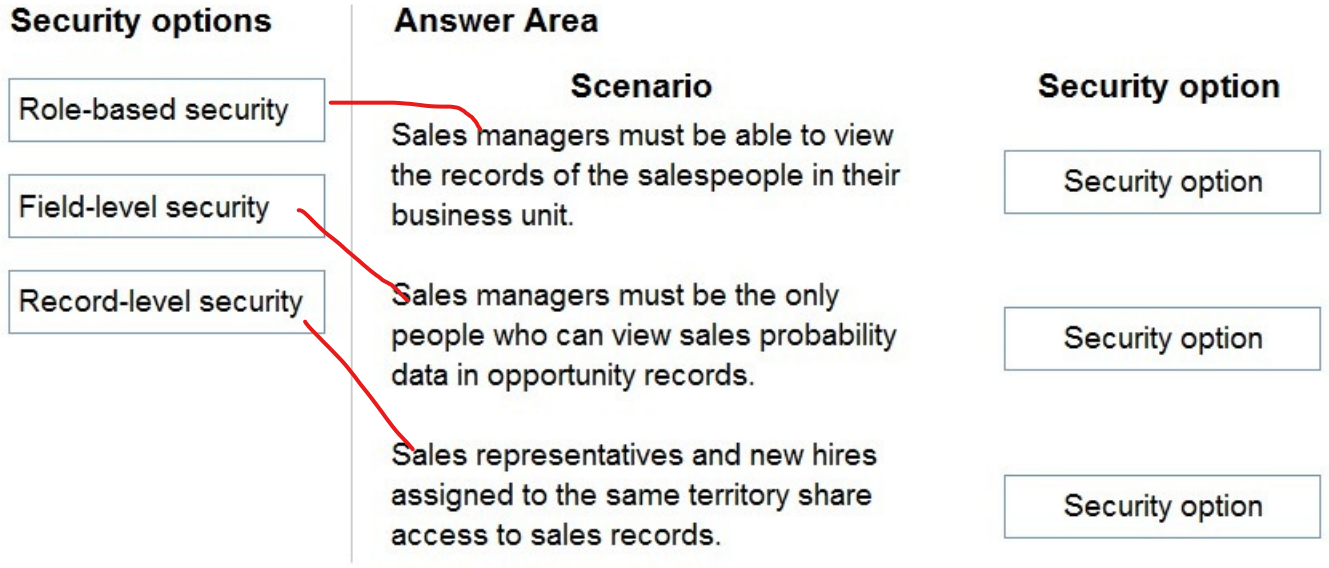

Answer:

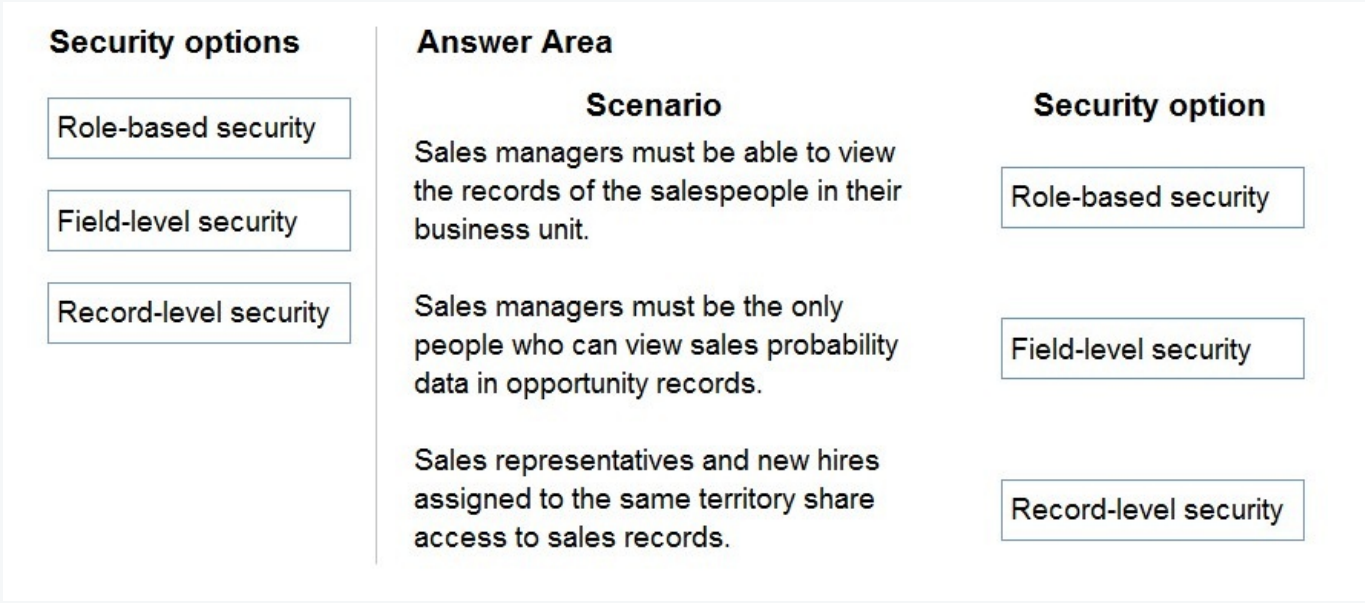

Explanation:

Box 1: Role-based security -

Dataverse uses role-based security to group together a collection of privileges. These security roles can be associated directly to users, or they can be associated with Dataverse teams and business units.

Box 2: Field-level security -

Sometimes record-level control of access is not adequate for some business scenarios. Dataverse has a field-level security feature to allow more granular control of security at the field level. Field-level security can be enabled on all custom fields and most system fields.

Box 3: Record-level security -

Reference:

https://docs.microsoft.com/en-us/power-platform/admin/wp-security-cds

Question: 61

CertyIQ

HOTSPOT -

You are synchronizing company data from a SQL Server-based .NET application into a Common Data Service (CDS) environment.
The data is entered in both the SQL Server and CDS systems.
You have a program that includes the following code:

```
var account = new Entity("account", "accountnumber", "CO-555");
account["name"] = "Contoso";
account["creditlimit"] = new Money(100000);
var request = new UpsertRequest() { Target = account };
var response = (UpsertResponse)_serviceProxy.Execute(request);
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

	Yes	No
Creating a new field to store the record identifier from the database resolves the error: `The specified key attributes are not a defined key for the account entity.`	○	✗
Creating an alternate key that uses the accountnumber field resolves the error: `The specified key attributes are not a defined key for the account entity.`	✗	○
If an account exists with only the account name entered as Contoso and all other fields empty, a new account record is created.	✗	○
If an account exists that uses the account number CO-555, a new account record is created.	○	✗

Answer:

Answer Area

	Yes	No
Creating a new field to store the record identifier from the database resolves the error: `The specified key attributes are not a defined key for the account entity.`	○	●
Creating an alternate key that uses the accountnumber field resolves the error: `The specified key attributes are not a defined key for the account entity.`	●	○
If an account exists with only the account name entered as Contoso and all other fields empty, a new account record is created.	●	○
If an account exists that uses the account number CO-555, a new account record is created.	○	●

Explanation:

Box 1: No.

An alternate key is needed, not a new field for the record identifier.

Box 2: Yes -

The specified key attributes are not a defined key for the account entity.

Name: EntityKeyNotDefined -

Message: The specified key attributes are not a defined key for the 0 entity

Box 3: Yes -

One way to create an entity is by using the UpsertRequest class. An upsert will create a new entity when there is no existing record that has the unique identifiers included in the entity passed with the request.

Box 4: No -

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/org-service/web-service-error-codes https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/org-service/entity-operations-update-delete#use-upsert

Question: 62 CertyIQ

DRAG DROP -
A company is creating a new system based on the Microsoft Dataverse.
You need to select the Dataverse features that meet the company's requirements.
Which features should you select? To answer, drag the appropriate features to the correct requirements. Each feature may be used once, more than once, or not at all. You may needs to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

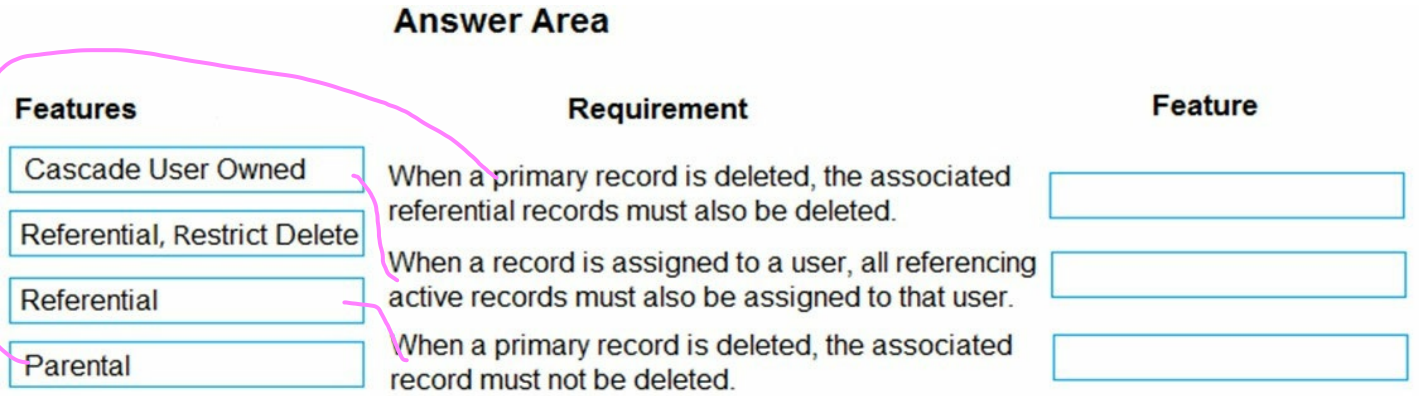

Answer:

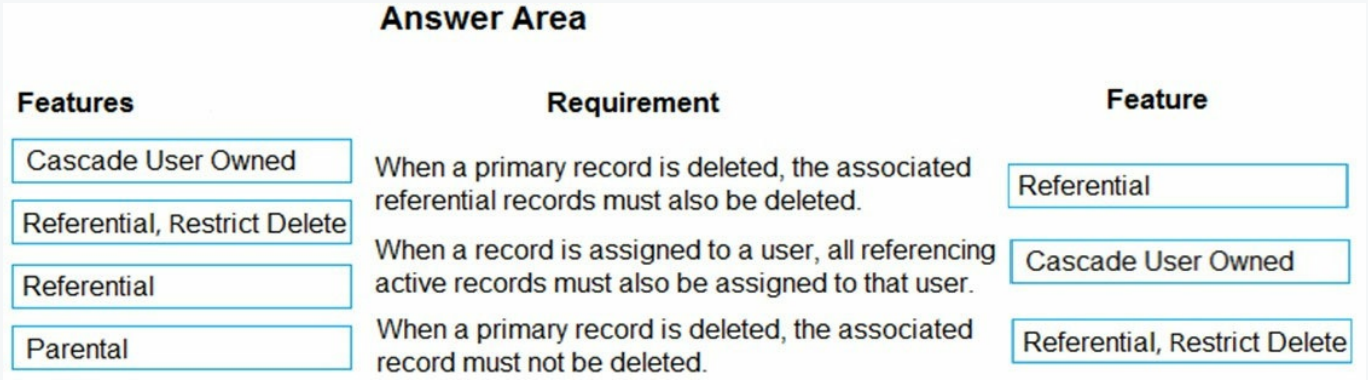

Explanation:

Box 1: Referential -

Active/ Cascade Active one-to-many entity relationship: Perform the action on all active referencing entity records associated with the referenced entity record.

Box 2: Cascade User Owned

Cascade User Owned: Perform the action on all referencing entity records owned by the same user as the referenced entity record.

Box 3: Referential, Restrict Delete

Restrict: Prevent the Referenced entity record from being deleted when referencing entities exist.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/configure-entity-relationship-cascading-behavior

Question: 63 CertyIQ

DRAG DROP -
A company implements Dynamics 365 Sales.
Only sales managers must be able to perform the approval to move high value sales on in the opportunity qualification process. A new field must be created to capture the approval.
You need to create and secure the new field.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

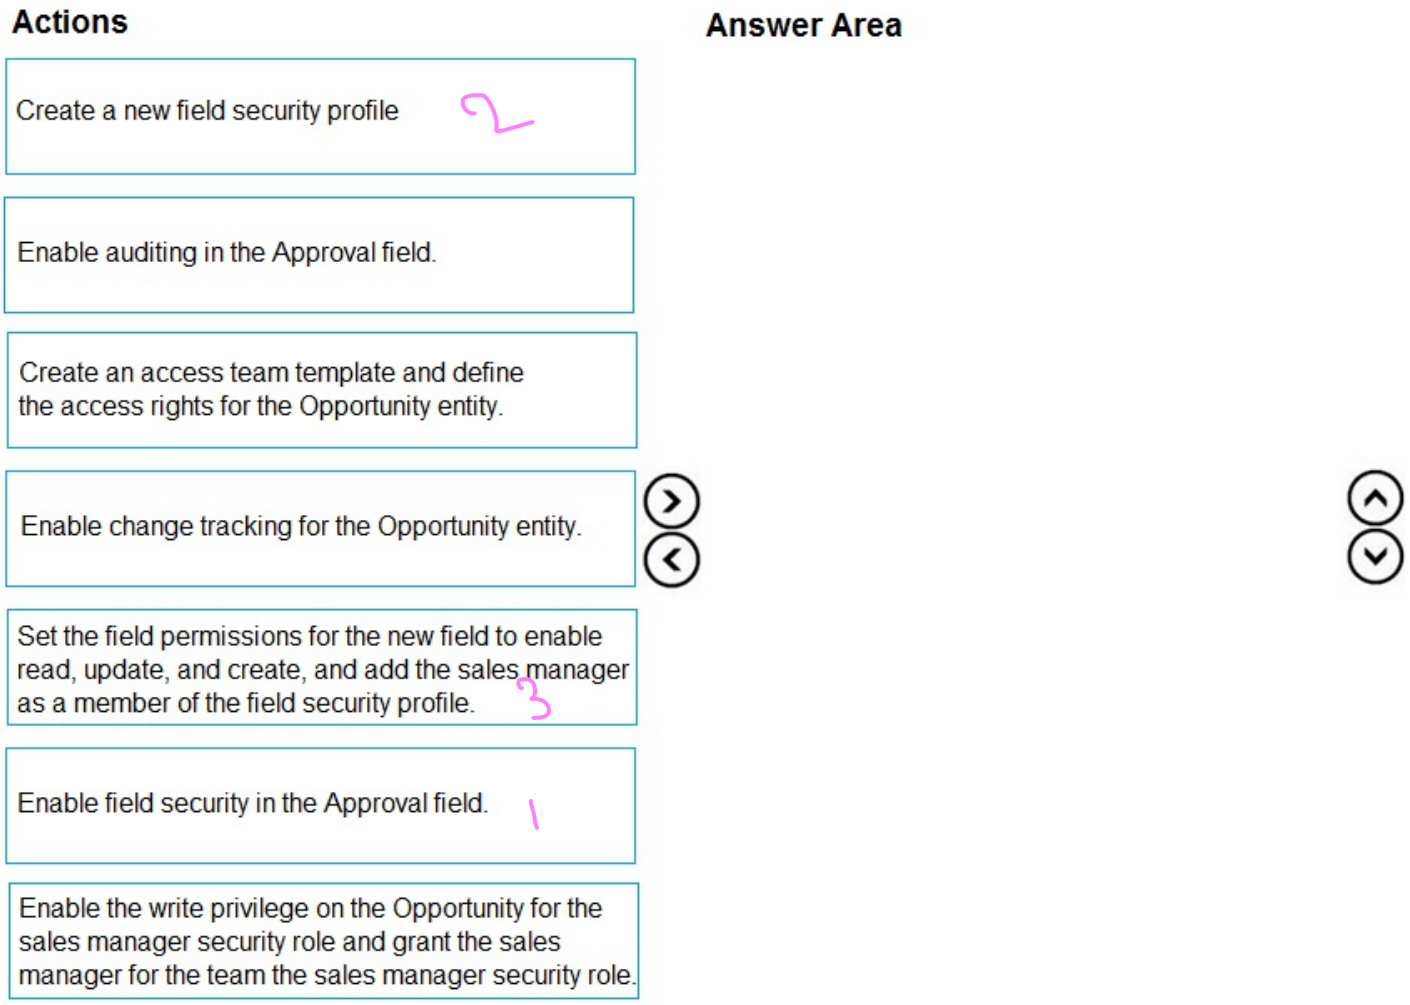

Answer:

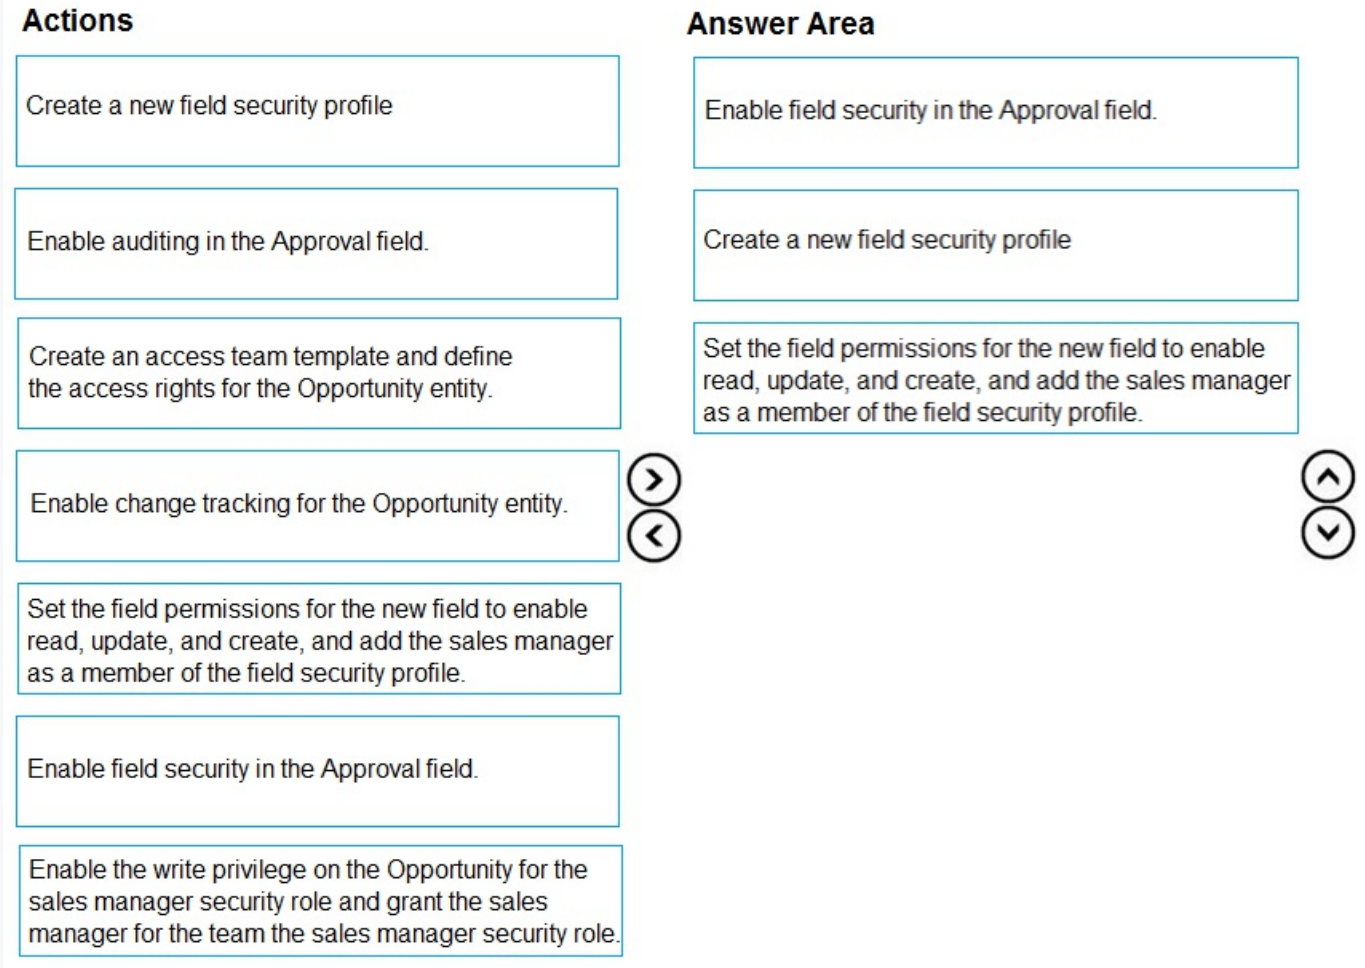

Explanation:

Step 1: Enable field security in the Approval field.

1. Enable field security on one or more fields for a given entity.
2. Associate one more existing security profiles, or create one or more new security profiles to grant the appropriate access to specific users or teams (step 2 and step 3 below).

Step 2: Create a new field security profile.

Create a new field security profile for the sales manager.

Step 3: Set the field permissions security profile

Step 2 and step 3, example:

Configure the security profiles.

1. Create the field security profile for sales managers.
2. Go to Settings > Security.
3. Click Field Security Profiles.
4. Click New, enter a name, such as Sales Manager access contact mobile phone, and click Save.
5. Click Users, click Add, select the users that you want to grant read access to the mobile phone number on the contact form, and then click Add.
6. Click Field Permissions, click mobilephone, click Edit, select Yes next to Allow Read, and then click OK.

Reference:
https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/admin/field-level-security

Question: 64 CertyIQ

HOTSPOT -
A company delivers packages to businesses and consumers. A custom entity named Package captures the package details.
You need to add the following sets of fields to the entity and leverage the built-in operations of the platform:

✑ A set of fields to represent the package length, width, depth, and weight. The maximum value for any dimension is 100 centimeters.
✑ A set of fields for time-sensitive attributes to calculate the efficiency of a delivery. The calculation must be based on a delivery is entered in the system and the value for a custom field named Delivery time.
Which constructs should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Construct
Calculate the efficiency of the delivery.	DIFFINMINUTES(Created On, Modified On) DIFFINMINUTES(Created On, Delivery Time) DIFFINHOURS(Created On, Modified On) DIFFINHOURS(Created On, Delivery Time)
Select the data type for delivery that has additional transformations applied before the data is displayed.	Autonumber Phone number Customer Currency Duration

Answer:

Answer Area

Requirement	Construct
Calculate the efficiency of the delivery.	DIFFINMINUTES(Created On, Modified On) DIFFINMINUTES(Created On, Delivery Time) DIFFINHOURS(Created On, Modified On) DIFFINHOURS(Created On, Delivery Time)
Select the data type for delivery that has additional transformations applied before the data is displayed.	Autonumber Phone number Customer Currency Duration

Explanation:
Box 1: DIFFINMINUTES(Created on, Delivery Time)
DIFFINMINUTES (date and time, date and time) returns the difference in minutes between two Date and Time columns.

Box 2: Duration -
Duration - A number value presented as a drop-down list that contains time intervals. A user can select a value from the list or type an integer value that represents the number of minutes. The duration must be entered in the format: x minutes, x hours or x days. Hours and days can also be entered using decimals, for example, x.x hours or x.x days. The values entered must be expressible in minutes, sub-minute values will be rounded to the nearest minute.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/define-calculated-fields
https://docs.microsoft.com/en-us/power-apps/maker/data-platform/create-edit-field-portal

Question: 65 CertyIQ

A financial services company uses the Common Data Service (CDS) to develop solutions. The company uses development and production instances.
You need to move solutions from the development instance to the production instance.
What are two possible ways to achieve this goal? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. In the development instance, make changes to the solutions that are deployed in the production instance, export the solutions as managed solutions, and import the managed solutions into the production instance.

B. In the development instance, highlight the solution you want to make changes to, select Clone a Patch, make changes, export the solution, and import the solution into the production instance.

C. Export all managed solutions from the development instance and import the solutions into the production instance.

D. In the production instance, import solutions with the same version number or higher when updating solutions.

Answer:

AB

Explanation:

A: When you import a managed solution, all component changes will be brought into the environment in a published state.

B: You can apply patches to either managed or unmanaged solutions and include only changes to entities and related entity assets. Patches do not contain any non-customized system components or relationships that it dependents upon because these components already exist in the deployed-to organization. At some point in your development cycle, you can roll up all the patches into a new solution version to replace the original solution that the patches were created from.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/import-update-export-solutions
https://docs.microsoft.com/en-us/power-platform/alm/create-patches-simplify-solution-updates

Question: 66 CertyIQ

DRAG DROP -
A company uses Common Data Service (CDS) and manages their engineers using a model-driven app.
You create a new reusable custom component named Component1 by using the Power Apps component framework (PCF).
You need to package Component1 for deployment into the model-driven app.
Which three commands should you run in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

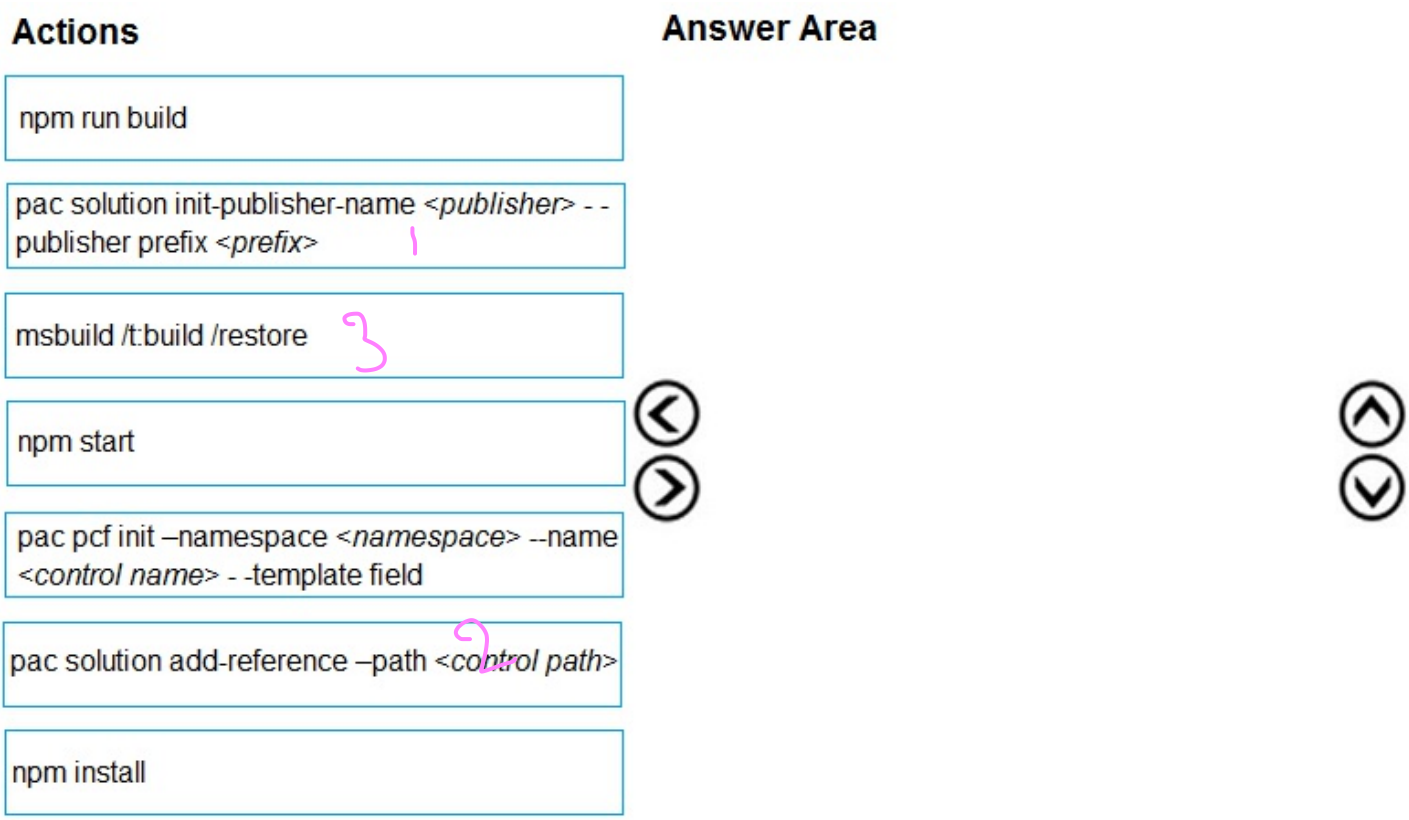

Answer:

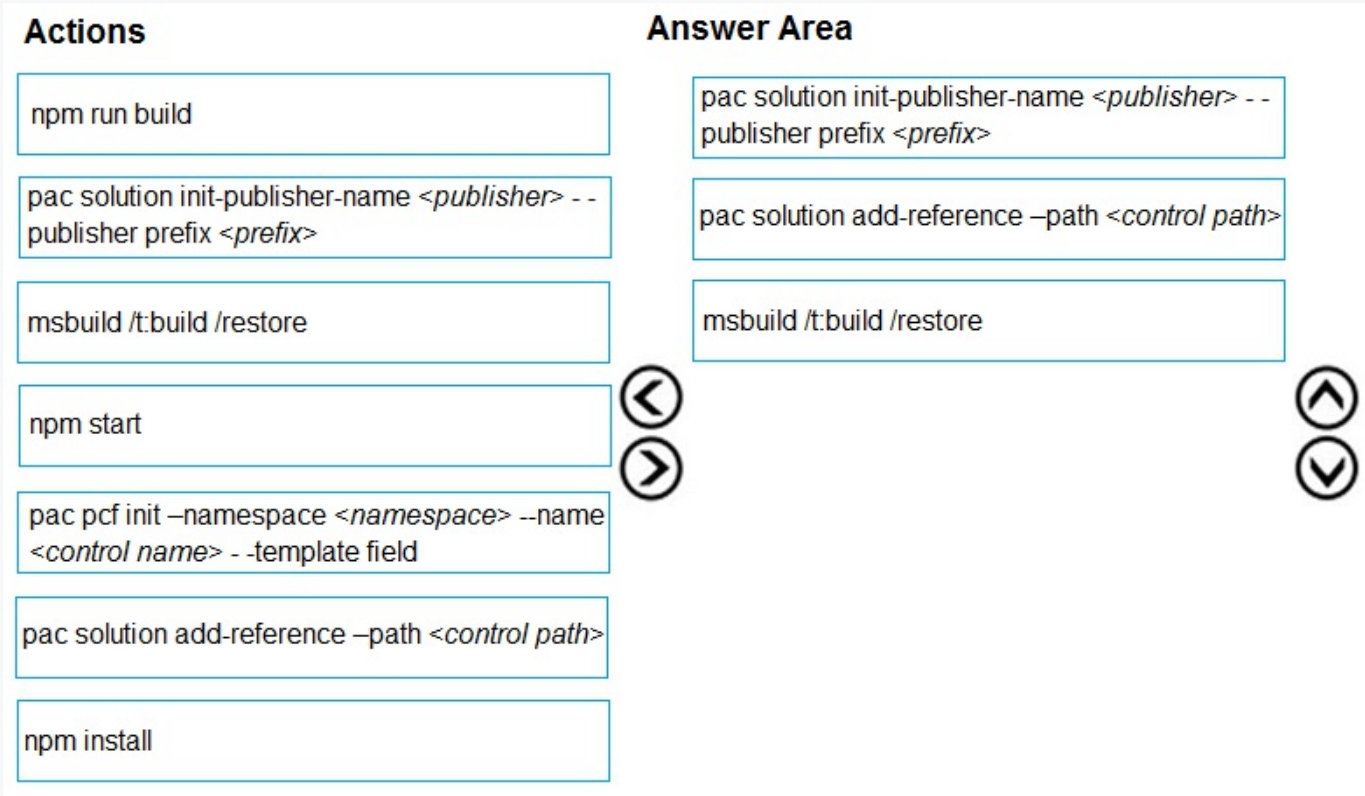

Explanation:

Step 1: pac solution init --publisher-name <publisher> --publisher-prefix <prefix>

Create a new solutions project using the following command. The solution project is used for bundling the code component into a solution zip file that is used for importing into Dataverse. pac solution init --publisher-name developer --publisher-prefix dev

Step 2: pac solution add-reference --path <control-path>

Once the new solution project is created, refer the Solutions folder to the location where the created sample component is located. You can add the reference using the command shown below. This reference informs the solution project about which code components should be added during the build. You can add references to multiple components in a single solution project. pac solution add-reference --path c:\downloads\mysamplecomponent

Step 3: msbuild /t:build /restore

To generate a zip file from the solution project, go into your solution project directory and build the project using the following command. This command uses

MSBuild to build the solution project by pulling down the NuGet dependencies as part of the restore. Use the /restore only for the first time when the solution project is built. For every build after that, you can run the command msbuild. msbuild /t:build /restore

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/component-framework/import-custom-controls

Question: 67 CertyIQ

You are developing a model-driven app. The app uses data from two custom tables. The tables have a parent-child relationship. The parent record form contains a subgrid that displays the child records.
When creating a new child record from the parent form, data must automatically populate in the child record form to reduce data input errors.
You need to implement the solution.
What should you do?

A. Use a Power Automate flow to read data from the parent record and update the child record upon creation.
B. Map table columns from the parent record to the child record.
C. Create a business rule that sets the default values on the child record fields to values from the parent record.
D. Include a quick view form on the child record showing the data from the parent record.

Answer: B

Explanation:
A subgrid exists within a main form and let app users view data within a Dataverse table, typically related to the record currently being reviewed.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/model-driven-apps/sub-grid-properties-legacy

Question: 68 CertyIQ

DRAG DROP -
A company has a Common Data Service (CDS) environment.
All accounts in the system with a relationship type of Customer set must have an account number. A plug-in has been developed.
When a Customer is updated with a relationship type, the plug-in sets the account number if not provided by the user.
You need to register the plug-in.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

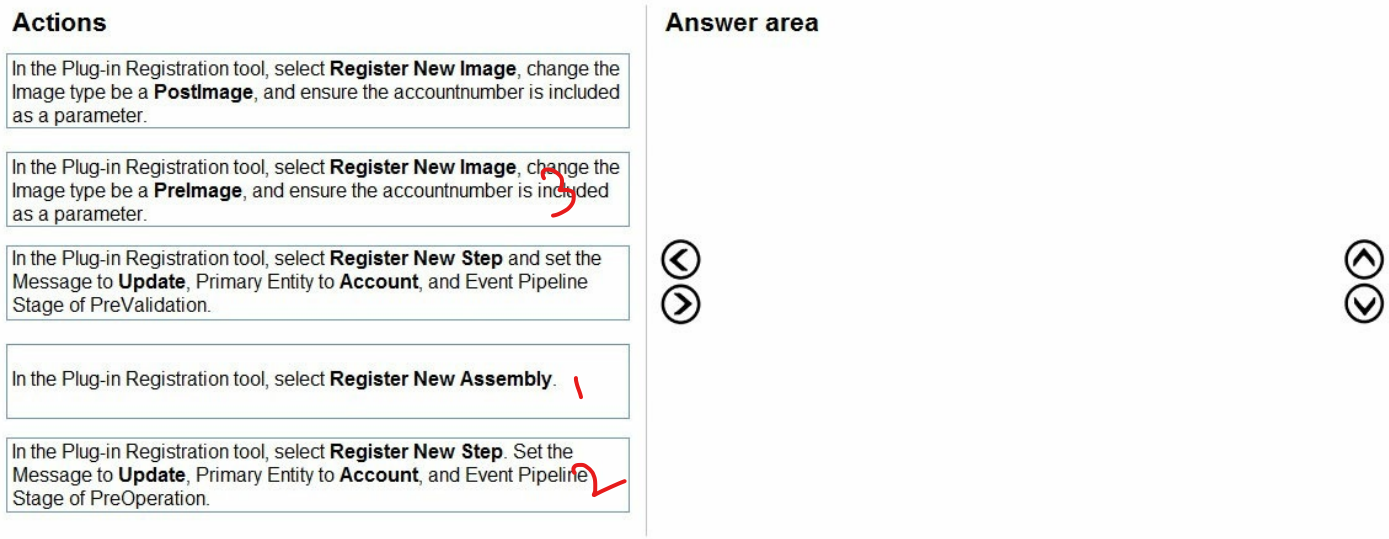

Answer:

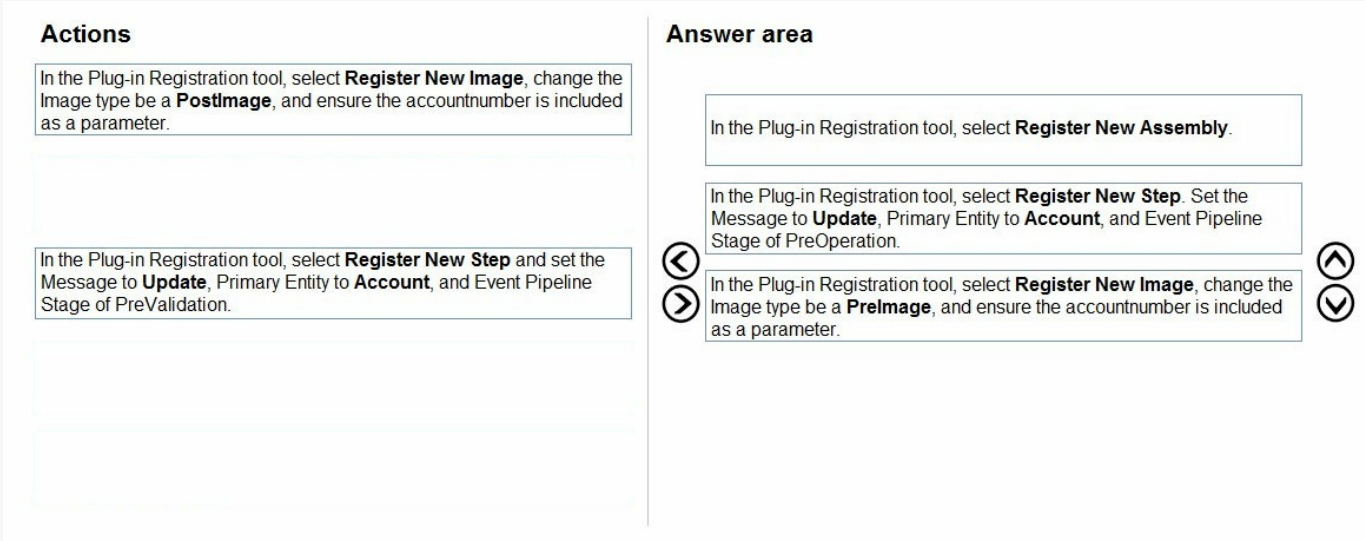

Explanation:

Step 1: In the Plug-in Registration tool, select Register New Assembly.

You use the Plug-in Registration tool (PRT) to register your plug-in assemblies and steps.

Registering an assembly is the process of uploading the assembly to the Dataverse database.

Step 2: In the Plug-in Registration tool, Select Register New Step,..PreOperation

PreOperation occurs before the main system operation and within the database transaction.

If you want to change any values for an entity included in the message, you should do it here.

Step 3: In the Plug-in Registration tool, Select Register New Image, change the Image type to be a PreImage, and..

If your plug-in step is registered in the PreValidation or PreOperation stages of the execution pipeline, you could use the Organization service to retrieve the current value of the property, but this is not a good practice for performance. A better practice is to define a pre-entity image with your plug-in step registration.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/register-plug-in

Question: 69

CertyIQ

You are developing a Power Platform solution for a medical practice. You create a custom table named Doctors to record details about the doctors who work at the medical practice.

You must be able to attach a PDF copy of a doctor's medical license to the row for each doctor.

You need to configure the table.

What should you do?

A. Create a Power Automate flow to add attachments.
B. Navigate to Table options and enable attachments.
C. Navigate to Column options and enable attachments.
D. Create relationships between the Doctor table and the Notes table.

Answer:

C

Explanation:

A file column is used for storing file data up to a specified maximum size. A custom or customizable table can have zero or more file columns plus a notes

(annotation) collection with zero to one attachment in each note.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/file-attributes

Question: 70 CertyIQ

HOTSPOT -
You are creating a package for a Power Platform solution. The package will include custom code and sample data.
The package must include all files that need to be installed.
You need to configure the package.
Which setting should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Configuration option	Value
File that you must edit to include custom code.	PackageTemplate.cs ImportConfig.xml CRMSDKTemplates.vsix ComplexImportDetail.log
File to edit to include sample data.	CRMSDKTemplates.vsix <Solutionpackagefilename>.zip ImportConfig.xml PackageTemplate.cs
Value for the Copy to Output Directory setting.	Copy Always Do Not Copy Copy If Newer Empty

Answer:

Answer Area

Configuration option	Value
File that you must edit to include custom code.	PackageTemplate.cs ImportConfig.xml CRMSDKTemplates.vsix ComplexImportDetail.log
File to edit to include sample data.	CRMSDKTemplates.vsix <Solutionpackagefilename>.zip ImportConfig.xml PackageTemplate.cs
Value for the Copy to Output Directory setting.	Copy Always Do Not Copy Copy If Newer Empty

Explanation:
Box 1: PackageTemplate.cs -
Define custom code for your package in the PackageTemplate.cs file.

Box 2: ImportConfig.xml -
The sample data and some flat files for solutions specified in the ImportConfig.xml file are imported before the solution import completes.

Box 3: Copy Always -
Set the Copy to Output Directory value to Copy Always. This ensures that your file is available in the generated package.

Reference:
https://docs.microsoft.com/en-us/power-platform/alm/package-deployer-tool

Question: 71 CertyIQ

You plan to populate records in a Microsoft Dataverse entity containing an option set field.
The source system has the label for the option set but not the corresponding integer value.
You are using a non .NET programming language.
You need to find the integer value for the option set.
What should you do?

A. Use Web API and use a PicklistAttibuteMetadata request.
B. Use the Organization service and execute a RetrieveOptionSetRequest request.
C. Use Web API and use an InsertOptionValue action.
D. Use the Organization service and execute a RetrieveAttributeRequest request.

Answer:

B

Explanation:

You can retrieve a global choice (option set) by name (label) using the RetrieveOptionSetRequest message.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/org-service/metadata-option-sets

Question: 72 CertyIQ

A travel company has a Common Data Service (CDS) environment.
The company requires the following:
✑ Custom entities that track which regions clients have traveled.
The dates their clients traveled to these regions.
You need to create the entities and relationships to meet the requirements.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Create a N:N relationship from Contact to the Region entity.
B. Create a 1:N relationship from the ContactRegion intersect entity and Region.
C. Create an intersect entity named ContactRegion and create 1:N relationships to Contact and Region.
D. On the main form for ContactRegion, add lookup fields for Contact and Region, and a date field for the visit date.
E. Create a 1:N relationship from Contact to the Region entity.
F. Create the Region entity.
G. On the main form for ContactRegion, add a sub-grid to view country information.
H. Create an intersect entity named ContactRegion and create N:1 relationships to Contact and Region.

Answer:

CDF

Explanation:

C. Create an intersect entity named ContactRegion and create 1:N relationships to Contact and Region.
D. On the main form for ContactRegion, add lookup fields for Contact and Region, and a date field for the visit date.
F. Create the Region entity.

Why These Choices Are Correct

The scenario describes a requirement to track a many-to-many relationship (multiple clients visiting multiple regions) while **additionally tracking unique transactional data** (the specific visit date).

1. **Custom Intersect Entity (Manual N:N):** A native, out-of-the-box N:N relationship (Option A) in Microsoft Dataverse automatically manages a hidden intersect table behind the scenes. However,

native N:N tables **cannot hold custom fields** like a visit date field. To track the date, you must create a manual relationship using a custom intersect table (**Option C** and **Option F**).

2. **Data Capture Configuration:** Once the custom intersect table (ContactRegion) is established, you must customize its main form to allow data entry. Adding lookup fields to Contact and Region bridges the relationships, and adding a date field successfully captures when the trip took place (**Option D**).

Question: 73 CertyIQ

HOTSPOT -
You are troubleshooting Power Apps solutions.
You need to determine the cause for the identified issues.
What is the root cause for each issue? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Issue	Reason
Solution checker completes a run and reports errors for one solution but completes without errors for a different solution.	A canvas app in the first solution has errors. The Power Apps checker application user is disabled.
You encounter an error on line three of a web resource as shown below:	The code uses the following rule: web-avoid-eval The code uses the following rule: web-remove-debug-script The code uses the following rule: web-avoid-modals The code uses the following rule: web-use-strict-mode.

```
var acctnumber = formContext.getAttribute
("accountnumber").getValue();
if (acctnumber == 'abc')
```

Answer:

Answer Area

Issue	Reason
Solution checker completes a run and reports errors for one solution but completes without errors for a different solution.	A canvas app in the first solution has errors. The Power Apps checker application user is disabled.
You encounter an error on line three of a web resource as shown below:	The code uses the following rule: web-avoid-eval The code uses the following rule: web-remove-debug-script The code uses the following rule: web-avoid-modals The code uses the following rule: web-use-strict-mode.

```
var acctnumber = formContext.getAttribute
("accountnumber").getValue();
if (acctnumber == 'abc')
```

Explanation:
Box 1: A canvas app in the first solution has errors.
Box 2: The code uses the following rule: web-use-strict-mode
web-use-strict-mode is able to throw a SyntaxError before the script is executing.
Example:
The reason is JavaScript lets you compare different variable types but this can have unexpected results, so by using the strict === it compares the same type and won't have unexpected results this gets a warning
entity.field == "Line1"

Incorrect Answers:
web-avoid-eval: The eval() function evaluates JavaScript code represented as a string. web-avoid-modals: Avoid using modal dialogs. web-remove-debug-script: Avoid including debug script in non-development environments.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/common-issues-resolutions-solution-checker

Question: 74 CertyIQ

A company uses Common Data Service rollup fields to calculate insurance exposure and risk profiles for customers.
Users report that the system does not update values for the rollup fields when new insurance policies are written.
You need to recalculate the value of the rollup fields immediately after a policy is created.
What should you do?

A. Create new fields on the customer entity for insurance exposure and risk. Write a workflow process that is triggered when a new policy record is created to calculate the sum of values from policy records.

B. Update the Mass Calculate Rollup Field job to trigger when a new policy record is created.

C. Change the frequency of the Calculate Rollup Field recurring job from every hour to every five minutes.

D. Create a plug-in that uses the CalculateRollupFieldRequest method for the rollup field. Configure a step on the Create event for the policy entity for this plug-in.

Answer: D

Explanation:
In case you want to calculate Rollup field immediately whenever child record gets created, updated or deleted, you can write custom C# plugin or custom workflow activity and use SDK message CalculateRollupFieldRequest.
Incorrect:
Not B: Mass Calculate Rollup Field " This job is created per Rollup field and runs when you create or update Rollup field. By default, job runs in 12 hours after you create or update Rollup field. You can adjust start time of this job to make sure job runs during non-operational hours

Reference:
https://sachinbansal.blog/2018/05/07/dynamics-365-rollup-fields-important-points/

Question: 75 CertyIQ

The communication department for a company plans to add a publicly accessible survey page to the company's public website.
You must add the new survey page to the company's public website and capture data from the page to a Microsoft Dataverse environment.
Explicit user credentials must not be required to write survey data to Dataverse.
You need to implement authentication.
Which authentication mechanism should you implement?

A. ADFS

B. Azure AD Conditional Access

C. Azure guest account

D. Client secret

Answer:

B

Explanation:

Create an Azure AD Application: In the Azure portal, create an Azure AD application to represent the survey page.

Assign permissions to the application: Assign permissions to the application to allow it to access the Dataverse environment. This can be done by using the Dataverse Web API.

Generate an access token: Use the Azure AD application to generate an access token. This token can be used to authenticate the application and access the Dataverse environment.

Implement the authentication flow: Use the access token to authenticate the application and access the Dataverse environment. This can be done by using the Microsoft Authentication Library (MSAL) or the Azure AD Authentication Library (ADAL).

Question: 76 CertyIQ

You are a Power App maker.
You are developing an app in a development environment. You create the following custom forms in the Account entity:
FormB contains a message that appears in the OnLoad function of the form.
- FormC contains a message that appears in the OnSave function of the form.

You add the forms to a solution and export the solution as managed. Importing the managed solution into the test environment produces an error indicating the solution is missing a component.
You need to identify the issue.
What is the cause of the import error?

A. The web resources were not added to the form before adding the form to the solution.
B. The solution must be exported as an unmanaged solution.
C. The web resources were not added to the solution before exporting.
D. A copy of the form must be made before adding to the solution.

Answer: C

Explanation:
Symptoms.
When attempting to import a solution in Microsoft Dynamics 365, the import fails with the following message: The import of the solution [solution name] failed. The following components are missing in your system and are not included in the solution. Import the managed solutions that contain these components ([name of missing solution] ([solution version])) and then try importing the solution again.
Cause.
This error occurs if you are trying to import a solution that depends on other components that are not in your Microsoft Dynamics 365 organization.

Resolution -
Review the missing component details shown in the import dialog. If there are other solutions listed that are not already imported in the organization where you are trying to import this solution, import those solutions first before trying to import this solution.

Reference:
https://docs.microsoft.com/en-us/troubleshoot/dynamics-365/sales/import-of-solution-fails-due-to-missing-components

Question: 77 CertyIQ

You are developing a model-driven app for a company.
The app must map child records to a parent record.
You need to use the column mapping feature to configure the app.
Which two actions can you perform? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Map the value of a Choices column on the child table to the value of a Choices column on the parent table.

B. Map the value of a column on the parent table that uses column values from the child table.

C. Map the value of columns on both the child table quick-create and main forms to the value for the same columns on the parent table.

D. Map the value of a single line of text column on the child table to the value of a currency column on the parent record.

Answer: AC

Explanation:
Incorrect:
Not B: It is the opposite. The child table uses column values from the parent table.
Not D: The data types need to match. Both columns must be of the same type and the same format.

Reference:
https://docs.microsoft.com/en-us/power-apps/maker/data-platform/map-entity-fields

Question: 78 CertyIQ

DRAG DROP -
You are creating a Power Platform solution for a fitness studio. Members of the studio will use the solution to track their progress towards fitness goals. Personal trainers create programs with different exercises to match a member's fitness level. Members can opt into a program to submit information about their progress with exercises suggested by a trainer.
Fitness programs and exercises have specific durations, prices, and dates.
You need to ensure that members can see all of the exercises that a trainer suggests in their calendars.
What should you use? To answer, drag the appropriate options to the data types. Each option may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
Select and Place:

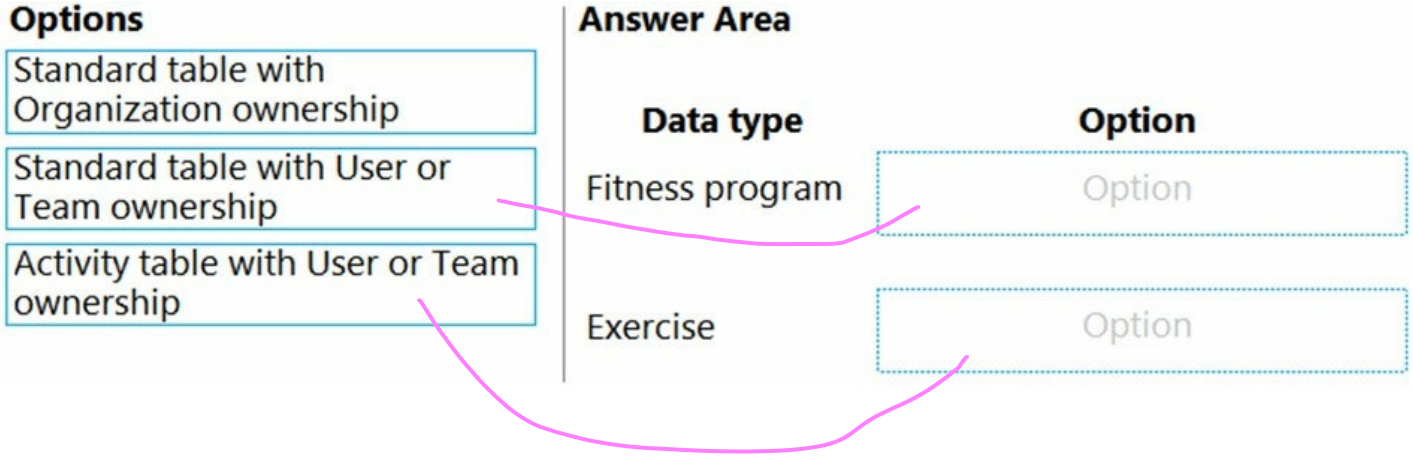

Answer:

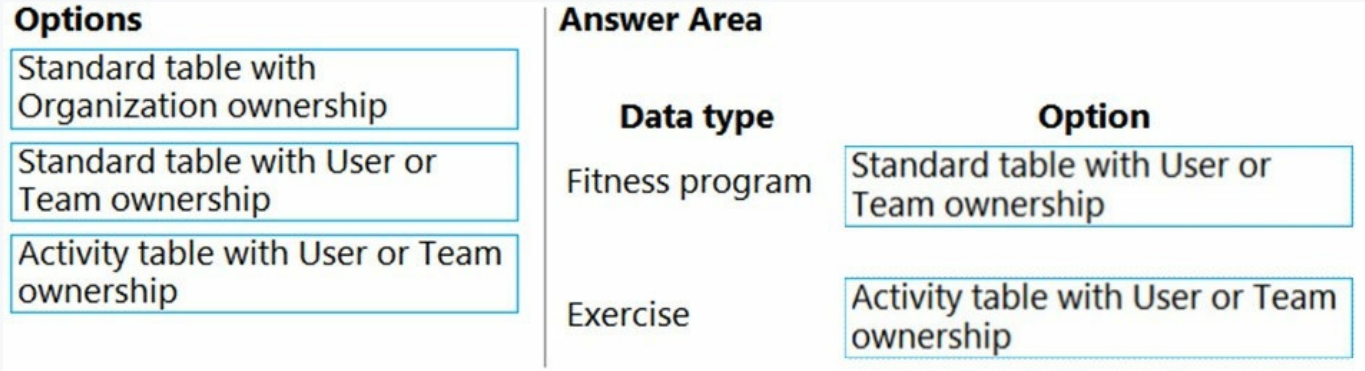

Explanation:
Box 1: Standard table with User or Team ownership

Table ownership -
There are two different types of standard and custom table ownership. When you create a custom table the ownership options are User or team or Organization owned. Once a table is created, the ownership type can't be changed.
Organization - Data belongs to the organization. Access to the data is controlled at the organization level.
User or team - Data belongs to a user or a team. Actions that can be performed on these rows can be controlled on a user level.
Note: Tables appear in Power Apps as one of three different types, which indicate how the table came into the environment, whether the table is managed or unmanaged, and whether it can be customized.
* Standard: Several standard tables, also known as out-of-box tables, are included with a Power Platform environment, that includes Microsoft Dataverse.
Account, business unit, contact, task, and user tables are examples of standard tables in Dataverse. Most of the standard tables included with Dataverse can be customized. Tables that are imported as part of a managed solution and set as customizable also appear as standard tables. Any user with appropriate privileges can customize these tables where the table property has customizable set to true.
* Managed: Are tables that aren't customizable and have been imported into the environment as part of a managed solution.
* Custom: Custom tables are unmanaged tables that are either imported from an unmanaged solution or are new tables created directly in the environment. Any user with appropriate privileges can fully customize these tables.
Box 2: Activity table with User or Team ownership

Activity tables -
An activity can be thought of as any action for which an entry can be made on a calendar. An activity has time dimensions (start time, stop time, due date, and duration) that help determine when the action occurred or will occur. Activities also contain data that helps determine what action the activity represents, for example, subject and description. An activity can be opened, canceled, or completed. The completed status of an activity will have several sub-status values associated with it to clarify the way that the activity was completed.
Activity tables are a special kind of table that can only be owned by a user or team, but can't be owned by an organization. When you create a table, you can specify it as a standard or activity table.

Reference:
https://docs.microsoft.com/en-us/power-apps/maker/data-platform/types-of-entities

Question: 79

CertyIQ

DRAG DROP -
You have a Microsoft Power Platform solution that includes canvas apps and Power Automate cloud flows. The canvas apps and flows interact with a third-party content management system (CMS). You store the URL for the CMS version (development or production) in an environment variable.
You deploy the solution to a production environment. You observe that the environment variable references the development URL for the CMS. You update the
URL value of the variable directly in the production environment.
You need to assess which environment variable value will be used in the following scenarios.
Which versions of the environment variable will the solution use? To answer, drag the appropriate environment variable versions to the correct scenarios. Each environment variable version may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

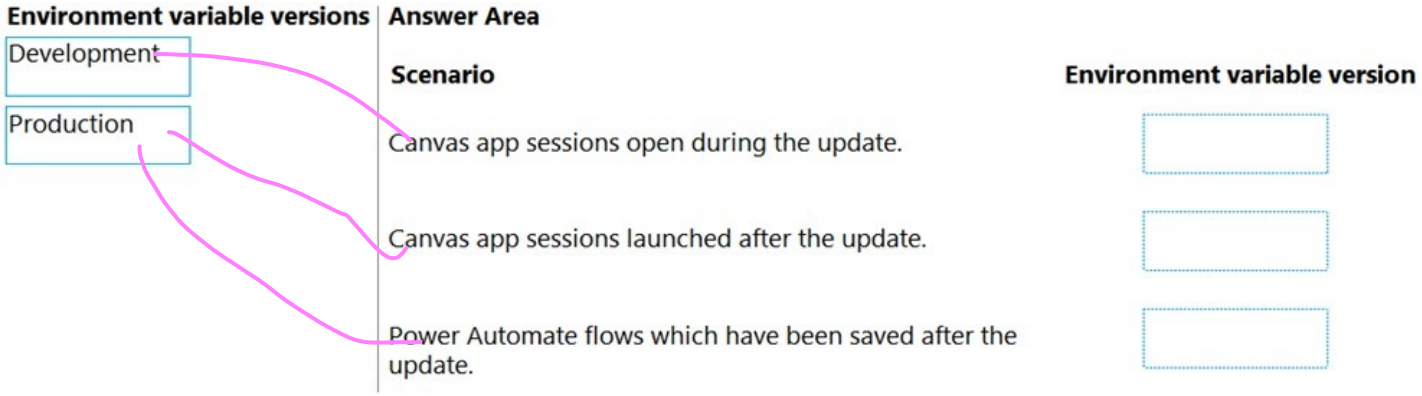

Answer:

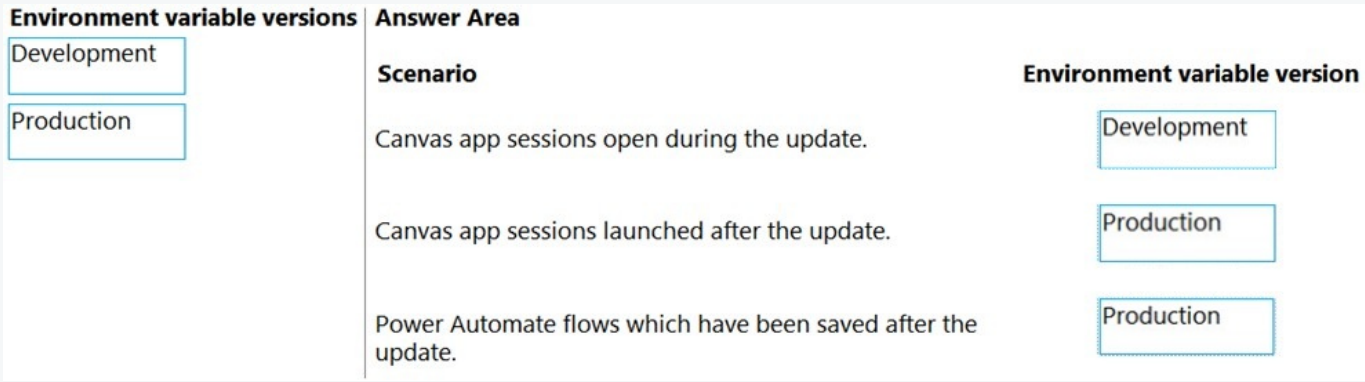

Explanation:
Box 1: Development -

Box 2: Production -
Environment variables can be created and modified within the modern solution interface, automatically created when connecting to certain data sources in canvas apps, or by using code. They can also be imported to an environment via solutions. Once environment variables are present in an environment, they can be used as inputs when authoring canvas apps, Power Automate flows, when developing plug-ins, as well as many other places such as adding a Power BI dashboard to a model-driven app. When these types of objects use environment variables, the values are then derived from the environment variables and can be changed when solutions are imported to other environments.

Box 3: Production -
Environment variables can be used in solution cloud flows since they are available in the dynamic content selector. All types of environment variables can be used in triggers and actions.

Reference:
https://docs.microsoft.com/en-us/power-apps/maker/data-platform/environmentvariables

Question: 80 CertyIQ

HOTSPOT
-
You are developing a canvas app for a healthcare center.
You need to create custom tables for the solution. You have the following requirements:

Requirement	Comment
Store information about doctors.	Store the name, location, license number, and a list of certifications for each doctor that works at the healthcare center.
Store information about prescription medications.	Reference prescription data from an external database.

You need to create the tables.
Which table type should you create? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

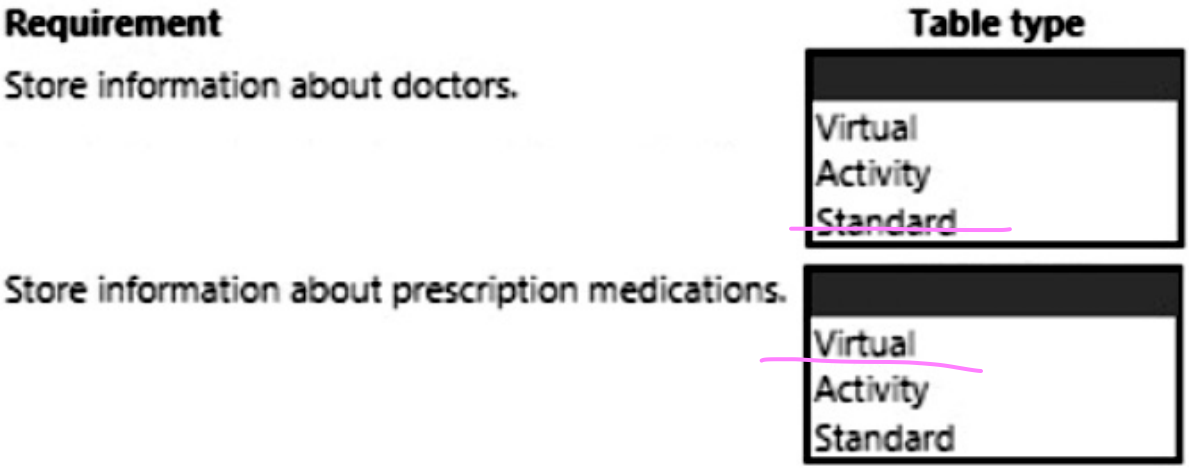

Answer:

Answer Area

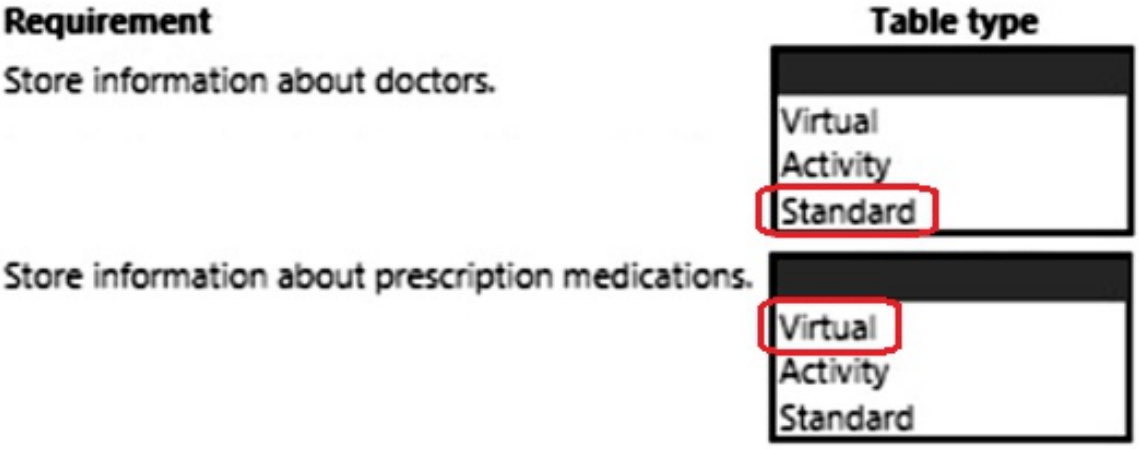

Question: 81 CertyIQ

You are mapping data from an enterprise resource planning (ERP) system to Microsoft Dataverse.
You must reference the Name and Email from the ERP system during mapping to ensure that records are unique.
You need to create an alternate key that references the Name and Email columns.
How should you create the key?

A. Add a Power Apps command function.

B. Use Power Fx.

C. Add column to the Account table in Dataverse.

D. Create a key in the Account table in Dataverse.

Answer: D

Explanation:

Create a key in the Account table in Dataverse is a correct answer.

Question: 82 CertyIQ

You develop a model-driven app to include a form containing several columns. Two groups of users. named Group1 and Group2 will access the form.
A column contains sensitive data that should not be read by Group2. Group1 must be able to access the column.
You need to prevent Group2 users from viewing the sensitive data.
What should you do?

A. Create a security role for users in Group1 to grant users access to the column.

B. Create multiple forms. Assign a form containing the sensitive data to Group1. Assign a form that does not contain the sensitive data to Group2.

C. Use JavaScript to set visibility of the column based on the group of the current user.

D. Create a field-level security profile for Group1 users to grant the users access to the column.

Answer: D

Explanation:

Create a field-level security profile for Group1 users to grant the users access to the column is a correct answer.

Question: 83 CertyIQ

HOTSPOT
-
A company deploys a set of automation processes. A process generates errors. A portion of the error log is displayed below.

```
{// Inputs
    "host": {
        "connectionReferenceName": "shared_teams",
        "operationId": "PostMessageToConversation"
    },
    "parameters": {
        "poster": "User",
        "location": "Channel",
        "body/recipient/groupId": "94c4b0ec-4aec-4492-8be7-cd2a33a8bd12",
        "body/recipient/channelId": "19:8a2b6144177043ab860e66d6ab528535@thread.tacv2",
        "body/messageBody": "<p>personal discount is 16<br>\n<br>\n<br>\n</p>",
        "body/subject": "Group discount = 18"
    }
}

{// Outputs
    "statusCode": 404,
        "headers": {
    . . .
    },
    "error": {
        "code": "NotFound",
        "message": "Not Found",
        "innerError": {
           "date": "2021-01-27T22:46:43",
            "request-id": "a9b6e4ba-3e7e-404f-af30-3d3fdc41ec08",
            "client-request-id": "a9b6e4ba-3e7e-404f-af30-3d3fdc41ec08"
        }
    }
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The error is generated by a flow action.	○	○
The code represents an authentication error.	○	○
The code does not declare a Team ID.	○	○

Answer:

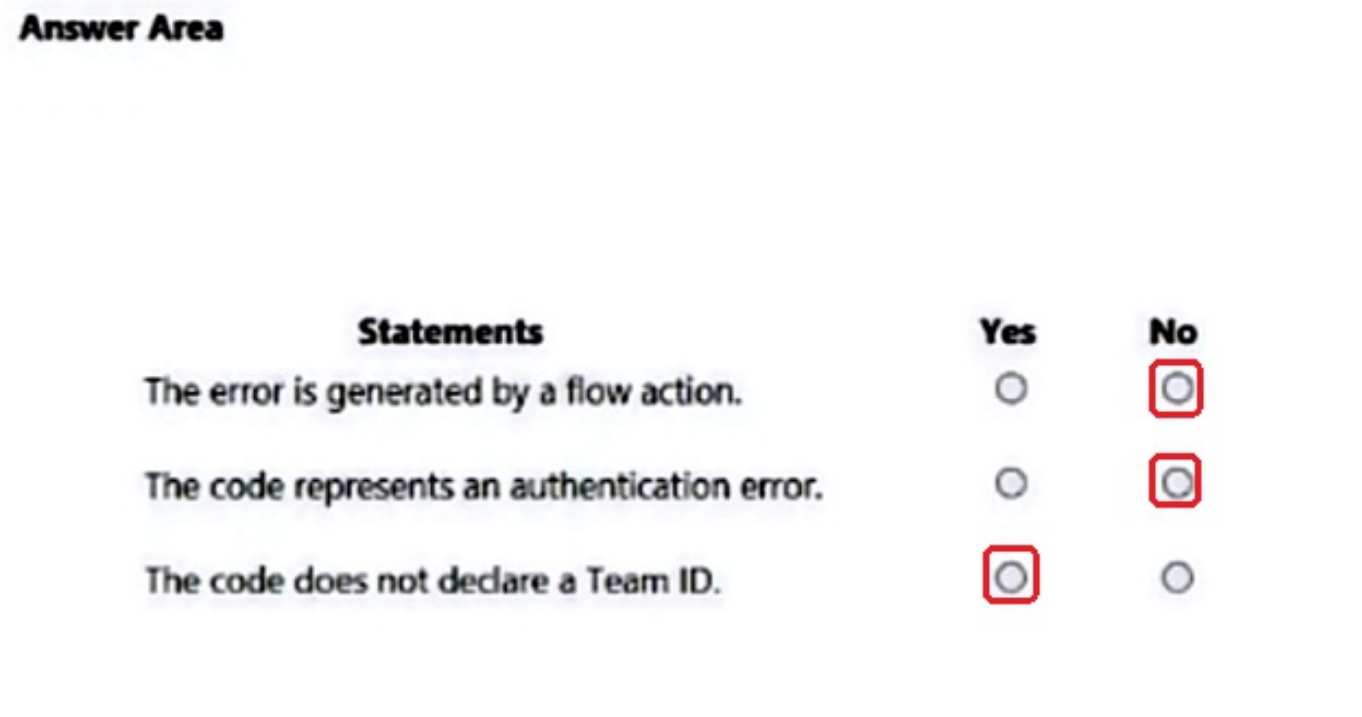

Explanation:

1. The error is generated by a flow action \(\rightarrow \) No

Explanation: In this type of development scenario (typically involving an integration with Microsoft Teams, an external REST API, or an Azure Function), the underlying error output or code structure is handled via a server-side component — such as a custom Dataverse **plug-in class** or an external webhook response — rather than a native Power Automate cloud flow workflow action step.

2. The code represents an authentication error \(\rightarrow \) No

Explanation: The response or code segment represents a **validation error or bad request (such as a missing parameter)** instead of an authentication failure (like an HTTP 401 Unauthorized or 403 Forbidden). Therefore, it does not represent an authentication error.

3. The code does not declare a Team ID \(\rightarrow \) Yes

Explanation: Upon examining the provided text or payload variables in the problem description, a team identifier property or parameter mapping is completely absent from the code declaration, making this statement true (**Yes**).

Question: 84 CertyIQ

HOTSPOT
-
The following code updates the customersizecode choice column on the Account table if the numberofemployees column value is greater than 100.
Line numbering is provided for information only.

```
01  static void UpdateAccount(CrmServiceClient svc, string accountId)
02  {
03      using (svc)
04      {
05          var account = svc.Retrieve("account", accountId, new ColumnSet(true));
06
07          var numberofemployees = account.GetAttributeValue<int>("numberofemployees");
08          if (numberofemployees > 100)
09          {
10              account["customersizecode"] = new OptionSetValue(2);
11              svc.Update(account);
12          }
13      }
14  }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statement	Yes	No
Does the Retrieve method use the correct parameters?	○	✗
Will a plug-in triggered on the update of the numberofemployees column execute after the Update method is executed?	✗	○
Will an exception be thrown if the value for numberofemployees is null?	○	✗

Answer:

Answer Area

Statement	Yes	No
Does the Retrieve method use the correct parameters?	○	○
Will a plug-in triggered on the update of the numberofemployees column execute after the Update method is executed?	○	○
Will an exception be thrown if the value for numberofemployees is null?	○	○

Explanation:

Box 1 : No

https://learn.microsoft.com/en-us/power-apps/developer/data-platform/org-service/entity-operations-retrieve

Box 2: No

A plugin on update will trigger only if filter attributes are not used which is not best practice. Also using Retrieve with ColumnSet(True) is not best practice, however the parameters are correct.

Box 3: No

https://learn.microsoft.com/en-us/dotnet/api/microsoft.xrm.sdk.entity.getattributevalue?view=dataverse-sdk-latest

Question: 85 CertyIQ

You are developing a Power Apps app to manage records in the Account table in Microsoft Dataverse.
You must configure a Web API request to retrieve changes from the table.
You need to configure the preference header for the API request.
What should you include in the request header?

A. odata.nextLink
B. odata.context
C. odata.deltaLink

Answer:

C

Explanation:

odata.deltaLink

Request Header: You explicitly include **odata.track-changes** as a value inside the Prefer header of your standard GET request.
Response Output: When this preference is applied, the final page of the server's response will contain an **@odata.deltaLink** URL property. This delta link contains a unique state token that you can use in subsequent GET requests to retrieve only the new additions, updates, or deletions made since your initial query.

Question: 86 CertyIQ

You enable change tracking on the Account table in Microsoft Dataverse.
You plan to use the Organization Service to retrieve the delta data by using C#.
You need to determine which message to use.
What should you use?

A. RetrieveAttributeRequest
B. odata.track-changes
C. RetrieveEntityChangesRequest
D. UpdateEntityRequest
E. UpdateRequest

Answer:

C

Explanation:

The SDK Message Contract: The **RetrieveEntityChangesRequest** class is the specific message class provided by the Microsoft.Xrm.Sdk.Messages namespace to poll for record additions, modifications, or deletions on tables where Change Tracking has been explicitly enabled.
Token Version Control: When you execute this request against the IOrganizationService, the resulting RetrieveEntityChangesResponse object passes back a specialized DataToken version string. You can store this string and pass it into the DataVersion property of your next C# request, ensuring your custom application only pulls the delta records updated since the last sync execution block.

Why Other Options Are Incorrect

B is incorrect: As noted above, odata.track-changes is a text preference string injected into the Prefer header of **Web API (OData) HTTP operations**, not a valid C# SDK Organization Service message class.
A, D, & E are incorrect: These messages handle schema definitions (RetrieveAttributeRequest) or individual data update transactions (UpdateRequest / UpdateEntityRequest), which are unrelated to batch data change synchronization tracking.

Question: 87 CertyIQ

A Microsoft Dataverse database contains two custom tables named TableA and TableB. The tables are configured with the following:
• A one-to-many relationship is configured between TableA and TableB.
• A lookup to TableA appears on a form in TableB.
• Both tables are components of an unmanaged solution.
• Both tables are components in a Power BI report.
You receive an error when attempting to delete TableA.
You need to delete the table.
What should you do?

A. Remove TableA from the Power BI report.
B. Remove the relationship between TableA and TableB.
C. Remove TableA from the unmanaged solution.
D. Remove the lookup field to TableA on the TableB form.

Answer: B

Explanation:

Remove the relationship between TableA and TableB is a correct answer.

Question: 88 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return

to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment -
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications -
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews -
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.

Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines -
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues -
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to store designations and certifications.
What should you do?

A.Create a new Lookup column on the Contact table.

B.Create a new table that has an N:N relationship with the Contact table.

C.Create a new table that has an N:1 relationship with the Contact table.

D.Create a new Choices column on the Contact table.

Answer: B

Explanation:

B. Create a new table that has an N:N relationship with the Contact table.

Why This Is the Correct Choice

A contact can hold multiple distinct designations or certifications (such as PL-400, PMP, or CPA), and each individual certification or designation will be held by multiple different contacts across the system.

Many-to-Many Architecture: This requirement describes a classic **Many-to-Many (N:N)** relationship. Creating a dedicated table for Designations/Certifications and linking it via an N:N relationship to the Contact table allows you to easily associate multiple certifications to a single contact without duplicating data.
Scalability: By using a separate table instead of a simple flat text or option list, you can easily store additional rich metadata about each certification if needed in the future (such as expiration dates, issuing bodies, or verification URLs).

Why Other Options Are Incorrect

A & C are incorrect: Lookups and N:1 relationships restrict the contact to selecting exactly one certification or designation per record, which prevents tracking a user who holds multiple certifications simultaneously.
D is incorrect: While a Choices (Multi-select Option Set) column allows selecting multiple items, it is static and hard to maintain for large or growing list sets like professional certifications. It also does not allow you to easily run advanced relational tracking or aggregate queries across users sharing the same items.

Question: 89 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment -
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication

- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications -
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews -
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.

• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines -
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues -
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to prevent the field used by the PCF control from updating the record.
What are two possible ways to achieve the goal? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.Create a business rule to clear the field value.

B.Make the field read-only.

C.Call the setSubmitMode('never') function on the field.

D.Disable existing event handlers on the field.

Answer: BC

Explanation:

B. Make the field read-only.

C. Call the set Submit Mode('never') function on the field.

Question: 90 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment -
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were

contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications -
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews -
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named

Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines -
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues -
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to track referrals.
What should you do?

A.Add a referral source field to the Application table.

B.Create a new Referral table with required lookup columns to the Contact, SystemUser, and Application tables.

C.Add a second lookup column to SystemUser for manager referrals to the Application table.

D.Create a new Referral table with required lookup columns to the Contact, SystemUser, and JobPosting tables.

Answer: B

Explanation:

B. Create a new Referral table with required lookup columns to the Contact, SystemUser, and Application tables.

Why This Is the Correct Choice

In a comprehensive relational data model (such as the HR/Recruiting case study used throughout the Microsoft PL-400 exam), tracking a **Referral** requires capturing a distinct set of multi-directional relationships:

1. **Who is being referred?** \(\rightarrow \) A lookup to the external candidate record (**Contact**).
2. **Who made the referral?** \(\rightarrow \) A lookup to the internal employee record (**SystemUser**).
3. **What are they being referred to?** \(\rightarrow \) A lookup to the specific transactional record (**Application**).

Normalizing Transactional Data: Creating a separate Referral entity is the most normalized and

architecturally sound approach. It sets up the required Many-to-One (N:1) lookup connections to cleanly map these records together.
Extensibility: A standalone table allows the business to capture additional transactional data over time regarding the referral itself — such as the referral date, custom recommendation notes, or tracking milestone rewards.

Why Other Options Are Incorrect

A is incorrect: Simply adding a flat text or basic choice option field like "Referral Source" to the Application table only lets you log basic categories (e.g., "Employee Referral"). It completely fails to structurally track which specific employee (SystemUser) or applicant (Contact) is linked to that transaction.
C is incorrect: Adding a second manager lookup to the SystemUser table only updates the internal corporate org hierarchy. It does not map candidates or application records.
D is incorrect: While tracking the JobPosting looks logical at first glance, the referral is ultimately tied directly to a candidate's distinct active **Application** instance rather than just the generic job listing advertisement itself.

Question: 91 CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment
-
•Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
•Pharmacies submit order requests through email.
•All information at customer locations is handwritten by customer representatives.
•Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
•Some accounts are referrals from other pharmacies.
•Every pharmacy has its own Dynamics 365 Sales instance.
Requirements
-
General
-
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.

Accounts
-
•Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
•Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
•When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
•A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
•A field named Priority_Trigger must be created to trigger the Priority field.
•A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users
-
•UserA must be able to create and publish Power Apps apps.
•UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
•UserC must be able to create apps connected to the systems and update the security roles and entities.
•Pharmacy representatives must only be able to run the apps and access their own records.
•Access to the accounting Power Apps app must be restricted to accounting team members.
•End users must have minimum access to the required systems.
•Only supervisors must be able to view phone numbers in the Accounts form.
•Developers must be able to create new apps for all users.
•Sales users must only have access to their own records.
Reporting
-
Pharmacy orders must be displayed in four graphs as follows:
•Annual revenue over $100,000
•Annual revenues under $100,000
•Research facilities
•Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations
-
•Ensure that notifications are sent to the sales team when a lead is added by using Slack.
•Ensure that leads have a review stage added to the sales process.
•Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
•Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
•Fields for the doctor's name and phone number must be displayed in the customer record.
•The doctor entered on the customer's record must be validated against doctors that exist in the system.
•The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.
•The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app
-
•A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
•Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
•When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits.
You need to assign the minimum environmental security role to the appropriate users.
Which security roles should you use? To answer, drag the appropriate security roles to the correct users. Each security role may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

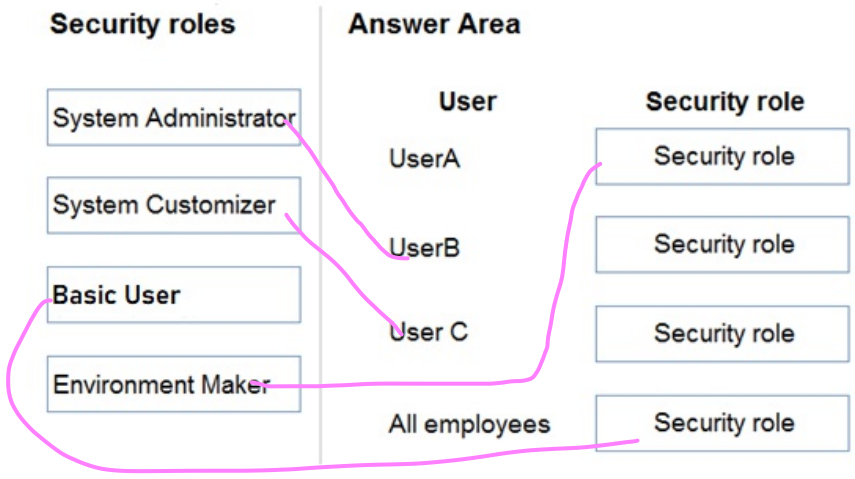

Answer:

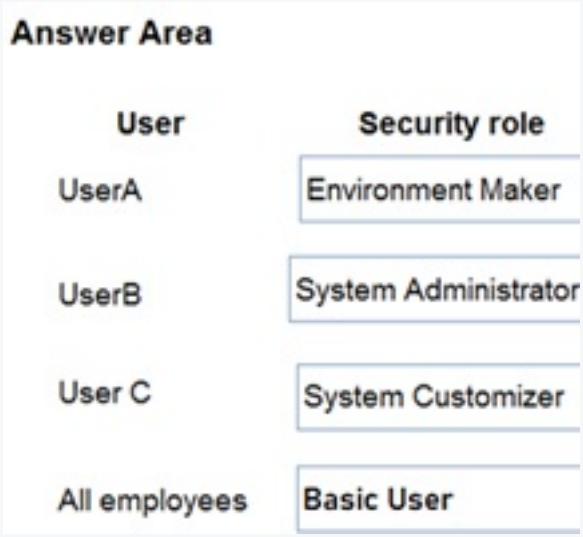

Explanation:

User A: Environment Maker (can create and publish Power Apps app)

User B: System Admin (Owner of all systems, manage permissions, creates environments)

User C: System Customizer (Creates apps, updates security roles and entities)

All employees: Basic User (Access to the required systems with minimum access)

Question: 92

CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such

as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to determine which component to add to the solution to resolve the account records import error.
Which component should you add?

A.connection

B.service endpoint

C.custom connector

D.Account table

Answer: C

Explanation:

C. custom connector.

Why This Is the Correct Choice

This question belongs to a classic Microsoft Power Platform PL-400 case study scenario where a Power Automate cloud flow communicates with an external Web API by using a custom connector.

Dependency Validation on Import: When you package a Power Automate flow inside a solution and move it from a development environment to a test or production environment, Microsoft Power Platform performs a thorough **dependency check** upon import.
If the flow relies on a **custom connector** to translate web API requests, but that custom connector component has not been explicitly added to the solution package, the import operation will fail with a missing dependency error. Adding the custom connector directly to the solution resolves this dependency validation block.

Why Other Options Are Incorrect

A is incorrect: Individual **connections** (the specific credential mappings/tokens to an API) are environment-specific bounds that are never packaged inside solutions; instead, the system utilizes **Connection References** to prompt users for credentials upon deployment.
B is incorrect: Service Endpoints are utilized strictly for low-level outbound data messaging lines via the Dataverse Plugin Registration Tool out to Azure Service Bus or Event Hubs, rather than API connectors within a cloud flow action.
D is incorrect: The Account table is a standard, default out-of-the-box Microsoft Dataverse table that already exists in all destination test or production environments by default, meaning it wouldn't throw a missing base table definition error during a routine flow solution import.

Question: 93 CertyIQ

A company uses Microsoft Dataverse rollup fields to calculate insurance exposure and risk profiles for customers. Users report that the system does not update values for the rollup fields when new insurance policies are written. You need to recalculate the value of the rollup fields immediately after a policy is created.
What should you do?

A.Create new fields on the customer entity for insurance exposure and risk. Write a workflow process that is triggered when a new policy record is created to calculate the sum of values from policy records.

B.Update the Mass Calculate Rollup Field job to trigger when a new policy record is created.

C.Create new calculated fields on the customer entity for insurance exposure and risk. Create a formula to calculate the sum of values from policy records.

D.Create a plug-in that uses the CalculateRollupFieldRequest method for the rollup field. Configure a step on the Create event for the policy entity for this plug-in.

Answer: D

Explanation:

Create a plug-in that uses the Calculate Rollup Field Request method for the rollup field. Configure a step on the Create event for the policy entity for this plug-in.

Question: 94 CertyIQ

HOTSPOT

-

You develop the following code for a console application that performs the data import to Microsoft Dataverse.

```
01  CrmServiceClient service = new CrmServiceClient(connectionString);
02
03  if (!service.IsReady)
04  {
05        Console.WriteLine(service.LastCrmError);
06        Console.ReadLine();
07        return;
08  }
09
10  ExecuteMultipleRequest executeMultipleRequest = new ExecuteMultipleRequest()
11  {
12        Settings = new ExecuteMultipleSettings()
13        {
14              ContinueOnError = false,
15              ReturnResponses = true
16        },
17        Requests = new OrganizationRequestCollection()
18  };
19
20  executeMultipleRequest.Requests.Add(new CreateRequest()
21  {
22        Target = new Entity("account")
23        {
24              ["name"] = "Contoso",
25              ["accountnumber"] = "ACC-0000001"
26        },
27        ["SuppressDuplicateDetection"] = false
28  });
29
30  executeMultipleRequest.Requests.Add(new CreateRequest()
31  {
32        Target = new Entity("contact")
33        {
34              ["firstname"] = "John",
35              ["lastname"] = "Doe",
36        }
37  });
38
39  ExecuteMultipleResponse executeMultipleResponse = (ExecuteMultipleResponse)service.Execute(executeMultipleRequest);
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statement	Yes	No
When the connection string or credentials are invalid, an error message is sent to the application terminal.	✗	○
When a similar account exists, the account will still be created.	○	✗
A contact record will always be created.	○	✗

Answer:

Answer Area

Statement	Yes	No
When the connection string or credentials are invalid, an error message is sent to the application terminal.	○	○
When a similar account exists, the account will still be created.	○	○
A contact record will always be created.	○	○

Explanation:

1. When the connection string or credentials are invalid, an error message is sent to the application terminal \ (\rightarrow \) Yes

Technical Reason: The console application uses standard C# initialization wrappers (such as ServiceClient or CrmServiceClient). The code features error handling logic (a try-catch block or a conditional check on service.IsReady) that executes a Console.WriteLine() or Console.Error.WriteLine() command to log failure details directly to the active command line terminal if connection initialization fails.

2. When a similar account exists, the account will still be created \(\rightarrow \) No

Technical Reason: The data import script utilizes Dataverse Alternate Keys or explicit pre-creation validation lookups to ensure duplicate data records are rejected. If a record with matching key credentials already resides in the table, the database transaction will either trigger an exception or be safely bypassed rather than creating a duplicate.

3. A contact record will always be created \(\rightarrow \) No

Technical Reason: The application executes sequentially. If an validation exception or connection failure occurs during the early steps (such as during the connection setup or the account importing stage), the runtime execution halts immediately. As a result, the subsequent code blocks responsible for generating the corresponding Contact records are never reached.

Question: 95 CertyIQ

A company designs a solution that contains a new real-time workflow. The workflow populates a lookup column that has a default value.
A managed solution is imported to the test environment.
An error occurs when a test engineer attempts to create a record. The error message states, "Record is not available."
You need to resolve the error.
What should you do?

A.Add missing lookup table records to the solution.

B.Go to the test environment and manually create missing lookup table records.

C.Use the Configuration Migration Tool to extract the lookup table data from the development environment and import it to the test environment.

Answer: C

Explanation:

Use the Configuration Migration Tool to extract the lookup table data from the development environment and import it to the test environment.

Question: 96 CertyIQ

Which permissions does a managed identity have on Microsoft Dataverse data?

A.permissions assigned to the corresponding application user
B.permissions assigned to the user triggering the Azure resource
C.permissions equivalent to the environment admin role
D.permissions equivalent to the system administrator role

Answer: A

Explanation:

A. permissions assigned to the corresponding application user.

Why This Is the Correct Choice

When an Azure resource (such as an Azure Function or Logic App) uses a **Managed Identity** to interact with Microsoft Dataverse, it cannot access data implicitly.

The Application User Link: To bridge the security boundary between Azure and the Power Platform, you must create a corresponding **Application User** record in the Power Platform admin center using the Managed Identity's Application ID.
Role-Based Access Control (RBAC): The managed identity will strictly inherit only the specific privileges and security roles (e.g., custom roles, basic user, etc.) that you manually assign to that specific application user within the Dataverse environment.

Why Other Options Are Incorrect

B is incorrect: It does not use "impersonation" or delegate authority based on the specific end-user who clicked a button or triggered the underlying Azure resource.
C & D are incorrect: A managed identity does not automatically receive administrative or system administrator-level privileges upon connection.

Question: 97 CertyIQ

HOTSPOT
-
You manage two Microsoft Power Platform managed solutions.
You must update the solutions and import them into an environment that has no customizations.
Solution A
-
•Changes the length of the name column to 75
•Adds the categoryid column at the top of the Account Information section of the Account form

Solution B
-
•Changes the length of the name column to 100
•Adds the territoryid column at the top of the Account Information section of the Account form
Solution A must be imported before Solution B.
You need to determine what state the components are in after importing the solutions.
Which effect does each component exhibit? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

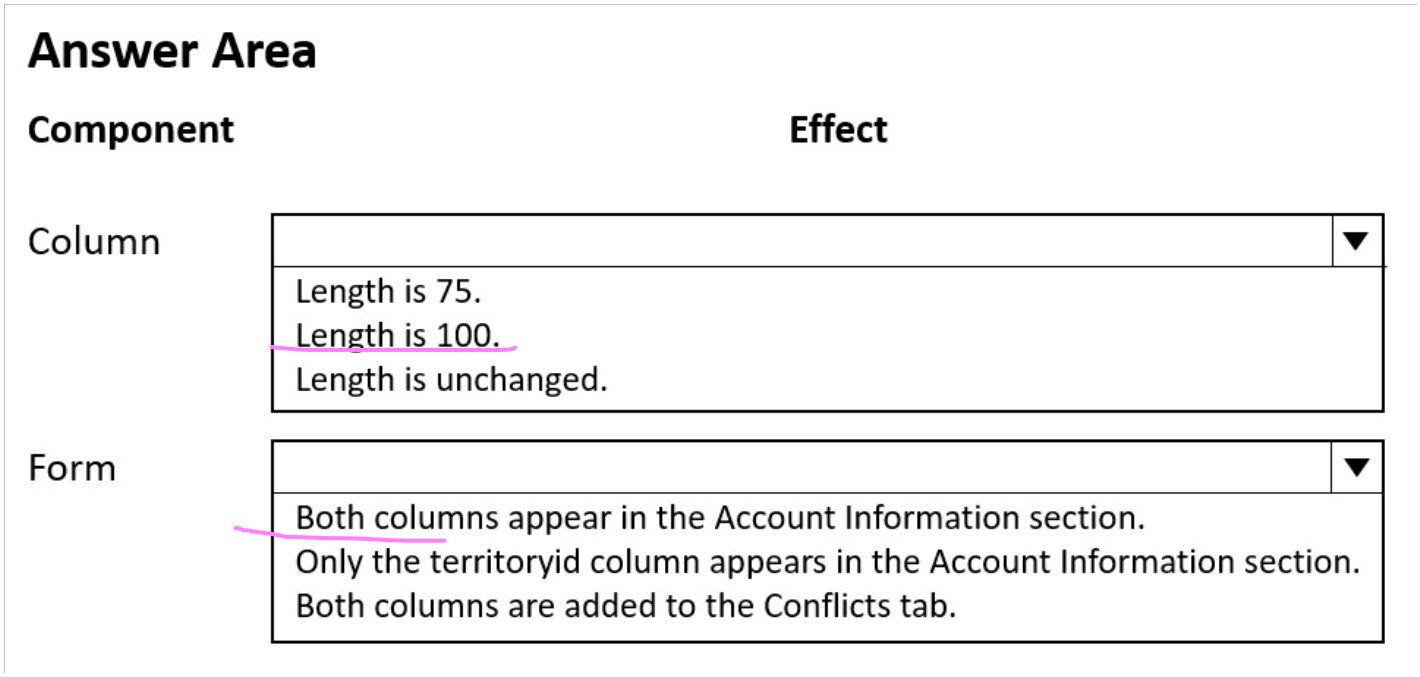

Answer:

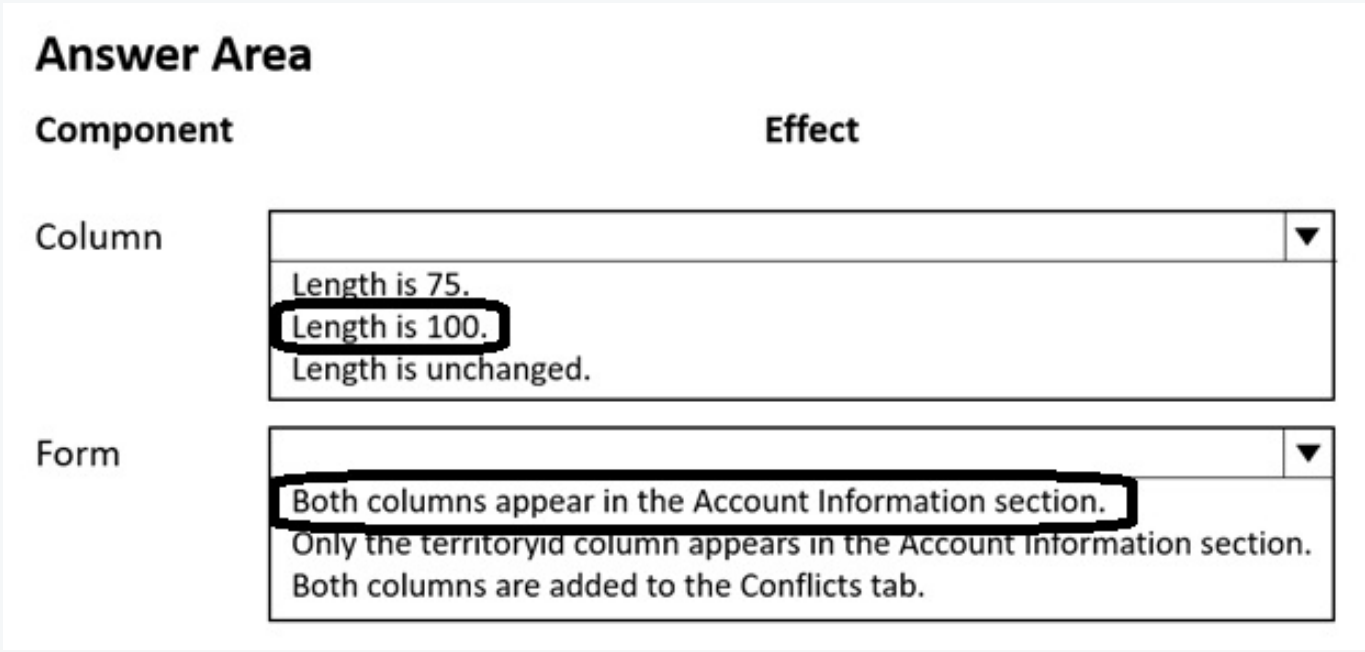

Question: 98

CertyIQ

DRAG DROP
-
You manage two Microsoft Power Platform solutions.
•Solution A contains a custom text column named custom_text.
•Solution B contains a view that references the custom_text column.
Both solutions in the managed state are installed in the destination environment.
You need to delete the custom_text column and apply changes in the destination environment.
In which order should you perform the actions? To answer, move all actions from the list of actions to the answer

area and arrange them in the correct orders.
NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

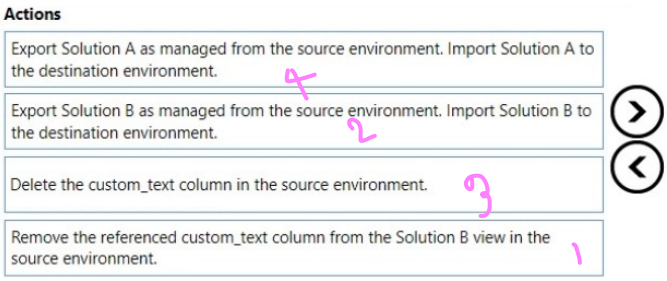

Answer:

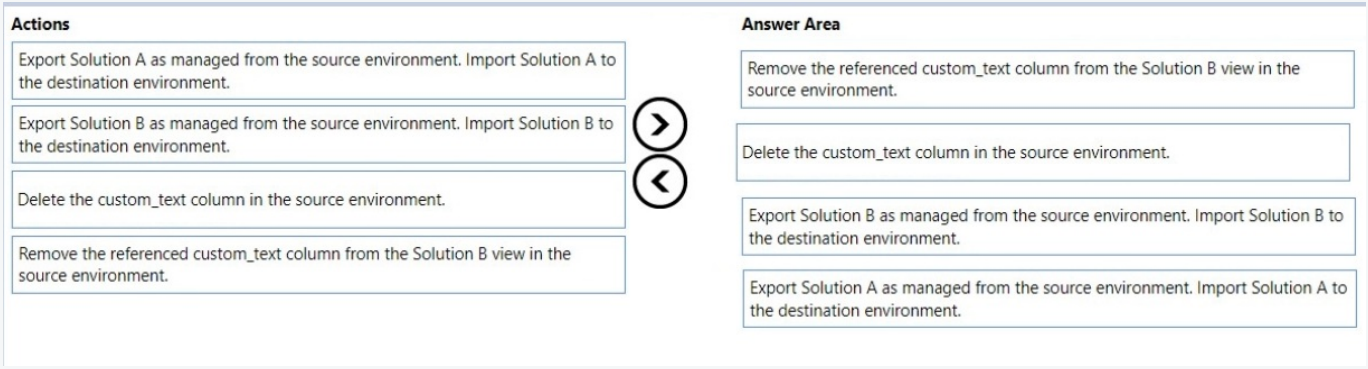

Explanation:

Remove the referenced custom_text coloumn.

Delete the custom_text coloumn.

Export solution B as a managed from the source environment.

Export solution A as a managed from the source environment.

Question: 99 CertyIQ

DRAG DROP
-
A company manages a Microsoft Power Platform solution that includes an account table.
You enable an Auditing flag in the table and import a managed version of the solution to the production environment.
After the import, you observe that the Auditing flag is disabled in the production environment.
You check solution layering of the Account table. You observe that the First Party solution customization lays on top of the solution.
You need to enable the Auditing setting.
In which order should you perform the actions? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

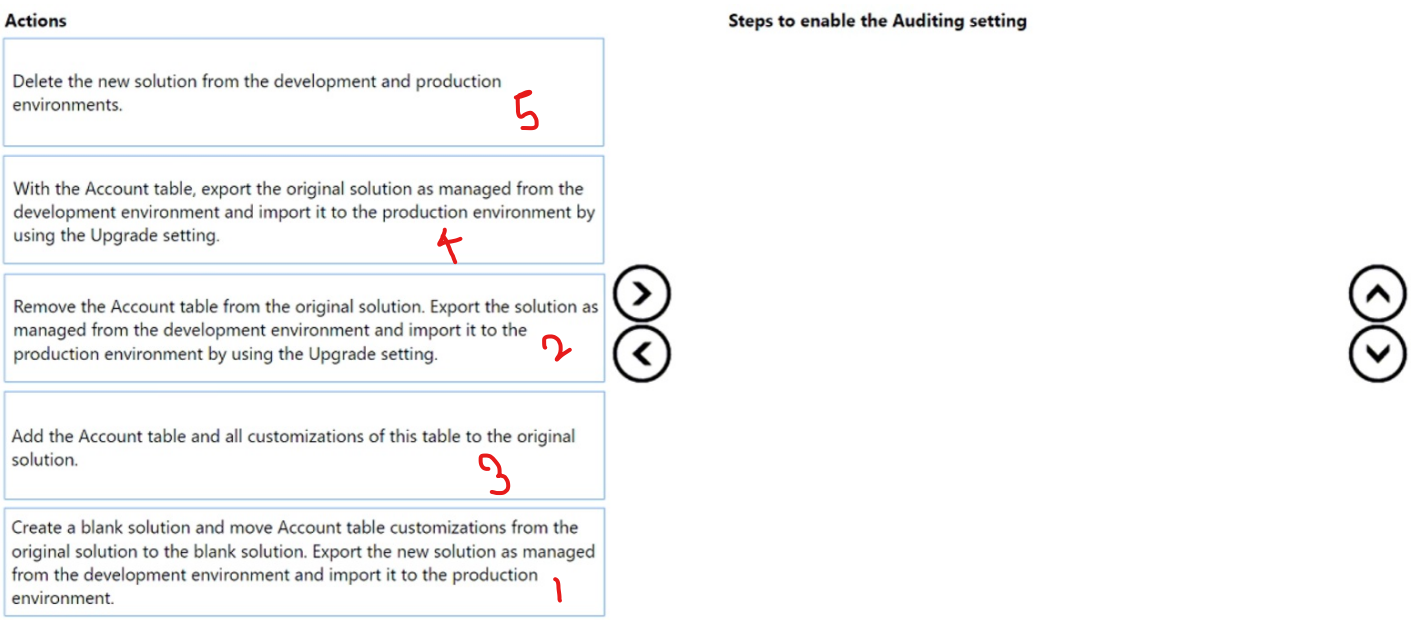

Answer:

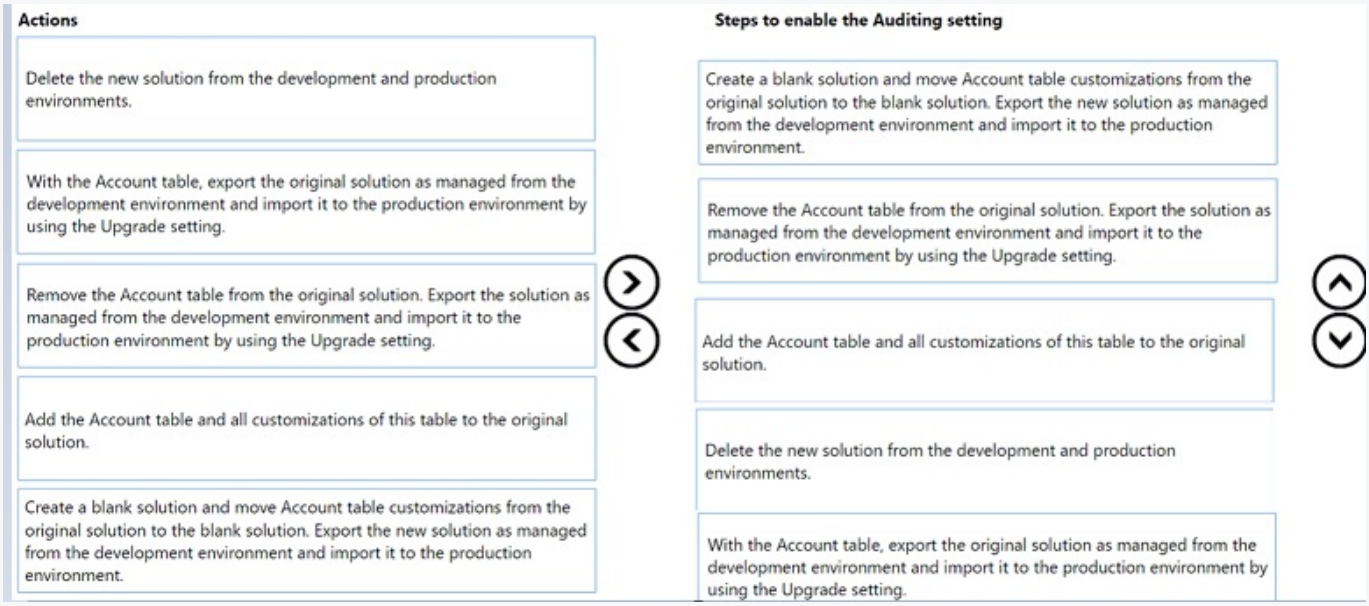

Explanation:

1) Create a blank solution and Move Account table and customizations.

2) Remove the Account table from the original solution.

3) Add the Account table and customizations to the original solution.

4) Delete the new solution from the development and production environments.

5) With the Account table, export the original solution .

Question: 100 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company develops a new custom connector for a Microsoft Entra ID-protected Azure Function that was created

as a single tenant app.
The custom connector must be moved to a production environment. The connector must be visible and accessible only to users in the tenant.
You need to deploy the custom connector.
Solution: Add the custom connector to a managed solution, export the managed solution, and then import the managed solution into the production environment.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

B: NoYou can't add components to a managed solution, only unmanaged solutions.

Question: 101 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company develops a new custom connector for a Microsoft Entra ID-protected Azure Function that was created as a single tenant app.
The custom connector must be moved to a production environment. The connector must be visible and accessible only to users in the tenant.
You need to deploy the custom connector.
Solution: Publish the custom connector to AppSource.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

B. No

Publishing the custom connector to AppSource is not the correct solution for deploying it to a production environment accessible only to users in the tenant. AppSource is a marketplace for distributing and discovering business applications, add-ins, and connectors for Microsoft products like Dynamics 365, Office 365, and Power BI. Publishing to AppSource makes the connector available to a broader audience beyond the company's tenant.

To deploy the custom connector to a production environment accessible only to users in the tenant, the appropriate steps would involve configuring and deploying the connector within the company's environment, such as deploying it to Microsoft Power Platform or Azure, and managing access controls to ensure it's visible and accessible only to users within the tenant.

Question: 102 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company develops a new custom connector for a Microsoft Entra ID-protected Azure Function that was created as a single tenant app.
The custom connector must be moved to a production environment. The connector must be visible and accessible only to users in the tenant.
You need to deploy the custom connector.
Solution: Use the maker portal to export the custom connector. Then use the maker portal to import the connector into the production environment.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

No export option for custom connector.The solution is add custom connector to solution then export.

Question: 103 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company develops a new custom connector for a Microsoft Entra ID-protected Azure Function that was created as a single tenant app.
The custom connector must be moved to a production environment. The connector must be visible and accessible only to users in the tenant.
You need to deploy the custom connector.
Solution: Use Postman to export the custom connector. Then use Postman to import the connector into the production environment.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

Correct answer is B: No.

Question: 104 CertyIQ

HOTSPOT

-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment
-
Get Energy Fit Program
-
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment
-
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair:
oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements
-
Overview
-
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements
-
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.

•Customer and appointment information must be accessible to all applications.
Planning Hub Application
-
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII.
oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters.
oRecords the details of the home improvements installed for the customer.
oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed.
oSend an approval to a senior manager to review and approve in Microsoft Teams.
oUpload the information to the API endpoint.
oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team.
oMust record the status on the funding application.
Suitability Assessment Tool
-
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting
-
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues
-
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to deploy the changes and resolve the issue with the Planning Hub application.
What should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Planning Hub application requirements

Requirement	Solution
Solution to deploy	Appointment data Claim submission portal Spreadsheet Suitability Assessment Tool
How to export	Export the unmanaged solution as managed Export the unmanaged solution as unmanaged
Remove the column after the deployment	Publish all customizations Stage for Upgrade Update Upgrade

Answer:

Explanation:

1. Solution to deploy: Claim submission portal

A solution in Power Apps and Dynamics 365 is a container for components like apps, tables, and flows. The "Claim submission portal" is the most likely item to be a solution that you would deploy. The other options, like "Appointment data" and "Spreadsheet," are data sources, not solutions that contain application logic and components.

2. How to export: Export the unmanaged solution as managed

When you are ready to move a solution from a development environment to a production or test environment, it should always be exported as a managed solution.

An unmanaged solution is used in development and allows for direct editing of components.

A managed solution is used for deployment and production. It prevents direct editing of the components and allows for a clean upgrade path. This ensures that changes are only made in the development environment and then pushed to production in a controlled manner.

3. Remove the column after the deployment: Upgrade

When you need to remove a component, such as a column, from a managed solution that is already deployed, you cannot simply delete it. Deleting a component in a managed solution can cause issues. The correct method is to perform an Upgrade. During an upgrade, the solution package is replaced with a new version that does not include the column. The Upgrade process handles the safe removal of the component without affecting the integrity of the data. The Update option, on the other hand, is used for minor changes, not for removing components.

Question: 105 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment -
Get Energy Fit Program -
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment -
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair: oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.

Requirements -
Overview -
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements -
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application -
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII. oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters. oRecords the details of the home improvements installed for the customer. oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed. oSend an approval to a senior manager to review and approve in Microsoft Teams. oUpload the information to the API endpoint. oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team. oMust record the status on the funding application.
Suitability Assessment Tool -
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting -
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues -
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to resolve the funding application issue.
Which component should you use?

A.secure config

B.unsecure config

C.environment variable

D.settings

Answer: C

Explanation:

C. Environment variableEnvironment variables are the best practice for storing configurable values (like API endpoints, retry delays, flags) in Power Platform.

Question: 106 CertyIQ

HOTSPOT
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment
-
Get Energy Fit Program
-
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment
-
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair:
oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements
-
Overview
-

City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.

Business Requirements

-

•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.

Planning Hub Application

-

The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:

•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII.
oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters.
oRecords the details of the home improvements installed for the customer.
oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed.
oSend an approval to a senior manager to review and approve in Microsoft Teams.
oUpload the information to the API endpoint.
oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team.
oMust record the status on the funding application.

Suitability Assessment Tool

-

The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:

•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.

Reporting

-

The company has the following requirements for a reporting solution:

•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.

Issues

-

•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.

You need to resolve the issues with the appointment data.

What should you change on the view? To answer, select the appropriate interface components in the answer area.

NOTE: Each correct selection is worth one point.

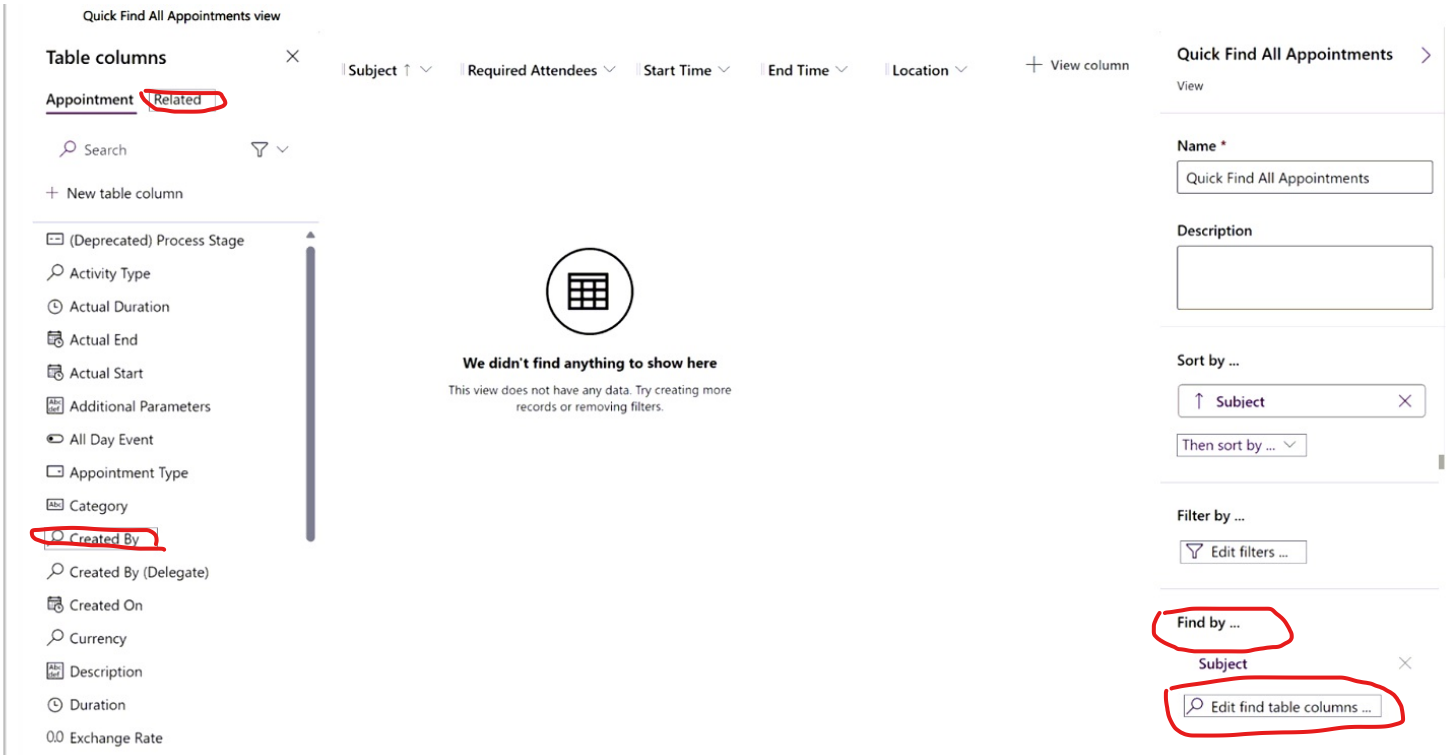

Answer:

Explanation:

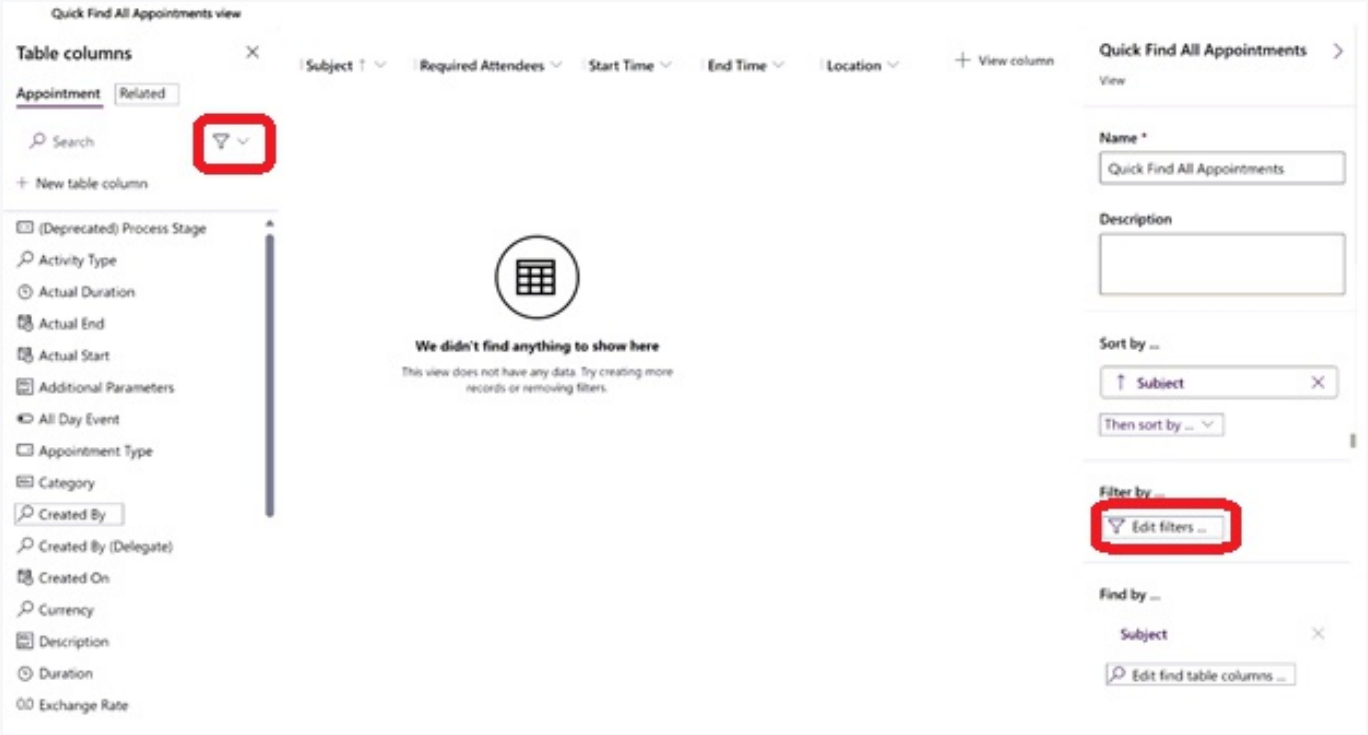

Top Left Highlight (Filter icon next to column search): This dropdown toggles column-level filtering states directly within the design canvas to preview layout changes.
Bottom Right Highlight (Edit filters... button): Clicking this button opens the conditional expression builder panel. Here, you define the core FetchXML filter criteria — such as Status Equals Active — ensuring that only records matching this baseline rule are queried and displayed when an end user executes a search.

Question: 107 CertyIQ

You create a custom page that is used as a contextual dialog in a model-driven app.
The app must be able to receive two contextual parameters by passing a concatenated string. The string must use the pipe (|) symbol with the recordId parameter.
You need to compose the formulas to extract parameter information.
Which two formulas should you compose? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A.Left(Param("recordId"), Find("|", Param("recordId")) - 1)
B.Left(Param("recordId"), Len(Param("recordId")) - Find("|", Param("recordId")))
C.Right(Param("recordId"), Len(Param("recordId")) - Find("|", Param("recordId")))
D.Right(Param("recordId"), Find("|", Param("recordId")) - 1)

Answer: AC

Explanation:

A.Left(Param("recordId"), Find("|", Param("recordId")) - 1)

C.Right(Param("recordId"), Len(Param("recordId")) - Find("|", Param("recordId")))

Question: 108 CertyIQ

DRAG DROP
-
You are designing an implementation that has complex data requirements.
The data storage requirements are as follows:
•Query large amounts of unstructured data in Dataverse.
•Read and update structured data stored outside of Dataverse.
You need to implement data storage to meet the requirements.
Which table types should you use? To answer, move the appropriate table types to the correct data storage requirements. You may use each table type once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

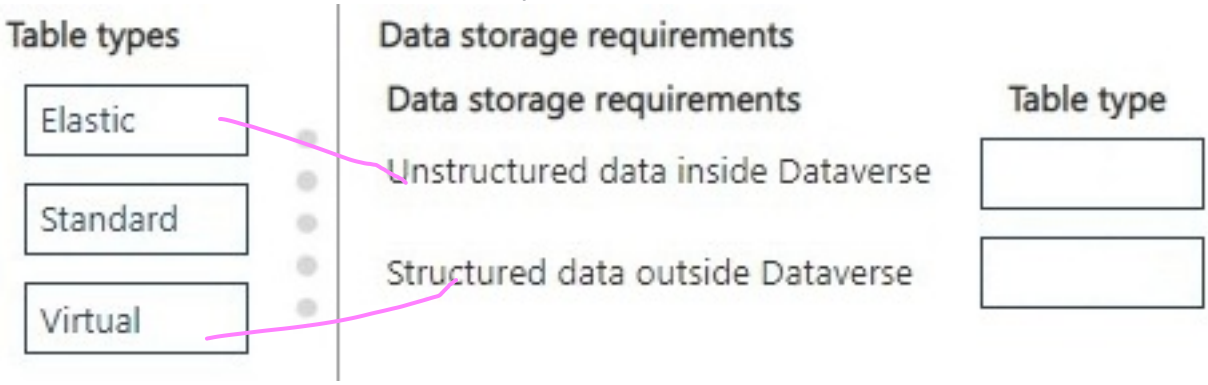

Answer:

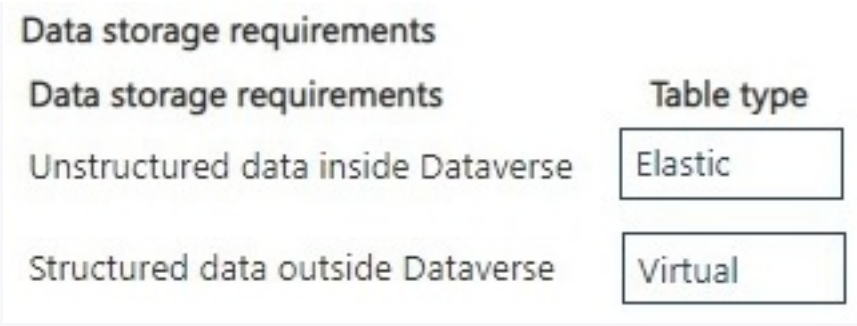

Question: 109 CertyIQ

A company deploys managed customizations by using two solutions, SolutionA and SolutionB. The solutions share components with one another.
A developer for SolutionA requires a new development environment. Customizations made in SolutionA must not interfere with customizations made in SolutionB.
You need to import solutions to prepare the environment.
What should you do?

A.Import SolutionA as managed and SolutionB as unmanaged.
B.Import SolutionA and SolutionB as unmanaged.
C.Import SolutionA as unmanaged and SolutionB as managed.
D.Import SolutionA and SolutionB as managed.

Answer: B

Explanation:

B. Import SolutionA and SolutionB as unmanaged.

When working in a development environment, importing solutions as unmanaged allows developers to make changes and customizations freely. This ensures that the customizations made in SolutionA do not interfere with those in SolutionB, as unmanaged solutions are editable and can be modified independently.

Question: 110 CertyIQ

DRAG DROP
-
You work for a consulting company that implements Microsoft Power Platform solutions.
The company develops the following reusable components:
•A control that customers can install themselves from Microsoft AppSource.
•A JavaScript web resource that contains common functions developers will add to in the development environments of new projects.
You need to package the components in separate solutions.
Which solution type should you use? To answer, move the appropriate solution types to the correct components. You may use each solution type once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

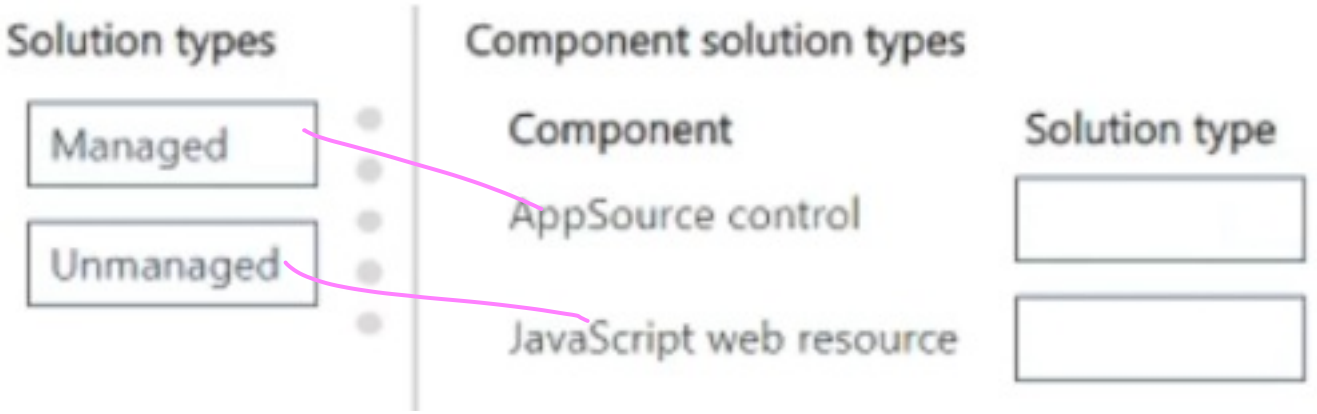

Answer:

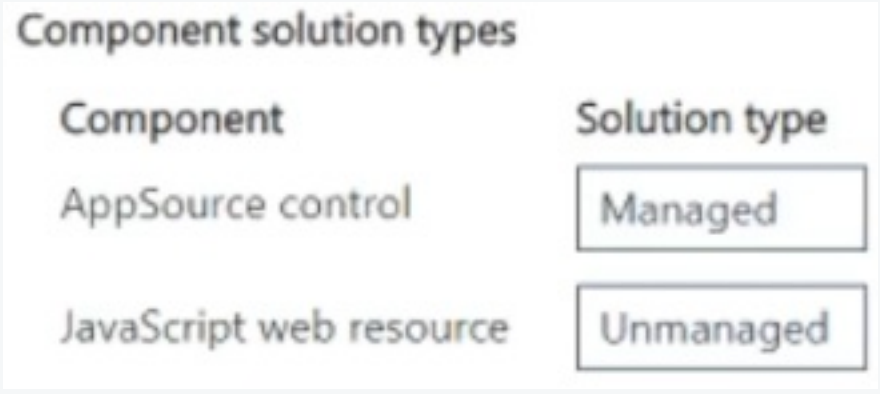

Explanation:

AppSource control : **Managed.**

AppSource control refers to solutions that are published and distributed via Microsoft AppSource.

Managed solutions are read-only, meaning they cannot be edited directly in the target environment.

These are typically used in production environments to maintain integrity and avoid unintended modifications.

JavaScript web resource : **Unmanaged.**

JavaScript web resources are custom scripts used in model-driven apps or Power Apps to enhance UI functionality.

Unmanaged solutions allow developers to edit and customize components freely.

These are used in development environments for testing and iteration before exporting as a managed solution.

Question: 111 CertyIQ

DRAG DROP
-
You are creating an input control to format telephone numbers for a canvas app.
The control must be reusable in other canvas apps inside your company. Any updates must be able to be applied without editing the control in each canvas app.
You need to create the control.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

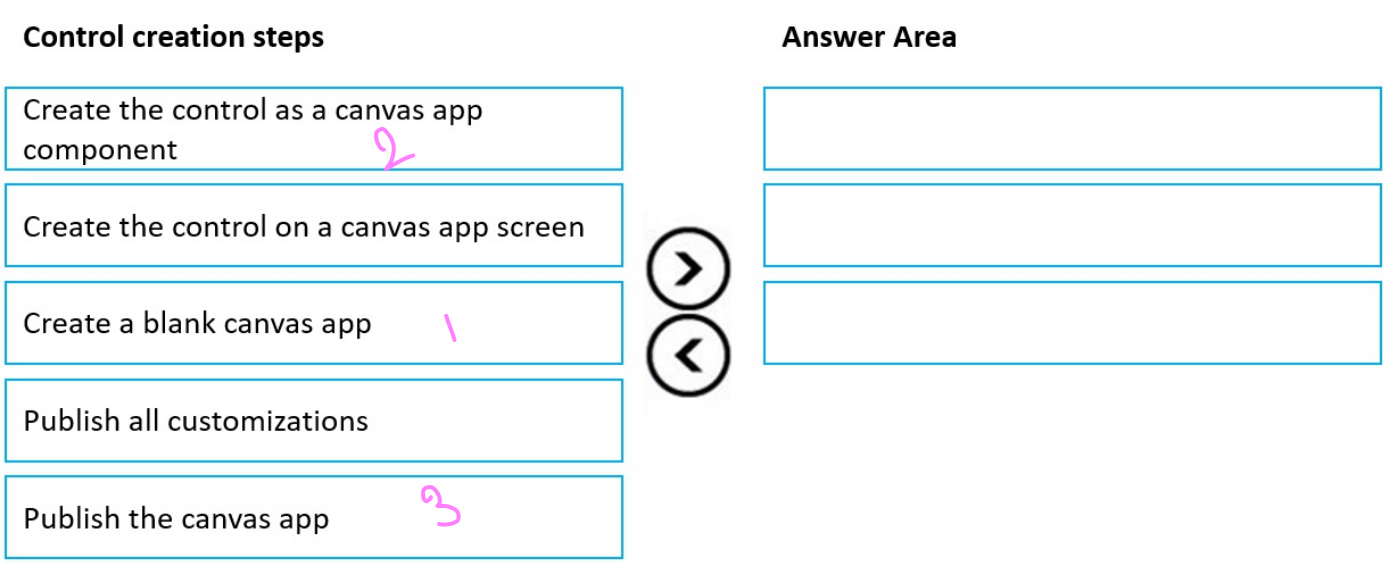

Answer:

Explanation:

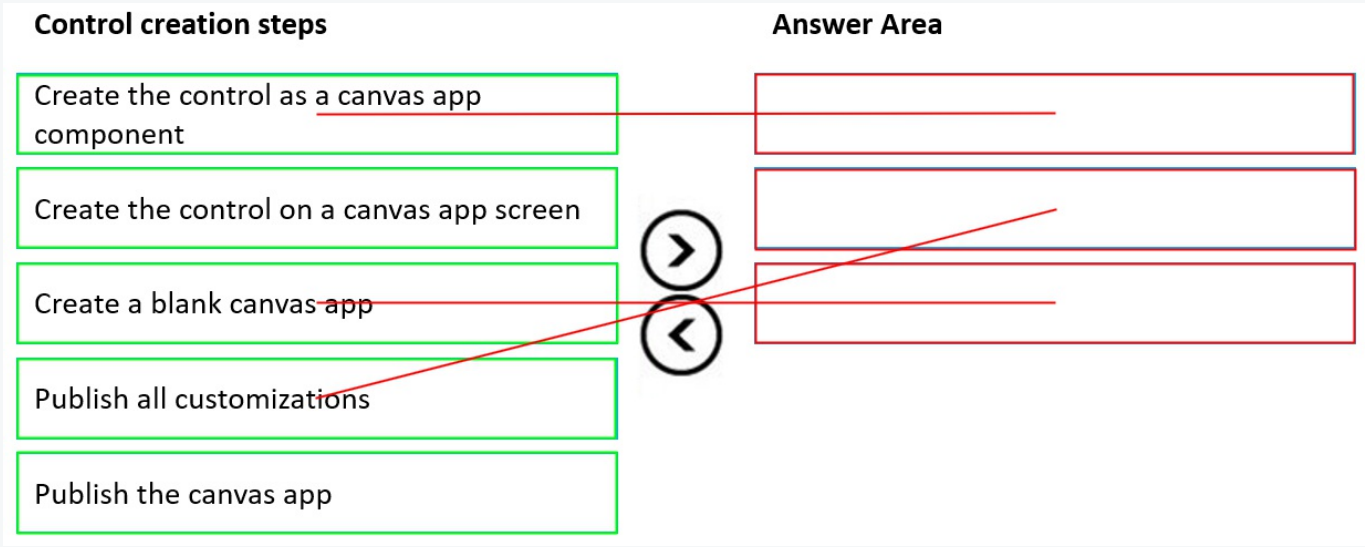

Create the control as a canvas app component

(This builds out the actual custom UI control layout, custom properties, and internal canvas formula logic).

Publish the canvas app

(This finalizes the compilation, publishing the library container so that other distinct canvas apps can successfully reference, ingest, and consume updates from the control).

Create a blank canvas app

(This initializes the base wrapper that functions as the component library repository container).

Question: 112 CertyIQ

A company employs four Microsoft Power Platform developers. Each developer has an individual development environment. Each development environment is refreshed regularly from source control as a managed layer. The developers must implement their changes in isolation within these environments. Development work must be merged into a base solution within a shared sandbox environment.

You need to ensure work carried out by each developer is deployed into the main solution in the sandbox environment.
What should you do?

A.Copy each development to the shared environment each day.

B.Perform all customizations in the shared environment.

C.Export each developer's solution as managed.

D.Export each developer's solution as unmanaged.

Answer: D

Explanation:

D. Export each developer's solution as unmanaged.

Unmanaged solutions are used in development environments because:

They allow customizations and changes.

Components can be modified, deleted, or extended.

They are ideal for merging work from multiple developers.

Question: 113 CertyIQ

DRAG DROP
-
You are creating a canvas app. The canvas app uses a data source in which the data structure consists of three columns named Id, Value1, and Value2. Id will always be unique, whereas
Value1 and Value2 may not be.
You must use Power Fx to perform the following operations:
•Modify Value2 of a single row, knowing the Id and Value1.
•Delete all rows with a specified Value1.
You need to create the Power Fx commands.
Which function should you use? To answer, move the appropriate functions to the correct operations. You may use each function once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

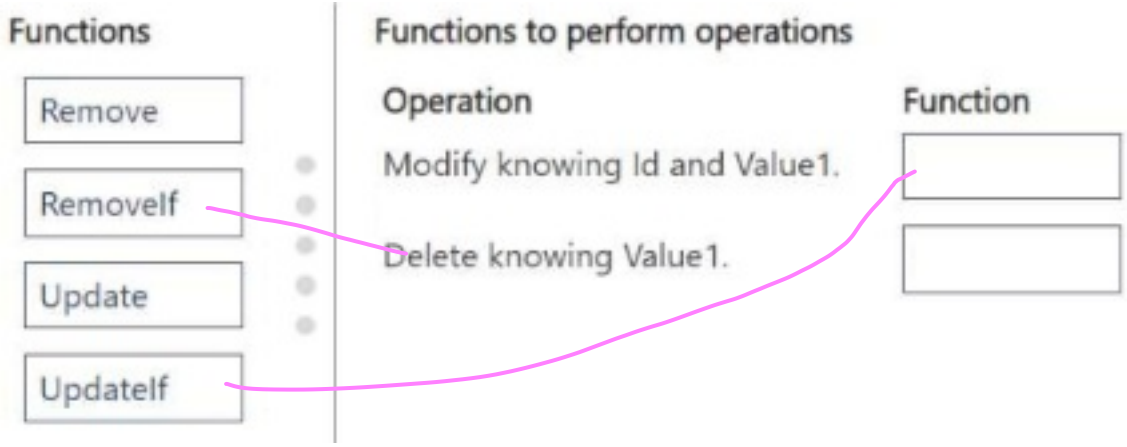

Answer:

Explanation:

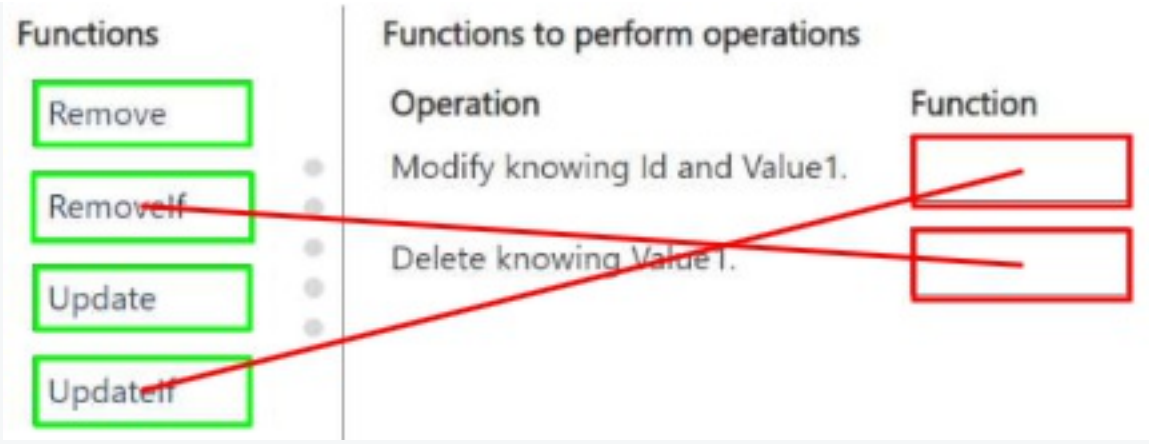

Modify knowing Id and Value1: Use UpdateIf

The UpdateIf function is used to modify records in a table that meet a specific condition. The prompt specifies that you "know Id and Value1", which implies you have a way to identify a specific record (or set of records) based on a condition (Id = some_id and Value1 = some_value). UpdateIf is the most appropriate function for this as it lets you specify a filter to find the correct record(s) and then apply the update.

Delete knowing Value1: Use RemoveIf

The RemoveIf function is used to delete records from a table that match a given condition. Similar to the UpdateIf scenario, the prompt states you "know Value1", which means you have a condition to select which records to delete. RemoveIf is the correct function to use because it lets you specify a filter (Value1 = some_value) to remove one or more records that satisfy the condition.

Question: 114 CertyIQ

DRAG DROP
-
You are making changes to a solution in a development environment. The solution is deployed as managed to the production environment.
You observe that changes were made directly in the production environment, which is not in line with the software development lifecycle.
You apply the changes made in the production environment to your development environment and delete a table column that is no longer required. You add several views to the model-driven app.
You need to apply all changes in production to mirror development without impacting users.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Answer Area

Actions	Apply all development changes in production
Export the solution from development as managed.	1.
Import the solution as an update.	2.
Export the solution from development as unmanaged.	3.
Import the solution as an upgrade.	
Delete the table column in production.	
Remove the unmanaged layer from the model-driven app in production.	
Publish all customizations in production.	

Answer:

Answer Area

Actions	Apply all development changes in production
Export the solution from development as managed.	1. Publish all customizations in production.
Import the solution as an update.	2. Export the solution from development as managed.
Export the solution from development as unmanaged.	3. Import the solution as an upgrade.
Import the solution as an upgrade.	
Delete the table column in production.	
Remove the unmanaged layer from the model-driven app in production.	
Publish all customizations in production.	

Explanation:

Publish all customizations in production.

Export the solution from development as managed.

In standard Power Platform enterprise architectures, all packages targeting downstream test, QA, or production systems must be distributed as **Managed Solutions** to enforce strict source-of-truth ownership from development.

Import the solution as an upgrade.

The scenario notes that a table column was removed during development cleanup. Importing a managed package as an **Upgrade** triggers a solution holding-phase deletion mechanism that automatically removes any historical database components in the target environment that are no longer present in the updated version.

Question: 115

CertyIQ

HOTSPOT
-
You are configuring Microsoft Power Platform Managed Environments.
You must enable the following behaviors:
•Users must be directed to their own personal development environment when they visit make.powerapps.com.
•Users must be able to view output from plug-ins that write to the tracing service.
You need to configure the system to enable the behaviors.
Which configuration changes should you make? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Behavior configurations

Behavior	Configuration
Direct users to personal developer environments.	Enable environment routing. Enable customer lockbox. Set developer environment assignments.
View tracing service output.	Enable logging to the place-in trace log. Enable auditing and a set retention policy. Remove any data loss prevention policies affecting the environment.

Answer:

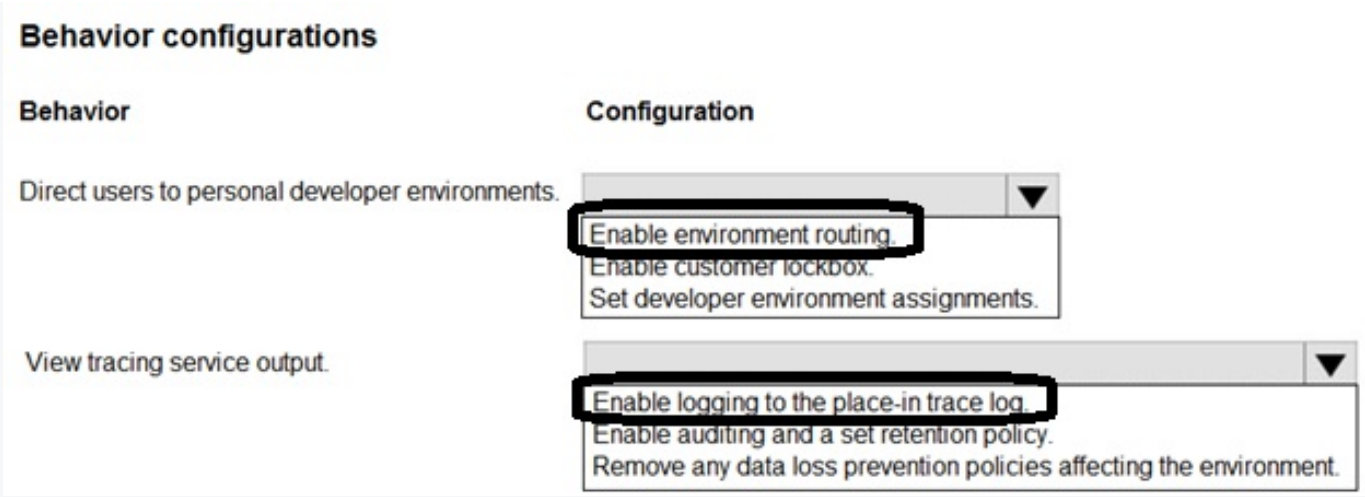

Explanation:

1. Direct users to personal developer environments: Enable environment routing

Why it is correct: Environment routing is an administrative feature in the Power Platform Admin Center. When enabled, it automatically intercepts makers when they navigate to ://powerapps.com for the first time and transparently routes them into their own isolated, personal **Developer Environment** instead of letting them build apps in the default tenant workspace.

2. View tracing service output: Enable logging to the place-in trace log

Why it is correct: When writing and debugging custom C# plug-ins for Microsoft Dataverse, developers use the ITracingService interface to log operational diagnostics. To capture and view this text output within Dataverse, an administrator must navigate to System Settings and set the **Plug-in trace log** setting to All or Exception.
Note: The text "place-in trace log" seen in the dropdown is a well-known typographical extraction error commonly found inside automated exam simulator software; it represents the native **Plug-in trace log** feature.

Question: 116 CertyIQ

A company uses Microsoft Power Platform for development.
Developers for the company spend many hours deploying customizations in a single solution to several downstream environments. Developers do not have access to any Microsoft or third-party integrated developer environments (IDEs).
You need to recommend a solution that automates deployment to the environment.
What should you recommend?

A. Use production environments.
B. Use Azure DevOps.
C. Use the maker portal.
D. Create a configuration migration package.

Answer: D

Explanation:

Justification

Correct option – D. Create a configuration migration package
A configuration migration package (CMP) captures all environment-specific settings, connections, and custom metadata that need to be moved between environments.
It can be generated from the maker portal and imported into downstream environments, enabling repeatable, automated deployments without manual recreation of each setting.
CMPs are designed for scenarios where developers lack direct IDE access; they provide a declarative, source-controlled way to propagate changes across environments, fitting the requirement for automation and minimal manual effort.
Why the other options are unsuitable
A. Use production environments – Deploying directly to production bypasses testing, violates change-control best practices, and offers no automation or versioning; it does not address the need for repeatable moves across multiple downstream environments.
B. Use Azure DevOps – While Azure DevOps can automate CI/CD pipelines, it requires developers to have access to an IDE or pipeline authoring tools, which contradicts the constraint that they "do not have access to any Microsoft or third-party integrated developer environments."
C. Use the maker portal – The maker portal is primarily for building and testing within a single environment; it does not provide a built-in mechanism for exporting and importing configuration changes across multiple downstream environments in an automated fashion.

Conclusion – Creating a configuration migration package is the only option that meets the automation, repeatability, and IDE-access constraints while leveraging native Power Platform capabilities for moving customizations across environments.

Question: 117 CertyIQ

A global company based in North America maintains several Dataverse instances, including instances based in Europe. A single Microsoft Entra ID tenant is used by the organization, with the default location of North America.
Compliance rules dictate that data must remain within the European Union data boundary.
You develop a plugin for the company.
Users encounter an issue with the plug-in within an environment located in Germany. You are unable to replicate the issue in any other environment.
You need to debug the issue in a separate environment in the default region of the company and adhere to all necessary compliance rules.
What should you do?

A. Copy the environment.
B. Create a new developer environment. Register the plug-in.
C. Back up and restore the environment.
D. Create a new sandbox environment Register the plug-in.

Answer: D

Explanation:

Why optionD is the correct choice

A sandbox environment is an isolated, fully-managed PowerApps/Dataverse instance that can be provisioned in any supported region.
By creating a sandbox in the **European Union** region you keep all data inside the required data-boundary,

satisfying the EU-compliance rule.
Sandboxes are designed for development and debugging; you can register, test, and troubleshoot plug-ins without impacting production or other environments.
The sandbox can be linked to the same Microsoft Entra ID tenant, so security and identity settings remain consistent with the rest of the organization.
Because it is a separate, throw-away environment, you can delete or reset it after debugging, avoiding any long-term compliance exposure.

Why the other options are unsuitable

Copy the environment – duplicating a production-like environment would copy all data, potentially moving it outside the EU boundary and violating compliance; also it creates a permanent copy that must be managed.
Create a new developer environment – a developer environment is typically tied to the default (North-America) region and does not guarantee that the data residency requirement is met; it also lacks the explicit isolation and region-selection controls that a sandbox provides.
Back up and restore the environment – restoring a backup into another region would again place EU-resident data into a non-EU location, breaching the data-boundary rule, and the restored copy would still be a production-grade environment, not a safe debugging sandbox.

Bottom line: The only option that simultaneously provides a compliant, isolated, and easily disposable debugging target is to **create a new sandbox environment and register the plug-in there** (optionD). This aligns with Microsoft's recommended practices for plugin debugging while honoring data-residency constraints.

Question: 118 CertyIQ

You are building an integration by using Dataverse.
As part of a single request, the integration must create a new row if it does not already exist or update the existing row by using supported mechanisms.
You need to validate which Dataverse features can implement the requirement.
Which three Dataverse features can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Client-side script
B. Cloud flow
C. Business rule
D. Plug-in
E. PCF control

Answer: ABD

Explanation:

WhyABD are the correct choices

Business rule (B) – Executes on the server when a record is **created** or **updated**. It can contain a Create or Update action, allowing the same rule to either insert a new row or modify an existing one in a single transaction. Business rules are the native, supported server-side mechanism for this "create-or-update" pattern.
Cloud flow (A) – A Power Automate flow can be triggered (e.g., by a button, HTTP request, or on-create event) and can use **Get a row** to test for existence. If the row is found, the flow performs an **Update**; otherwise it performs a **Create**. Because the flow runs on the Dataverse server, the whole logic completes in one logical

request from the client's perspective.
Plug-in (D) – Custom server-side code that can be registered on the **Create** and **Update** messages. The plug-in can query for an existing record; if it exists, it updates the record, otherwise it creates a new one. This gives the same single-request behavior as a business rule but with full programmatic control.

Why the other options are not suitable

Client-side script (C) – Runs in the browser and can only call the Web API. It would need to perform separate retrieve and create/update calls, which violates the "single request" requirement and is not a supported server-side implementation.
PCF control (E) – A Power Apps component framework control is a client-side UI element. Like client scripts, it cannot enforce server-side create-or-update logic in a single transaction and is intended for UI enhancement, not for business rule enforcement.

Thus, the only server-side, single-request mechanisms that satisfy the requirement are **Business rule, Cloud flow, and Plug-in** – options **A, B, and D**.

Question: 119 CertyIQ

DRAG DROP
-
You have two custom tables that have a parent-child relationship.
The parent table value is formed by the fixed prefix ABC followed by a six-digit, auto-incrementing number.
Each child table value appends a three-digit sequence starting at 001 to its associated parent table value, incrementing with each new child record. Child records are always linked to a parent.
Each table requires a column that has a unique value, Low-code functionality must be used when possible.
You need to implement the method that will create each unique value.
Which method should you use? To answer, move the appropriate methods to the correct tables. You may use each method once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

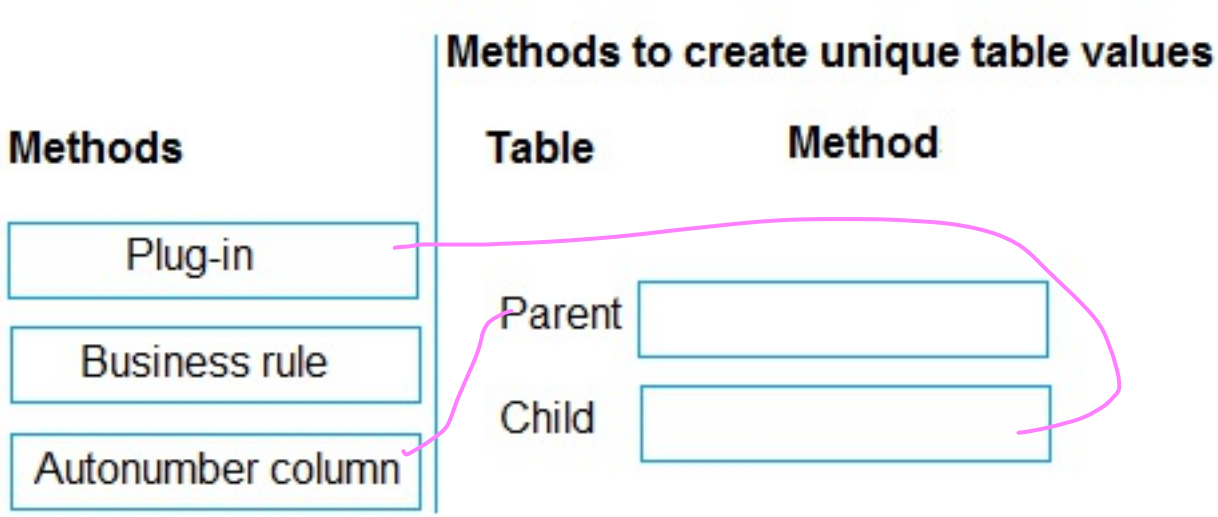

Answer:

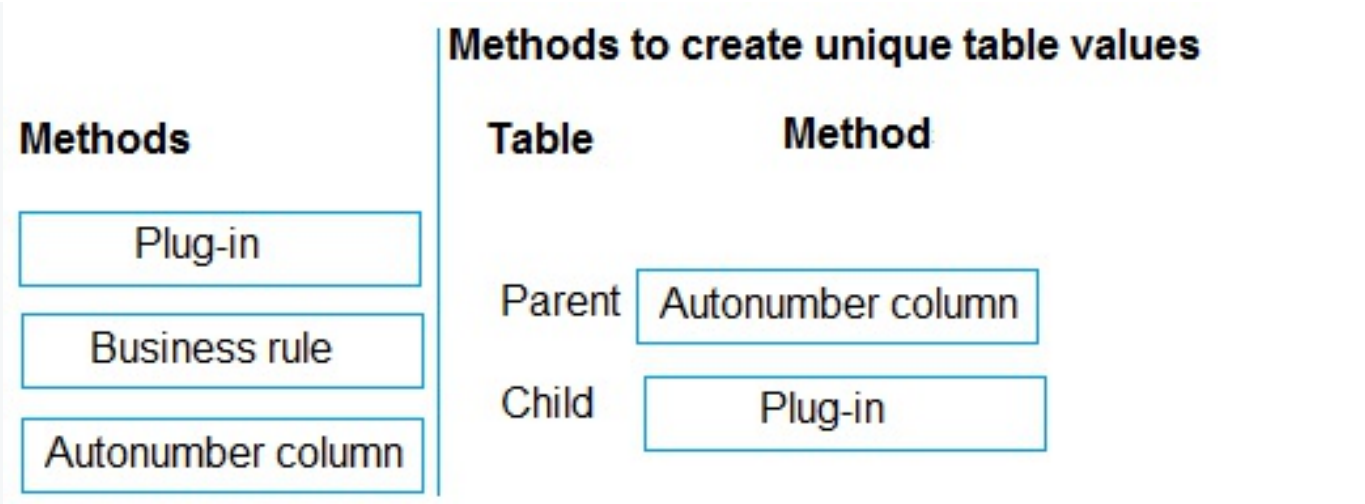

Explanation:

Parent Table Method: Autonumber column

Why it is correct: Microsoft Dataverse natively provides an Autonumber column type. It allows you to define a string prefix (ABC) and specify a formatted sequential token length (like 6 digits). It is a pure out-of-the-box configuration that requires zero code, perfectly satisfying the requirement to use low-code functionality whenever possible.

Child Table Method: Plug-in

Why it is correct: Because the child table's serial counter needs to dynamically evaluate how many other children are already attached to that specific parent record before assigning the next increment (001, 002), a low-code option cannot handle this atomic lookup and increment logic. A server-side **C# Plug-in** registered on the Pre-Operation stage of the Create message is required to safely query the existing child count, handle transactional concurrency lockouts, and concatenate the calculated suffix string.

Question: 120

CertyIQ

A company is testing a solution that you built by using access team templates.
Users report that they are unable to access rows.
You need to ensure that the solution works as expected.
What should you do?

A. Assign the rows to the team.
B. Add the users to the Access Team Members subgrid.
C. Share the affected rows.
D. Assign a security role to the users.

Answer: D

Explanation:

Technical justification

The issue involves users being unable to view rows that are governed by **team-based security** (access-team templates). In Dynamics 365, row-level security is enforced through **security roles** that grant access to entities. Even if a user is a member of an access team, the effective permissions are only applied when the user's **security role** includes the appropriate privileges (Read, Read/Write, etc.) for that entity.
Option **D – Assign a security role to the users** directly addresses the root cause: the users lack the necessary role-based permissions, so they cannot see the rows regardless of team membership. Adding a role ensures the platform evaluates the user's access rights at runtime and surfaces the rows they are allowed to view.
Option A – Assign the rows to the team is ineffective because rows cannot be "assigned" manually; they are controlled by the team's security settings, which are driven by the underlying role. Simply assigning rows does not modify the security role that governs access.
Option B – Add the users to the Access Team Members subgrid only adds them to the team record; without the proper role, the system still denies access. The subgrid is merely a UI for managing team membership, not a security control.
Option C – Share the affected rows is not a supported mechanism in the out-of-the-box security model. Sharing is typically used for one-off record sharing, but it bypasses the structured role-based security model and does not scale or align with the design of access-team templates.

Conclusion – The only actionable, supported solution is to **assign an appropriate security role** that includes the required privileges for the entity, ensuring that the access-team security model functions as intended.

References

Security Roles Overview: https://learn.microsoft.com/en-us/power-apps/maker/security/security-roles
Access Teams and Row-Level Security: https://learn.microsoft.com/en-us/power-apps/maker/security/access-teams#row-level-security

Question: 121 CertyIQ

You create a custom API as part of a solution that will be made available on Microsoft AppSource.
You need to prevent others from using Dataverse code generation tools that create classes and use the messages for your custom API.
What should you do?

A. Set Is Private to Yes.
B. Set Is Function to Yes.
C. Set Allowed Custom Processing Step Type to None.
D. Set Allow Customizations to No.

Answer: A

Explanation:

Technical Justification

Option A – Set Is Private to Yes

When a custom API is marked **private**, the generated proxy code and message contracts are hidden from the public SDK. This prevents the Power Platform code-generation tools from exposing the API's message definitions, thereby stopping other developers from automatically generating classes that consume those messages.
Private APIs are intended for internal use only; they are not discoverable through the standard public API

catalog, which directly satisfies the requirement to block external code generation.

Option B – Set Is Function to Yes

"Is Function" applies only to custom **functions** (e.g., Power Automate custom connectors that expose a function), not to APIs. Selecting this does not affect code-generation behavior for API messages and therefore does not address the problem.

Option C – Set Allowed Custom Processing Step Type to None

This setting controls which types of custom processing steps (e.g., plug-ins, workflow activities) can be attached to a solution. It does not influence the visibility of API messages or the generation of proxy classes, so it cannot prevent external developers from using code-generation tools.

Option D – Set Allow Customizations to No

Disallowing customizations blocks modifications to the solution after publishing, but it does not hide the API definition or its message schema. External developers can still retrieve the API metadata and generate code, so this option does not meet the requirement.

Conclusion
Marking the custom API as **private** (OptionA) is the only setting that directly restricts the exposure of its message contracts, thereby preventing other developers from using Dataverse code-generation tools to create classes that consume those messages.

References

Create a private API in Power Apps
Control API visibility and code generation

Question: 122 CertyIQ

A create a model-driven app. You run Solution checker. The tool displays the following error:
Solution checker fails to export solutions with model-driven app components.
You need to resolve the issue.
What should you do?

A. Manually export the solution before running Solution checker
B. Assign the Environment Maker security role to the Power Apps Checker application user
C. Assign the System Administrator security role to your user ID
D. Disable the Power Apps Checker application user
E. Assign the Environment Maker security role to your user ID

Answer: B

Explanation:

The error message "Solution checker fails to export solutions with model-driven app components" indicates that the Power Apps Checker (which runs Solution Checker) lacks sufficient permissions to access and analyze the components of the model-driven app during the solution export process. Solution Checker is an automated tool designed to analyze Power Platform solutions and identify potential issues related to performance, reliability, and best practices. It functions by exporting a solution package, unpacking it, and running a series of checks on the solution's components.

Specifically, the error message implies an authorization issue. The Power Apps Checker typically runs under a

system account. The underlying problem is that the system account which Power Apps Checker utilizes for its operations is not properly authorized to read the solution.

Assigning the Environment Maker security role to the Power Apps Checker application user grants the necessary privileges for the Checker to successfully export solutions, including those containing model-driven app components. Environment Maker rights allow solution exports which are a crucial pre-requisite for solution checking.

Option A, manually exporting the solution, does not address the underlying permissions issue, so Solution Checker would still fail. Option C, assigning the System Administrator role to your user ID, is an excessive privilege assignment and is not recommended. Solution Checker should execute without the need for elevated permissions to end user accounts. Option D, disabling the Power Apps Checker application user, would completely prevent Solution Checker from running. Option E, assigning the Environment Maker security role to your user ID, only addresses the user's privileges rather than the Power Apps Checker's authorization.

Therefore, assigning Environment Maker security role to the Power Apps Checker application user is the best resolution.

Relevant links for further research:

Use solution checker to validate your apps in Power Apps - Power Apps | Microsoft Learn
Security roles and privileges - Power Platform | Microsoft Learn

Question: 123 CertyIQ

HOTSPOT -
A company uses SharePoint for its intranet and other functions. The company has also implemented model-driven apps.
SharePoint users must be able to create contact records in Microsoft Dataverse without having to navigate to the model-driven apps.
You need to create a link in SharePoint to open the Dataverse contact form displaying data from SharePoint.
How should you complete the URL? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

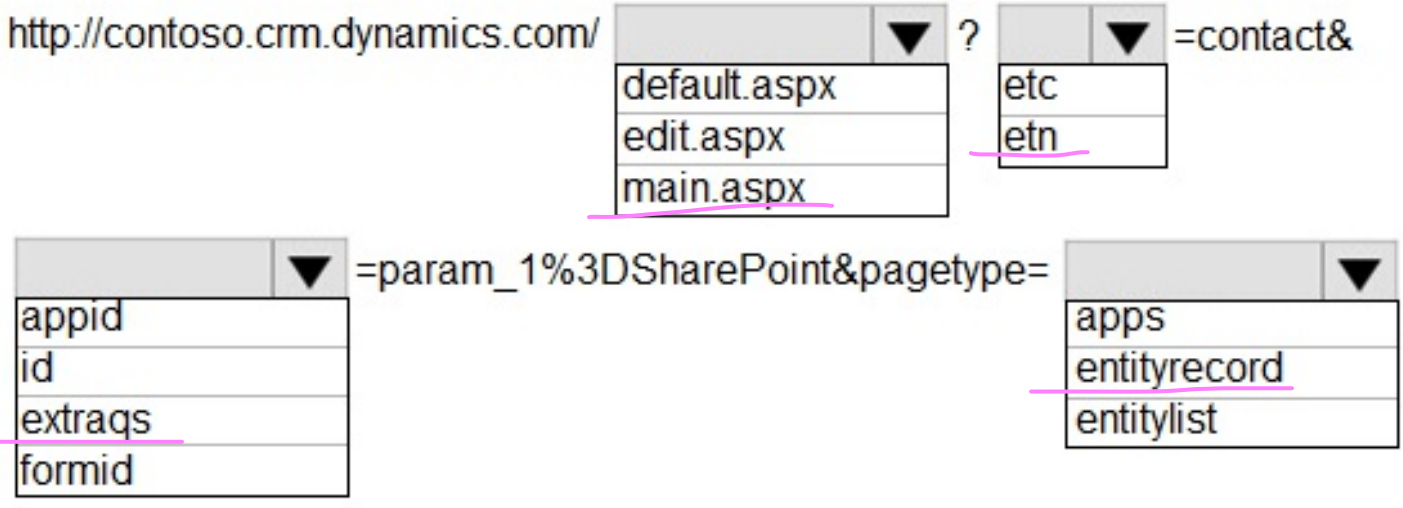

Answer:

Answer Area

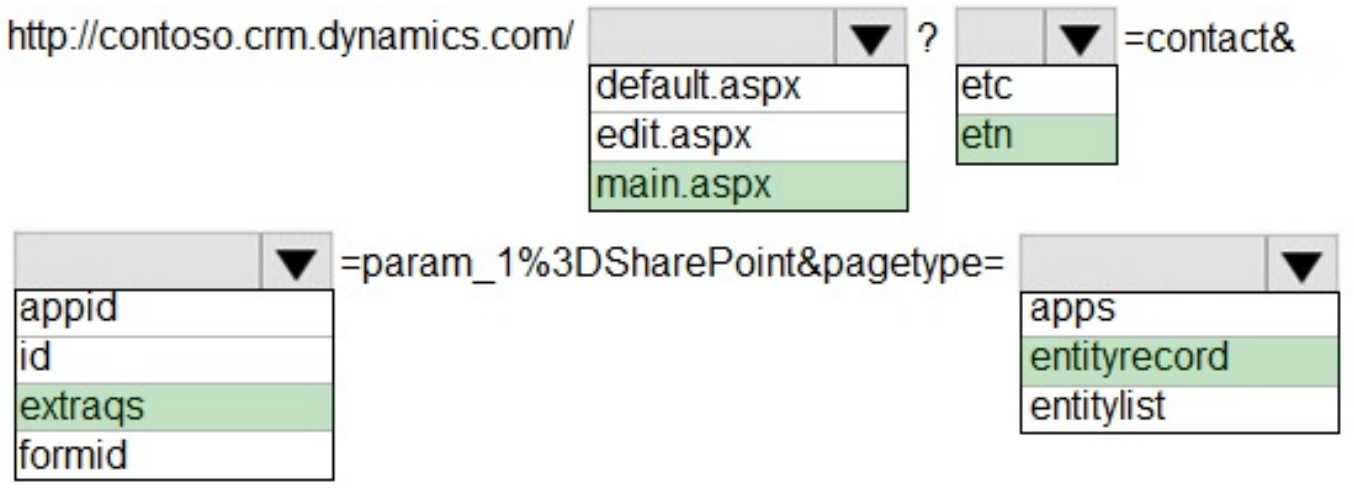

Explanation:
Box 1: main.aspx -
Example, to open the Active Contacts view.
https://myorg.crm.dynamics.com/main.aspx?etn=contact&pagetype=entitylist&viewid= 00000000-0000-0000-00AA-000010001004

Box 2: etn -
Etn: The logical name of the entity. Important: Do not use the etc (entity type code) parameter that contains an integer code for the entity. This integer code varies for custom entities in different organizations.

Box 3: Extraqs -
Extraqs: Optional for forms. This parameter contains encoded parameters within this parameter.
When you open a new form by using the URL address, you can include arguments in the extraqs parameter to set field values
Note: You must encode the parameters passed in the extraqs parameter. To encode the parameters, use encodeURIComponent. To use special characters like
"=" or "&" in the parameter values, you must double encode (e.g. to set name to A=B&C, it would be extraqs=name%3DA%253DB%2526C).

Box 4: entityrecord -
Example: Set the value for choice columns
To set the value for a Choice column, set the integer value for the option. The following sample sets the Role column value to Decision Maker in a new contact record.
The unencoded value for the extraqs parameter is accountrolecode=1.
/main.aspx?etn=contact&extraqs=accountrolecode%3D1&pagetype=entityrecord
Note: Pagetype: The type of page. There are two possible values:
- entityrecord
Displays an entity record form.
- entitylist
Displays an entity view.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/open-forms-views-dialogs-reports-url https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/set-field-values-using-parameters-passed-form

Question: 124 CertyIQ

A company uses a model-driven app to record details of laboratory test.
You are asked to create a custom component that makes it easier to capture multiple values from lab test results on mobile devices.
You need to create the interface for the dataset in case the mobile devices lose connection to the network.
Which method should you use?

A. SaveData
B. updateView
C. init
D. getClient

Answer:

A

Explanation:

Use LoadData and SaveData for basic data storage while offline.

Note:

When building mobile apps, one of the most common scenarios app makers face is how to enable their users be productive in situations where there is limited or no connectivity at all. This has been one of the most requested features for PowerApps to allow running apps while being disconnected and to provide some support for offline data caching. In this release of PowerApps, we are delivering the first set of improvements for app makers to achieve that by enabling:

1. Launching the PowerApps mobile player app offline

2. Running apps while being offline

3. Determine when your app is online or offline or in a metered connection by using the Connection signal object.

4. Leverage existing formulas such as LoadData and SaveData for basic data storage while offline.

Reference:

https://powerapps.microsoft.com/sv-se/blog/build-offline-apps-with-new-powerapps-capabilities/

Question: 125 CertyIQ

DRAG DROP -
Technicians for a company use a model-driven app on their phones to record information about service visits. Users do not have permissions to the Power Apps maker portal to create or update apps.
Technicians report issues with the model-driven app. You are unable to reproduce the issues in a development environment.
You need to provide instructions to the technicians to gather more details about the errors.
Which four actions should you recommend be performed in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

Actions	Answer area
Perform the steps to generate the errors and download the results from Monitor.	
Open the app in a browser on the phone.	
Open the application in a browser on a laptop computer when they return to the office.	
Perform the steps to generate the errors while you monitor the technician's monitor debug session.	
Add the following text to the end of the URL for the app: "&monitor=true"	
Open the app on a phone by using Power Apps mobile.	

Answer:

Actions	Answer area
	Open the app in a browser on the phone.
	Add the following text to the end of the URL for the app: "&monitor=true"
	Perform the steps to generate the errors and download the results from Monitor.
Perform the steps to generate the errors while you monitor the technician's monitor debug session.	Open the application in a browser on a laptop computer when they return to the office.
Open the app on a phone by using Power Apps mobile.	

Explanation:

Step 1: Open the app in a browser on the phone.

Step 2: Add the following text to end of the URL for the app: "&monitor=true"

You can start a Monitor session from a model-driven app. To do this, append &monitor=true to the end of the URL in the browser. This displays the Monitor command on the model-driven app global command bar. Select Monitor to open a monitoring session in a new tab.

Step 3: Perform the steps to generate the errors and download the results from Monitor.

Step 4: Open the application in a browser on a laptop computer when they return to the office

Reference:

https://powerapps.microsoft.com/en-us/blog/monitor-now-supports-model-driven-apps/

Question: 126 CertyIQ

You deploy a Power Platform plug-in to a production environment. The plug-in code contains detailed tracing

information. You are a member of the Environment Maker security role for the environment.
Users report unexpected results when they interact with confidential data by using the plug-in. You confirm that the plug-in works without errors in a development environment.
You need to investigate the root cause of the plug-in errors.
What should you do?

A. Send a PUT request to enable plug-in tracing for the production environment.
B. Send a GET request to retrieve the plugintracelogs records.
C. Install Plug-in profiler in the production environment by using the Plug-in Registration tool.
D. Reproduce and capture the errors, then debug from Visual Studio.

Answer:

C

Explanation:

Plug-in profiler is a solution that you can install on your environment that enables you to capture the execution context of a plug-in and then use that data to re- play the event within Visual Studio while debugging.

There are two tools available from which to run the Plug-in Profiler: the Plug-in Registration Tool and Power Platform Tools for Visual Studio.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/tutorial-debug-plug-in

Question: 127 CertyIQ

DRAG DROP -
You are creating a model-driven app.
Users need to see only the entities in the app navigation that are relevant to their role and their method of accessing the app.
You need to restrict entities on the sub-areas in the SiteMap.
Which properties should you use? To answer, drag the appropriate properties to the correct requirements. Each property may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

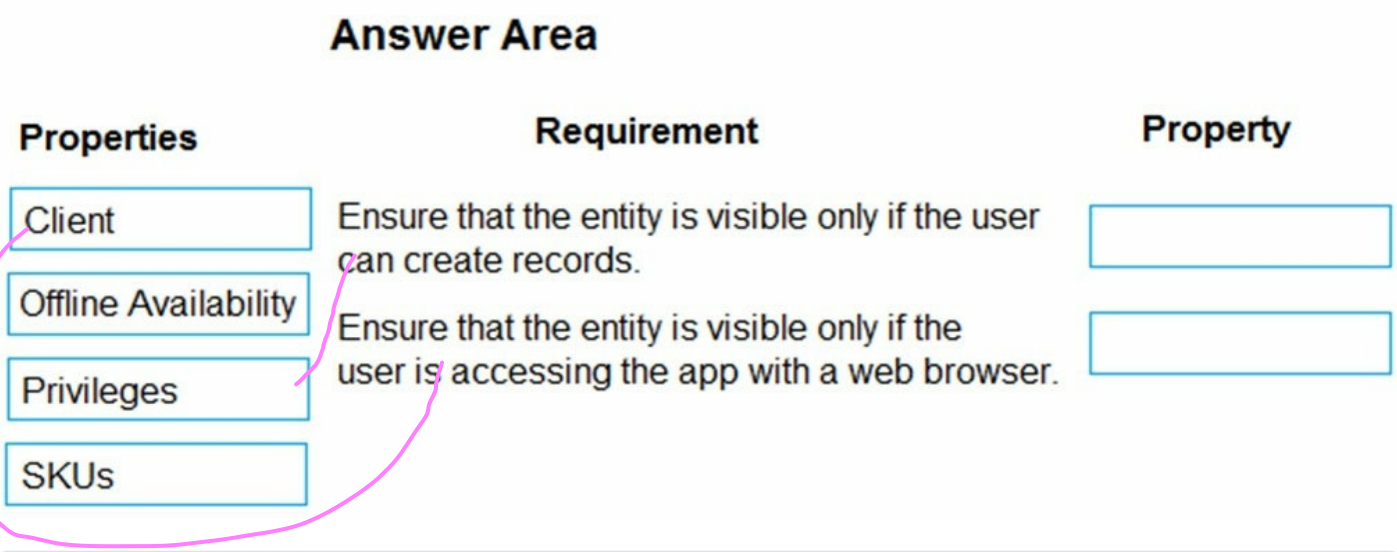

Answer:

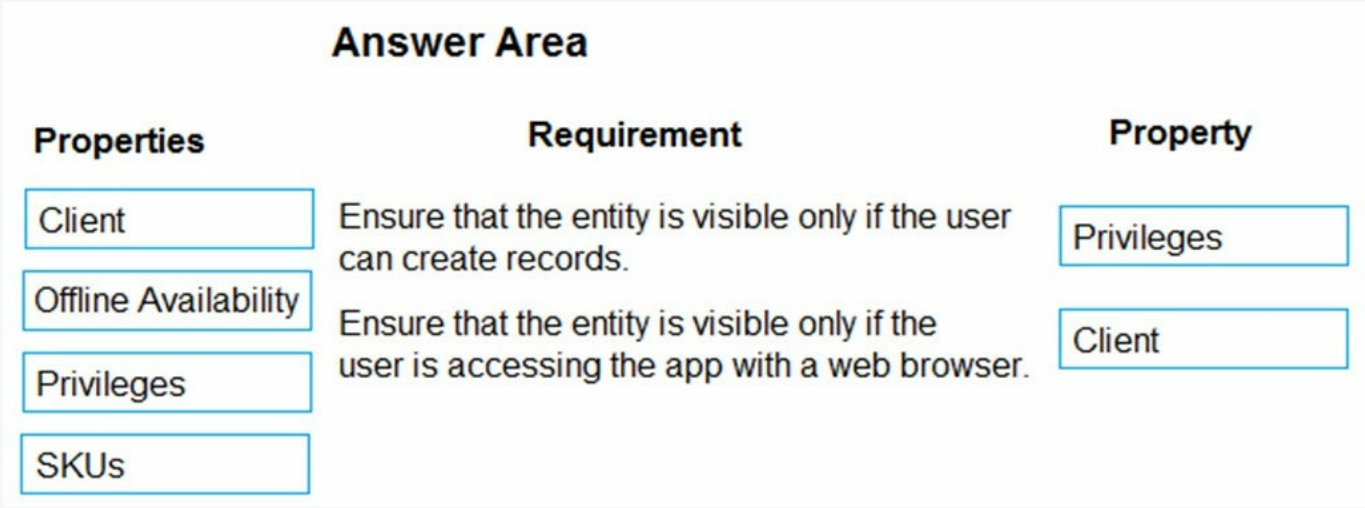

Explanation:

Box 1: Privileges -

Privileges: This defines whether a subarea is displayed based on privileges available in any security roles that are assigned to the user.

Box 2: Client -

Client: Select the type of client that displays this subarea.

Incorrect Answers:

Offline Availability: Select this check box to make this subarea available to users when they are offline in Dynamics 365 for Outlook.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/model-driven-apps/create-site-map-app

Question: 128 CertyIQ

You fix a bug in the code of your application, which is currently on version 10.0.2.1.
You need to publish an updated version of the solution.
Which version identifier should you use?

A. 10.0.3.1
B. 10.0.2.2
C. 10.1.0.2
D. 11.0.0

Answer:

B

Explanation:

The version number are <major>.<minor>.<build>.<revision>.

This is just a bug fix so we only update the revision number.

Note: When we create patches in Dynamics 365, the system will automatically increment the build version (you can overwrite the chosen number when you create the patch). For example, if our solution starts at 1.0.0.0, we export it to become 1.0.0.1. We then create a patch, and the version of the patch is 1.0.1.1. If we export it now, it might become 1.0.1.2. In all cases, the build or version number has been incremented. Patches require the build or version number to increment, but not the major or minor version.

Incorrect:

Not C: This is not a minor update.

Not D: This is not a major update.

Reference:

https://carldesouza.com/how-solution-version-numbers-work-in-the-microsoft-power-platform/
https://docs.microsoft.com/en-us/power-apps/maker/data-platform/update-solutions

Question: 129 CertyIQ

HOTSPOT -
Fabrikam, Inc, has two divisions as shown in the Business Unit exhibit. (Click the Business Unit tab.)

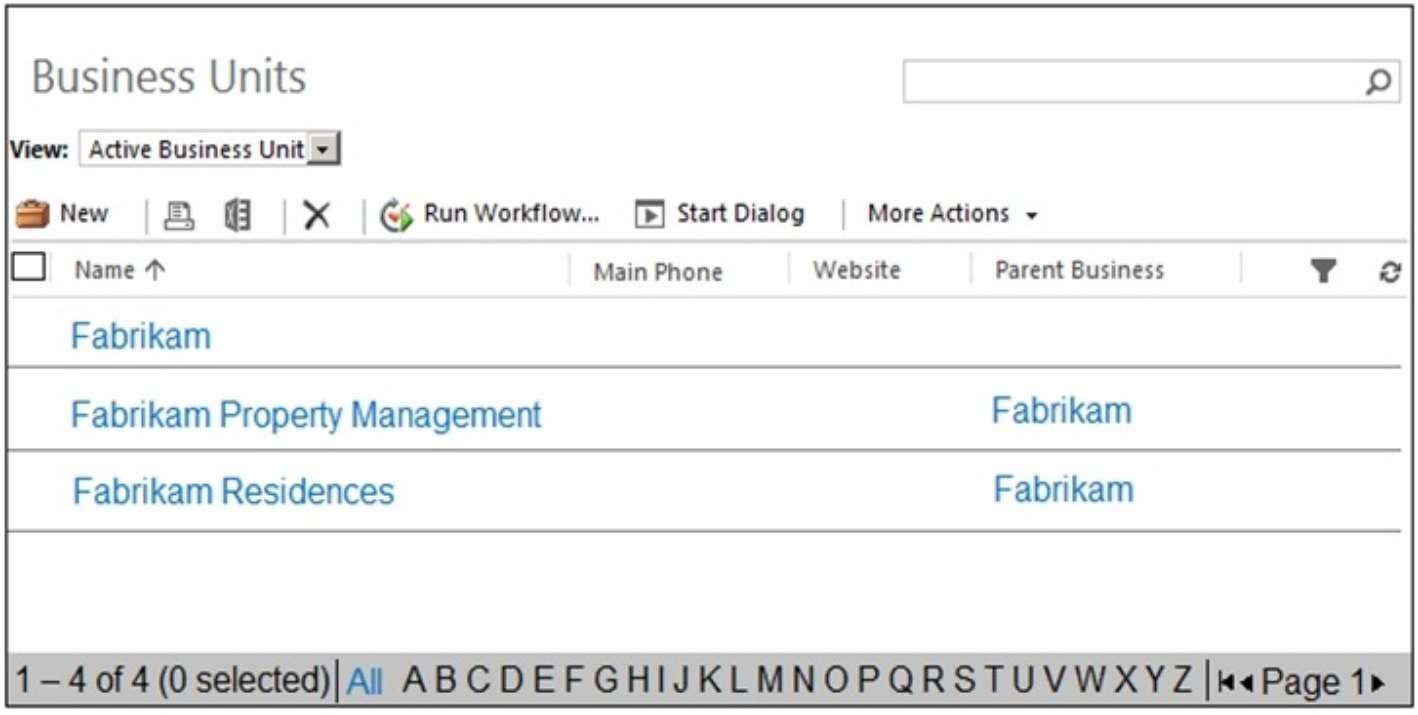

- Fabrikam Residences rents units short term to clients.
- Fabrikam Property Management deals with the maintenance of the units and manages the contractors who perform the maintenance.
- Clients and contractors are both stored in the Contact entity.

The manager of the Property Management business unit is a member of the Fabrikam Residences business unit, which has the root security role as shown in the
Security Role exhibit. (Click the Security Role tab.)

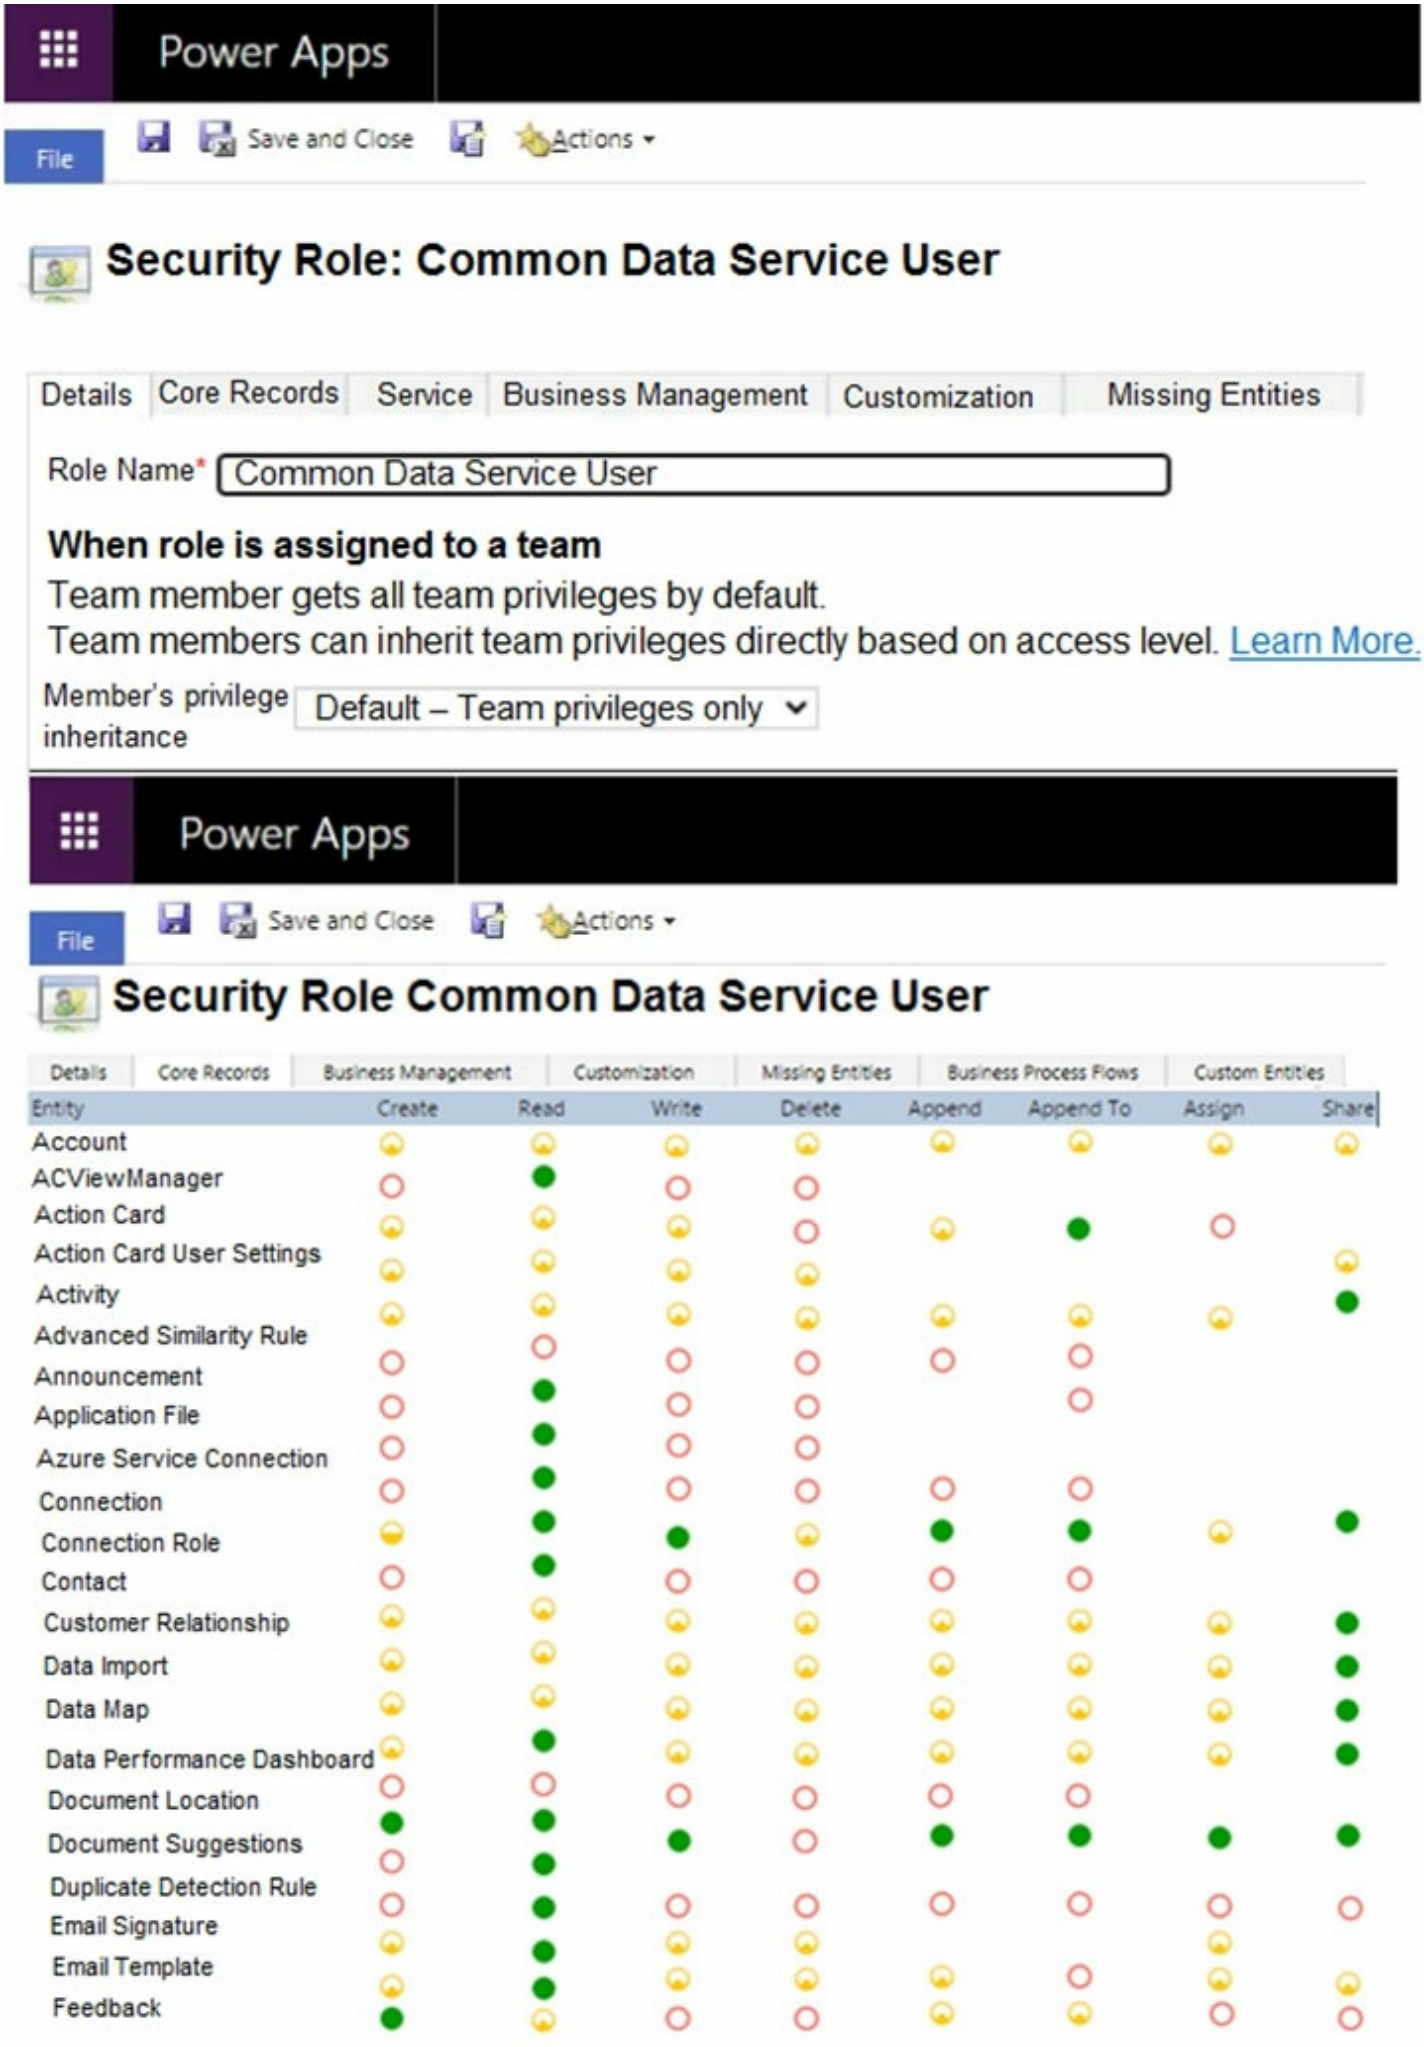

The manager cannot see the contact record shown in the Contact exhibit. (Click the Contact tab.)

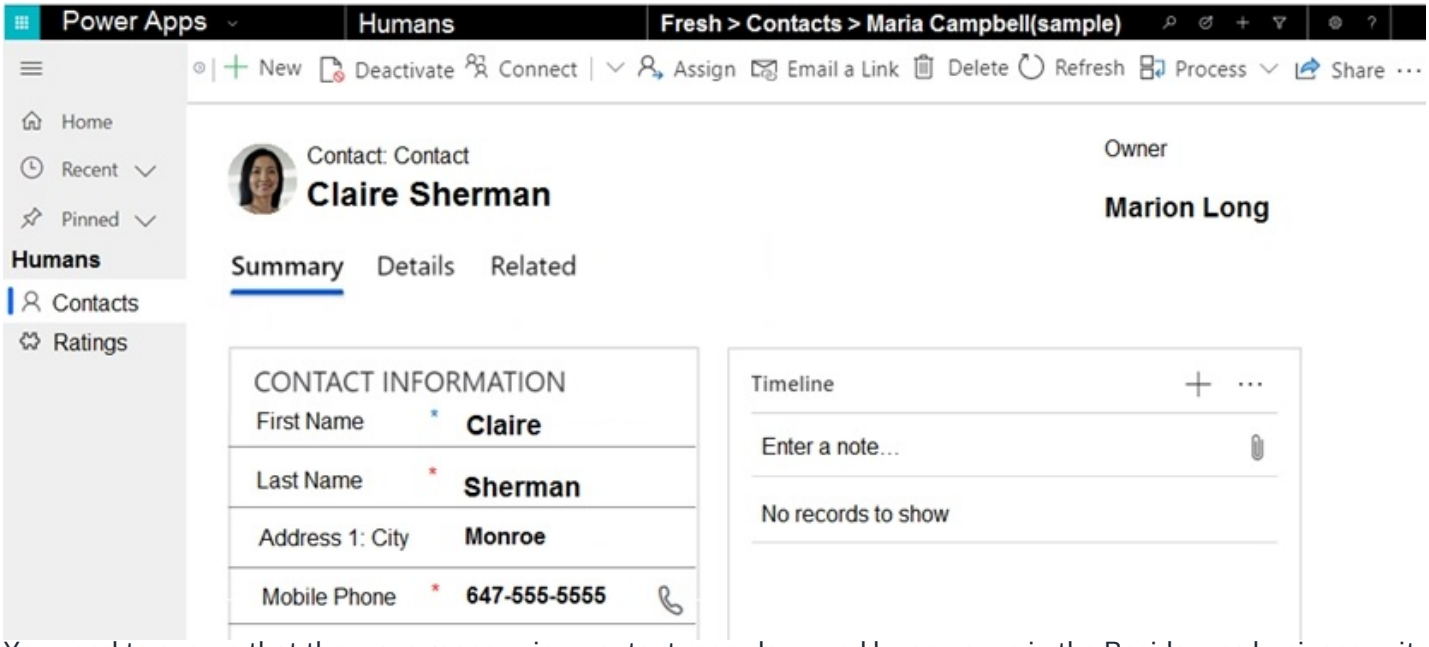

You need to ensure that the manager can view contact records owned by someone in the Residences business unit.
For each of the following statements, select Yes if the statement achieves the goal. Otherwise, select No.
Hot Area:

Answer Area

Statement	Yes	No
Modify the security inheritance.	○	○
Move the manager to the root Fabrikam business unit.	○	○
Expand the Read permission of the security role to be Business Unit level.	○	○

Answer:

Answer Area

Statement	Yes	No
Modify the security inheritance.	○	○
Move the manager to the root Fabrikam business unit.	○	○
Expand the Read permission of the security role to be Business Unit level.	○	○

Explanation:

Box 1: Yes -

Change it to Direct User/Basic access level and Team privileges. This creates a security role with team member's privilege inheritance.

Note: For roles assigned to teams with Basic-level access user privilege, the role's inheritance configuration

also comes into play. If the team has the Member's privilege inheritance set to Team privileges only, then the user will only be able make use of that privilege for records owned by the team.

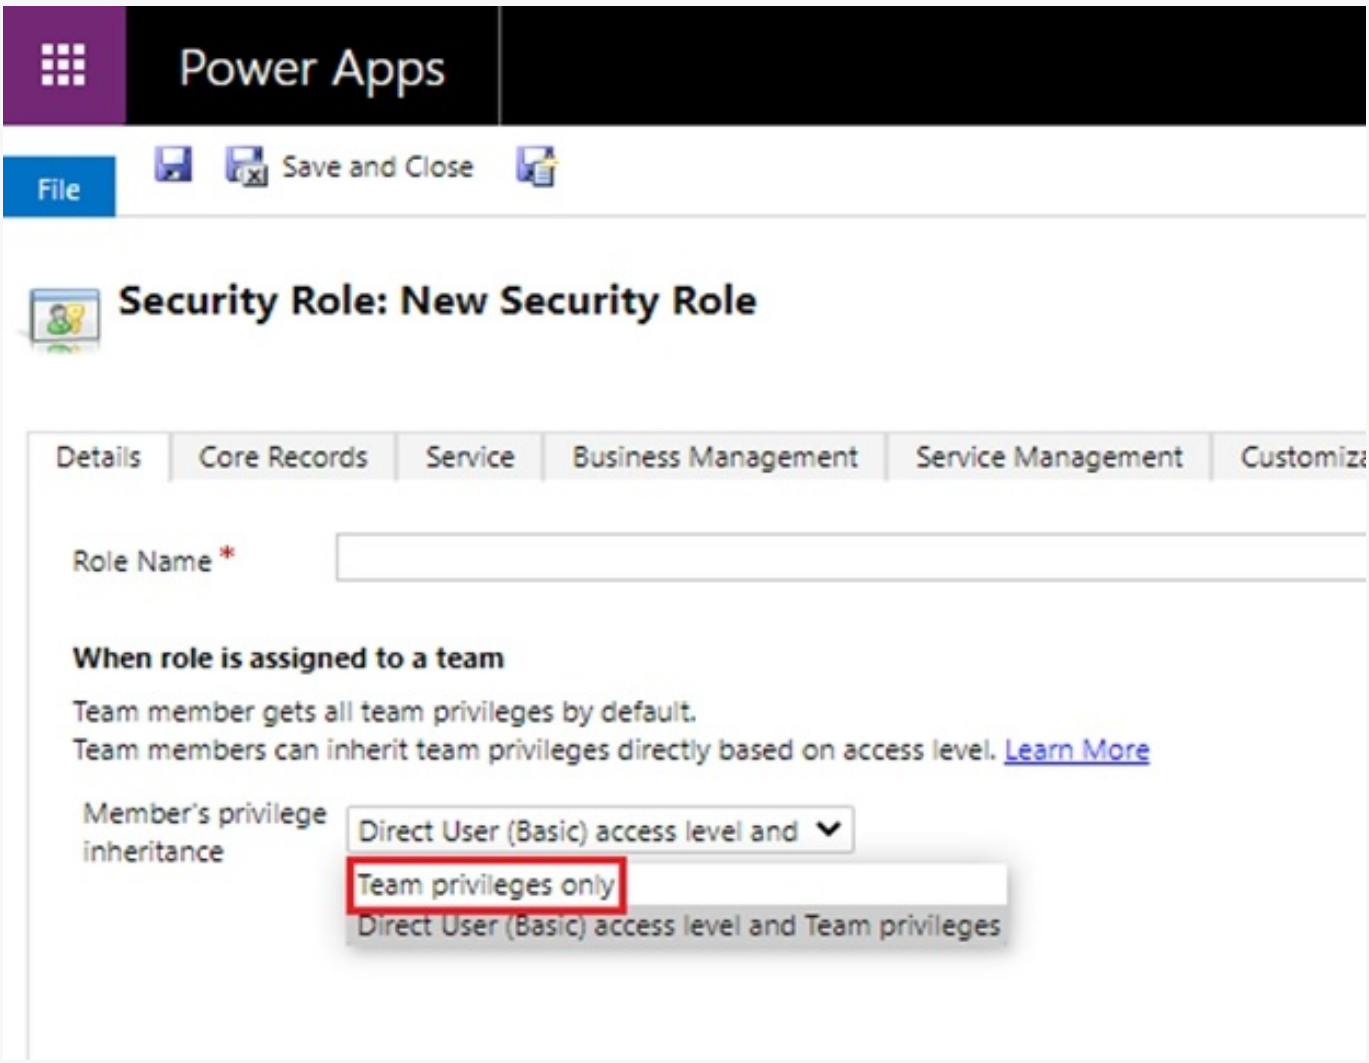

Box 2: No -

The manager of the Property Management business unit is already a member of a Fabrikam business unit, which has the root security role

Box 3: Yes -

Reference:

https://docs.microsoft.com/en-us/power-platform/admin/security-roles-privileges

Question: 130 CertyIQ

HOTSPOT -
A company has a development environment and a production environment. The production environment has several third-party managed and unmanaged solutions that made changes to the Contact main form.
You create a new solution in the development environment. You add the Contact entity and the Contact main form to the solution. You create a custom field on the
Contact entity.
What happens when you perform these actions in the new solution and import the solution as managed into the production environment?
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Action	Result
Add the field to the middle of an existing section in the Contact main form.	The field is inserted at the start of the existing section. The field is inserted in the middle of the existing section. The field is appended to the end of the existing section. The field is added in a new section.
Create a new section in the Contact main form and add the field to the new section.	The field is inserted at the start of the existing section. The field is inserted in the middle of the existing section. The field is appended to the end of the existing section. The field is added in a new section.
Create a new form and add the field to the middle of an existing section.	The field is inserted at the start of the existing section. The field is inserted in the middle of the existing section. The field is appended to the end of the existing section. The field is added in a new section.

Answer:

Answer Area

Action	Result
Add the field to the middle of an existing section in the Contact main form.	The field is inserted at the start of the existing section. The field is inserted in the middle of the existing section. **The field is appended to the end of the existing section.** The field is added in a new section.
Create a new section in the Contact main form and add the field to the new section.	The field is inserted at the start of the existing section. The field is inserted in the middle of the existing section. The field is appended to the end of the existing section. **The field is added in a new section.**
Create a new form and add the field to the middle of an existing section.	The field is inserted at the start of the existing section. **The field is inserted in the middle of the existing section.** The field is appended to the end of the existing section. The field is added in a new section.

Explanation:

Box 1: The field is appended to the end of the existing section.

When you add new elements to a form that is to be merged, we recommend that you include your new elements within new container elements (tabs or sections).

Additions to any container will be appended to the end of the container. For example, fields added to a section will be positioned at the end of the section.

Box2: The field is added in a new section

Box3: The field is inserted in the middle of the existing section

Reference:

https://docs.microsoft.com/en-us/previous-versions/dynamicscrm-2016/developers-guide/gg309329(v=crm.8)

Question: 131 CertyIQ

An organization uses Dynamics 365 Sales. The organization has accounting and customer service departments.
You must restrict users in customer service from being able to change the value of the balance field on the Contact records. The accounting team must be the only team able to edit this field.
You need to create the appropriate solution without any customizations.
What should you do first?

A. Enable field security for the balance field and grant the customer service team read and update permissions.
B. Create a customer service form and role and make the balance field read-only.
C. Enable field security for the balance field and grant the accounting team read and update permissions.
D. Create an accounting form and role and make the balance field read-only.

Answer: C

Explanation:
In Dynamics 365 Customer Engagement (on-premises), you use field-level security to restrict access to high business impact fields to specific users and teams.
For example, you use this to enable only certain users to read or update the credit score for a customer.

Reference:
https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/security-dev/use-field-security-control-access-field-values

Question: 132 CertyIQ

HOTSPOT -
You are developing a model-driven app for the purchasing department of an organization. You provision a new test environment and a security role. You select users to test the apps and assign the users to a security group named TestSG.
If the tests succeed, a manager will perform additional testing in the production environment and then publish the app for the organization's purchasing department.
You need to ensure that the test and production environments are configured correctly.
What should you do? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Scenario	Security artifact
Ensure that only test users can access the test environment.	Set the test environment security group to TestSG. Assign the test users the app security role. Set the test environment security group to TestSG and assign test users the app security role.
Ensure that only the manager can access the app in production.	Set the production environment security group to TestSG. Assign the manager the app security role. Add the manager to the TestSG security group and grant the manager the app security role.
Ensure that test users can access the app in production.	Set the production environment security group to TestSG. Assign the test users the app security role. Set the production environment security group to TestSG and assign test users the app security role.
Ensure that purchasing department users can access the test environment.	Remove the security group TestSG associated with the test environment. Assign all users the app security role. Add all users in the department to the TestSG security group.

Answer:

Answer Area

Scenario	Security artifact
Ensure that only test users can access the test environment.	Set the test environment security group to TestSG. Assign the test users the app security role. **Set the test environment security group to TestSG and assign test users the app security role.**
Ensure that only the manager can access the app in production.	Set the production environment security group to TestSG. **Assign the manager the app security role.** Add the manager to the TestSG security group and grant the manager the app security role.
Ensure that test users can access the app in production.	**Set the production environment security group to TestSG.** Assign the test users the app security role. Set the production environment security group to TestSG and assign test users the app security role.
Ensure that purchasing department users can access the test environment.	Remove the security group TestSG associated with the test environment. Assign all users the app security role. **Add all users in the department to the TestSG security group.**

Explanation:

Box 1: Set the test environment security group to TestSG and assign test users the app security role.

PowerApps apps use role-based security for sharing. The fundamental concept in role-based security is that a security role contains privileges that define a set of actions that can be performed within the app. All app users must be assigned to one or more predefined or custom roles.B

BOX2: Assign the manager the app security role

Box3: set the production environment security group to test SG

Box4: Add all users in the department to the TestSG Security group.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/model-driven-apps/share-model-driven-app

Question: 133 CertyIQ

A travel company plans to track the address of places their clients visit in an entity named Destination. Client information is captured as contact records. Client records include links to the places that clients visit.
The company must be able to link multiple rating records to the new address record.
You find a custom Rating entity that is incomplete.
You need to expand the Rating entity to include contact, address, and rating information in one place.
Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A. Create a 1:N relationship between the Contact system entity and the Address system entity named Destination.

B. Create a mapping for the Contact " Rating relationship.

C. Create a 1:N relationship between the Address system entity and the Rating entity.

D. Create a 1:N relationship between the Contact system entity and the Rating entity.

E. Create a mapping for the Destination " Rating relationship.

F. Create a 1:N relationship between the Destination entity and the Rating entity.

Answer:

ABC

Explanation:

A: Each Contact can visit a destination many times.

Note: A travel company plans to track the address of places their clients visit in an entity named Destination. Client information is captured as contact records.

Client records include links to the places that clients visit.

C (not D): The company must be able to link multiple rating records to the new address record.

Each address entity can be linked to many rating records.

B (not E): You need to expand the Rating entity to include contact, address, and rating information in one place.

Need a mapping between for the Contact and Rating entities (through the Address/Destination entity).

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/map-entity-fields

Question: 134

CertyIQ

HOTSPOT -
A company uses Dynamics 365 Sales and the Microsoft Online Services portal.
The multi-select OptionSet field data type is not supported in the portal.
You need to copy the selected field value to the text field.
How should you configure the Organization service request? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

```
Entity entity = (Entity)context.InputParameters["Target"];
var attributeRequest = new RetrieveAttributeRequest
{
     EntityLogicalName = "entityname",
     LogicalName = "fieldname",

            RetrieveAsIfPublished = [ ▼ ]
        };

        var attributeResponse = (RetrieveAttributeResponse)
service.Execute(attributeRequest);
        var attributeMetadata =
(EnumAttributeMetadata)attributeResponse.[ ▼ ]
```

- true
- false

- AttributeMetadata
- AttributeResponse
- OptionMetadataCollection
- MultiSelectPicklistAttributeMetadata

Answer:

Answer Area

```
Entity entity = (Entity)context.InputParameters["Target"];
var attributeRequest = new RetrieveAttributeRequest
{
     EntityLogicalName = "entityname",
     LogicalName = "fieldname",

            RetrieveAsIfPublished = [ ▼ ]
        };

        var attributeResponse = (RetrieveAttributeResponse)
service.Execute(attributeRequest);
        var attributeMetadata =
(EnumAttributeMetadata)attributeResponse.[ ▼ ]
```


- true
- false

- AttributeMetadata
- AttributeResponse
- OptionMetadataCollection
- MultiSelectPicklistAttributeMetadata

Explanation:

Box 1: True

If you are creating an attribute editor you will need to retrieve entity data that has been saved but not published. For other scenarios you will want to only retrieve published metadata.

➪ Set this value to true to include unpublished changes, as it would look if you called publish.

✑ Set this value to false to include only the currently published changes, ignoring the changes that haven't yet been published.

Box 2: AttributeMetadata -

AttributeMetadata class is returned in the RetrieveAttributeResponse.

Reference:

https://docs.microsoft.com/en-us/dotnet/api/microsoft.xrm.sdk.messages.retrieveattributerequest.retrieveasifpublished?view=dynamics-general-ce-9 https://docs.microsoft.com/en-us/dotnet/api/microsoft.xrm.sdk.metadata.attributemetadata?view=dynamics-general-ce-9

Question: 135 CertyIQ

A bank uses a Common Data Service solution to manage clients.
Bank representatives perform client credit checks while the client is present. Credit checks may take up to five minutes to complete.
Bank policy dictates that the bank representative's app must stay blocked until credit checks are complete.
You need to display a model-driven app while credit checks run to ask the bank representative and client to wait for the credit check to complete.
Which function should you use?

A. Xrm.Navigation.openWebResource("prefix.myPoliteMessage.html")
B. Xrm.Navigation.openAlertDialog(myPoliteMessage)
C. Xrm.Utility.openWebResource("prefix_myPoliteMessage.html")
D. Xrm.Utility.showProgressIndicator(myPoliteMessage)

Answer: D

Explanation:
showProgressIndicator displays a progress dialog with the specified message.
Any subsequent call to this method will update the displayed message in the existing progress dialog with the message specified in the latest method call.
The progress dialog blocks the UI until it is closed using the closeProgressIndicator method. So, you must use this method with caution.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/xrm-utility/showprogressindicator

Question: 136 CertyIQ

DRAG DROP -
You are creating a model-driven app.
Users need to see only the entities in the app navigation that are relevant to their role and their method of accessing the app.
You need to restrict entities on the sub-areas in the SiteMap.
Which properties should you use? To answer, drag the appropriate properties to the correct requirements. Each property may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

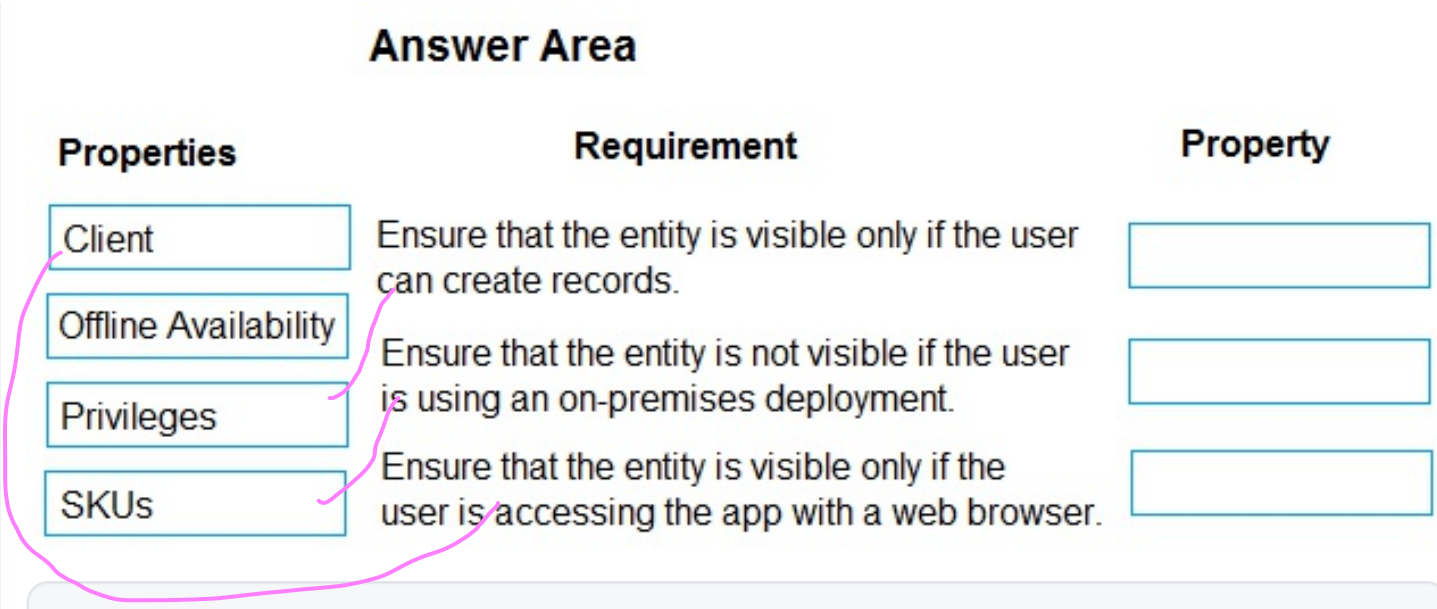

Answer:

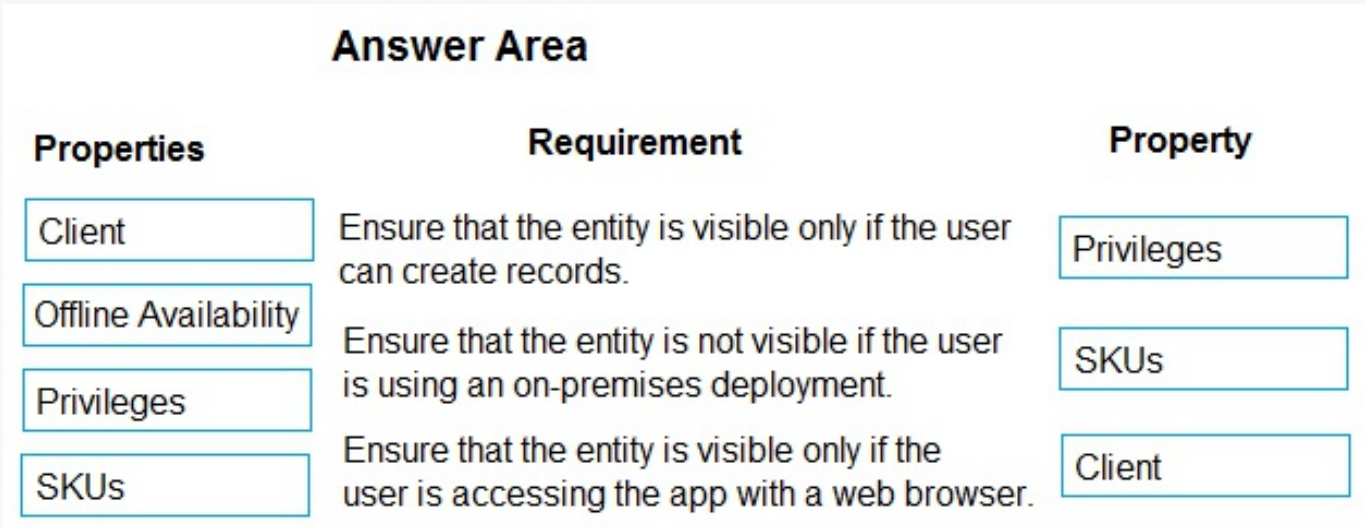

Explanation:

Box 1: Privileges -

Privileges: This defines whether a subarea is displayed based on privileges available in any security roles that are assigned to the user.

Box 2: SKU -

SKUs: Select the versions of Dynamics 365 that display this subarea.

Box 3: Client -

Client: Select the type of client that displays this subarea.

Incorrect Answers:

Offline Availability: Select this check box to make this subarea available to users when they are offline in Dynamics 365 for Outlook.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/model-driven-apps/create-site-map-app

Question: 137

CertyIQ

HOTSPOT -

You are troubleshooting Power Apps solutions.

You need to determine the cause for the identified issues.

What is the root cause for each issue? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Issue	Reason
Solution checker does not complete a run for one solution but works for a different solution.	A canvas app in the first solution has errors. The Power Apps checker application user is disabled.
You encounter an error on line three of a web resource as shown below:	The code uses the following rule: web-avoid-eval The code uses the following rule: web-remove-debug-script The code uses the following rule: web-avoid-modals The code uses the following rule: web-use-strict-mode.

```
var acctnumber = formContext.getAttribute
("accountnumber").getValue();
if (acctnumber == 'abc')
```

Answer:

Answer Area

Issue	Reason
Solution checker does not complete a run for one solution but works for a different solution.	A canvas app in the first solution has errors. The Power Apps checker application user is disabled.
You encounter an error on line three of a web resource as shown below:	The code uses the following rule: web-avoid-eval The code uses the following rule: web-remove-debug-script The code uses the following rule: web-avoid-modals The code uses the following rule: web-use-strict-mode.

```
var acctnumber = formContext.getAttribute
("accountnumber").getValue();
if (acctnumber == 'abc')
```

Explanation:

Box 1: A canvas app in the first solution has errors.

Failures that occur during background processing of the analysis will fail with 'Couldn't be completed' status and return an error message in the Power Apps portal as well as send email notification to the requestor.

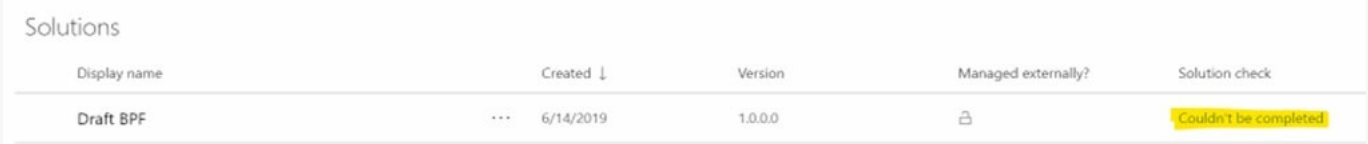

Selecting the portal notification will link to this page of common issues for further troubleshooting. If one of the provided common issues does not resolve the problem, a reference number is also returned. Provide this reference number to Microsoft Support for further investigation.

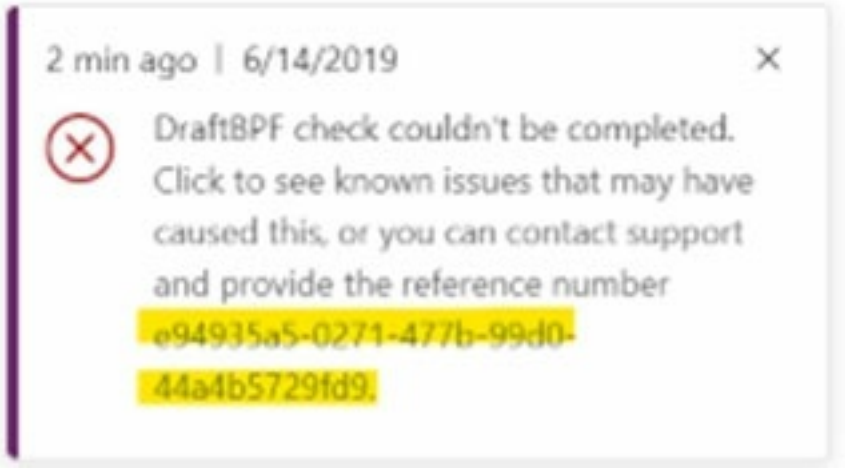

Box 2: The code uses the following rule: web-use-strict-mode
web-use-strict-mode is able to throw a SyntaxError before the script is executing.
Example:
The reason is JavaScript lets you compare different variable types but this can have unexpected results, so by using the strict === it compares the same type and won't have unexpected results this gets a warning entity.field == "Line1"
Incorrect Answers:
web-avoid-eval: The eval() function evaluates JavaScript code represented as a string. web-avoid-modals: Avoid using modal dialogs. web-remove-debug-script: Avoid including debug script in non-development environments.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/common-issues-resolutions-solution-checker

Question: 138 CertyIQ

You create a Power Apps app that integrates with Dynamics 365 Customer Service.
You update the app and run solution checker on the original solution. You receive an error stating solution checker cannot export the solution.
You need to determine the primary cause for the issue.
What is the primary cause?

A. The original solution is locked because there is a dependent patch.
B. The solution was not exported before running solution checker.
C. The environment is in Administrator mode.
D. Solution checker cannot check default solutions.

Answer: A

Explanation:
Solution checker fails to export patched solutions.
If a solution has had a patch applied, Solution Checker will fail to export the solution for analysis. When a solution has had a patch applied, the original solution becomes locked and it can't be changed or exported as long as there are dependent patches that exist in the organization that identify the solution as the parent solution.
To resolve this issue, clone the solution so that all patches related to the solution are rolled into the newly created solution. This unlocks the solution and allows the solution to be exported from the system.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/common-issues-resolutions-solution-checker#solution-checker-fails-to-export-solutions- with-model-driven-app-components

Question: 139 CertyIQ

HOTSPOT -
You are creating a model-driven app to track the time that employees spend on individual projects.
You need to configure the app according to the company's requirements.
Which components should you configure? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Component
Ensure that the values stored in the Project Name field are discoverable in Advanced Find.	Entity / View / Connector
Display the original estimated duration as estimated start and end dates for the operation during time entry.	Quick View / Card / Quick Create

Answer:

Answer Area

Requirement	Component
Ensure that the values stored in the Project Name field are discoverable in Advanced Find.	Entity / **View** / Connector
Display the original estimated duration as estimated start and end dates for the operation during time entry.	**Quick View** / Card / Quick Create

Explanation:
Box 1: View -
Search for rows and create personal views with modern advanced find
When your administrator enables the modern advanced find experience, it lets you search for rows and create personal views in your app.

Box 2: Quick View -
Quick View - Used in model-driven apps, Dynamics 365 for tablets, and Dynamics 365 for Outlook.
For updated tables, these forms appear within the main form to display additional data for a row that is referenced by a lookup column in the form.
Users can view data from related tables without having to leave the form.
Incorrect Answers:
* Quick Create - Used in model-driven apps, Dynamics 365 for tablets, and Dynamics 365 for Outlook.
For updated tables, these forms provide a basic form optimized for creating new records.
* Card - Used in views for model-driven apps. Card forms are designed to present information in a compact format that is suitable for mobile devices.

Reference:
https://docs.microsoft.com/en-us/power-apps/user/advanced-find https://docs.microsoft.com/en-us/power-apps/maker/model-driven-apps/types-forms https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/customize-entity-views

Question: 140 CertyIQ

HOTSPOT -
You are developing a Power Platform solution. You plan to add three buttons to a form. The buttons have the following requirements:

Button	Requirement
Button1	Add the current date and time to the form when the button is selected.
Button2	Apply conditional logic to change the form color based on the option selected in the Title field.
Button3	Ensure that the word Emergency is entered as “Emergency”.

You need to complete each button's action.
Which commands should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Button	Command
Button1	Today() only Now() only Today() or Now()
Button2	Switch () only IF () only Switch() or IF()
Button3	IsMatch(TextInput1.Text, “emergency”, Contains) IsMatch(TextInput1.Text, “emergency”, Contains & IgnoreCase) IsMatch(TextInput1.Text. “emergency”. Contains) or IsMatch(TextInput1.Text, “emergency”, Contains & IgnoreCase)

Answer:

Answer Area

Button	Command
Button1	Today() only **Now() only** Today() or Now()
Button2	Switch () only IF () only **Switch() or IF()**
Button3	IsMatch(TextInput1.Text, “emergency”, Contains) **IsMatch(TextInput1.Text, “emergency”, Contains & IgnoreCase)** IsMatch(TextInput1.Text. “emergency”. Contains) or IsMatch(TextInput1.Text, “emergency”, Contains & IgnoreCase)

Explanation:

Box 1: Now() only.

The Now function returns the current date and time as a date/time value.

Box 2: Switch() or IF()

If and Switch functions in Power Apps determines whether any condition in a set is true (If) or the result of a formula matches any value in a set (Switch) and then returns a result or executes an action.

Box 3: isMatch(TextInput1.Text,"emergency",Contains & IgnoreCase)

Example: IsMatch(TextInput1.Text, "hello", Contains & IgnoreCase)

Tests whether the user's input contains the word "hello" (case insensitive).

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-if

Question: 141 CertyIQ

HOTSPOT -
A company imports data from files.
The following code is created to import the files. (Line numbers are included for reference only.)

```
1. var transactionrequest = new ExecuteTransactionRequest()
2. {
3. Requests = new OrganizationRequestCollection(),
4. ReturnResponses = true
5. };
6. ...
7. foreach (DataRow dr in Rows)
8. {
9. ...
10. var contact = new Entity("contact");
11. contact["firstname"] = firstname;
12. contact["lastname"] = lastname;
13. var createRequest = new CreateRequest() { Target = contact };
14. transactionrequest.Requests.Add(createRequest);
15. }
16. try
17. {
18. var response = (ExecuteTransactionResponse)crmSvc.Execute(transactionrequest);
19. foreach (var responseItem in response.Responses)
20. {
21. var createResponse = (CreateResponse)responseItem;
22. Console.WriteLine("Created: {0}", createResponse.id.ToString());
23. }
24. }
25. catch (FaultException<Microsoft.Xrm.Sdk.OrganizationServiceFault> ex)
26. {
27. Console.WriteLine("Error: {0}", ((ExecuteTransactionFault)(ex.Detail)).FaultedRequestIndex + 1,
    ex.Detail.Message);
28. }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
If an error occurs when one of the contacts is created, processing will continue, and the remainder of the contacts will be created.	○	⊗
If you add the `code ,ContinueOnError = true` at line 5, bad requests will not roll back the transaction.	○	⊗
Requests are processed in the sequence added to transactionrequest.	⊗	○
Lines 19-23 are required for the contacts to be created.	○	⊗

Answer:

Answer Area

Statements	Yes	No
If an error occurs when one of the contacts is created, processing will continue, and the remainder of the contacts will be created.	○	◉
If you add the `code ,ContinueOnError = true` at line 5, bad requests will not roll back the transaction.	○	◉
Requests are processed in the sequence added to transactionrequest.	◉	○
Lines 19-23 are required for the contacts to be created.	○	◉

Explanation:
Box 1: No -
The For Each loop is exited if there is an error. Need ContinueOnError in the right place.

Box 2: No -
The ContinueOnError statement should be placed in the For Each loop before line 13.

Box 3: Yes -

Box 4: No -
This code is just for displaying the result on the screen.

Question: 142 CertyIQ

You have the following code:

```
Xrm.WebApi.createRecord("account", data).then(
    function success(result) {
        console.log("Success");
    },
    function (error) {
        console.log(error.message);
    }
);
```

A. var data = { "name": "Contoso account", "primarycontactid": { "logicalname": "contact", "id": "991bf2fd-d40c-4752-9984-26b7c0455b69" } };
B. var data = { "name": "Contoso account", "primarycontactid@odata.bind": "/contacts(991bf2fd-d40c-4752-9984-26b7c0455b69)" };
C. var data = { "name": "Contoso account", "primarycontactid@odata.context": "/contacts(991bf2fd-d40c-4752-9984-26b7c0455b69)" };
D. var data = { "name": "Contoso account", "primarycontactid": "/contacts(991bf2fd-d40c-4752-9984-26b7c0455b69)" };

You have a contact record that uses the GUID 991bf2fd-d40c-4752-9984-26b7c0455b69.
You need to assign the contact record as the primary contact for an account when you create the account.
Which two code segments can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. var data = "name": "Contoso account", "primarycontactid": "logicalname": "contact", "id": "991bf2fd-d40c-4752-9984-26b7c0455b69" ;

B. var data = "name": "Contoso account", "": "/contacts(991bf2fd-d40c-4752-9984-26b7c0455b69)" ;

C. var data = "name": "Contoso account", "": "/contacts(991bf2fd-d40c-4752-9984-26b7c0455b69)" ;

D. var data = "name": "Contoso account", "primarycontactid": "/contacts(991bf2fd-d40c-4752-9984-26b7c0455b69)" ;

Answer:

AB

Explanation:

B: To associate new table records to existing table records, set the value of single-valued navigation properties using the @odata.bind annotation

Example:

var data =

"name": "Sample Account",

"": "/contacts(465b158c-541c-e511-80d3-3863bb347ba8)"

A: For mobile clients in the offline mode, you cannot use the @odata.bind annotation, and instead have to pass a lookup object (logicalname and id) pointing to the target record. var data =

"name": "Sample Account",

"primarycontactid":

"logicalname": "contact",

"id": "465b158c-541c-e511-80d3-3863bb347ba8"

Note Syntax:

Xrm.WebApi.createRecord(entityLogicalName, data).then(successCallback, errorCallback);
entityLogicalName: Logical name of the table you want to create. For example: "account".

Data: A JSON object defining the columns and values for the new table record.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/xrm-webapi/createrecord

Question: 143 CertyIQ

DRAG DROP -
A company has a model-driven app.
A form that validates the date entered requires a custom button. The button must be available only under certain conditions.
You need to define the CommandDefinition in the RibbonDiffXML to meet the conditions for the button.
Which elements should you use? To answer, drag the appropriate elements to the correct conditions. Each element may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

Select and Place:

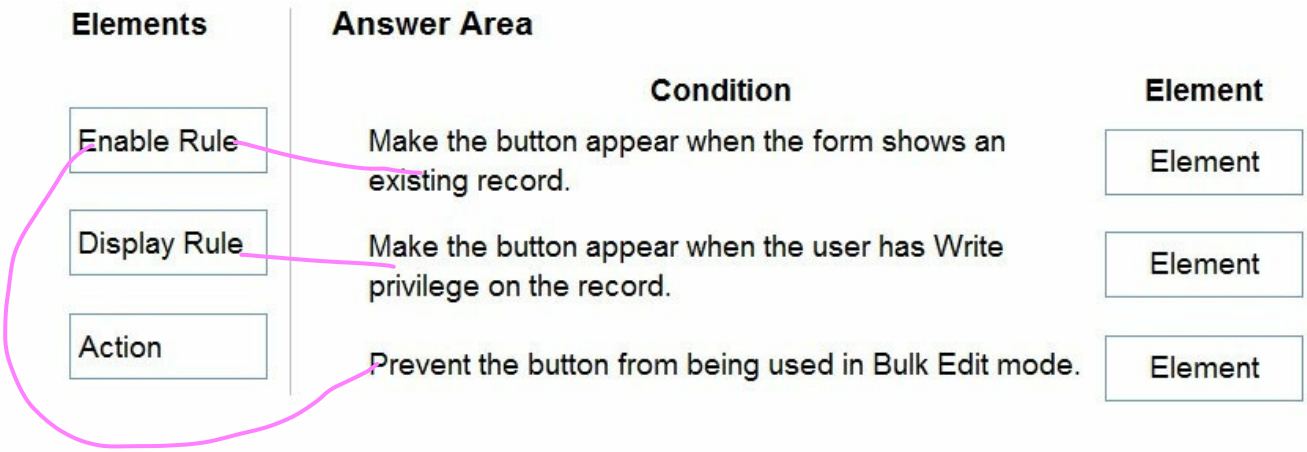

Answer:

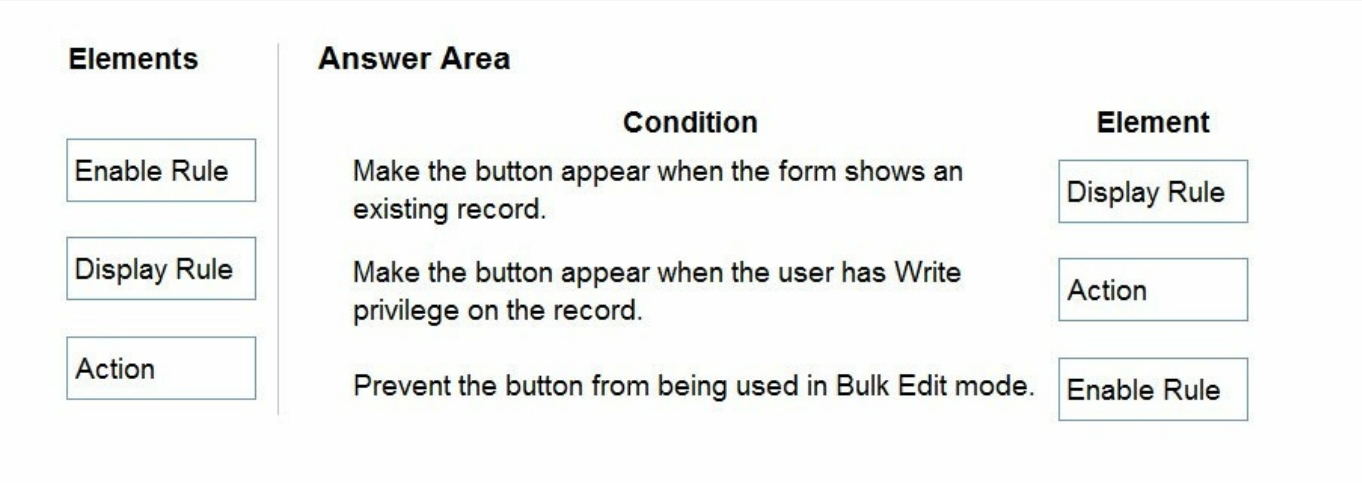

Explanation:

Box 1: Display Rule -

When configuring ribbon elements, you can define specific rules to control when the ribbon elements will display.

Box 2: Action -

Define the actions to be performed by a command bar or ribbon control in a <CommandDefinition> element together with rules that control whether the control is enabled or visible in the ribbon.

Box 3: Enable Rule -

When configuring ribbon elements, you can define specific rules to control when the ribbon elements are enabled.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/define-ribbon-enable-rules
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/define-ribbon-display-rules
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/define-ribbon-actions

Question: 144

CertyIQ

An organization uses Dynamics 365 Sales.
You plan to use a JavaScript web resources file in the Accounts form. The file has a dependency on two image web resource files and on the custom field new_placeofbirth in the Account entity.
You need to add the dependencies for the JavaScript file.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Open the web resource file, add the two image web resources to the dependency's lists, and then add the custom field new_placeofbirth to the dependency's list.

B. From Settings, select Customizations and then select Customize the System.

C. In the Account form, select Form Properties, select Non-Event Dependencies, and then add the custom field new_placeofbirth.

D. Select Account, select Forms, and then select the Account form.

E. From Web Resources, select the JavaScript file for the Account form and then select the JavaScript file.

F. In the Account form, select Form Properties and add the primary JavaScript file and the other two images web resources in Form Libraries.

Answer:

BCD

Explanation:

Step 1 (B): From Settings, select Customizations and then select Customize the System.

Step 2 (D): Select Account, select Forms, and then select the Account form.

Step 3 (C): In the Account form, select Form Properties, select Non-Event Dependencies, and then add the custom field new_placeofbirth.

In our Dynamics 365 forms, there are measures we can take to ensure fields that are being used by JavaScript are not removed from forms. To prevent this from happening, we can go to Form Properties and select the Non-Event Dependencies, and add the website field:

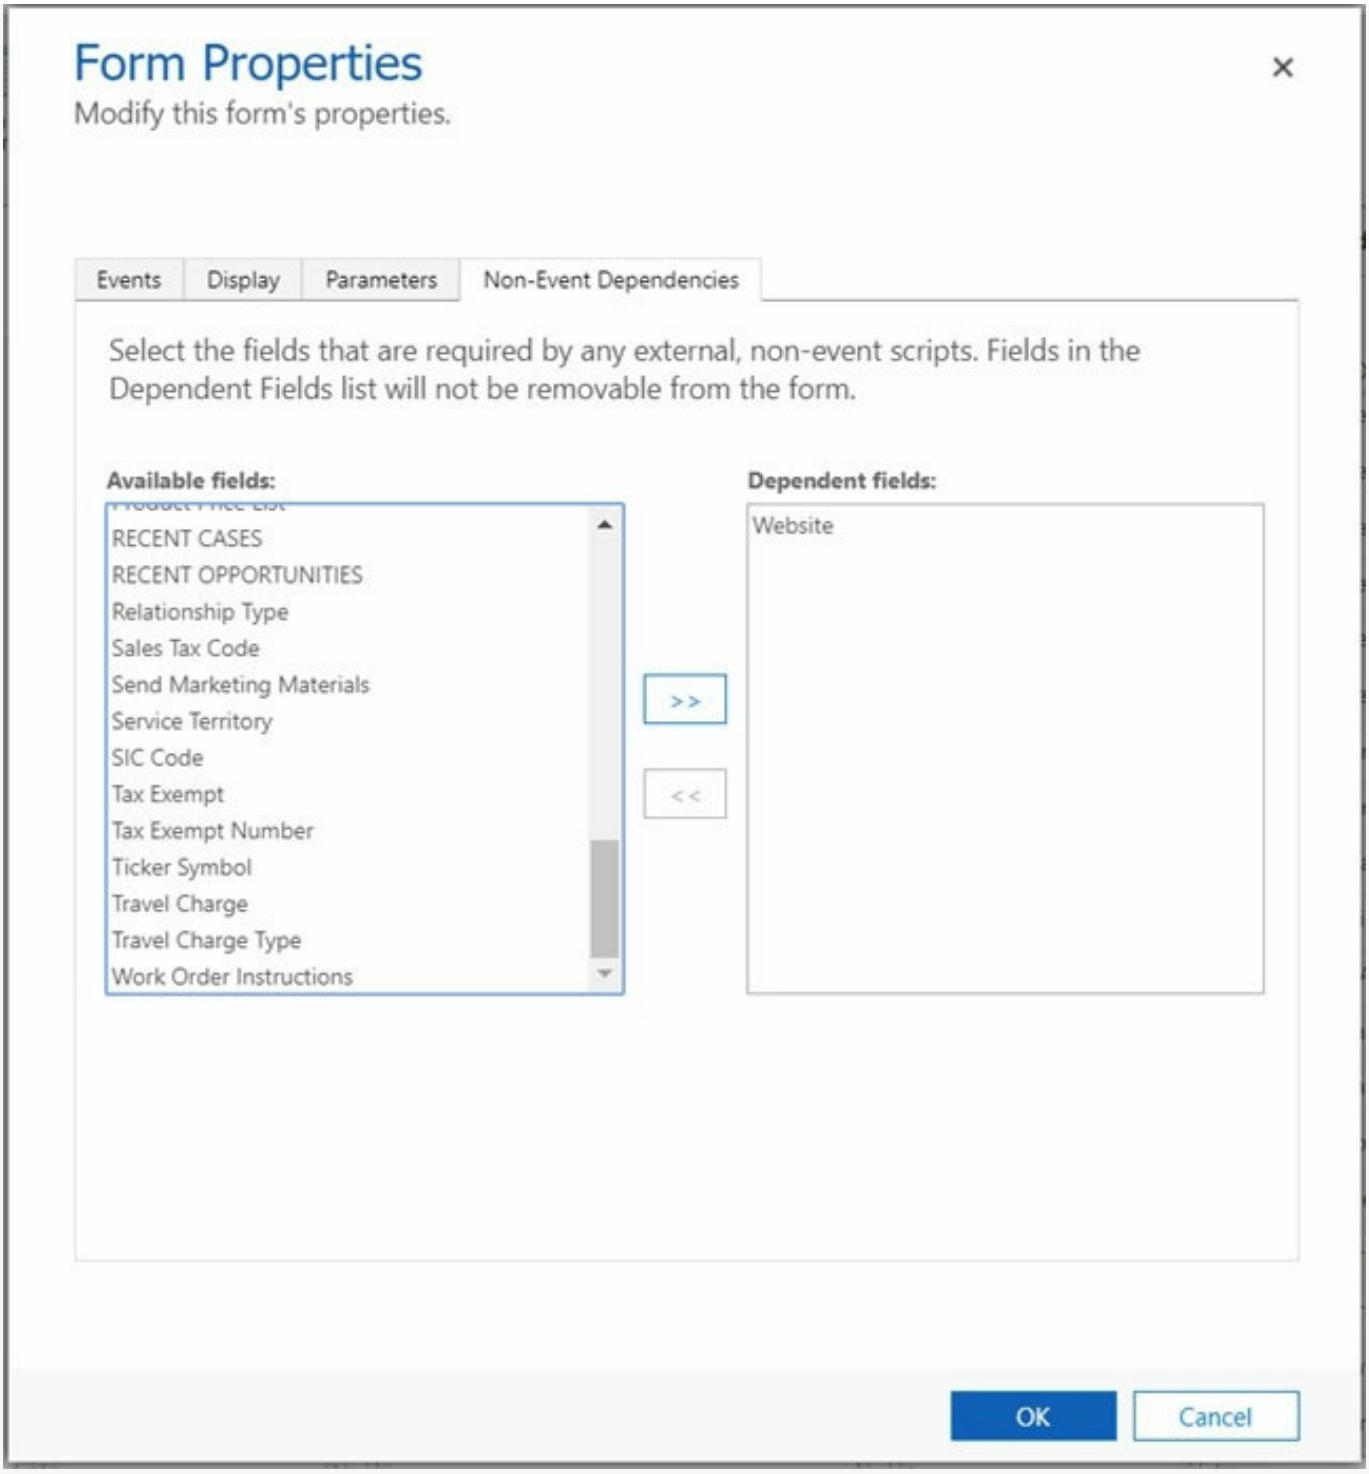

Reference:

https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/web-resource-dependencies

Question: 145

CertyIQ

HOTSPOT -
You open a canvas app in edit mode. A warning message displays as shown in the graphic.

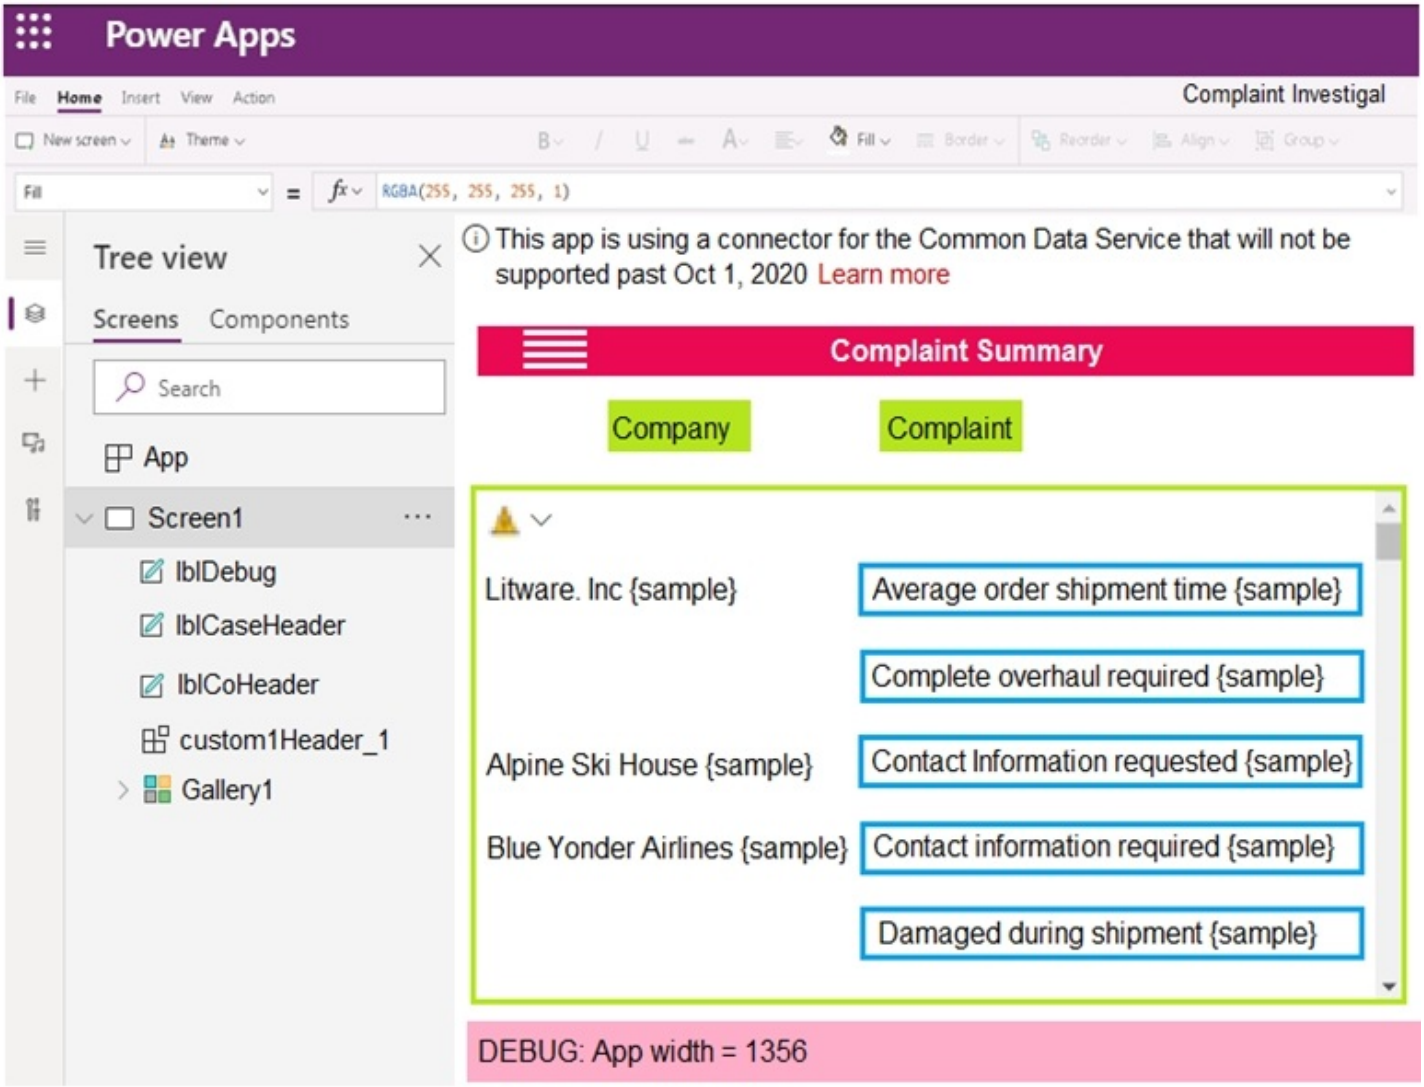

Use the drop-down menus to select the answer choice that answers each question based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

You need to troubleshoot the warning. What should you do?

Navigate to Solution checker and view results.
Navigate to App checker and expand the Formulas section.
Navigate to Advanced Tools and open the Monitor.
Navigate to Connections and add a new connection.

Which component should you troubleshoot?

App
Screen1
customHeader_1
Gallery1

Answer:

Answer Area

You need to troubleshoot the warning. What should you do?

Navigate to Solution checker and view results.
Navigate to App checker and expand the Formulas section.
Navigate to Advanced Tools and open the Monitor.
Navigate to Connections and add a new connection.

Which component should you troubleshoot?

App
Screen1
customHeader_1
Gallery1

Explanation:

Box 1: Navigate to Connections and add a new connection

Error message: This app is using a connector for the Common Data Service will not be supported past Oct 1, 2020.

To convert your app that uses the Common Data Service 365 connector, you'll need to remove and add the connections to your data sources.

Box 2: Gallery1 -

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/use-native-cds-connector

Question: 146 CertyIQ

A company implements Dynamics 365 Supply Chain Management.
The company wants a button to display in the command bar when viewing accounts.
You need to add the button using the Ribbon Workbench.
In which three areas can you add a button for the Account entity? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. In the home area for Accounts.

B. In the main body of a form.

C. On the main application window.

D. On the associated view of the account.

E. On the Account form.

Answer: ADE

Explanation:
The Ribbon Workbench requires a solution to load that contains the entities that you wish to work on.

Reference:
https://community.dynamics.com/crm/f/microsoft-dynamics-crm-forum/371643/add-a-button-on-account-list-view-in-dynamics-crm

Question: 147 CertyIQ

An organization uses Dynamics 365 Sales. You plan to add a custom button to the app ribbon.
You need to ensure that the button displays only when conditions specified by business rules are met.
Which two code segments can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. gridContext.refresh();

B. formContext.ui.refreshRibbon(refreshAll);

C. formContext.data.refresh(save).then(successCallback, errorCallback);

D. formContext.ui.refreshRibbon();

E. formContext.getControl(arg).refresh();

Answer: BD

Explanation:
B: formContext.ui.refreshRibbon(refreshAll);
Causes the ribbon to re-evaluate data that controls what is displayed in it.
Indicates whether all the ribbon command bars on the current page are refreshed. If you specify false, only the page-level ribbon command bar is refreshed. If you do not specify this parameter, by default false is passed.
Remarks: This function is typicaly used when a ribbon (RibbonDiffXml) depends on a value in the form. After your code changes a value that is used by a rule, use this method to force the ribbon to re-evaluate the data in the form so that the rule can be applied.
D: If role is there - just refresh the ribbon to see the button if (isButtonEnabled)
formContext.ui.refreshRibbon();

,

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/formcontext-ui/refreshribbon https://community.dynamics.com/crm/f/microsoft-dynamics-crm-forum/302049/show-hide-button-bases-on-different-criteria/871674

Question: 148 CertyIQ

HOTSPOT -
A fine arts school uses a custom canvas application based on the Microsoft Dataverse.
Artists experience errors on their Artist canvas app and delays when switching pages.
You need to identify the root causes of these issues.
Which troubleshooting methods should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

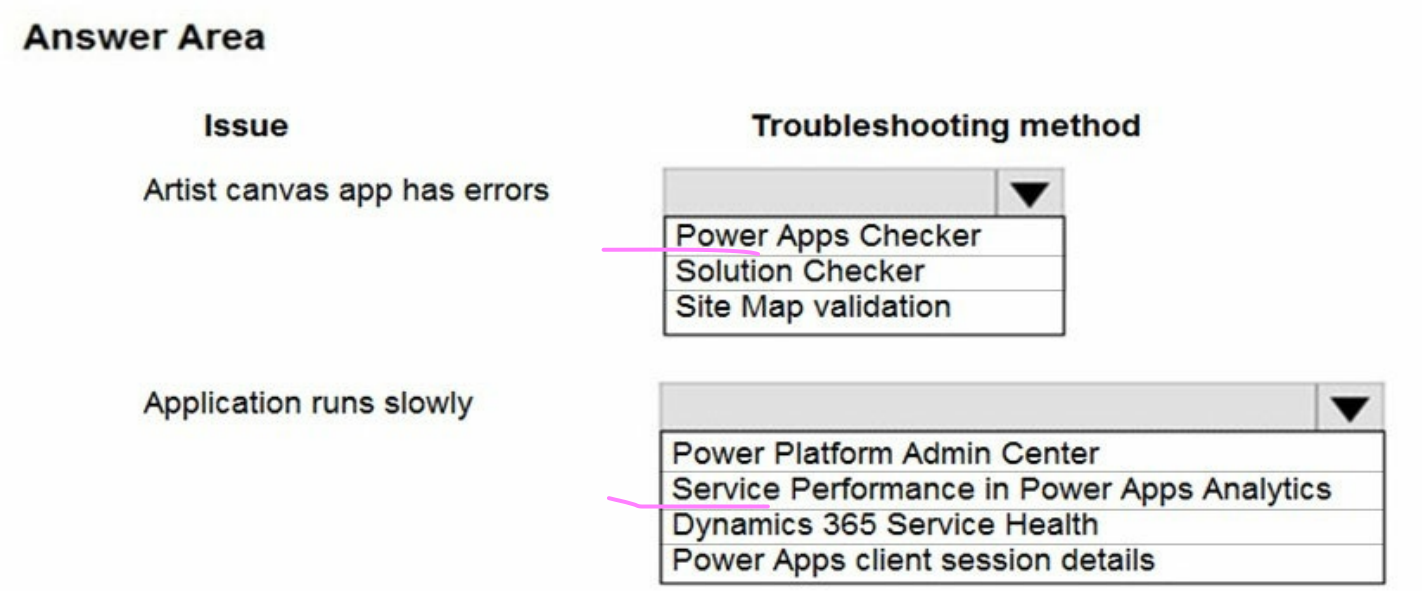

Answer:

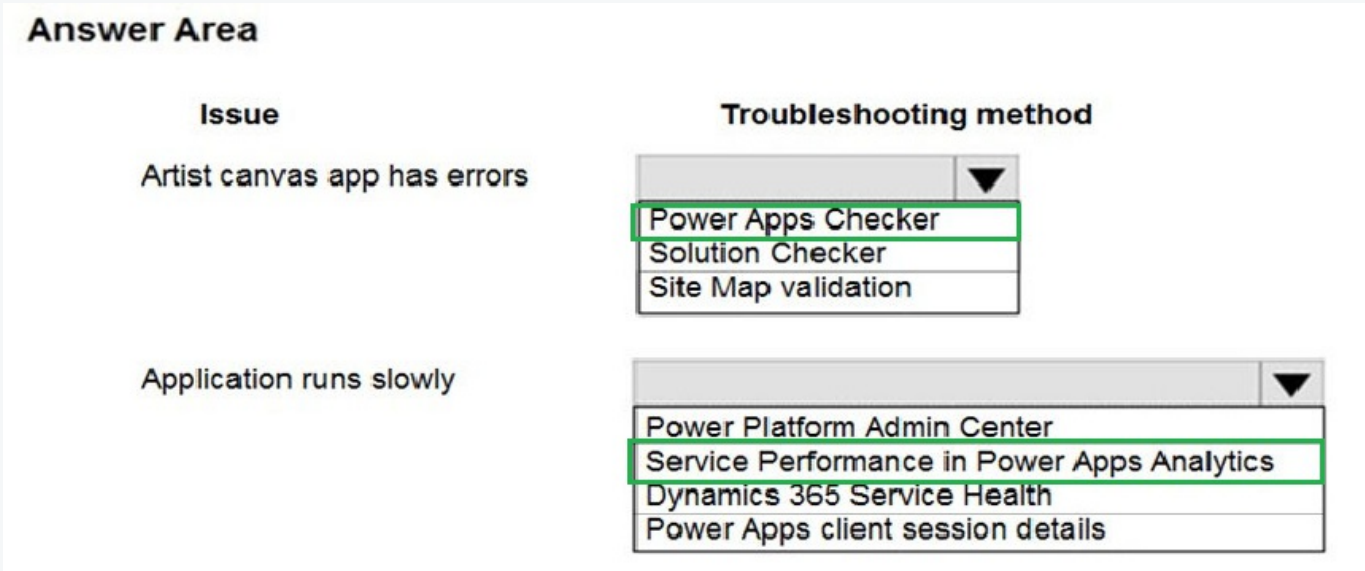

Explanation:

PowerApp Checker checks... any performance... issues in the code

Issue 1: Artist canvas app has errors

Correct Troubleshooting Method: Power Apps Checker

Why Power Apps Checker?
Power Apps Checker analyzes Power Apps solutions, including canvas apps, to identify configuration issues, errors, and deviations from best practices. It performs in-depth checks on the app's logic, expressions, and components to find potential issues.

Why Not Others?
Solution Checker: This is primarily used for evaluating model-driven apps and solutions as a whole, rather than troubleshooting individual canvas apps.
Site Map Validation: This tool validates site map configurations for model-driven apps and is irrelevant for canvas apps.

Issue 2: Application runs slowly

Correct Troubleshooting Method: Service Performance in Power Apps Analytics

Why Service Performance in Power Apps Analytics?
This tool provides a detailed analysis of app performance metrics such as load times, response times, and resource utilization. It is specifically designed to identify and address performance bottlenecks, making it ideal for resolving issues related to slow applications.
Why Not Others?
Power Platform Admin Center: This tool is used for environment and resource management but does not provide app-specific performance details.
Dynamics 365 Service Health: This focuses on monitoring the availability and performance of Dynamics 365 services, not Power Apps.
Power Apps Client Session Details: This provides troubleshooting data for specific user sessions, which may not address broader application performance issues.

Reference:

https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/customize/validate-app
https://community.dynamics.com/crm/b/crminthefield/posts/monitoring-the-power-platform-canvas-driven-apps---power-apps-analytics

Question: 149 CertyIQ

You are developing a new Power Platform app.
The checker fails with an error due to missing security roles.
You need to add security roles to the Power Apps Checker application user.
Which two security roles should you add? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Global Discover Service Role
B. Export Customizations
C. Environment Maker
D. Solution Checker
E. Resource Manager

Answer: BD

Explanation:

Before you are able to run it, make sure you have the proper Security Roles in your common data service environment. Two of the required permissions are

Export Customizations and Solution Checker.

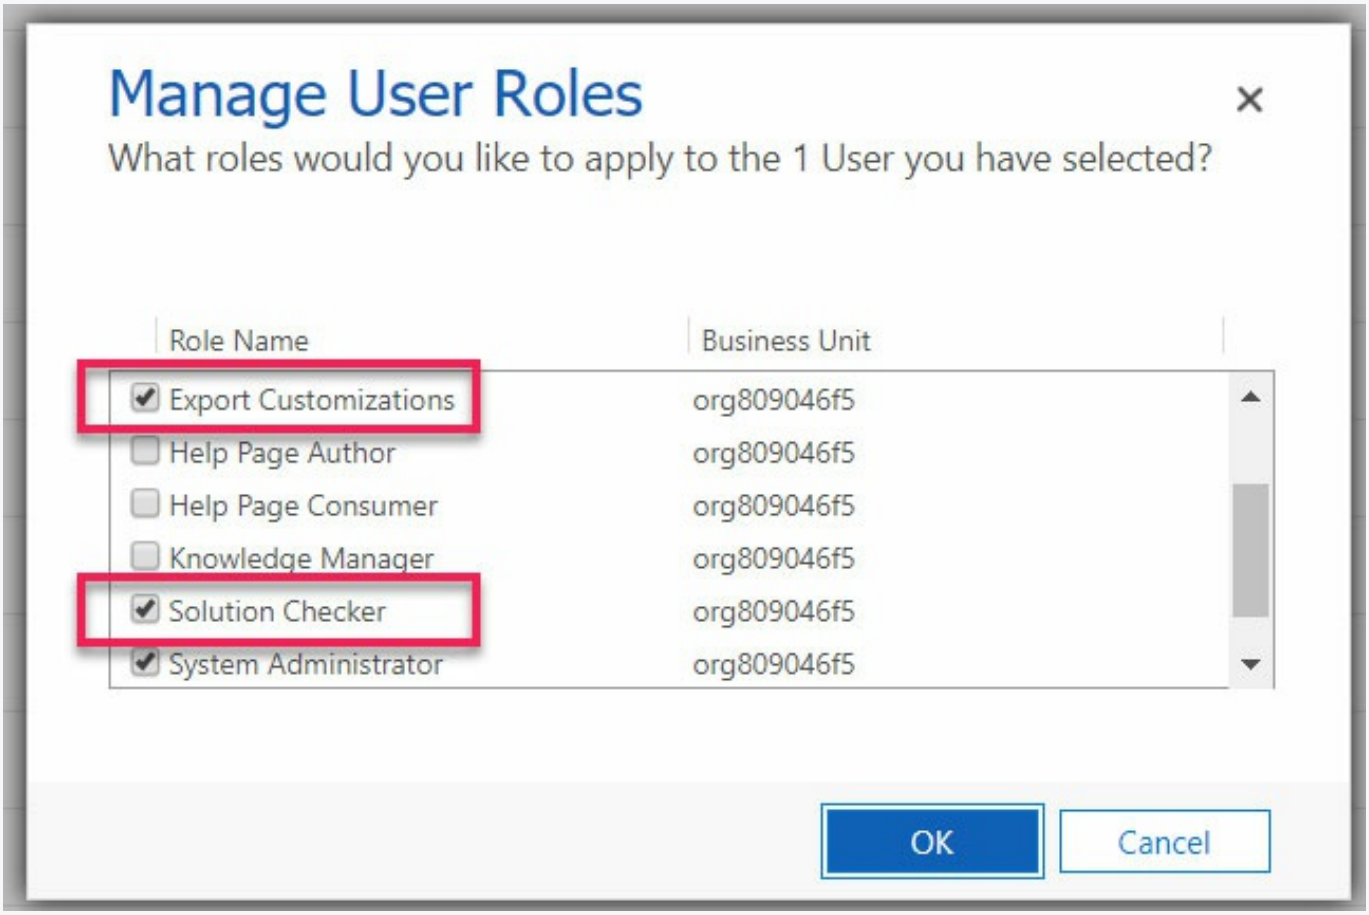

Reference:

https://learntoinspire.ca/2020/01/18/leveraging-the-power-of-solution-checker/

Question: 150 CertyIQ

You are creating a Power Apps app.
The app must retrieve data from an API that requires two-factor authentication.
You need to configure authentication.
Which type of authentication should you implement?

A. Server-to-server
B. API key-based
C. Basic
D. OAuth

Answer: D

Explanation:
OAuth 2.0 is the industry-standard protocol for authorization. After application users provide credentials to authenticate, OAuth determines whether they are authorized to access the resources.
OAuth enables two-factor authentication (2FA) or certificate-based authentication for server-to-server application scenarios.

Reference:
https://docs.microsoft.com/en-us/power-apps/developer/data-platform/authenticate-oauth

Question: 151 CertyIQ

You are creating a canvas app that realtors use to identify neighbors for properties that are for sale.
The OnStart property includes the following code:
ClearCollect(collectNeighborList, Filter(NeighborList, Status = `Active")); ClearCollect (collectRealtorList,CompanyList);ClearCollect(collectRegions, RegionList)
The app is running slower than expected.
You need to resolve the issue.
What should you do?

A. Replace all instances of the ClearCollect method with the connect method.

B. Replace the existing code segment with the following code segment Concurrent (ClearCollect(collectNeighborList, Filter(NeighborList, Status = Active)), ClearCollect(collectRealtorList,CompanyList),ClearCollect(collectRegions, RegionList))

C. Replace the existing code segment with the following code segment: ClearCollect(collectNeighborList, Filter(NeighborList, Status = Active)); Concurrent(ClearCollect(collectRealtorList,CompanyList)); Concurrent(ClearCollect(collectRegions, RegionList))

Answer: B

Explanation:
Optimize the OnStart property -
Use the ClearCollect function to cache data locally if it doesn't change during the user session. Also, use the Concurrent function to load data sources simultaneously; this can cut the amount of time an app needs to load data in half.
Example: Without the Concurrent function, the following formula loads each of four tables one at a time:
ClearCollect(Product, '[SalesLT].[Product]');
ClearCollect(Customer, '[SalesLT].[Customer]');
ClearCollect(SalesOrderDetail, '[SalesLT].[SalesOrderDetail]');
ClearCollect(SalesOrderHeader, '[SalesLT].[SalesOrderHeader]')
You can enclose the same formula in the Concurrent function to reduce the overall time that the operation needs:
Concurrent(
ClearCollect(Product, '[SalesLT].[Product]'),
ClearCollect(Customer, '[SalesLT].[Customer]'),
ClearCollect(SalesOrderDetail, '[SalesLT].[SalesOrderDetail]'),
ClearCollect(SalesOrderHeader, '[SalesLT].[SalesOrderHeader]'))

Reference:
https://docs.microsoft.com/en-us/power-apps/maker/canvas-apps/performance-tips#optimize-the-onstart-property

Question: 152 CertyIQ

DRAG DROP -
You are creating an app that connects to Microsoft Dataverse on a nightly basis. You plan to integrate the app with an external system.
The application must not authenticate by using a Microsoft Azure Active Directory (Azure AD) user account.
You need to enable the application to authenticate to Dataverse.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

Actions	Answer Area
Use the Azure AD application id and secret as credentials in the application.	
Use the Dataverse application user username and password as credentials in the application.	
Assign a security role to the application user in Dataverse.	
Register the application in Azure AD with appropriate permissions.	
Create the application user in Dataverse using the Application User form.	
Grant the Dataverse application user the Access Dynamics 365 as organization users permission in Azure AD.	

Answer:

Actions	Answer Area
Use the Azure AD application id and secret as credentials in the application.	Register the application in Azure AD with appropriate permissions.
Use the Dataverse application user username and password as credentials in the application.	Create the application user in Dataverse using the Application User form.
Assign a security role to the application user in Dataverse.	Assign a security role to the application user in Dataverse.
Register the application in Azure AD with appropriate permissions.	Use the Dataverse application user username and password as credentials in the application.
Create the application user in Dataverse using the Application User form.	
Grant the Dataverse application user the Access Dynamics 365 as organization users permission in Azure AD.	

Explanation:

Register the application in Azure AD with appropriate permissions.

Action:

This is the first step in integrating an application with Azure AD.

You register the application in Azure AD to generate an **application ID** and configure permissions for accessing Dataverse resources.

This is crucial for authentication and authorization.

Create the application user in Dataverse using the Application User form.

Action:

After registering the application in Azure AD, you create a corresponding **application user** in Dataverse.

This links the Azure AD application with Dataverse, allowing the app to interact with the Dataverse environment.

You use the **Application User form** to create this user.

Assign a security role to the application user in Dataverse.

Action:

Once the application user is created in Dataverse, it needs specific **security roles** to define permissions.

Security roles determine what operations the application user can perform within the Dataverse environment, such as read, write, and delete access to data.

Use the Dataverse application user username and password as credentials in the application.

Action:

The application connects to Dataverse using the application user's credentials (typically, the **application ID** and **client secret**).

This ensures secure authentication between the application and Dataverse.

Why Other Actions Are Not Correct?

"Grant the Dataverse application user the Access Dynamics 365 as organization users permission in Azure AD":

This is not needed because the application user is specific to Dataverse, and permissions are managed within Dataverse through security roles.

"Use the Azure AD application ID and secret as credentials in the application":

This is already implied when using the Dataverse application user credentials (the ID and secret generated during Azure AD registration).

Summary of the Process:

Register the application in Azure AD.

Create an application user in Dataverse.

Assign the necessary security roles to the application user.

Use the application user credentials for the app to connect to Dataverse.

Reference:

https://docs.microsoft.com/en-us/power-apps/developer/data-platform/walkthrough-register-app-azure-active-directory https://docs.microsoft.com/en-us/azure/active-directory/develop/quickstart-register-app https://docs.microsoft.com/en-us/dynamics365/marketing/admin-users-licenses-roles

Question: 153

CertyIQ

DRAG DROP -
You are creating a Power Apps Component Framework (PCF) control.
You test the control by using a local test harness.
You need to complete testing.
Which commands should you use? To answer, drag the appropriate commands to the correct functions. Each command may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

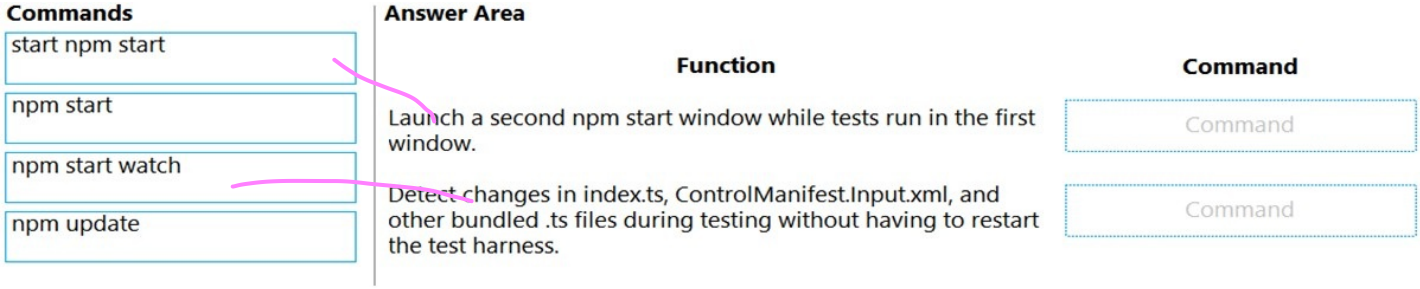

Answer:

Commands	Answer Area	
start npm start	**Function**	**Command**
npm start	Launch a second npm start window while tests run in the first window.	start npm start
npm start watch	Detect changes in index.ts, ControlManifest.Input.xml, and other bundled .ts files during testing without having to restart the test harness.	npm start watch
npm update		

Explanation:

Box 1: start npm start -

Those two start-s surrounding the npm have completely different meaning. When done this way, a new command prompt window will show up and npm start will run in that additional window:

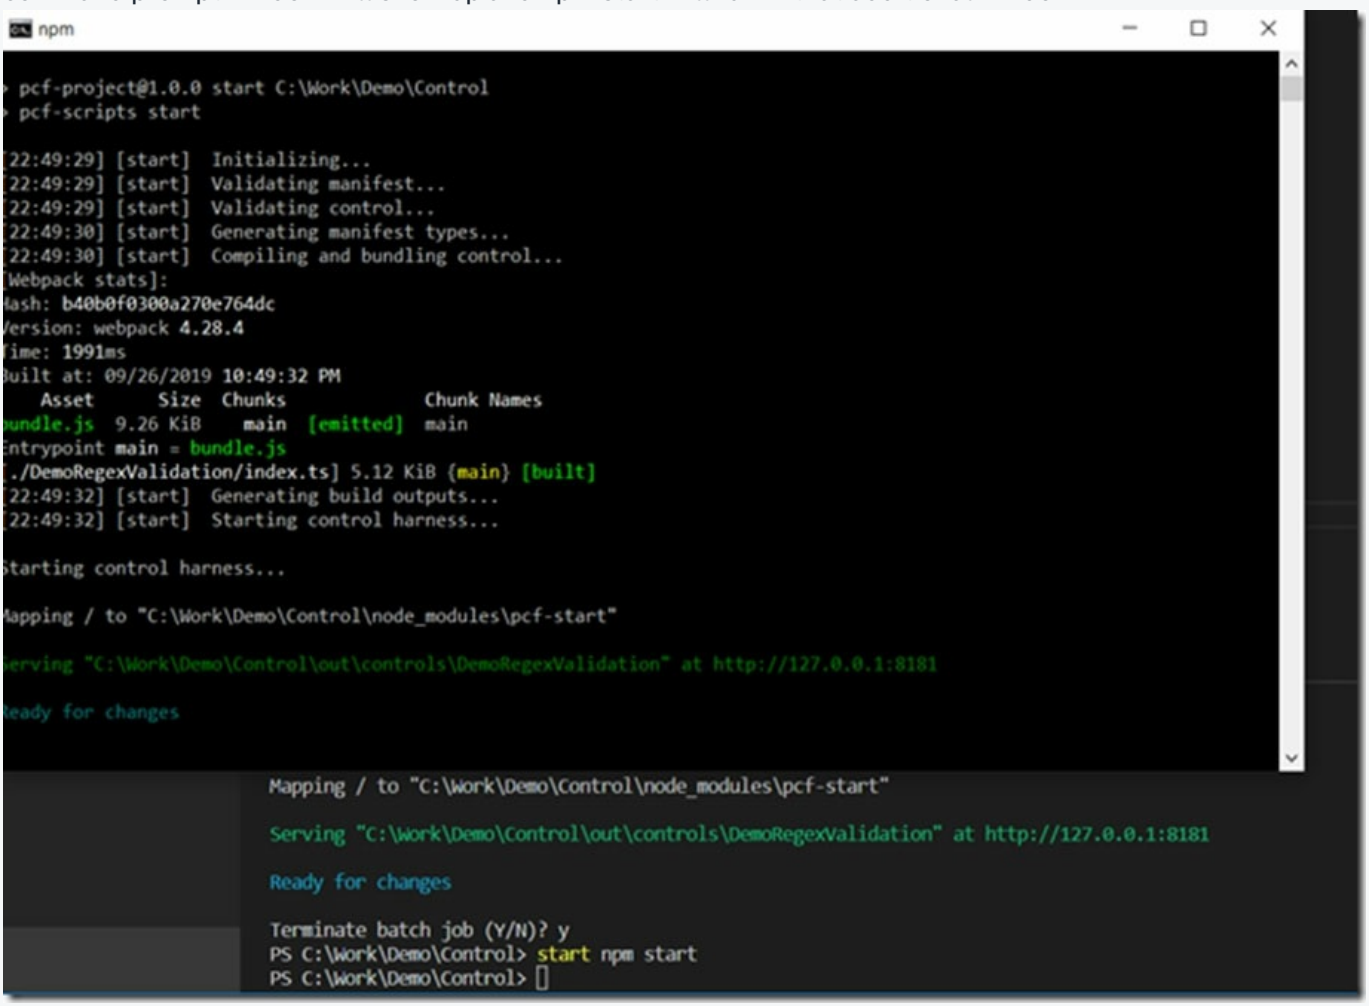

It'll be the same result " you will have the harness started, but, also, your original terminal session will continue to work, and you won't need to open another one.

Box 2: Npm start watch -

The following image shows what Visual Studio Code will look like when you use the npm start watch for the DataSetGrid sample:

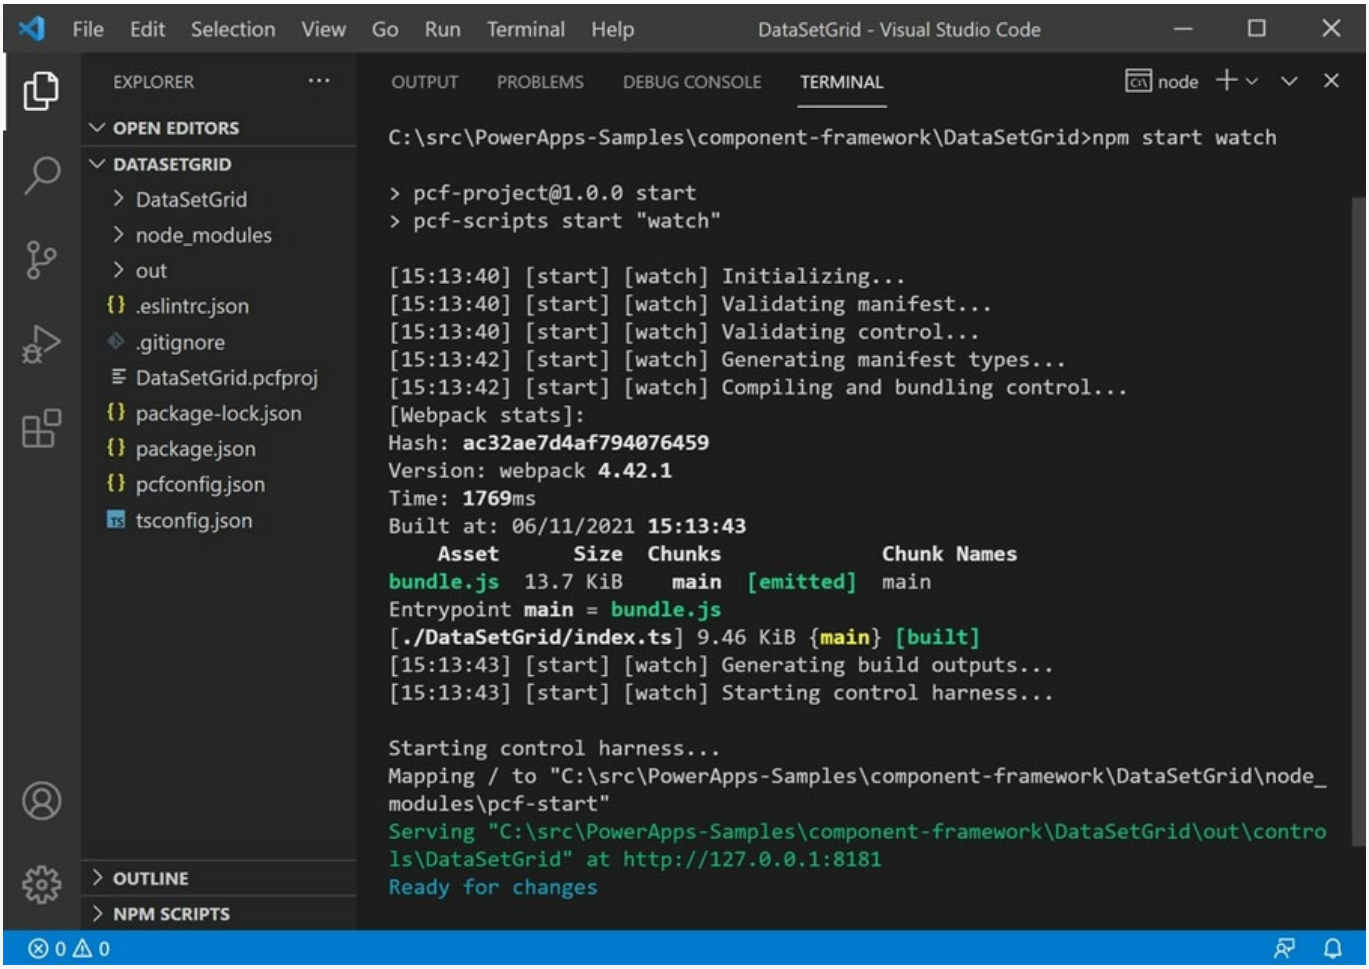

Launching the test harness in watch mode enables you to quickly see the changes in action. Changes made to any of the following component assets are automatically reflected in the test harness without having to restart it: index.ts file.

Imported modules in index.ts (excluding node_modules).

All of the resources listed in the ControlManifest.Input.xml file, for example, css/DataSetGrid.css or strings/DataSetGrid.1033.resx

Incorrect:

* To start the test harness, you would use the following command: npm start

This is fast and convenient, but this command will lock your terminal session. For example, if you are doing PCF development in Visual Studio Code, here is what you will see in the terminal window:

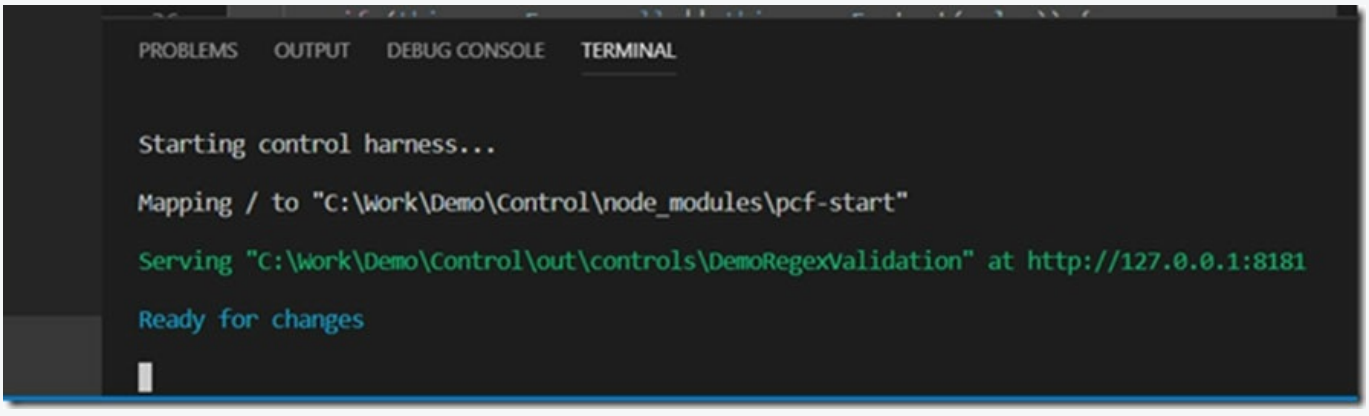

Reference:

https://docs.microsoft.com/en-us/power-apps/developer/component-framework/debugging-custom-controls

https://www.itaintboring.com/dynamics-crm/test-harness-for-pcf-controls-we-can-also-use-start-npm-start/

Question: 154

CertyIQ

DRAG DROP -

You are designing a model-driven app for a company's support desk team.
You must add a button to the app that creates a reminder task. The button must only display to users if a service case is open for at least seven days.
You need to define the steps to create the button when App Designer is open.
In which order should you perform the actions? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.
Select and Place:

Actions	Answer Area
Add a data source to the component library. 3	
Create a task by using an OnSelect expression. 5	
Edit the command bar. 1	
Add a command button. 2	
Configure a visibility expression. 4	

Answer:

Actions	Answer Area
	Edit the command bar.
	Add a command button.
	Add a data source to the component library.
	Configure a visibility expression.
	Create a task by using an OnSelect expression.

Explanation:
Step 1: Edit the command bar.
Step 2: Add a command button.
Step 3: Add a data source to the component library

DataSourceInfo function -
Data sources can provide a wealth of information to optimize the user experience.
Step 4: Configure a visibility expression.
You can use Power Fx for both actions (what happens when the command button is selected) as well as visibility (logic to control when the button is visible).

Visible -
Defines logic for hiding or showing the button when running the app.
To define visibility logic select the command. Then select Visibility on the right command properties pane and choose Show on condition from formula. You may now select Visible on the left of the formula bar then write a Power Fx expression using the formula bar.

Step 5: Create a task by using OnSelect expression.

OnSelect -
Defines the logic that will be executed when the button is selected within the app.

Reference:
https://docs.microsoft.com/en-us/power-apps/maker/model-driven-apps/use-command-designer
https://docs.microsoft.com/en-us/power-apps/maker/model-driven-apps/commanding-use-powerfx

Question: 155 CertyIQ

You are developing a model-driven app for a company that sells sporting goods. You add a button to a page that displays information for a product.
The button must copy information for the selected product and create a record in the data source. You add the following code to the button. (Line numbers are included for reference only.)

```
01
02  Products,
03  Defaults(Products),
04    {
05      Name: Self.Selected.Item.Name,
06      Description: Self.Selected.Item.Description,
07      Type: Self.Selected.Item.Type,
08      Price: Self.Selected.Item.Price
09    }
10  )
```

You need to complete the code.
Which function should you insert at line 01?

A. UpdateContext(
B. IsMatch(
C. LoadData(
D. Patch(
E. SaveData(

Answer: D

Explanation:

patch is correct

Reference:

https://learn.microsoft.com/en-us/power-platform/power-fx/reference/function-patch

Question: 156 CertyIQ

HOTSPOT

-
You are creating a new model-driven app.
The app must meet the following requirements:
• Display an image that can be resized without loss in quality.
• Use a client API function to return language-localized text.
You need to customize the app by using web resources.
Which web resource types should you use?
To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Requirement	Web resource type
Display a resized image.	SVG / PNG / ICO
Return language-localized text.	XAP / XSL / RESX

Answer:

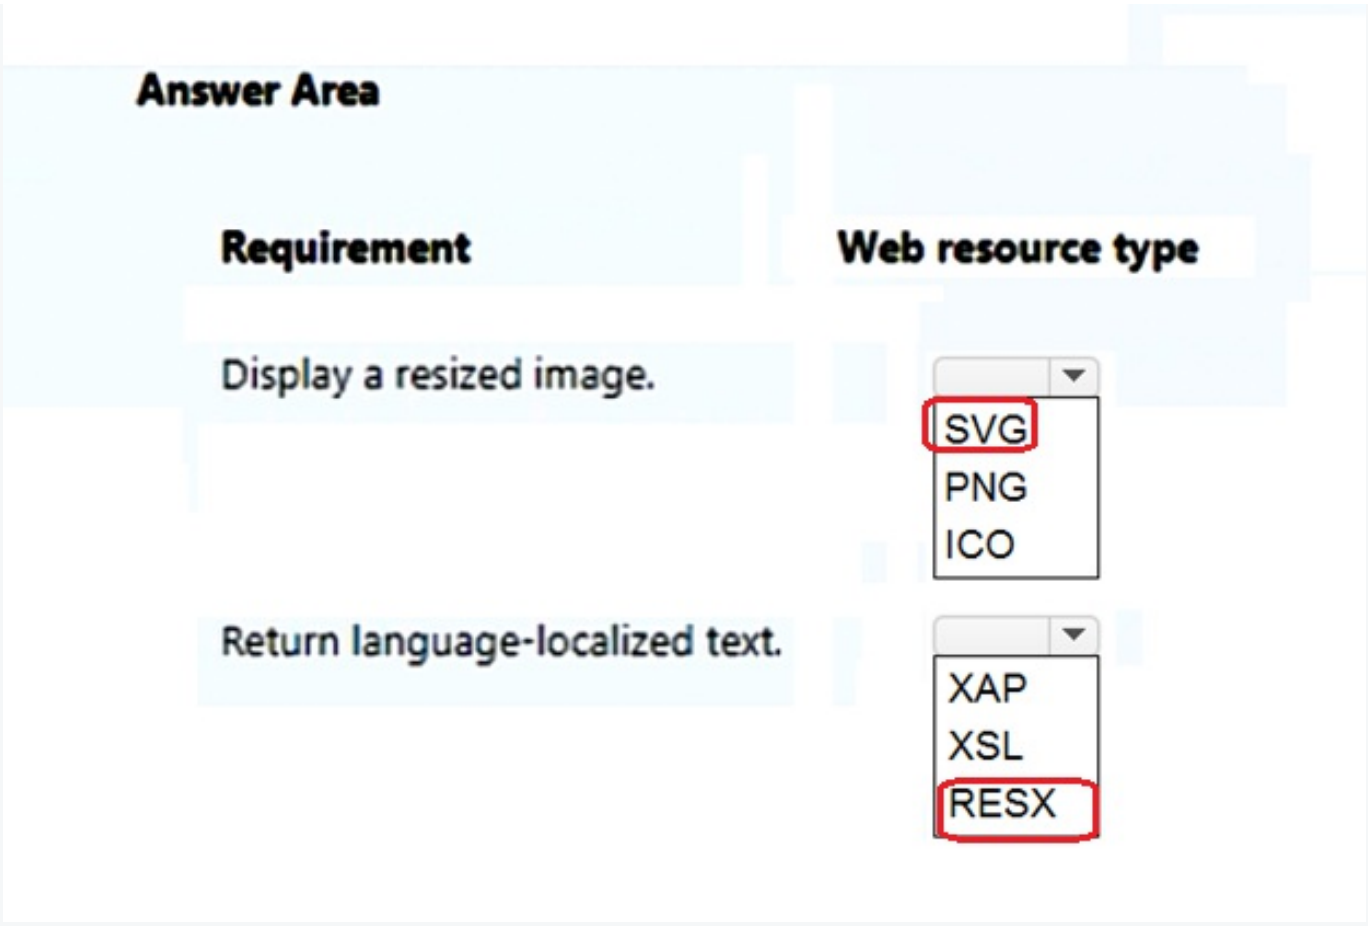

Explanation:

SVG

RESX

Question: 157

CertyIQ

You create and deploy a Power Platform solution that includes synchronous plug-ins.
Users report performance issues with the solution.
You need to determine whether a plug-in is the cause of the performance issues.
Which two tools can you use? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Tracing
B. Data policies
C. Solution checker
D. ISV Studio
E. Microsoft Dataverse Analytics

Answer: AE

Explanation:

Tracing allows you to enable logging of plug-in execution in the application logs. Microsoft Dataverse Analytics allows you to track performance metrics for your solution, including plug-in execution time, which can help you identify any plug-ins that are causing performance issues

Question: 158

CertyIQ

DRAG DROP
-
You are creating a model-driven app for users to submit and manage budgets for projects.
You must create a business process flow to ensure any lead with a budget over $10,000 requires approval by a manager. You must add a custom control that allows users to select the estimated budget cost for a project.
You need to add the control to the business process flow.
In which order should you perform the actions? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

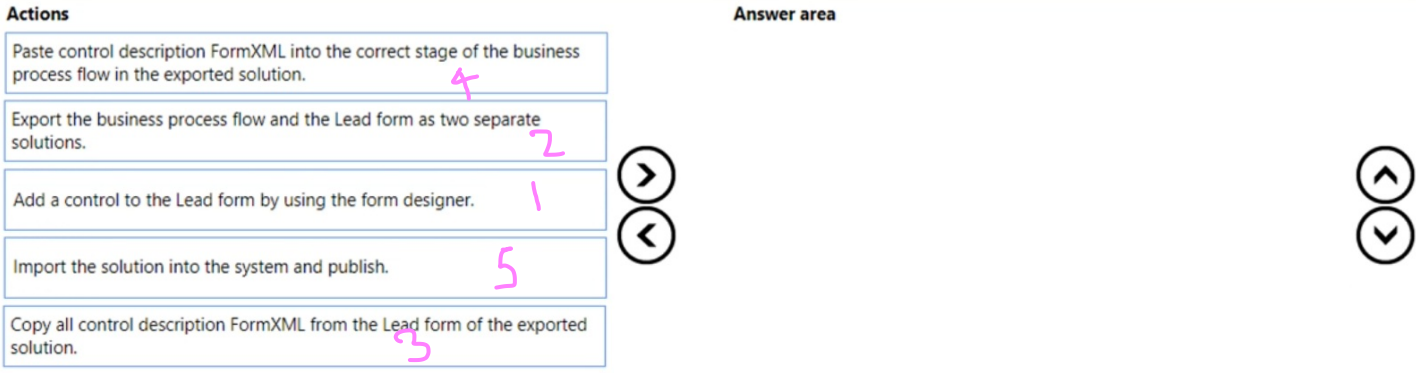

Answer:

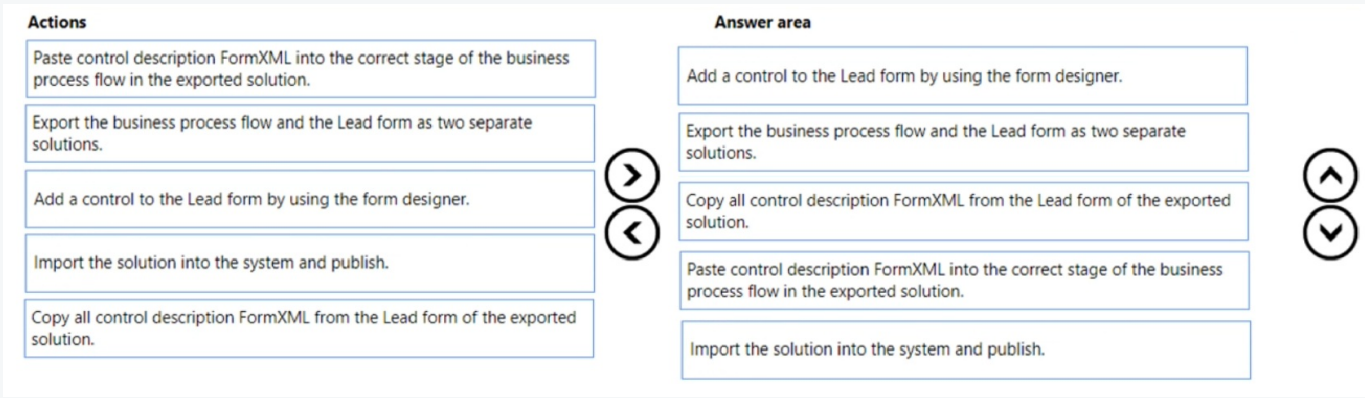

Explanation:

1. **Add a control to the Lead form by using the form designer.**
    - The first step is to create or add the desired control (e.g., a custom or prebuilt control) directly to the Lead form using the Power Apps form designer.
    - This ensures the control is available in the form configuration.
2. **Export the business process flow and the Lead form as two separate solutions.**
    - Exporting the solutions containing the Lead form and the business process flow provides the XML files needed for custom configuration.
    - The solutions must be exported separately because the BPF and the Lead form are distinct entities in Dataverse.
3. **Copy all control description FormXML from the Lead form of the exported solution.**
    - Once the solution containing the Lead form is exported, the FormXML (metadata describing the control) for the control added in Step 1 is extracted from the form's XML.
4. **Paste control description FormXML into the correct stage of the business process flow in the exported solution.**
    - The copied FormXML is inserted into the corresponding stage of the BPF's XML file. This ties the control to the desired stage within the BPF.
    - Proper placement within the XML is critical to ensure functionality.
5. **Import the solution into the system and publish.**
    - Finally, re-import the modified solutions (containing both the updated Lead form and the BPF) back into the system.
    - After importing, publishing the solutions makes the changes live for end users.

Question: 159 CertyIQ

DRAG DROP
-
The engineering team in a company uses a SharePoint list to manage critical technical issues that are raised by clients. Other departments do not have access to this list. Departments use their own apps for their own processes. All departments must be able to see the total number of client issues at any point in time.
You need to design a component that can be used in all the departmental apps to display the total number of client issues in bold colors.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
NOTE: Each correct selection is worth one point

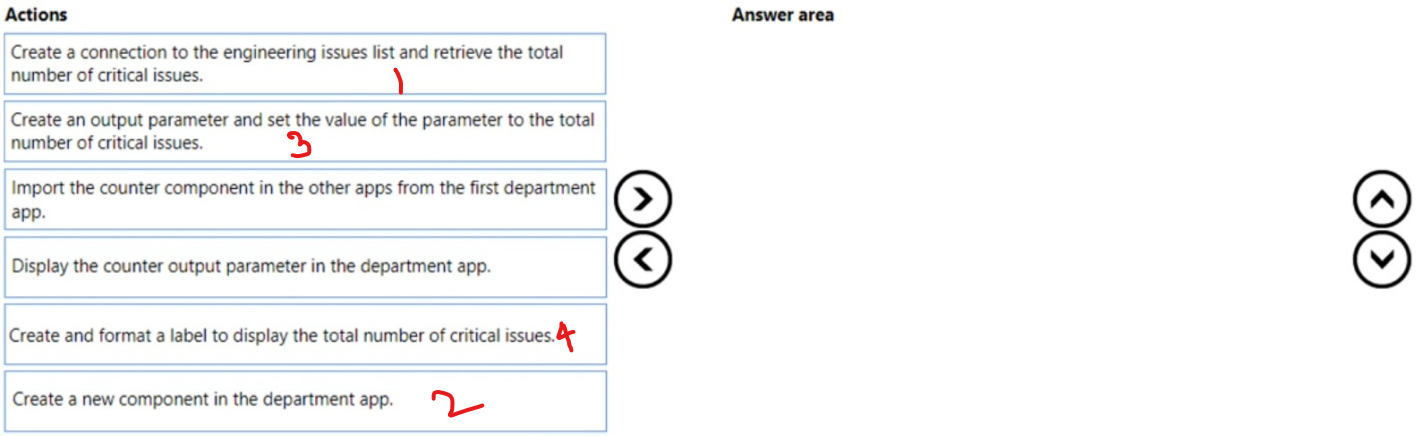

Answer:

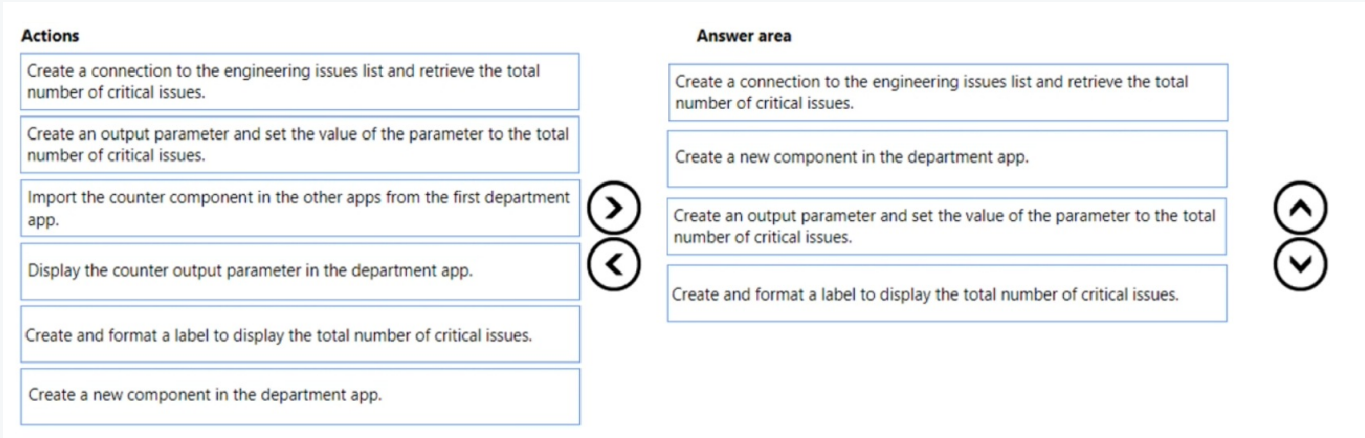

Explanation:

1.Create a connection to the engineering issues list and retrieve the total number of critical issues.

The first step is to establish a data connection in the app to the engineering issues list (e.g., a SharePoint list or Dataverse table).

Use formulas (such as Filter and CountRows in Power Apps) to filter for critical issues and retrieve their total count.

2.Create a new component in the department app.

Create a reusable component within the app. This allows for modular design and makes the counter accessible in other parts of the app or other apps if needed.

Components enable encapsulation of functionality, which is essential in this scenario.

3.Create an output parameter and set the value of the parameter to the total number of critical issues.

Add an output parameter to the component to expose the total number of critical issues as a value. This allows other parts of the app (or other apps) to retrieve and use this data.

The output parameter acts as a dynamic property that returns the critical issues count.

4.Create and format a label to display the total number of critical issues.

Add a label control to the app to visually display the critical issue count. Bind the label's Text property to the output parameter of the component.

Format the label for readability, such as setting font size, color, and alignment.

Explanation of Why This Sequence is Correct

Connection Setup:

A data connection is required first to retrieve the data (critical issues count) from the engineering issues list. Without this, the app cannot access the necessary information.

Component Creation:

Creating a component ensures reusability and modularity. This aligns with Power Apps best practices, enabling you to use the counter in other apps without redundant configuration.

Output Parameter Configuration:

The output parameter exposes the calculated total to the app. This is crucial for dynamic data handling and ensures the value is updated as the data changes.

Display the Data:

Adding and formatting the label ensures the calculated total is visible to users in a clear and user-friendly manner.

Question: 160 CertyIQ

DRAG DROP
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser

- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.

- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to configure the columns to store scores and totals.
Which configurations should you use? To answer, drag the appropriate configurations to the correct columns. Each configuration may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

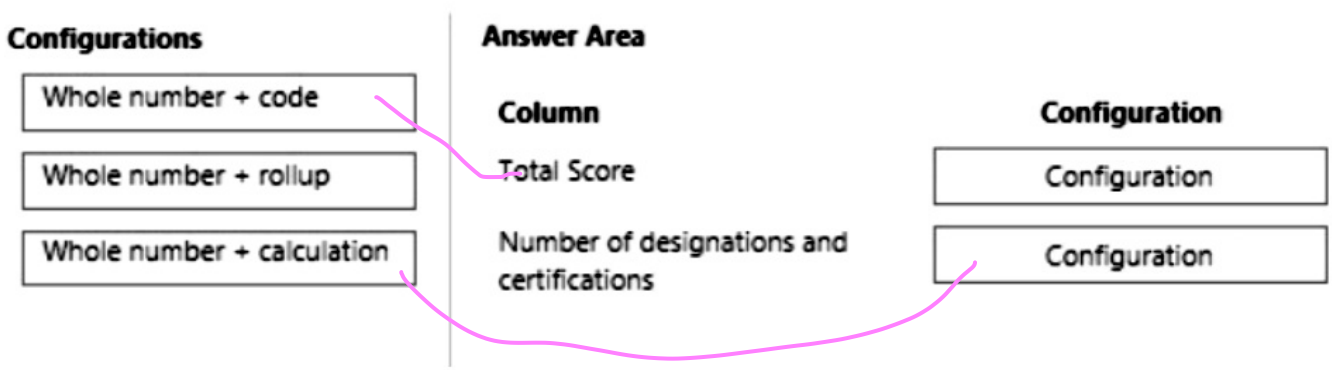

Answer:

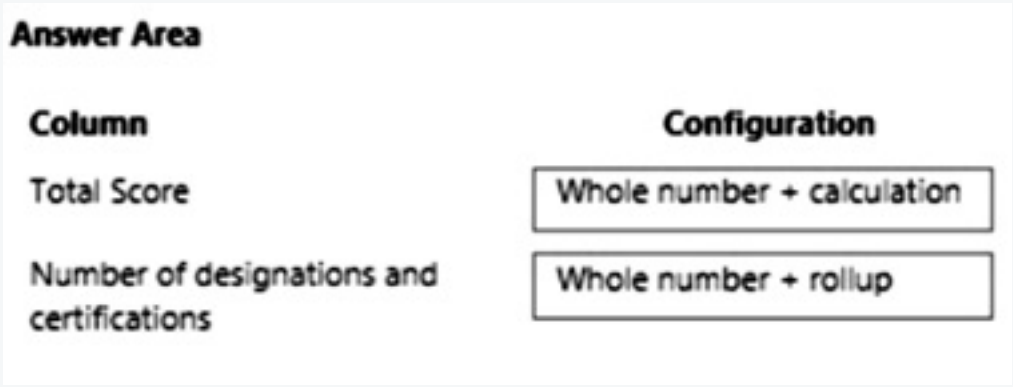

Explanation:

Whole number+ calculation.

Whole number+ roll up

Question: 161 CertyIQ

HOTSPOT
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser

- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.

• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You create the following Fetch XML query to determine the number of interviews where there are no recommendations for an applicant.

```
<fetch aggregate='true'>
  <entity name='pro_interview'>
    <attribute name='pro_interviewid' alias='recommend_count' aggregate='count' />
    <filter>
      <condition attribute='pro_recommend' operator='eq' value='1' />
    </filter>
    <link-entity name='pro_application' from='pro_applicationid' to='pro_applicationid' link-type='inner' >
      <link-entity name='contact' from='contactid' to='pro_contactid' >
        <filter>
          <condition attribute='contactid' operator='eq' value='1b315d5d-b436-eb11-a813-000d3a8b6647' />
        </filter>
      </link-entity>
    </link-entity>
  </entity>
</fetch>
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The query meets the requirements for retrieving the count of interviews without recommendations.	○	⊗
You can modify the query to return counts of interviews with and without recommendations.	⊗	○
The query allows scheduled interviews for job applications when there are no recommendations for the job applicant.	○	⊗

Answer:

Answer Area

Statements	Yes	No
The query meets the requirements for retrieving the count of interviews without recommendations.	○	○
You can modify the query to return counts of interviews with and without recommendations.	○	○
The query allows scheduled interviews for job applications when there are no recommendations for the job applicant.	○	○

Explanation:

1. The query meets the requirements for retrieving the count of interviews without recommendations \ (\rightarrow \) Yes

Technical Reason: The case study query is specifically constructed with a **left outer join** linking the Interview entity to the Recommendation entity, coupled with a filter condition where the recommendation identity is null (operator="null"). Using an aggregate="true" setup with count, it isolates and counts only the interview records that lack a matching recommendation child record.

2. You can modify the query to return counts of interviews with and without recommendations \(\rightarrow \) Yes

Technical Reason: By adjusting the FetchXML structure — specifically by removing the restrictive null filter condition on the outer join and adding a **groupby** attribute targeting the recommendation field or status indicator — the same base query can be grouped to yield aggregate count subtotals for both groups concurrently.

3. The query allows scheduled interviews for job applications when there are no recommendations for the job applicant \(\rightarrow \) No

Technical Reason: This is a read-only reporting query utilizing FetchXML data extraction rules. An analytical query only extracts historical or reactive record snapshots; it has **no transactional control or security enforcement rules** to allow or block business operations (like scheduling an interview) within the Dataverse platform.

Question: 162 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.

•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to choose a technology to access the Web API.
Which technology should you select?

A.Canvas app that uses the custom connector
B.Plug-in that contacts the Web API
C.Power Automate flow that uses the custom connector
D.Webhook that contacts the Web API

Answer: C

Explanation:

Correct answer is C:Power Automate flow that uses the custom connector

Question: 163

CertyIQ

A company designs a solution for use in an international organization.
The solution must provide multiple UI languages and currencies.
You need to move components to include them as part of the solution.
Which three component types can you move? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A.available UI languages
B.scheduled power automate flow

C.custom entity

D.modified standard security role

E.Currencies enabled in the environment

Answer: BCD

Explanation:

Power automates, Entities and security roles can be moved with solutions. UI must be enabled/installed on the environments and currencies added.

Question: 164 CertyIQ

An organization uses Dynamics 365 Sales. The organization has accounting and customer service departments.
You must restrict users in customer service from being able to change the value of the balance field on the Contact records. The accounting team must be the only team able to edit this field.
You need to create the appropriate solution without any customizations.
What should you do first?

A.Enable field security for the balance field and grant the customer service team read and update permissions.

B.Create a customer service form and role and a business rule that enables the balance field.

C.Enable field security for the balance field and grant the customer service team read permissions.

D.Enable field security for the balance field and grant the accounting team read permissions.

Answer: C

Explanation:

C. Enable field security for the balance field and grant the customer service team read permissions.

Why this is the correct choice:

Field-Level Security (FLS): In Dynamics 365, standard security roles control access at the table/entity level (e.g., whether someone can read or edit any Contact record). To restrict or grant permissions to a specific field (like the balance field) without writing custom code or creating complex configurations, you must enable **Field Security** on that field.
When you enable field security, the field is locked down by default. You then use Field Security Profiles to explicitly grant Read, Update, or Create permissions to specific users or teams.
Option C explicitly grants the customer service team **Read** permission, ensuring they can see the balance but cannot change it (fulfilling the requirement to restrict them from editing it).
Option A is incorrect because it grants them update permissions, which lets them change the value.
Option B relies on business rules or form switches, which are easily bypassed (e.g., via bulk edits, API, or data imports) and do not provide true back-end data security.
Option D is incomplete because while the accounting team needs access, granting them only Read permissions would prevent them from editing the field (and it fails to define the customer service team's access)

Question: 165 CertyIQ

HOTSPOT

-
You create a model-driven app.
You observe that the following issues occur with the app:
•One custom column displays an unexpected value when a new record is created.
•An error prevents the record from saving.
You need to use the browser to find the root cause of the issues.
Which events should you debug? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

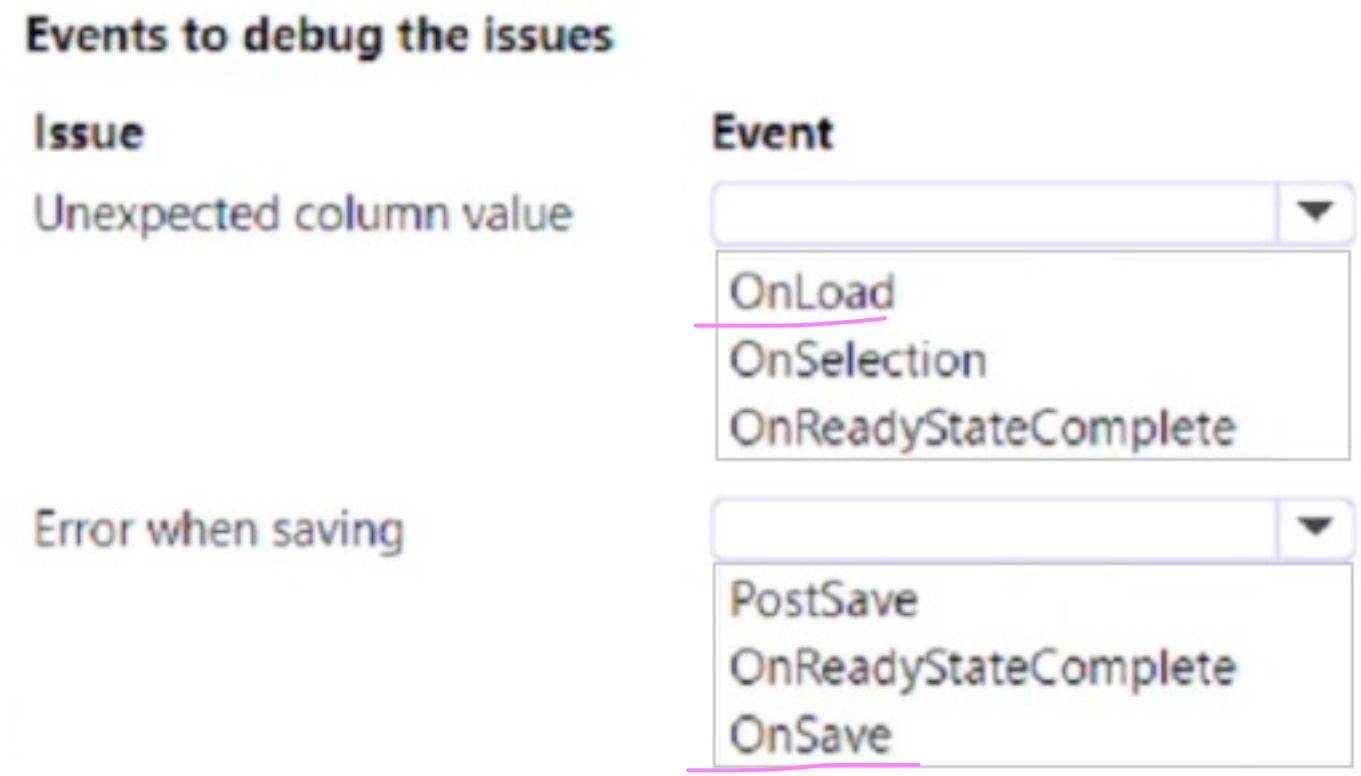

Answer:

Explanation:

On load.

On save.

Question: 166 CertyIQ

DRAG DROP
-
You manage a model-driven app.
The forms in the app do not work as expected. You must troubleshoot the form issues.
Code unrelated to an event must continue to run as you troubleshoot.
You need to disable form events to isolate the causes.
Which URL parameters should you use? To answer, move the appropriate URL parameters to the correct events.
You may use each URL parameter once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

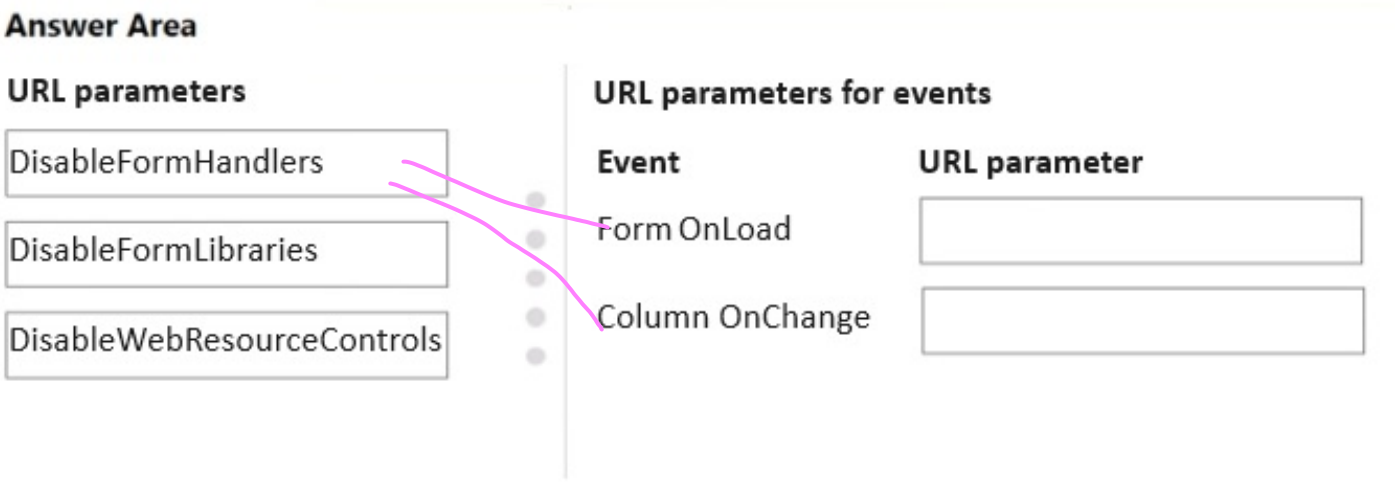

Answer:

Explanation:

1) DisableFormHandlers

2) DisableFormHandlers

If you use the DisableFormHandlers=true flag, it disables the following event handlers: OnLoad, OnSave, business rule, OnChange, and TabStateChange.

https://learn.microsoft.com/en-us/power-apps/developer/model-driven-apps/troubleshoot-forms#use-url-parameters-to-disable-various-form-components

Question: 167 CertyIQ

An organization uses Dynamics 365 Sales. The organization has accounting and customer service departments.
You must restrict users in customer service from being able to change the value of the balance field on the Contact records. The accounting team must be the only team able to edit this field.
You need to create the appropriate solution without any customizations.
What should you do first?

A. Enable field security for the balance field and grant the customer service team read permissions.
B. Create a customer service form and role and make the balance field read-only.
C. Create a customer service form and role and a business rule that enables the balance field.
D. Create an accounting form and role and a business rule that enables the balance field.

Answer: A

Explanation:

Enable field security for the balance field and grant the customer service team read permissions.

Question: 168 CertyIQ

DRAG DROP
-
A company plans to deploy an Azure Function that connects to Dataverse on a defined schedule to bulk-update Account data.
Corporate policy discourages password-based authentication if other viable options exist.
You need to implement the function app.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

List of steps to implement Dataverse authentication from an Azure Function

- Run pac admin application register.
- Create a Microsoft Entra ID user named IntegrationAccount.
- Set IntegrationAccount access mode to Non-interactive.
- Enable system-assigned managed identity. 2
- Run pac admin assign-user. 3
- Set IntegrationAccount access mode to Administrative.
- Create the Azure Functions app. 1
- Create an app password for IntegrationAccount.

Answer Area

Answer: