message is displayed. The entity "Trey Research" cannot be found. Specify a valid query, and try again. Code should be parent[0].entityTypeBox 3: No. Because the parent record can not be retrieved because of parent[0].name.

Question: 249

CertyIQ

HOTSPOT
-
You are creating an app for a school.
You need to implement client-side logic that uses the Microsoft Dataverse web API to evaluate the class type associated with a class record. The code must hide the School Schedule tab if no value is entered for Class Type.
How should you complete the code? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

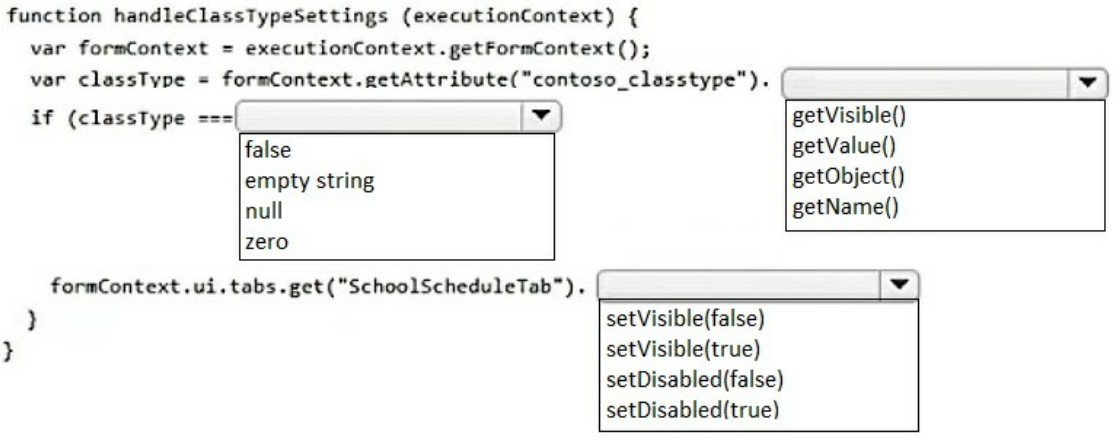

Answer:

Answer Area

Question: 250

CertyIQ

HOTSPOT
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the

scenario that is described in the case study. Each question is independent of the other questions in this case study. At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a

Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate's local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to configure elements in the manifest for the PCF control used to display local time.
Which values should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Manifest element	Value
Property	of-type="Lookup.Simple" of-type="Whole.TimeZone" of-type="DateAndTime.DateAndTime"
Type-Group	<type>Whole.None</type> <type>SingleLine.Text</type> <type>DateAndTime.DateAndTime</type>

Answer:

Answer Area

Manifest element	Value
Property	of-type="Lookup.Simple" of-type="Whole.TimeZone" of-type="DateAndTime.DateAndTime"
Type-Group	<type>Whole.None</type> <type>SingleLine.Text</type> <type>DateAndTime.DateAndTime</type>

Explanation:

1. Property \(\rightarrow \) of-type="DateAndTime.DateAndTime"

Explanation: The <property> element defines the input parameters or data fields that the PCF control expects from the host application (Canvas or Model-driven app). When a property is strictly bound to a single specific data type, the of-type attribute is used.
Specifying **DateAndTime.DateAndTime** ensures that this field will exclusively accept and bind to standard Dataverse date-and-time fields.

2. Type-Group \(\rightarrow \) <type>DateAndTime.DateAndTime</type>

Explanation: A <type-group> element is used when you want a single property to be compatible with multiple different data types (for example, allowing a control to bind to both a text field and a whole number).
Within a type group definition, individual allowed data types are declared using child <type> tags. Including **<type>DateAndTime.DateAndTime</type>** within a custom group enables the component to safely recognize and evaluate date/time values under that grouping contract.

Question: 251 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment -
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter

- Recruiter identifier
- Recruiter name

Applications -

There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.

Interviews -

Each interview is performed by an employee and is related to a single application.

The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.

Requirements. Interview Scheduling

The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.

• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.

You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.

Requirements. Historical Information Tracking

You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.

• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.

Requirements. Historical Information Scoring

The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.

• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.

Requirements. Design Guidelines -

The following design guidelines must be followed:

• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.

Issues -

• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.

You need to resolve the issue with the new command button.
What should you do?

A.Pass ExecutionContext to the function in the action definition.
B.Pass the value SelectedControl to the function in the action definition.
C.Select the Pass execution context as first parameter option on the event registration form.
D.Pass the value PrimaryControl to the function in the action definition.

Answer: D

Explanation:

D. Pass the value PrimaryControl to the function in the action definition.

Why This Is the Correct Choice

The problem statement describes a **command button** (ribbon button) that is failing because the execution/form context parameter inside the custom JavaScript function evaluates to null.

Command Bar vs. Form Event Parameters: Unlike standard form events (such as OnLoad or OnSave), which use a simple checkbox to "Pass execution context as first parameter" (Option C), command bar buttons do not use that configuration interface.
The PrimaryControl Parameter: When setting up a JavaScript action for a ribbon or command bar button (using tools like the Ribbon Workbench or the Power Apps Command Designer), you must explicitly supply a **CRM Parameter** and set its value to **PrimaryControl**. This passes the active form's context into the JavaScript handler, resolving the null parameter issue.

Question: 252 CertyIQ

HOTSPOT
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-

The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring

The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to implement ribbon display rules to control availability for the scoring command button.
Which rule types should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

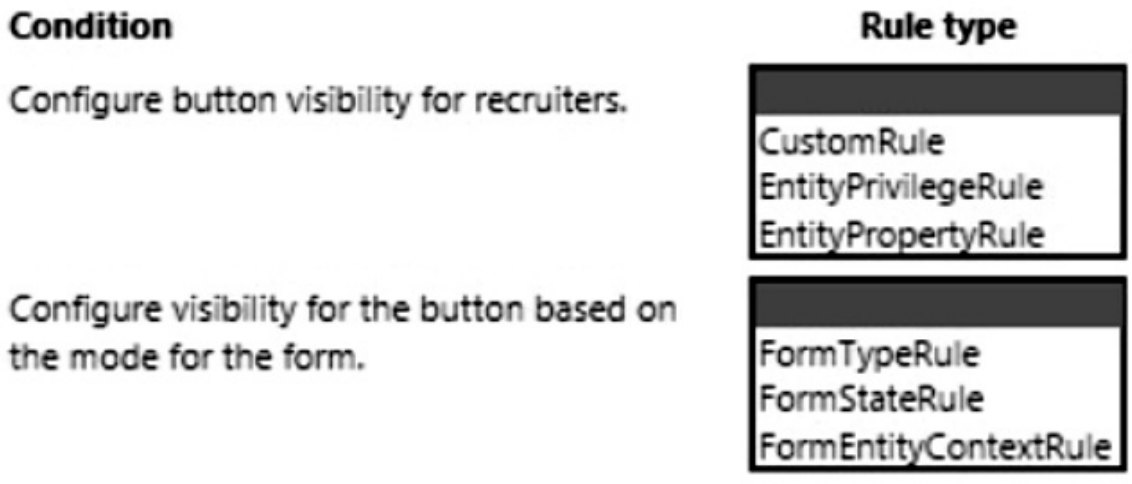

Answer:

Answer Area

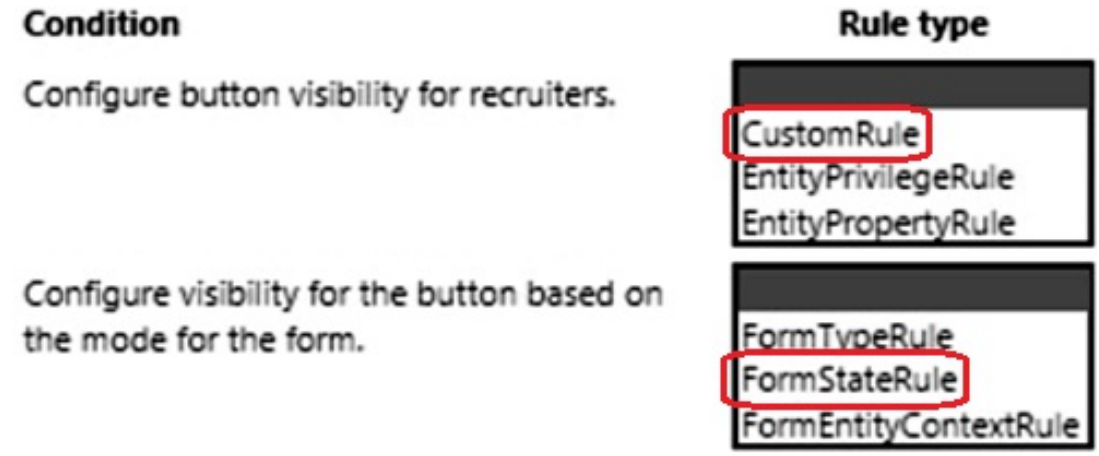

Explanation:

Condition / RequirementCorrect Rule TypeTechnical Justification**Configure button visibility for recruitersCustomRule**Dataverse ribbon rules do not contain a built-in rule type to natively check a user's specific **Security Role** name. You must use a **CustomRule** to invoke a JavaScript function that uses the Client API (Xrm.Utility.getGlobalContext().userSettings.roles) to evaluate if the current user possesses the "Recruiter" role.**Configure visibility for the button based on the mode for the formFormStateRule**The **FormStateRule** is explicitly built to toggle command button visibility dynamically based on the current transactional state or mode of the form (e.g., **Create**, **Existing**, **ReadOnly**, or **Disabled**).

Why the Other Options Are Incorrect

EntityPrivilegeRule: Checks standard table-level CRUD permissions (like Read, Write, or Append) for the current user, rather than specific named security roles.
EntityPropertyRule: Evaluates metadata definitions or boolean traits of the entity table itself rather than the active user's environment role context.
FormTypeRule: Determines visibility based on the functional style classification of the active form window (e.g., Main form, Quick Create, Dashboard, or Mobile) rather than the data record's lifecycle mode (new vs. existing record).
FormEntityContextRule: Filters button visibility based on whether the command layout is being loaded within a specific subgrid context or table frame relation, not the form entry mode.

Question: 253 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore

the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.

Background -

Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.

Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.

Current Environment -

The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.

Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.

The recruiting team manages all information by using a model-driven application.

The company has the following Microsoft Dataverse tables and columns:

• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name

Applications -

There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.

Interviews -

Each interview is performed by an employee and is related to a single application.

The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.

Requirements. Interview Scheduling

The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.

• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.

You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.

Requirements. Historical Information Tracking

You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.

• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines -
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues -
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to configure the PCF control to display team members for interview scheduling.
Which two inputs should you use? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A.identifier for the hiring manager

B.time-zone offset for the job candidate

C.identifier for the job posting

D.time-zone offset for the hiring manager

E.identifier for the job candidate

Answer: AB

Explanation:

1. **Finding the team members:** "You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager."

To query and pull the correct sub-list of employees from Dataverse, the control requires the unique record GUID/ID representing the **hiring manager (Option A)**.

1. **Sorting the list by location proximity:** "You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first."

To successfully perform the sorting mathematics/logic on the front-end control, the PCF component must know where the applicant is located. Therefore, it requires the dynamic **time-zone offset for the job candidate (Option B)** as an input property wrapper.

Why the Other Options Are Incorrect

C & E are incorrect: The requirement states that the control needs to find who reports to the hiring manager and compare their locations against the applicant's time zone. The job posting record ID or candidate GUID alone won't provide the direct reporting relationship or location coordinates needed for sorting.
D is incorrect: The time-zone information of the hiring manager is irrelevant for sorting the grid, as the requirement specifically asks to calculate proximity relative to the **candidate's** zone.

Question: 254 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-

[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to configure the row filter on the Dataverse trigger.
Which filter should you use?

A.not contains(new_dataid, '')

B.new_dataid eq null

C.DataId ne null

D.new_dataid ne null

Answer: D

Explanation:

• [DATAID] is the new_ data id column in the Account table.

Question: 255 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to ensure data returned from the Web API corresponds to the correct environment.
What should you use?

A.system settings

B.plug-in secure configurations

C.records in a new configuration table

D.environment variables

Answer: D

Explanation:

Correct answer is D:environment variables.

Question: 256 CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment
-
Environment
-
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data
-
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API
-
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements
-
Custom connector
-

•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process
-
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues
-
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to configure the custom connector to incorporate the environment name and DataId in the Web API URL.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

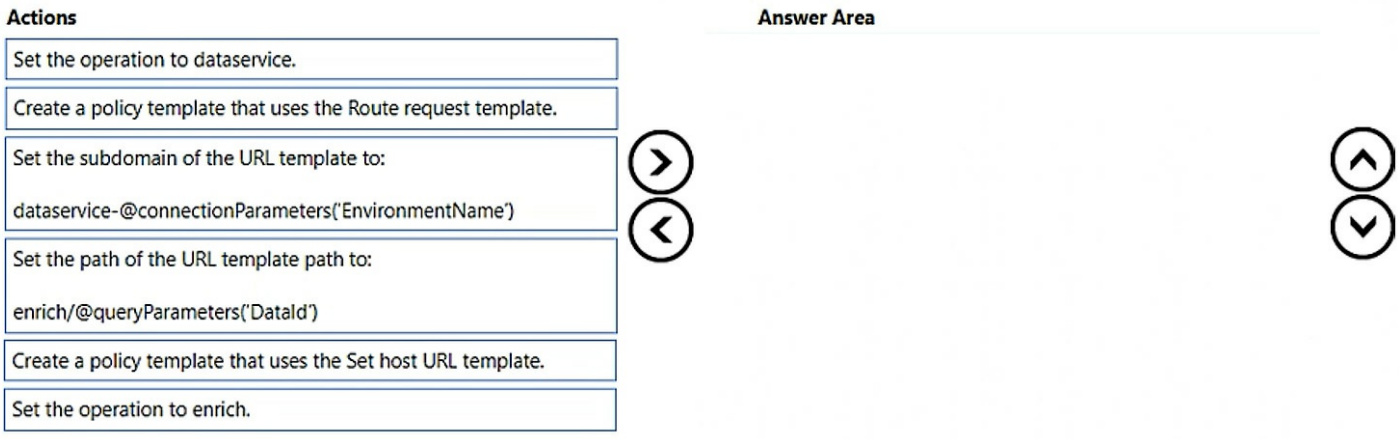

Answer:

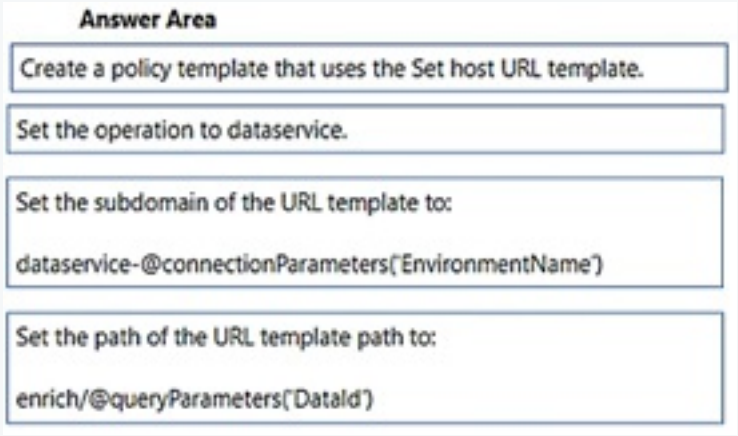

Explanation:

1. **Create a policy template that uses the Set host URL template \(\rightarrow \) Correct**

Justification: To dynamically alter the endpoint target URL host or subdomains at runtime based on environmental configuration parameter sets, you must select the **Set host URL** policy type.

1. **Set the operation to enrich \(\rightarrow \) Correction Needed**

Justification: There is a mismatch in the image selections. The path in the final box targets the /enrich endpoint: enrich/@queryParameters('DataId'). Therefore, the **Operation** scope parameter field inside the policy header must be mapped to match **enrich** rather than dataservice so the policy executes exclusively against the proper API action handler.

1. **Set the subdomain of the URL template to: dataservice-@connectionParameters('EnvironmentName') \(\rightarrow \) Correct**

Justification: This correctly leverages a dynamic expression value (@connectionParameters) injected into the sub-domain prefix structure string to resolve environment variants cleanly during execution pipeline parsing.

1. **Set the path of the URL template path to: enrich/@queryParameters('DataId') \(\rightarrow \) Correct**

Justification: This string successfully utilizes query string token variables via @queryParameters parameters to map individual transactional tracking values seamlessly into the absolute path mapping structure.

Question: 257 CertyIQ

HOTSPOT
-
You are configuring two command buttons on a form.
The form must display the buttons only if conditions meet a pre-defined criteria.
You need to create rules for the form.
Which rule types should you use?
To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Condition	Rule type
Website link to the current form	PageRule / ValueRule / EntityRule
Sum of two form fields	ValueRule / CustomRule / SelectionCountRule

Answer:

Answer Area

Condition	Rule type
Website link to the current form	PageRule
Sum of two form fields	CustomRule

Explanation:

Page rule

Custom rule

Reference:

https://d365demystified.com/2021/01/08/ribbon-button-visibility-based-on-a-field-value-in-dynamics-365-ribbon-workbench/ at least not value rule

Question: 258 CertyIQ

A company is testing a Microsoft Dataverse plug-in in an environment. The plug-in works in post-operation mode and performs the update of the Account entity.
During testing, a user observes that the plug-in unintentionally triggers a synchronous third-party ISV plug-in.
You need to modify the system design to avoid unwanted triggering of the third-party plug-in.
What should you do?

A.Disable the existing third-party plug-in by using the Plug-in Registration Tool.

B.Use UpdateRequest with the BypassCustomPluginExecution parameter and Execute method of the Organization service.

C.Update the code of the third-party ISV plug-in to ignore updates caused by the new plug-in.

D.Update the code of the new plug-in to use InputParameters of Plugin Execution Context.

Answer: B

Explanation:

Use the Bypass Custom Plugin Execution optional parameter to bypass custom synchronous logic.The alternative to using this optional parameter is to locate and disable the custom plug-ins that contain the synchronous business logic. But disabling plug-ins means that the logic is disabled for all users.

https://learn.microsoft.com/en-us/power-apps/developer/data-platform/bypass-custom-business-logic?tabs=sdk

Question: 259 CertyIQ

You are developing a model-driven app using JavaScript.
You need to configure the app to display a dialog box when a form is opened or when a grid on a form is sorted.
What should you use?

A.Grid OnSave

B.Grid OnRecordSelect

C.Grid OnChange

D.Subgrid OnLoad

Answer: D

Explanation:

Correct answer is D:Subgrid On Load.

Reference:

https://learn.microsoft.com/en-us/power-apps/developer/model-driven-apps/clientapi/reference/events/subgrid-onload

Question: 260 CertyIQ

A company performs an update to an existing column-bound Power Apps Component Framework (PCF) code component.
You test the changes to the code component in the development environment. You then import the component to the production environment as a part of a managed solution. You observe that the changes to the component are not reflected in the production environment.
You need to ensure that the changes are effective in the production environment.
What should you do?

A.Import the PCF code component to the production environment directly from Visual Studio Code by using the pac pcf push instruction.

B.Publish the form that uses the PCF code component in the production environment.

C.Increment the PCF control version property in the manifest.xml file, and then reimport the solution from development to the production environment.

D.Publish the PCF code component in the production environment.

Answer: C

Explanation:

C. Update the PCF control version property in the manifest.xml file and then reimport the solution.The solution on the production environment is managed and pushing a component directly on production is not a good practice.

Question: 261 CertyIQ

HOTSPOT

-

You develop the following code as part of an OnSave event handler in a form.

```
01  executionContext.getEventArgs().preventDefault();
02
03  var isOnHold = false;
04  Xrm.WebApi.retrieveRecord("account", id, "?$select=creditonhold").then(
05      function (result) {
06          isOnHold = result["creditonhold"];
07      }
08  );
09
10  if (isOnHold) {
11      Xrm.Navigation.openConfirmDialog({ text: 'Credit Hold - Save OK?' }).then(
12          function (success) {
13              if (success.confirmed) {
14                  formContext.data.save();
15              }
16          });
17  }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statement	Yes	No
The code cancels the normal save operation of the form.	○	○
A confirmation dialog box is displayed if the creditonhold value is true.	○	○
The record will save if the creditonhold value is false.	○	○

Answer:

Answer Area

Statement	Yes	No
The code cancels the normal save operation of the form.	●	○
A confirmation dialog box is displayed if the creditonhold value is true.	●	○
The record will save if the creditonhold value is false.	○	●

Explanation:

Yes

Yes

No

Question: 262 CertyIQ

You create a custom API. You define the API as a function.

The custom API does not appear in the response received from https://[yourorg].api.crm.dynamics.com/api/data/v9.2/$metadata and returns an error when called.
You need to identify why the custom API is not working.
What should you do?

A.Add a response property to the custom API.

B.Add a request property to the custom API.

C.Set the Enabled for Workflow option of the customer API to True.

D.Set the is Private property of the custom API to False.

Answer: D

Explanation:

"If you aren't willing to support other developers using your custom API, you should set the custom API Is Private (IsPrivate) property to true before you ship the managed solution containing your custom API.The Is Private property blocks the custom API from appearing within the $metadata service document and prevent Dataverse code generation tools from creating classes to use the messages for your custom API."

https://learn.microsoft.com/en-us/power-apps/developer/data-platform/custom-api

Question: 263 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.

•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to implement visual hints in the custom connector.
What should you do? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.In the custom connector, update the name of the policy template.

B.Extend the Open API definition of the Web API for the EnvironmentName parameter.

C.Extend the Open API definition of the Web API for the DataId parameter.

D.In the custom connector, update the description for the DataId parameter.

Answer: BD

Explanation:

B. Extending the OpenAPI definition for the EnvironmentName parameter will allow you to include a clear description of this parameter, providing guidance on its usage.D. Updating the description for the DataId parameter in the custom connector will also provide a clear explanation for this parameter, ensuring that users understand its purpose and how to use it effectively.

Question: 264

CertyIQ

HOTSPOT
-
You are composing a request to the Microsoft Dataverse Web API that updates existing account records in Dataverse and returns resulting records in the response.
You need to complete the request.
Which value should you use for each property? To answer, select the appropriate options in the Value for Property area.

NOTE: Each correct selection is worth one point.

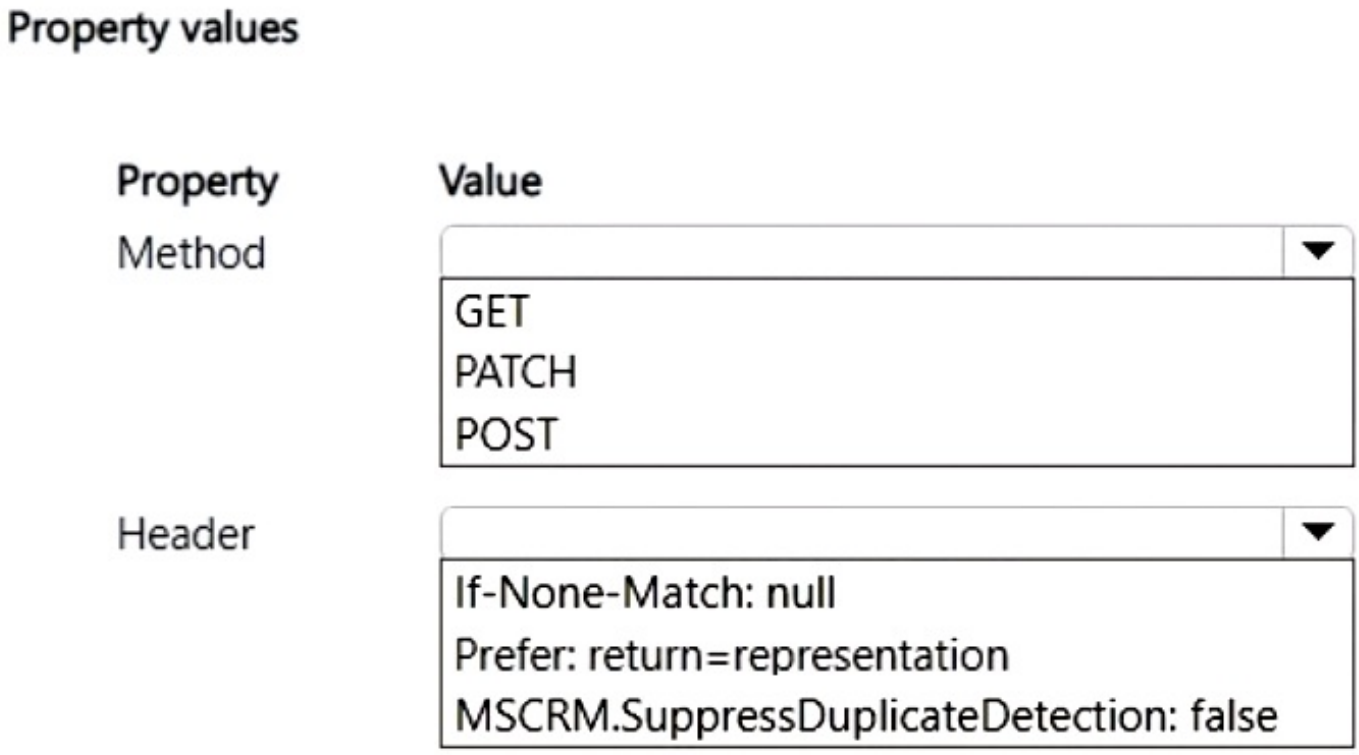

Answer:

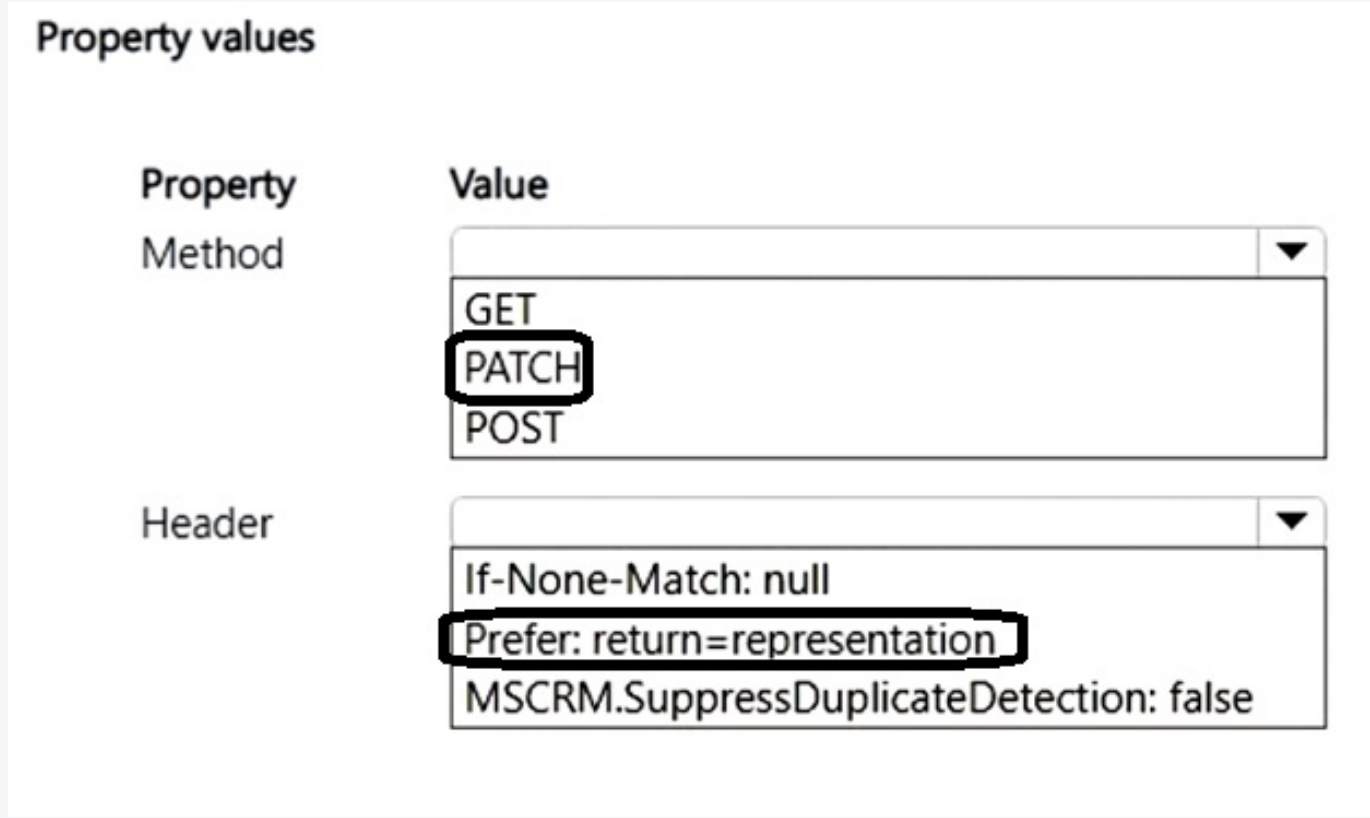

Explanation:

PATCH.

Prefer: return=representation.

Question: 265 CertyIQ

DRAG DROP
-
A company develops a model-driven app. The company sets up a custom form for the Contact table. The app contains multiple custom app pages.
You must extend the app as follows:
•Run logic when a contact is saved.
•Display data from an Azure SQL Server database.
•Apply a consistent header across multiple app pages.
•Run a Dataverse custom API when the Contact row is saved.
You need to implement the app extension by using minimal development effort.
What should you implement for each requirement? To answer, move the appropriate capabilities to the correct requirements. You may use each capability once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.

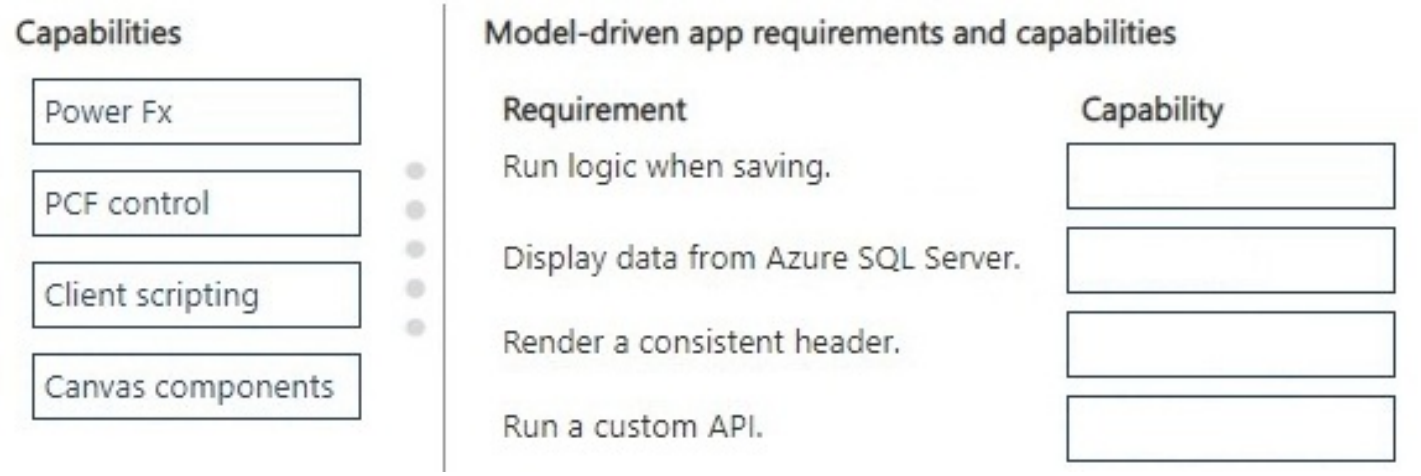

Answer:

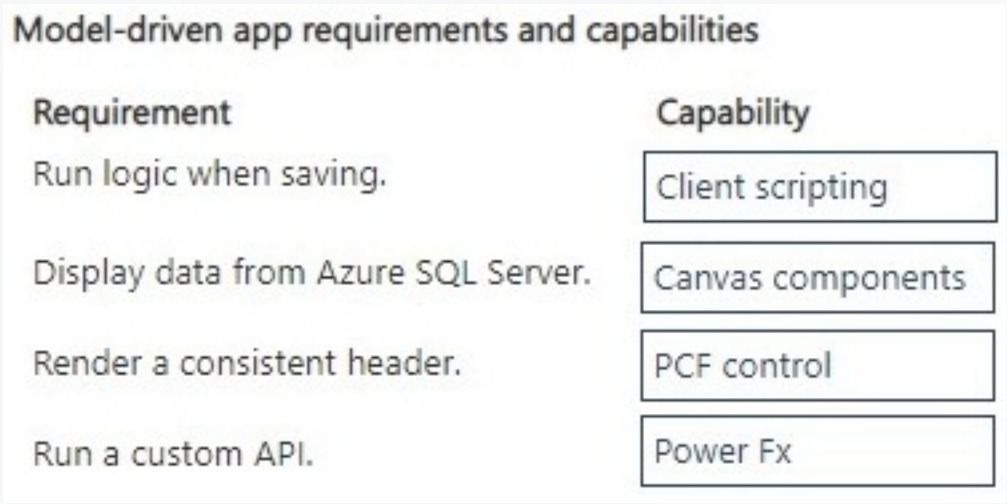

Explanation:

Client scripting(Correct in your image)To validate data or trigger dynamic calculations at the exact moment a model-driven form record is saved, you use client-side JavaScript bound to the form's OnSave event framework.

Canvas components(Requires Adjustment)Custom Canvas components allow low-code makers to build highly uniform, reusable visual artifacts (such as top navigation headers or banners) that can be embedded across multiple distinct app pages to guarantee UI layout consistency.

PCF control(Requires Adjustment)The **Power Apps Component Framework (PCF)** allows professional developers to build custom HTML/TypeScript controls that can query external APIs or databases (like an Azure SQL Server instance) and display that live data directly on a model-driven app form.

Power Fx(Correct in your image)Modern model-driven app command buttons and data rows natively support Power Fx formulas to invoke custom developer-made Dataverse actions and plug-in APIs without needing full pro-code deployments.

Question: 266 CertyIQ

You plan to create a Microsoft Power Apps Component Framework (PCF) code component for a record form in a model-driven app.
The code must be able to read the record's Id column.
You need to configure the manifest.
Which solution should you use?

A. resources
B. property
C. feature-usage
D. type-group

Answer: D

Explanation:

Technical Justification

The requirement is to configure a PCF code component on a model-driven form to read the record's primary key (Id) column, which is of data type **UniqueIdentifier (GUID)**. The critical constraint is that the PCF manifest schema (ControlManifest.Input.xml) does **not** list UniqueIdentifier or Guid as a valid native value for the property element's of-type attribute. The supported native types for input properties are limited to SingleLine.Text, Whole.Number, Decimal, Currency, TwoOptions, DateAndTime, OptionsSet, MultipleLines.Text, EntityReference, etc.

To bind a PCF property to a UniqueIdentifier column in the form designer, you must bridge this type mismatch by defining a custom **type-group** in the manifest. This type-group (e.g., named guidType) explicitly maps the unsupported UniqueIdentifier platform type to the supported PCF SingleLine.Text type. The property element then references this type-group via its of-type attribute (e.g., of-type="guidType"). Without this type-group definition, the manifest cannot correctly surface the Id column as a bindable target in the Power Apps designer, preventing the component from receiving the record Id.

Why Other Options Are Less Suitable

B. property: While a property element is required to receive the value, it is **insufficient on its own** because it cannot natively declare support for the UniqueIdentifier data type. A property defined with a standard type like SingleLine.Text will not automatically bind to a system Id column in the designer without the intermediary type-group mapping.
C. feature-usage: This node declares platform capabilities (e.g., webapi, utility, dataset, device). It does not define data bindings or property type mappings for field components.
A. resources: This node references code implementation files (TypeScript, CSS, RESX) and has no role in defining data contracts or column binding metadata.

References

1. PCF Manifest Schema Reference - type-group Element
2. PCF Property Data Types and Type Groups

Question: 267 CertyIQ

You are developing custom pages for a model-driven app.
The app must display a timer control within a menu and include a mixture of buttons and icons. If a change is made to any of these elements, then the changes must cascade out automatically to all custom pages.
You need to implement a solution.
What should you implement?

A.PCF control
B.Canvas component
C.Timer control
D.Web resource

Answer: B

Explanation:

B. Canvas component.

Why This Is the Correct Choice

This question belongs to a classic Microsoft Power Platform PL-400 case study series where a uniform UI element needs to be replicated cleanly across multiple screens or low-code applications.

Reusable Low-Code UI UI Blocks: A **canvas component** allows app developers to build modular, visual building blocks (such as a standard corporate header banner, navigation menu sidebar, or footer logo bar) completely within the low-code studio environment.
Once built, you can place this component across **dozens of different app screens** or package it in a **Component Library** for cross-application consumption. Any future design edits or updates made to the master component automatically propagate to every single instance across the system, saving significant maintenance overhead.

Why Other Options Are Incorrect

A is incorrect: While a **Power Apps Component Framework (PCF) control** is modular and highly customizable, it is an advanced pro-code solution built with TypeScript/HTML. It is designed to handle custom data visualizations or external API connections that low-code canvas capabilities cannot support natively. It is unnecessary for a standard visual layout requirement.
C is incorrect: The **Timer control** is an operational functional element used exclusively to measure passing time, count down intervals, or trigger events automatically after a delay period.
D is incorrect: Web resources (like custom JavaScript, CSS, or HTML files) are primarily used to implement custom client-side styling and script tracking behaviors within **model-driven apps** rather than low-code visual layout elements in canvas apps.

Question: 268 CertyIQ

DRAG DROP
-
Telephone numbers for a company must have their values formatted by using JavaScript on the OnChange event.

You need to create the JavaScript function.
Which three actions should you perform in sequence?
To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

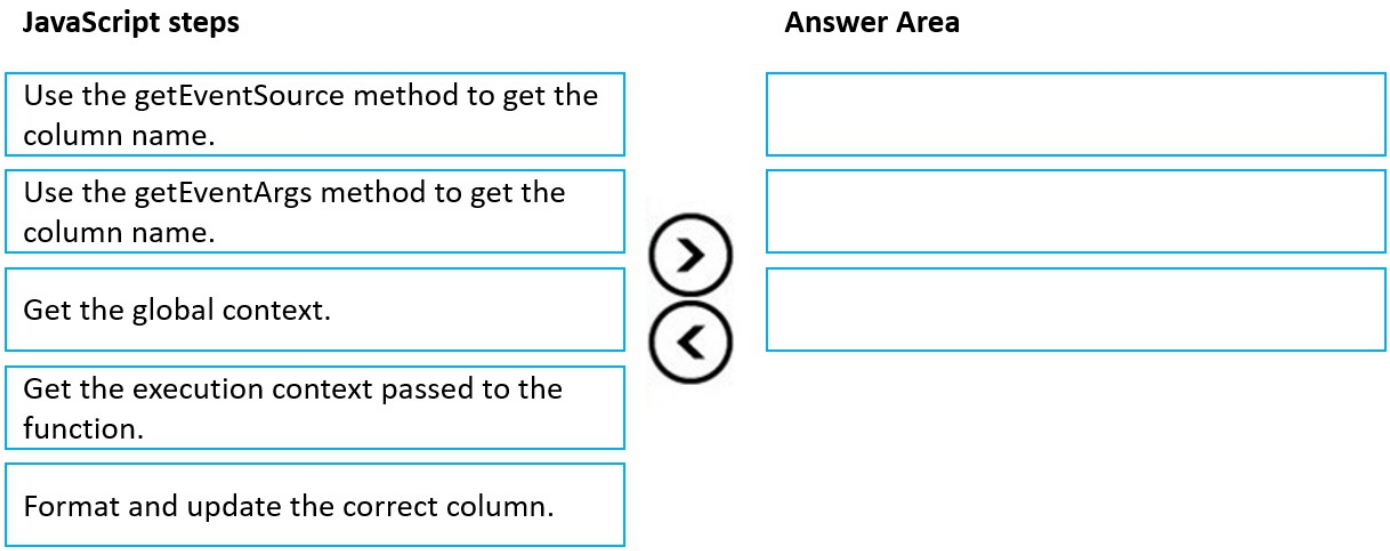

Answer:

Explanation:

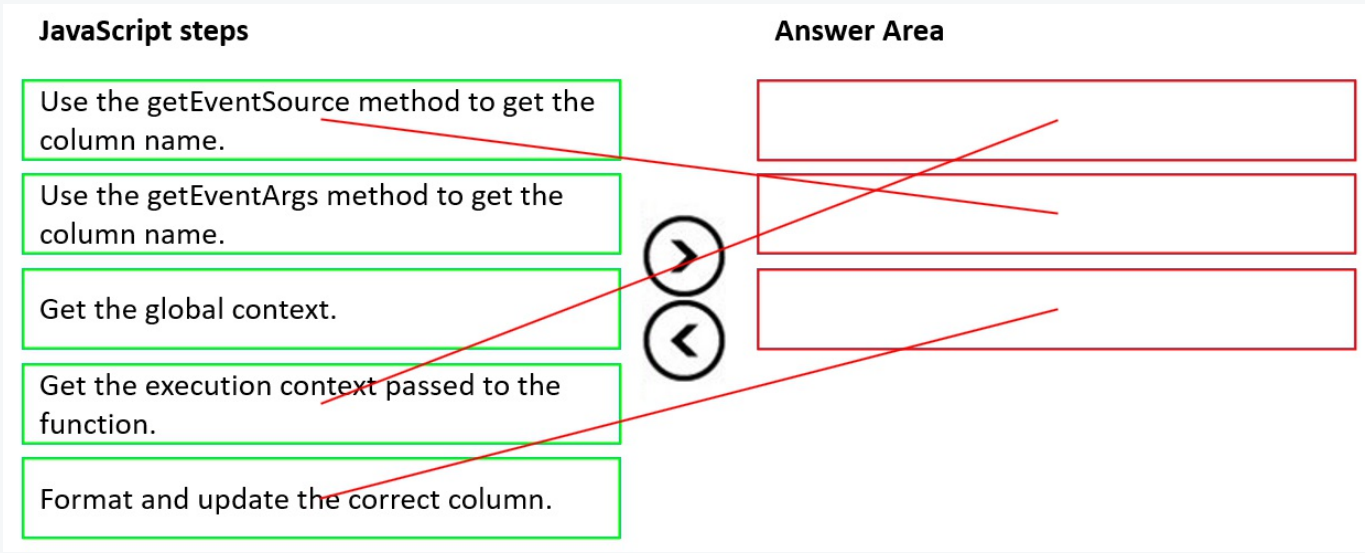

Get the execution context. The function is passed an execution context as a parameter. This context is an object that contains all the information about the event that triggered the function (e.g., a field changing, a form loading). You need this context to access the next level of information.

Use getEventArgs() to get the column name. Within the execution context, the getEventArgs() method retrieves an object that provides details about the specific event. For a field change event, this object includes the getEventSource() method, which gives you the control that triggered the event, from which you can get the column name.

Format and update the correct column. Once you have the column name and the necessary context, you can use the client-side APIs to format the data or update the column value. This is the final step in the process, as you must gather all the necessary information before attempting to modify the form.

Question: 269 CertyIQ

You develop a model-driven app in which client-side scripts are used extensively.

Users report that forms load quickly but become unresponsive.
You need to investigate the form issues before optimizing the forms.
What should you do first?

A. Use a Quick View form.
B. Add the URL parameter &ribbondebug=true.
C. Remove unused forms from the app.
D. Enable Offline mode.
E. Disable form event handlers.

Answer: B

Explanation:

Correct option: B – Add the URL parameter &ribbondebug=true.

Why it's the best first step
Enabling ribbon debugging injects additional telemetry and error-reporting into the form's client-side script execution.
It surfaces JavaScript console messages, script load failures, and performance bottlenecks that are otherwise hidden, allowing you to pinpoint the exact cause of the "unresponsive" behavior.
This approach is non-intrusive; you can reproduce the issue with the debug flag on and gather actionable diagnostics before making any code changes.
Why the other options are less appropriate at this stage
A. Use a Quick View form – Quick Views are meant for lightweight data display, not for diagnosing script responsiveness; they do not provide any debugging insight.
C. Remove unused forms from the app – While reducing form count can improve overall app performance, it does not help isolate the specific script-related problem on the affected form.
D. Enable Offline mode – Offline mode changes data caching behavior and is unrelated to client-side script execution speed or responsiveness.
E. Disable form event handlers – Disabling handlers may mask the symptom but does not reveal why the scripts are unresponsive; it also risks losing critical functionality needed for diagnosis.

Bottom line: Activating ribbon debugging (&ribbondebug=true) is the precise, low-impact technique to surface script errors and performance metrics, giving you the information needed to proceed with targeted optimizations.

Question: 270 CertyIQ

HOTSPOT
-
You are extending a model-driven app by using modern commanding in Power Fx.
When a user selects a button on the Opportunity form, the button must trigger an automation to generate a document by updating a single column in Dataverse. Users must affirm the action before it takes place and receive a message after it completes successfully.
You need to write the formula.
How should you complete the code segment? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

```
If(
    [ Confirm / Notify / Print ] (
        "This will proceed with generating the document. Proceed?"
    ),
    [ Patch / SubmitForm / Update ] (
        Opportunities,
        [ ThisItem / Self.Selected.Item / ThisRecord ]
        {'Trigger Document Generation?': true}

    );
    [ Confirm / Notify / Print ] ("Document generation has been triggered.")
)
```

Answer:

Answer Area

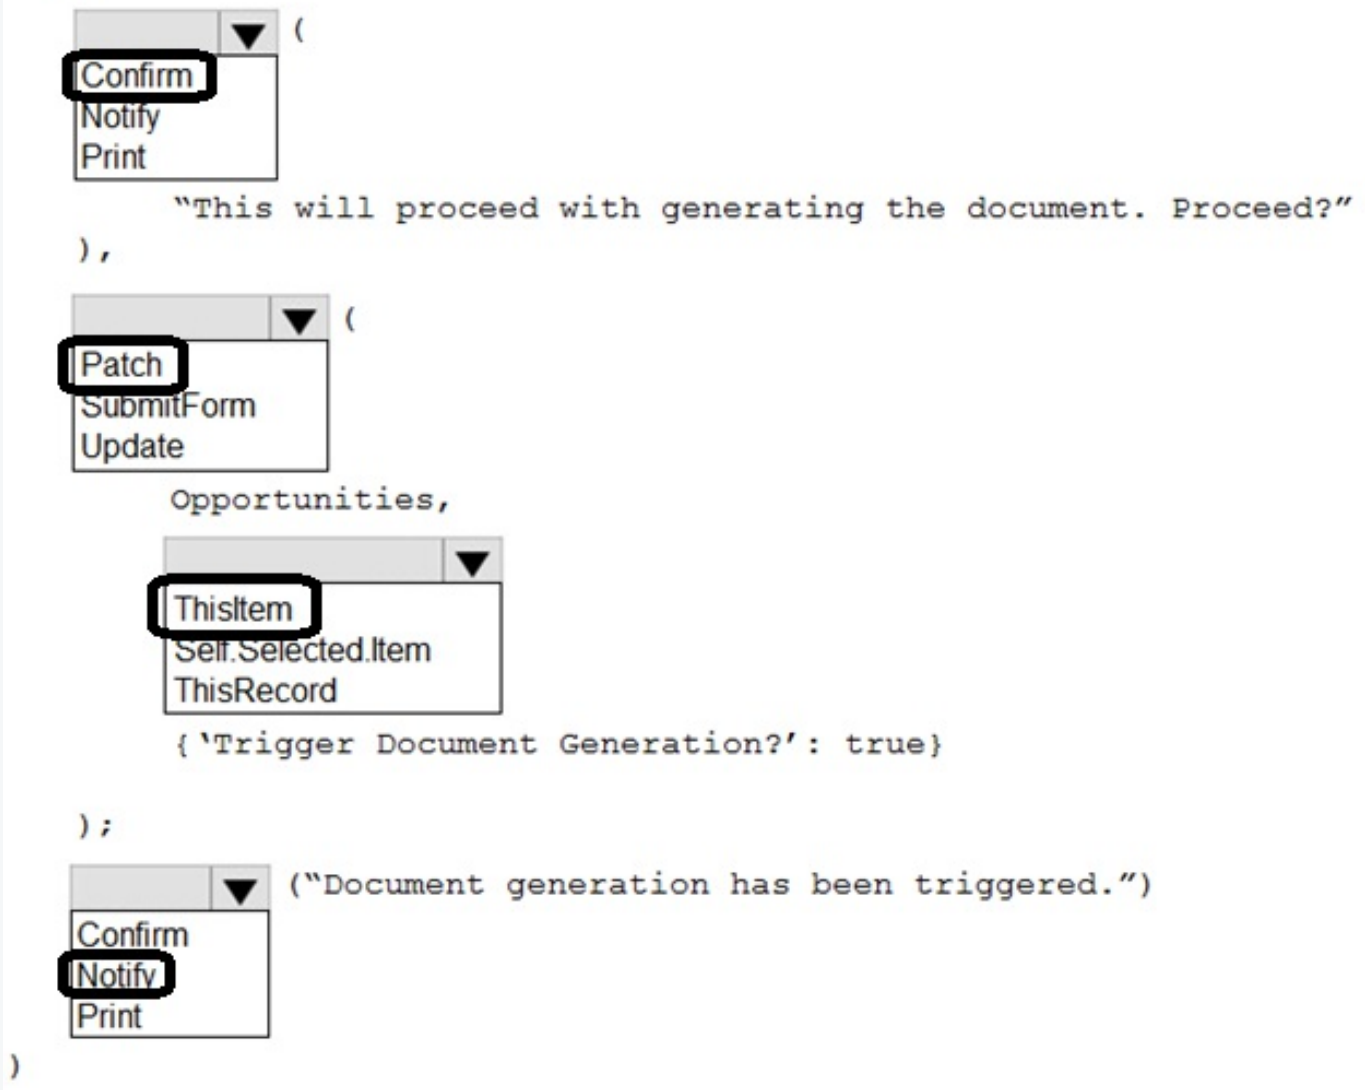

Explanation:

Confirm.

User Interactivity: The Confirm function displays a native modal dialog box to the user containing custom text alongside "OK" and "Cancel" buttons.

Conditional Logic: It returns a boolean value (true if the user clicks OK, false if they click Cancel). This makes it ideal inside an If statement to block accidental clicks before running backend operations.

Patch.

Targeted Field Modification: The Patch function is used to create or modify a specific record directly in a data source (Opportunities) without requiring a standard edit form control. Here, it targets and toggles a single field: 'Trigger Document Generation?': true .

ThisItem.

Record Context: When a button or icon is located inside a Gallery or a Form, ThisItem explicitly references the exact, single row/record currently being viewed or interacted with. Patch requires this base record parameter to know which specific row to update.

Notify.

Question: 271 CertyIQ

DRAG DROP
-
You are writing code to integrate a system with Dataverse by using the Web API.
The code must perform the following operations:
•Upsert to create and update records
•Upsert only to create new records
You need to complete the requests to perform the operations.
Which headers should you use? To answer, move the appropriate headers to the correct operations. You may use each header once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.

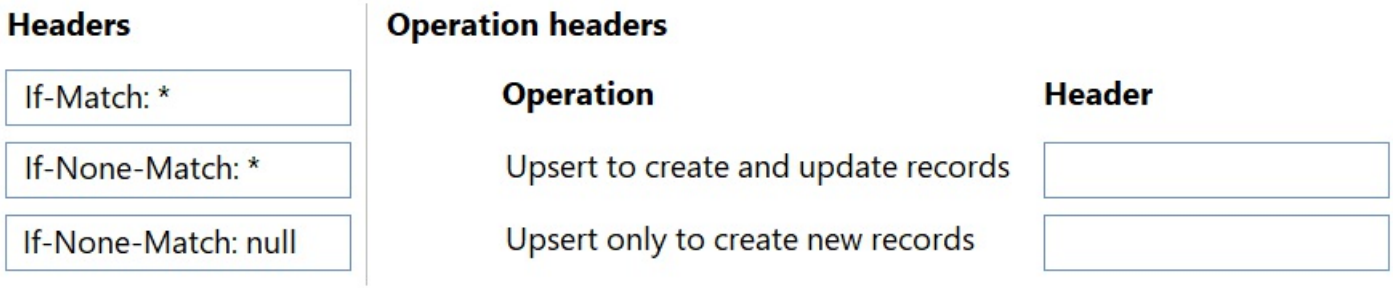

Answer:

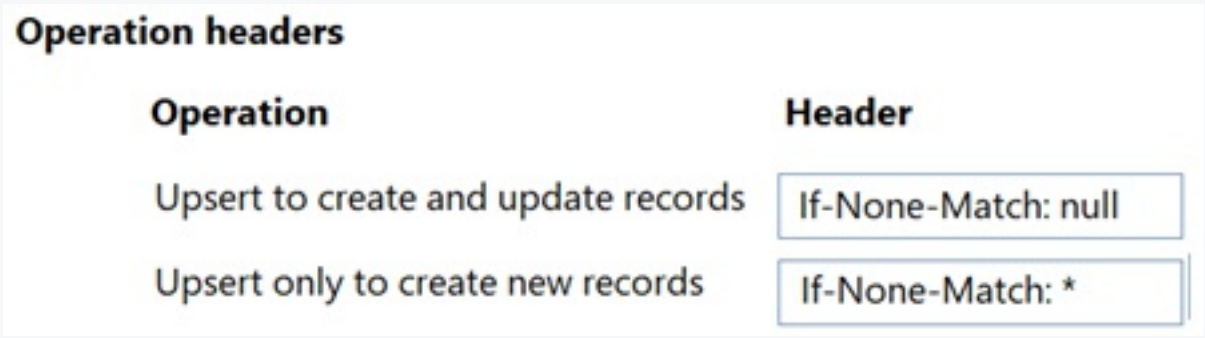

Explanation:

If-None-Match: null

In Dataverse, an HTTP PATCH request behaves as an upsert operation by default. It will automatically update the record if it already exists or create it if it doesn't. Setting If-None-Match: null ensures that no conditional restrictions are placed on the request, allowing both inserts and updates to occur smoothly.

If-None-Match:

To restrict an upsert operation so that it only creates new records and never overwrites existing data, you must apply the If-None-Match: * header. If Dataverse detects that a record with the specified ID or alternate key already exists, the precondition fails, and it blocks the update by throwing an HTTP 412 Precondition Failed error.

Question: 272 CertyIQ

You are creating an integration that uses an Azure function to create records in the Common Data Service when leads are submitted from your company website.
You create a user and grant the user the Basic User security role.
You do not have administrator access to the environment you are using or access to Azure Active Directory.
Company policy dictates that service accounts must be used for integrations, and integrations must not be granted privileges beyond what is needed.

You need to recommend actions that an administrator should perform to configure access for the Azure Function.
Which three actions should you perform? Each correct selection presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Create an application registration in Azure Active Directory.
B. Assign the system administrator security role to the application user.
C. Assign the Power Platform administrator role to the application user in Azure Active Directory.
D. Create a new security role with the minimum required permissions and assign to the application user.
E. Grant the application delegated permissions to the Dynamics CRM API in Azure Active Directory.
F. Deploy Azure B2B guest permissions to the application user.

Answer: ADE

Explanation:
A: Registering an application with Azure Active Directory, enables a user with Power Apps user account to connect to their Microsoft Dataverse environment from external client applications using OAuth authentication.
D: Use minimum permissions.
E: In the application registration process you delegate permissions to the Dynamics CRM API in Azure Active Directory.

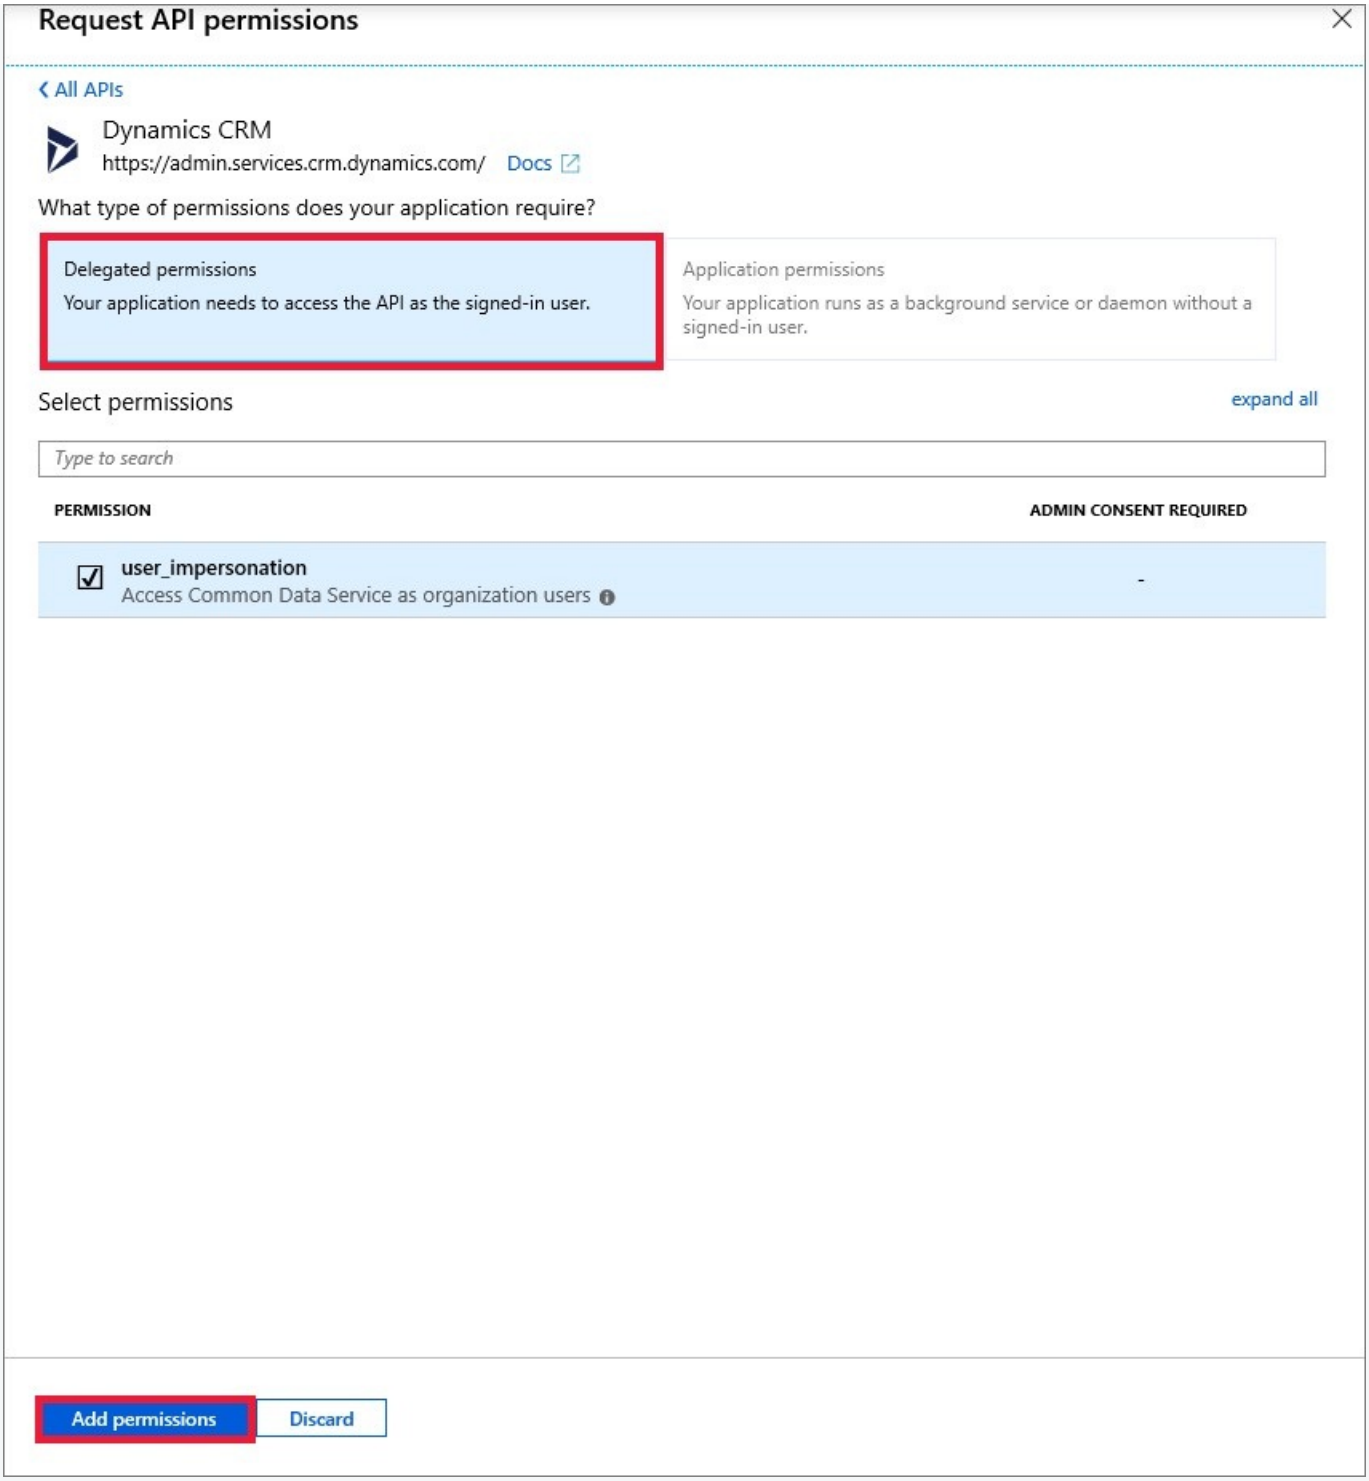

Incorrect:

Not B: The system administrator security role would give the user too much privileges.

Not C: The Power Platform administrator role would give the user too much privileges.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/walkthrough-register-app-azure-active-directory

Question: 273 CertyIQ

HOTSPOT -

You work for a multinational company that has Azure and Microsoft Dataverse environments in the United States (UTC-7) and Japan (UTC+9).

You create Azure Functions for each location to update key data.

You need to configure the functions to run at 4:00 AM on weekdays at each location.

Which schedule formats should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.
Hot Area:

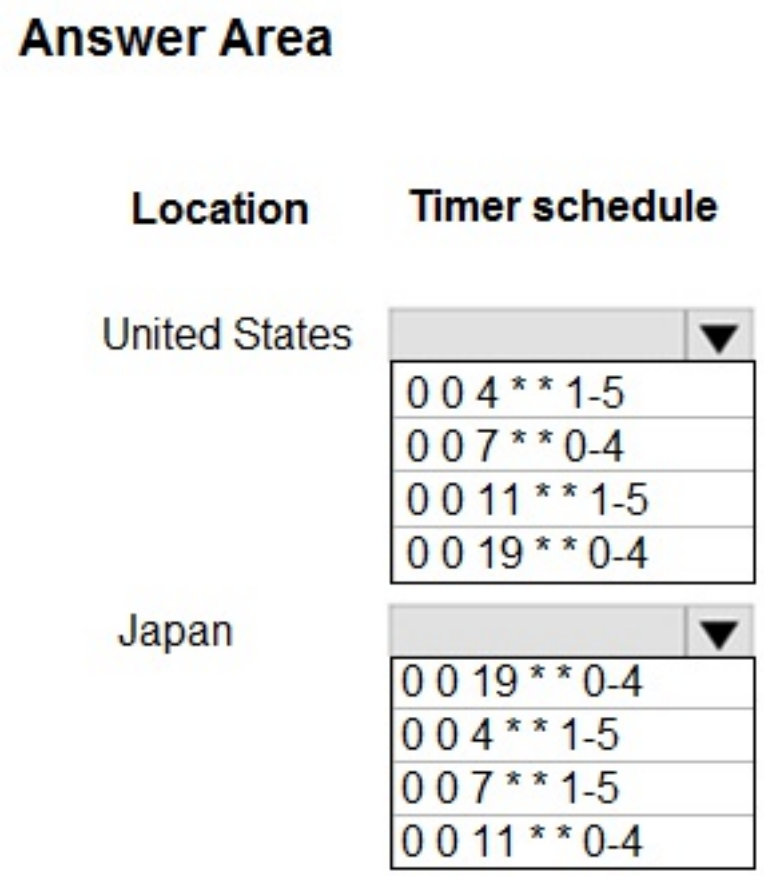

Answer:

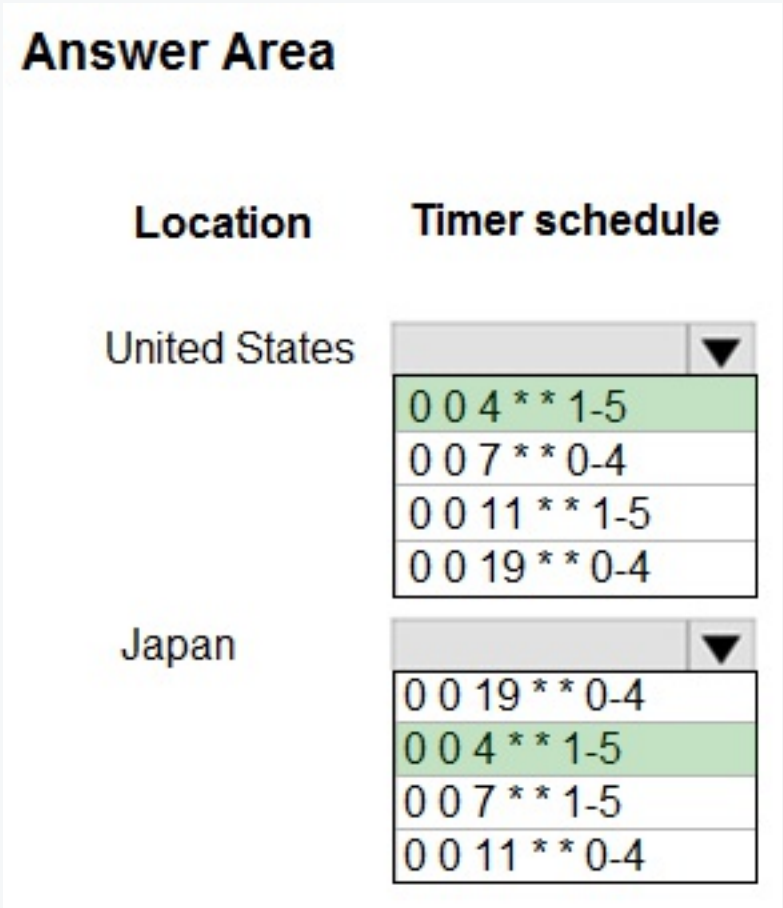

Explanation:

Box 1: 0 0 4 * * 1-5 -

Azure Functions uses the NCronTab library to interpret NCRONTAB expressions.

An NCRONTAB expression is similar to a CRON expression except that it includes an additional sixth field at the beginning to use for time precision in seconds:

second minute hour day month day-of-week

NCRONTAB time zones -

The numbers in a CRON expression refer to a time and date, not a time span. For example, a 5 in the hour field refers to 5:00 AM, not every 5 hours.

The default time zone used with the CRON expressions is Coordinated Universal Time (UTC).

To have your CRON expression based on another time zone, create an app setting for your function app named WEBSITE_TIME_ZONE.

1-5 is weekdays

Box 2: 0 0 4 * * 1-5 -

Reference:

https://docs.microsoft.com/en-us/azure/azure-functions/functions-bindings-timer

?

Question: 274 CertyIQ

DRAG DROP -
You are creating a PowerApps connector between Dynamics 365 Sales and Slack.
You must generate a Slack notification whenever a new product is added to Dynamics 365 Sales. You must not be required to sign in directly into Dynamics 365
Sales to generate notifications. You created a Power Apps connector between Dynamics 365 Sales in Slack to enable this to happen.
You need to configure the appropriate security for each scenario.
Which security components should you configure?
NOTE: Each correct selection is worth one point.
Select and Place:

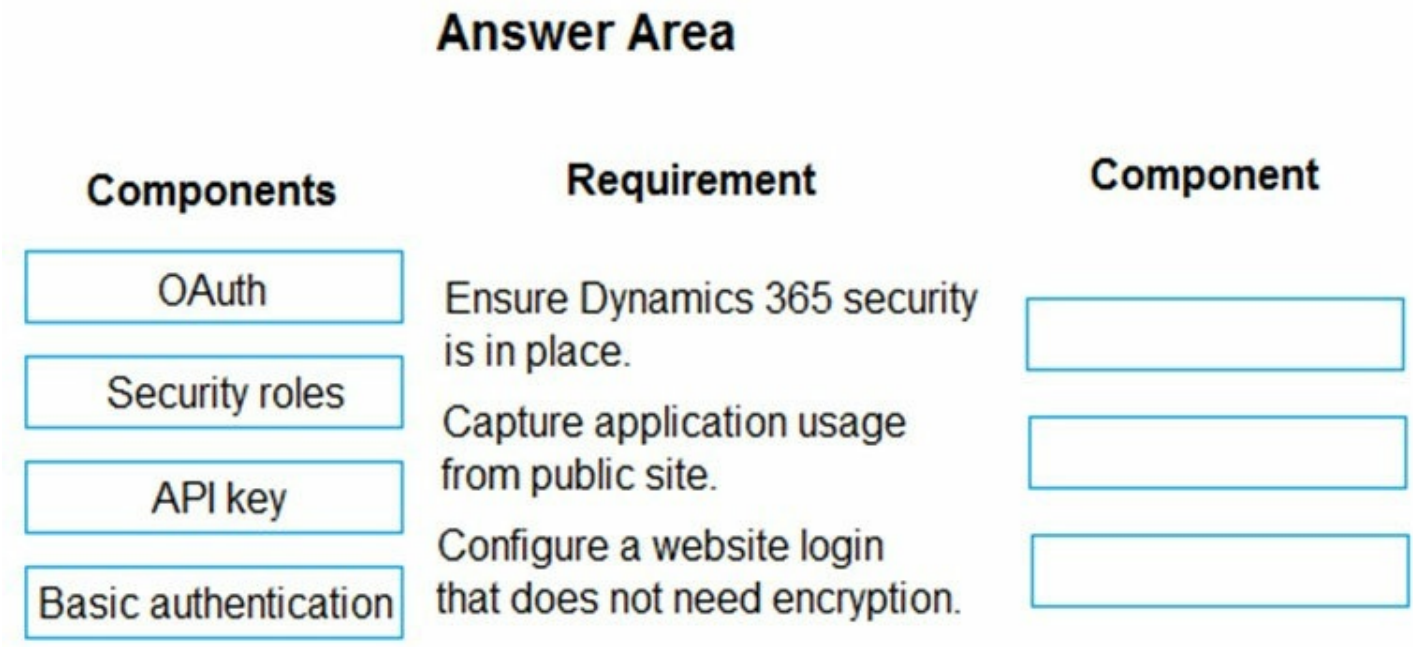

Answer:

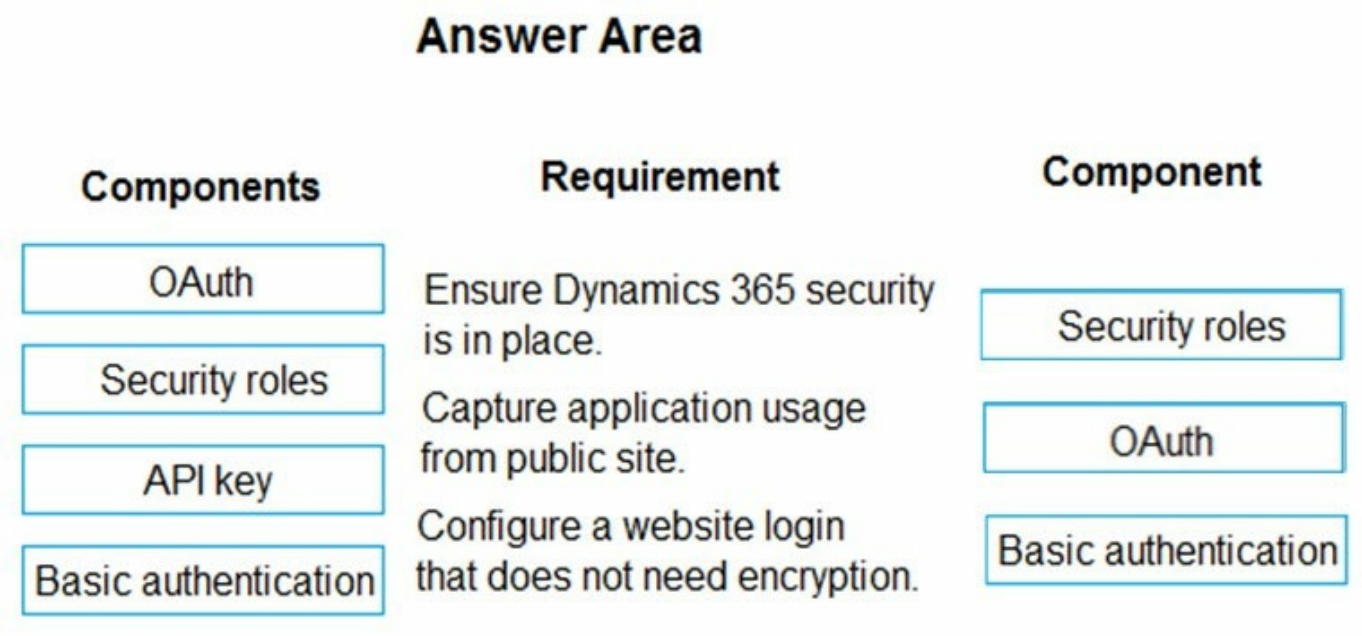

Explanation:

Box 1: Security roles -

A security role defines how different users, such as salespeople, access different types of records. To control access to data, you can modify existing security roles, create new security roles, or change which security roles are assigned to each user. Each user can have multiple security roles.

Security role privileges are cumulative: having more than one security role gives a user every privilege available in every role.

Each security role consists of record-level privileges and task-based privileges.

Box 2: OAuth -

Oauth 2.0 is the most frequently used type, which uses the Oauth 2 authentication framework to authenticate with the service. Before using this authentication type, you'll need to register your application with the service so that it can receive access tokens for the users.

For example, Register the application in Azure AD shows how to register an application with the Azure Active Directory service.

During the connection creation process, the user will be asked to enter the credentials for login to the service. These credentials will be used by the application to get an authorization token. For every request, this authorization token will be sent to your service through the Authorization header.

Box 3: Basic Authentication -

Basic Authentication is the simplest type of authentication, where the user just has to provide the username and password to create the connection.

Note: Before using any connector in Azure Logic Apps, Microsoft Power Automate, or Microsoft Power Apps, the user needs to create a connection by authenticating to the backend service.

Authentication types -

The different types of authentication that are currently supported are:

No authentication -

Basic authentication -

Api Key based authentication -

Oauth 2.0 -

Reference:

https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/admin/security-roles-privileges https://docs.microsoft.com/en-us/connectors/custom-connectors/connection-parameters

Question: 275 CertyIQ

DRAG DROP -
A developer must register a step using the Plug-in registration tool.
You need to associate the correct Event Pipeline Stage of Execution with its purpose.
Which stage should you associate with each description? To answer, drag the appropriate stages to the correct descriptions. Each stage may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

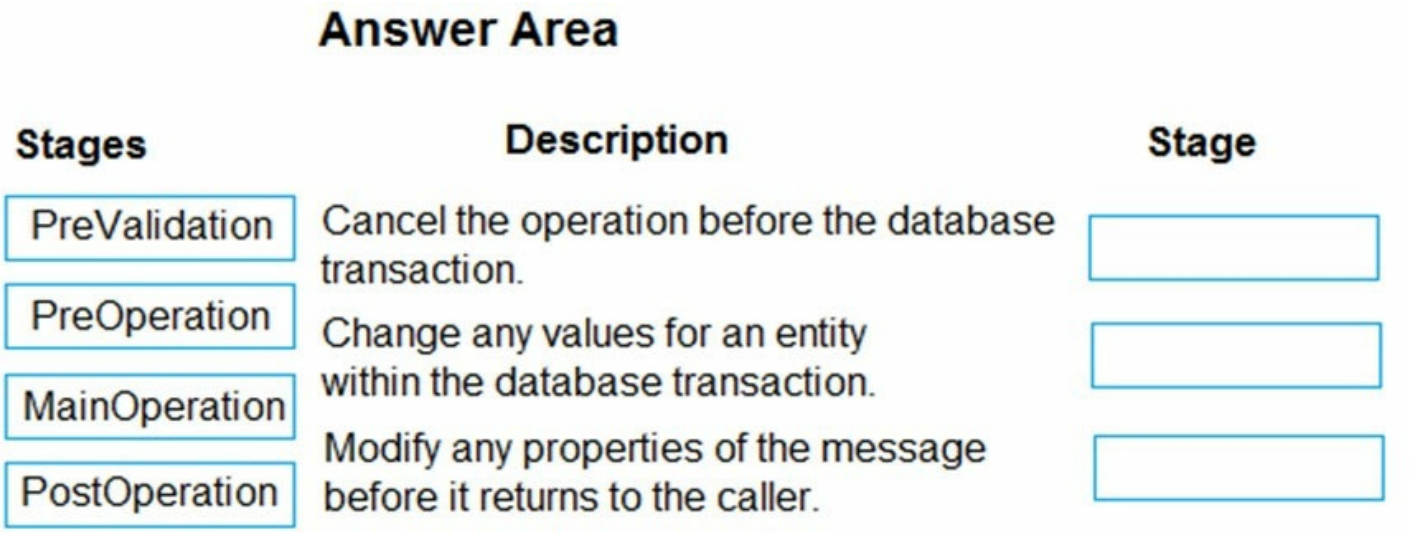

Answer:

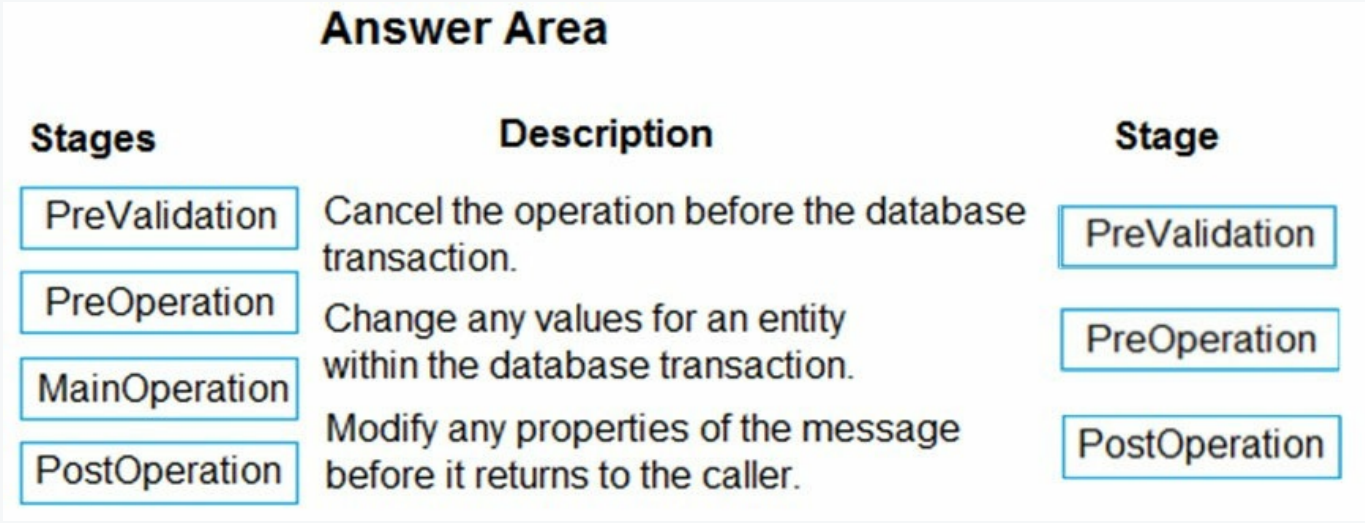

Explanation:

Box 1: PreValidation -

For the initial operation, this stage will occur before the main system operation.

This provides an opportunity to include logic to cancel the operation before the database transaction.

Box 2: PreOperation -

PreOperation occurs before the main system operation and within the database transaction.

If you want to change any values for an entity included in the message, you should do it here.

Box 3: PostOperation -

Occurs after the main system operation and within the database transaction.

Use this stage to modify any properties of the message before it is returned to the caller.

Incorrect Answers:

MainOperation: For internal use only except for Custom API and Custom virtual table data providers.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/event-framework

Question: 276 CertyIQ

HOTSPOT -
An organization has a custom Assignments entity that guides agent actions. Team leaders for each assignment group must be able to review any changes made to assignment data by their agents.
You have the following JSON segment:

```
{
 "@odata.context": "https://orgxyz.api.crm3.dynamics.com/api/data/v9.1/$metadata#xyz_assignments
 (xyz_assignmentname,xyz_secretcode)",
 "@odata.deltaLink": "https://orgxyz.api.crm3.dynamics.com/api/data/v9.1/xyz_assignments?
 $select=xyz_assignmentname,
     xyz_secretcode$deltatoken=652832%2107%2f20%2f2020%2017%3a21%3a13",
 "value": [
 {
      "@odata.etag": "W/\"652815\"",
      "xyz_assignmentname": "spy007",
      "xyz_secretcode": "abc",
      "xyz_assignmentid": "a278f39e-a7ca-ea11-a812-000d3af45c52"
     },
     {
      "@odata.etag": "W/\"652816\"",
     "xyz_assignmentname": "agent007",
     "xyz_secretcode": "123",
     "xyz_assignmentid": "1e110eac-a7ca-ea11-a812-000d3af45c52"
     }
     ...
   ]
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

	Yes	No
You can use the JSON segment to retrieve a list of changes to the assignment records referenced in the segment.	○	○
You can use the delta link to query the assignment changes from the last 30 days.	○	○
You can use the delta link with a $filter option to retrieve assignment changes from the last 30 days.	○	○
Is the delta link token valid?	○	○

Answer:

Answer Area

	Yes	No
You can use the JSON segment to retrieve a list of changes to the assignment records referenced in the segment.	○	○
You can use the delta link to query the assignment changes from the last 30 days.	○	○
You can use the delta link with a $filter option to retrieve assignment changes from the last 30 days.	○	○
Is the delta link token valid?	○	○

Explanation:

Box 1: Yes -

Delta query lets you query for additions, deletions, or updates to users, by way of a series of delta function calls. Delta query enables you discover changes to users without having to fetch the entire set of users from Microsoft Graph and compare changes.

Box 2: No -

Tracking user changes -

Tracking user changes is a round of one or more GET requests with the delta function. You make a GET request much like the way you list users, except that you include the following:

The delta function.

A state token (deltaToken or skipToken) from the previous GET delta function call.

Delta tokens are only valid for a specific period before the client application needs to run a full synchronization again. For directory objects (application, administrativeUnit, directoryObject, directoryRole, group, orgContact, oauth2permissiongrant, servicePrincipal, and user), the limit is 7 days.

Box 3: No -

There is limited support for $filter:

The only supported $filter expression is for tracking changes on a specific object: $filter=id+eq+ value .

Box 4: Yes -

Reference:
https://docs.microsoft.com/en-us/graph/api/user-delta

Question: 277 CertyIQ

HOTSPOT -
A training company implements a Common Data Service (CDS) environment. The company has created and stores information about courses in a custom entity.
A Power Automate flow must be created whether a course has been created that starts within the next seven days and must be accurate to the minute.
You need to define an expression that meets the requirements.
Which functions should you use for the expression? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

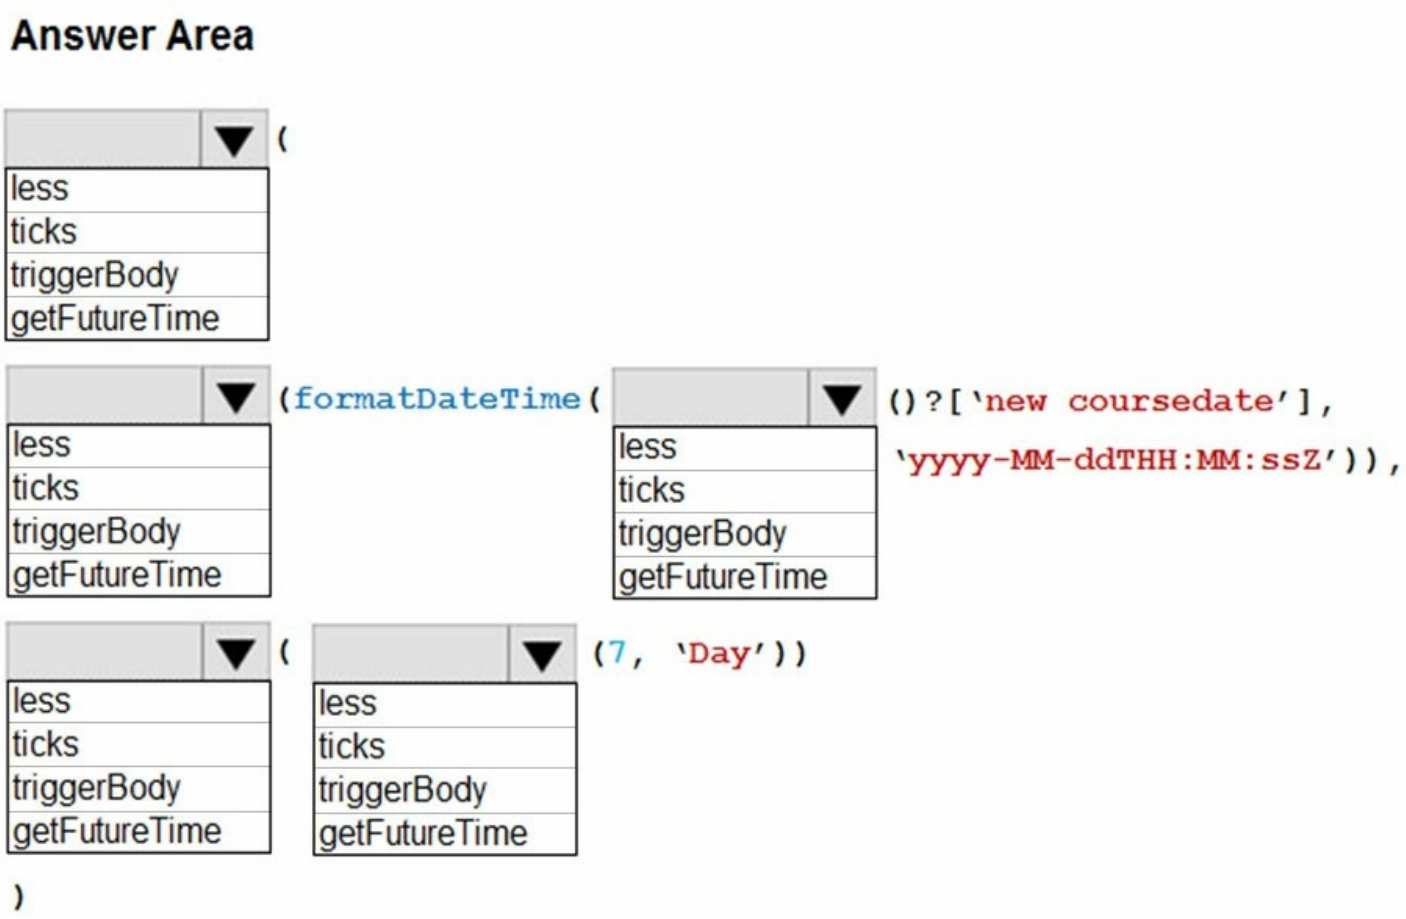

Answer:

Answer Area

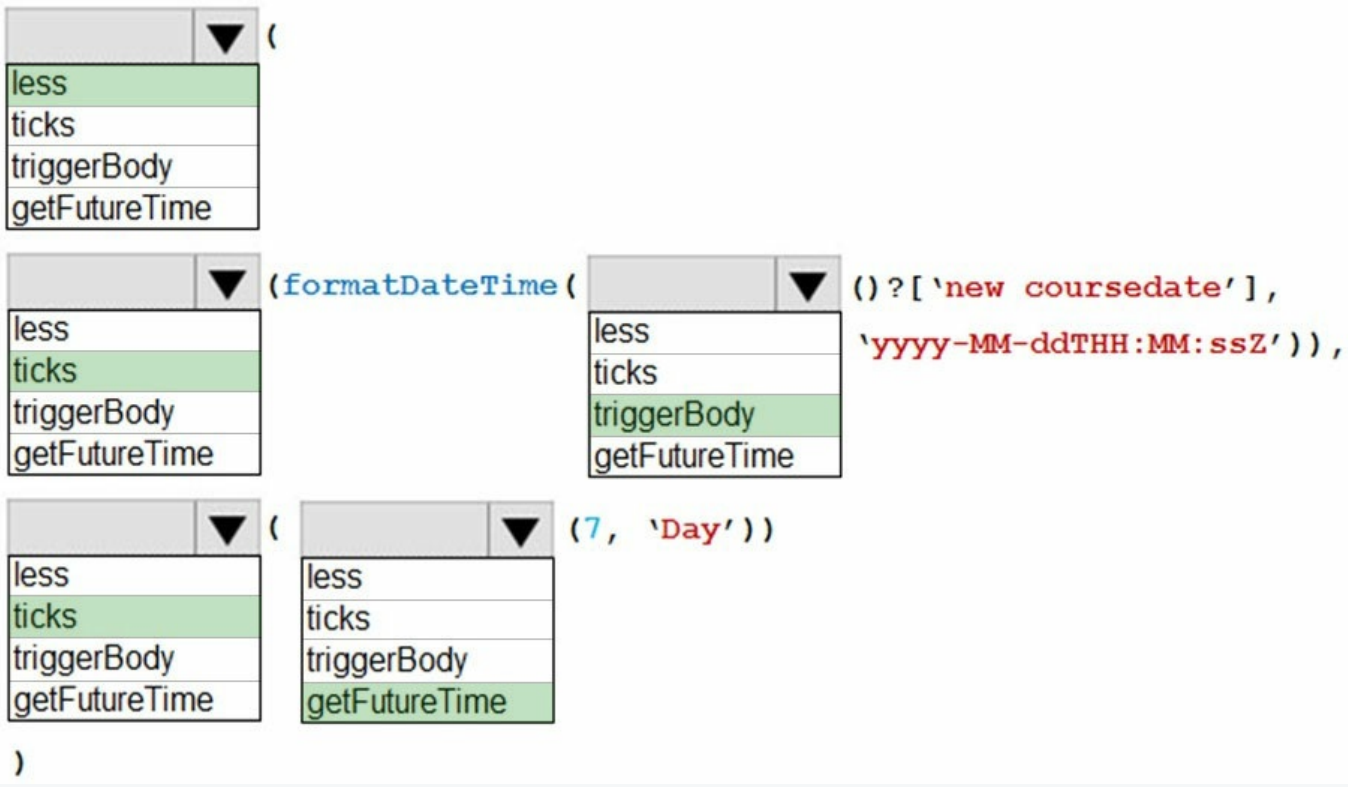

Explanation:

Box 1: less -

less checks whether the first value is less than the second value. Return true when the first value is less, or return false when the first value is more.

Box 2 : ticks -

ticks(timestamp: string) - Returns the number of ticks (100 nanoseconds interval) since 1 Jan 1601 00:00:00 UT

Syntax: ticks('<timestamp>')

Box 3: triggerBody -

triggerBody returns a trigger's body output at runtime.

Box 4: ticks -

Box 5: getFutureTime -

getFutureTime teturn the current timestamp plus the specified time units.

Syntax: getFutureTime(<interval>, <timeUnit>, <format>?)

Reference:

https://docs.microsoft.com/en-us/azure/logic-apps/workflow-definition-language-functions-reference

Question: 278 CertyIQ

DRAG DROP -

You are developing a Power Platform app for a school. The school plans to use the app to gather information about classes and students.

You must design a plug-in for the app. You must store data about students in the Contacts table and store data about classes in a custom table.

You need to select the stage in the event pipeline for each function.

Which stages should you use? To answer, drag the appropriate plug-in stages to the correct functions. Each plug-in stage may be used once, more than once, or not at all. You may need to drag the split bar between panes or

scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

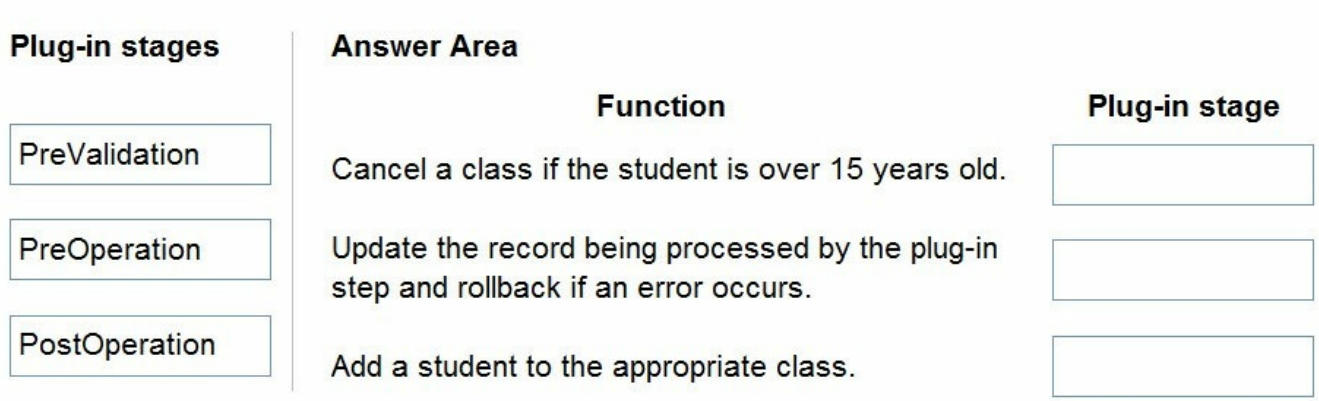

Answer:

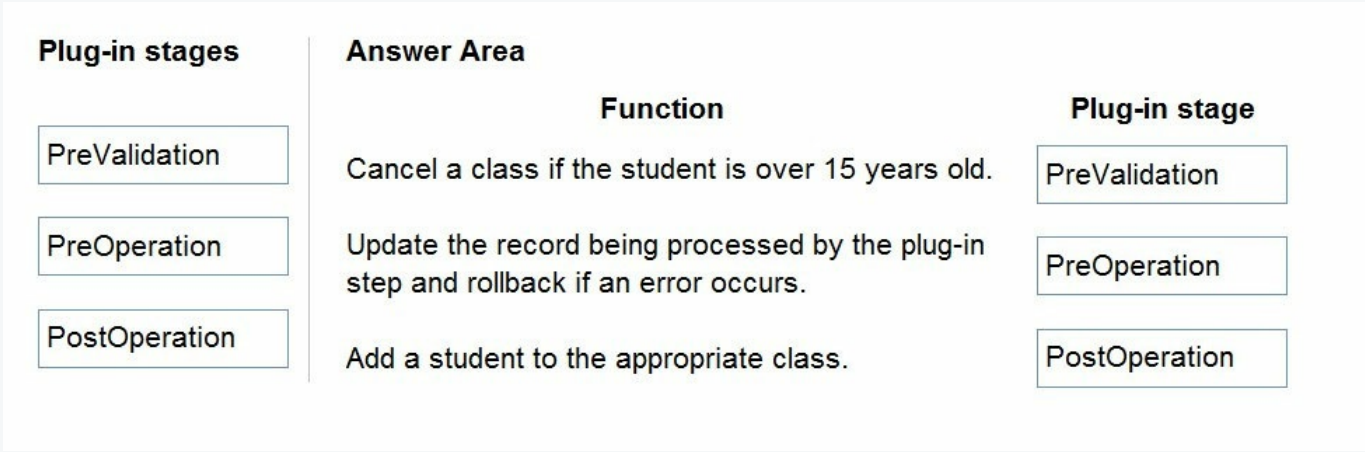

Explanation:

Box 1: PreValidation -

For the initial operation, this stage will occur before the main system operation.

This provides an opportunity to include logic to cancel the operation before the database transaction.

Box 2: PreOperation -

Occurs before the main system operation and within the database transaction.

If you want to change any values for an entity included in the message, you should do it here.

Avoid cancelling an operation here. Canceling will trigger a rollback of the transaction and have significant performance impact.

Box 3: PostOperation -

Occurs after the main system operation and within the database transaction.

Use this stage to modify any properties of the message before it is returned to the caller.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/event-framework

Question: 279 CertyIQ

The communication department for a company plans to add a publicly accessible survey page to the company's public website.
You must add the new survey page to the company's public website and capture data from the page to a Common Data Service environment.
Explicit user credentials must not be required to write survey data to Common Data Service.
You need to implement authentication.
Which authentication mechanism should you implement?

A. ADFS
B. Azure AD Conditional Access
C. OAuth 2.0
D. Client secret

Answer:

C

Explanation:

The OAuth 2.0 client credentials grant flow permits a web service (confidential client) to use its own credentials, instead of impersonating a user, to authenticate when calling another web service.

Note: OAuth is the preferred means to authenticate because it provides access to both the OData RESTful web services (Web API and OData global Discovery service) as well as to the SOAP web services (Organization service and Discovery service).

OAuth is also required to support:

✑ Azure Active Directory configurations for conditional access, such as Two-factor Authentication (2FA)

✑ Use of client secrets to enable server-to-server authentication scenarios.

✑ Cross-Origin Resource Sharing (CORS) to connect a Single-page Application (SPA)

Reference:

https://docs.microsoft.com/en-us/power-platform/admin/wp-security https://docs.microsoft.com/en-us/powerapps/developer/data-platform/authentication

Question: 280 CertyIQ

DRAG DROP -
A company uses Dynamics 365 Sales.
Sales commission must be calculated when an order is placed. You create an Azure Function to perform the calculation. The Azure Function has an HTTP trigger.
You need to configure the Plug-in Registration tool to send data to the Azure Function when an order is placed. You open the Plug-in Registration tool and connect to Dynamics 365 Sales.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

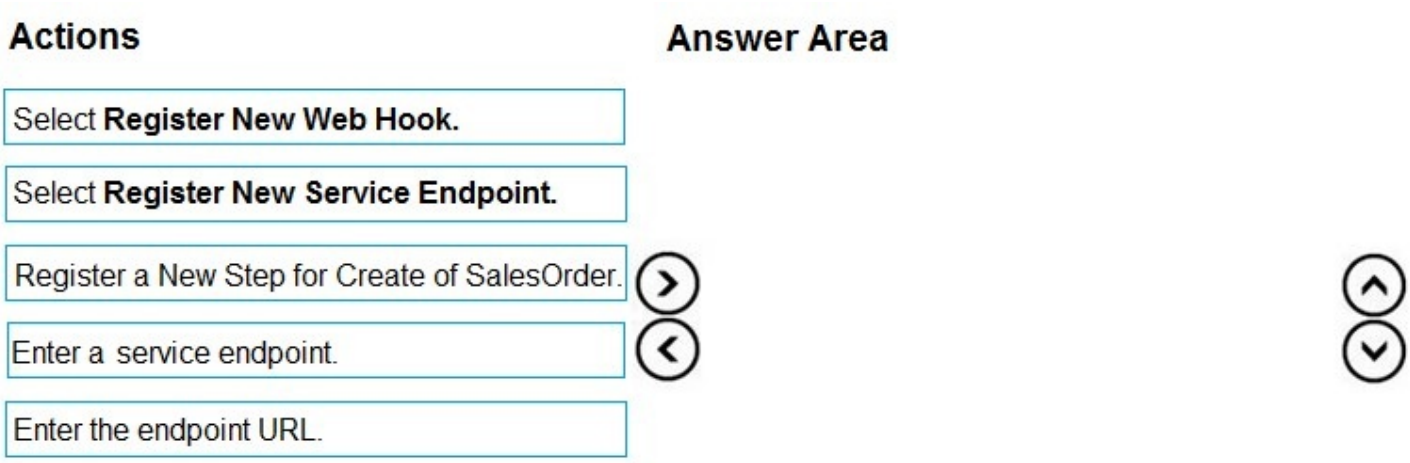

Answer:

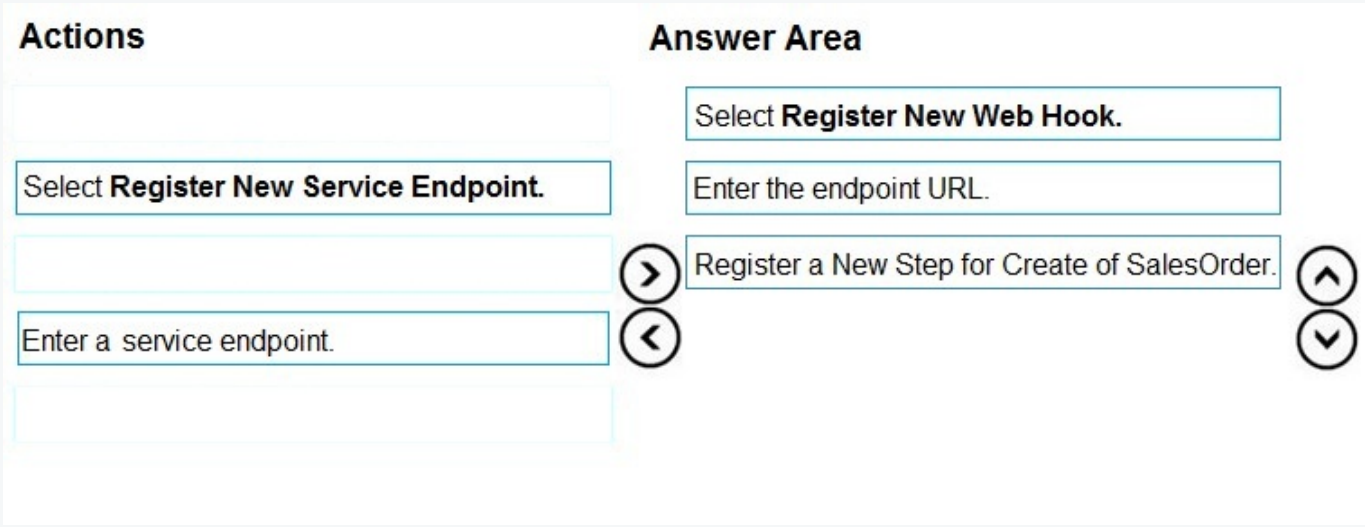

Explanation:

Step 1:SelectRegister New Web Hook.

Configure Dynamics 365 Sales to Call Your Webhook in Azure Functions

1. Open the Plug-in Registration Tool and connect to your organization.
2. Select Register->Register New Web Hook

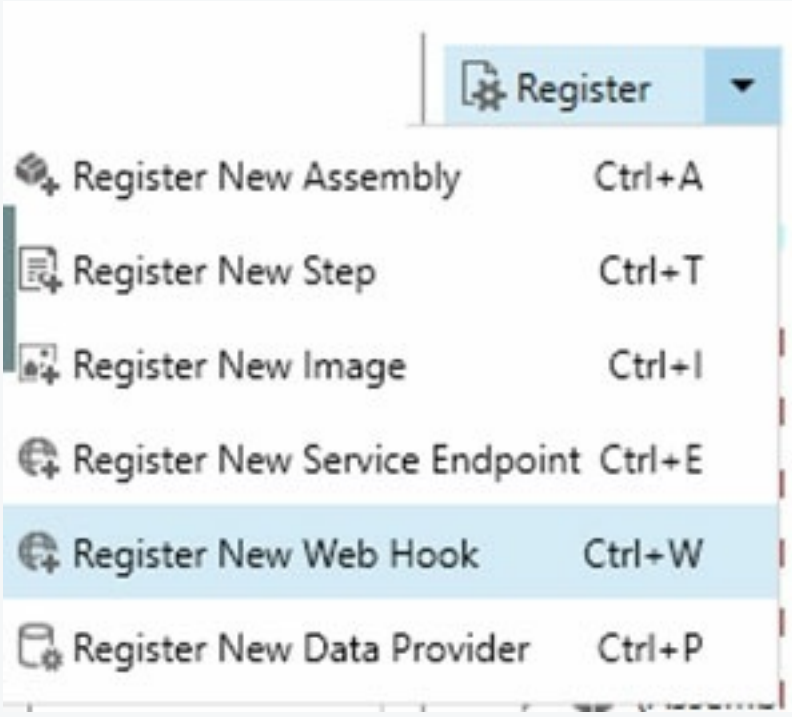

Step 2: Enter the endpoint URL -

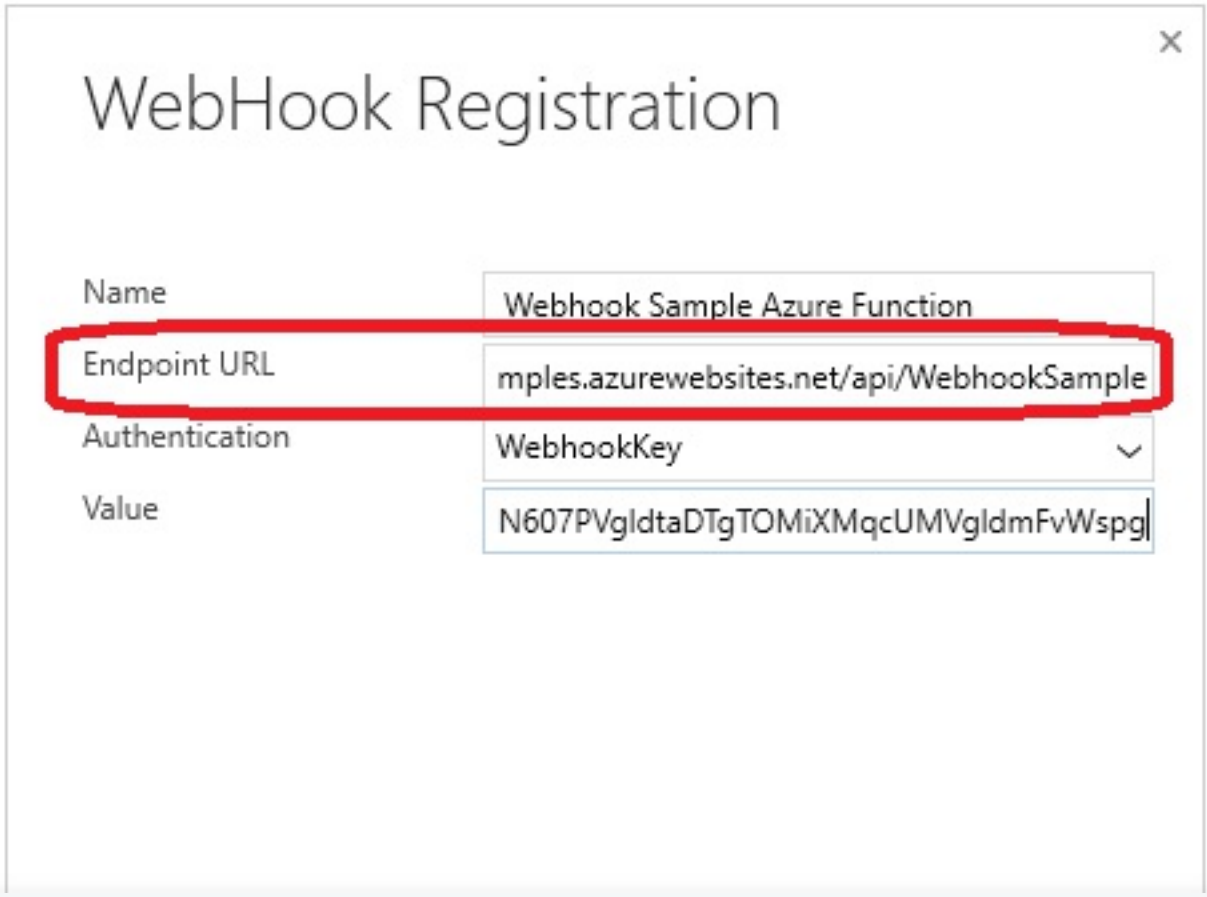

Step 3: Register a New Step for Create of SalesOrder.
Register a new webhook, and then tie that webhook to an event in Dynamics 365 Sales. Select your newly registered webhook, right-click it, and then choose
"Register New Step."
Note that the webhook here is set to execute whenever a change to an account record is detected within Dynamics 365 Sales.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/tutorial-write-plug-in

Question: 281 CertyIQ

The communication department for a company plans to add a publicly accessible survey page to the company's public website.
You must add the new survey page to the company's public website and capture data from the page to a Common Data Service environment.
Explicit user credentials must not be required to write survey data to Common Data Service.
You need to implement authentication.
Which authentication mechanism should you implement?

A. Microsoft 365
B. X.509 certificate
C. OAuth 2.0
D. Claims-based

Answer:

C

Explanation:

OAuth is the preferred means to authenticate because it provides access to both the OData RESTful web services (Web API and OData global Discovery service) as well as to the SOAP web services (Organization service and Discovery service).

OAuth is also required to support:

- Azure Active Directory configurations for conditional access, such as Two-factor Authentication (2FA)
- Use of client secrets to enable server-to-server authentication scenarios.
- Cross-Origin Resource Sharing (CORS) to connect a Single-page Application (SPA)

Incorrect Answers:

A: Using Microsoft 365 authentication does not require that your register your applications as OAuth does. You must simply provide a User Principal Name (UPN) and password for a valid user.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/authentication

Question: 282 CertyIQ

DRAG DROP -
You are a Power Platform developer.
Users report several access issues.
You need to resolve the user access issues.
What should you use? To answer, drag the appropriate security options to the correct scenarios. Each security option may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

Security options

- DLP policy
- GDPR compliance
- Conditional access
- Exfiltration blocking

Answer Area

Issues	Security option
A user is not able to sign into a Power Apps app from home.	Security option
A user is not able to use a social media connector in a flow that uses the Microsoft Teams connector.	Security option
A user is not able to forward email messages to an address in another domain.	Security option

Answer:

Security options	Answer Area	
DLP policy	**Issues**	**Security option**
GDPR compliance	A user is not able to sign into a Power Apps app from home.	Conditional access
Conditional access	A user is not able to use a social media connector in a flow that uses the Microsoft Teams connector.	DLP policy
Exfiltration blocking	A user is not able to forward email messages to an address in another domain.	Exfiltration blocking

Explanation:
Box 1: Conditional access -
You can limit access to users with block access by location to reduce unauthorized access. By using Conditional Access policies, you can apply the right access controls when needed to help keep your organization secure and stay out of your user's way when not needed. Conditional Access analyses signals such as user, device, and location to automate decisions and enforce organizational access policies for resources.

Box 2: DLP policy -
DLP policies enforce rules for which connectors can be used together by classifying connectors as either Business or Non-Business. If you put a connector in the
Business group, it can only be used with other connectors from that group in any given app or flow.
Sometimes you might want to block the usage of certain connectors altogether by classifying them as Blocked.

Box 3: Exfiltration blocking -
Email exfiltration controls for connectors
Microsoft Exchange enables admins to disable email autoforwards and autoreplies to remote domains for external recipients. Exchange does this by using message-type headers, such as Auto Forward received from Outlook and Outlook on web clients.

Reference:
https://docs.microsoft.com/en-us/power-platform/admin/restrict-access-online-trusted-ip-rules
https://docs.microsoft.com/en-us/power-platform/admin/wp-data-loss-prevention
https://docs.microsoft.com/en-us/power-platform/admin/block-forwarded-email-from-power-automate

Question: 283 CertyIQ

HOTSPOT -
A company uses Dynamics 365 Sales.
You need to configure the customer lookup search for email activity in the canvas app.
How should you complete the expression? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

```
If ( [IsBlank / AsType / IsType] ( ThisItem.'Company Name' ), "",
    [IsBlank / AsType / IsType] ( ThisItem.'Company Name', [@Accounts] ),
        "Account: " & [IsBlank / AsType / IsType] ( ThisItem.'Company Name', [@Accounts] ).'Account Name',
    "Contact: " & [IsBlank / AsType / IsType] ( ThisItem.'Company Name', [@Contacts] ).'Full Name'
)
```

Answer:

Answer Area

```
If ( [IsBlank] ( ThisItem.'Company Name' ), "",
    [IsType] ( ThisItem.'Company Name', [@Accounts] ),
        "Account: " & [AsType] ( ThisItem.'Company Name', [@Accounts] ).'Account Name',
    "Contact: " & [AsType] ( ThisItem.'Company Name', [@Contacts] ).'Full Name'
)
```

Explanation:

Box 1: IsBlank -

The IsBlank function tests for a blank value or an empty string. The test includes empty strings to ease app creation since some data sources and controls use an empty string when there is no value present.

Box 2: IsType -

The IsType function tests whether a record reference refers to a specific table type.

Box 3: AsType -

The AsType function treats a record reference as a specific table type, sometimes referred to as casting. You can use the result as if it were a record of the table and again use the Record.Field notation to access all of the fields of that record. An error occurs if the reference isn't of the specific type.

Box 4: AsType -

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-isblank-isempty
https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-astype-istype

Question: 284 CertyIQ

HOTSPOT -
You are designing an integration between Dataverse and an external application. The external application processes thousands of records per day.
Record processing volumes vary throughout the day. Extremely high processing volumes may occur and may exceed the Dataverse service protection API limits.
You need to implement each service protection limit that is enforced.
Which implementations should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Service Protection Limit	Implementation
Number of requests	Number per user over a sliding window of time Number per environment over a sliding window of time Number per user per 24-hour period Number per environment per 24-hour period
Combined execution time	Combined time per user over a sliding window of time Combined time per user over a fixed window of time Combined time per environment over a sliding window of time Combined time per environment over a fixed window of time
Concurrent requests	Fixed number per user Fixed number per tenant Fixed number per application Fixed number per environment

Answer:

Answer Area

Service Protection Limit	Implementation
Number of requests	Number per user over a sliding window of time
	Number per environment over a sliding window of time
	Number per user per 24-hour period
	Number per environment per 24-hour period
Combined execution time	Combined time per user over a sliding window of time
	Combined time per user over a fixed window of time
	Combined time per environment over a sliding window of time
	Combined time per environment over a fixed window of time
Concurrent requests	Fixed number per user
	Fixed number per tenant
	Fixed number per application
	Fixed number per environment

Explanation:

Box 1: Number per user over a sliding window of time

Service protection API limits are enforced based on three facets:

- The number of requests sent by a user.
- The combined execution time required to process requests sent by a user.
- The number of concurrent requests sent by a user.

The following table describes the default service protection API limits enforced per web server:

Measure	Description	Limit per web server
Number of requests	The cumulative number of requests made by the user.	6000 within the 5 minute sliding window
Execution time	The combined execution time of all requests made by the user.	20 minutes (1200 seconds) within the 5 minute sliding window
Number of concurrent requests	The number of concurrent requests made by the user	52

Box 2: Combined time per user over a sliding window of time

Box 3: Fixed number per user -

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/api-limits

Question: 285 CertyIQ

You are deploying a Power Apps app that uses the custom connector for ServiceNow.
The app loads very slowly for some users. You determine that all records from ServiceNow are being retrieved for every user.
The app must load only incidents that are assigned to each user.
You need to limit the number of records that the connector returns.
What should you do?

A. Apply a Lifecycle Services asset scope
B. Apply a business process flow
C. Apply the Azure APIM parameter
D. Apply a connector policy template

Answer: D

Explanation:
You can configure policy templates for custom connectors. Policies allow you to modify the behavior of a custom connector at runtime. You can use policies to perform data conversion, route requests, set parameter values, and more. You can configure policies directly in the custom connector API properties file before import, or you can do it from the maker portal in the custom connector designer by applying policy templates.
Common policy use cases are:
* Set query parameter - Use for handling default values, if necessary, but the maker doesn't configure one. For example, if an API required a top parameter for how many records to return by using a policy, you could set a default value to be used if the maker doesn't configure one.
Note: ServiceNow Action: GetRecords

Summary: List Records -
Description: Gets records of a certain ServiceNow object type like 'Incidents'
Syntax:ServiceNow.GetRecords (string tableType, [advanced][Optional]boolean sysparm_display_value, [advanced][Optional]boolean sysparm_exclude_reference_link, [advanced][Optional]string sysparm_query, [advanced][Optional]integer sysparm_limit, [advanced][Optional]integer sysparm_offset)

Reference:
https://docs.microsoft.com/en-us/learn/modules/policy-templates-custom-connectors/
https://www.carlosag.net/PowerApps/Connectors/ServiceNow

Question: 286 CertyIQ

A company is developing multiple plug-ins.
One of the plug-ins keeps failing.
You need to debug the plug-in.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Highlight the plug-in step and select Debug in the Plug-in Registration tool
B. Copy the .pdb file into the server/bin/assembly folder
C. Select Start Profiling in the Plug-in Registration tool
D. Attach the debugger to the w3wp.exe process
E. Install the plug-in profiler

Answer:

ADE

Explanation:

Starting profiling in the Plugin Registration Tool can help identify any performance bottlenecks or issues in the execution of the plugin, but it may not necessarily help in debugging a failing plugin. Debugging the plugin code and attaching a debugger to the process or using the Plugin Profiler can be more helpful for identifying and fixing errors in the code.

Question: 287 CertyIQ

DRAG DROP -
A company uses Dynamics 365 Sales.
Sales commission must be calculated when an order is placed. You create an Azure Function to perform the calculation. The Azure Function has an HTTP trigger.
You need to configure the Plug-in Registration tool to send data to the Azure Function when an order is placed. You open the Plug-in Registration tool and connect to Dynamics 365 Sales.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

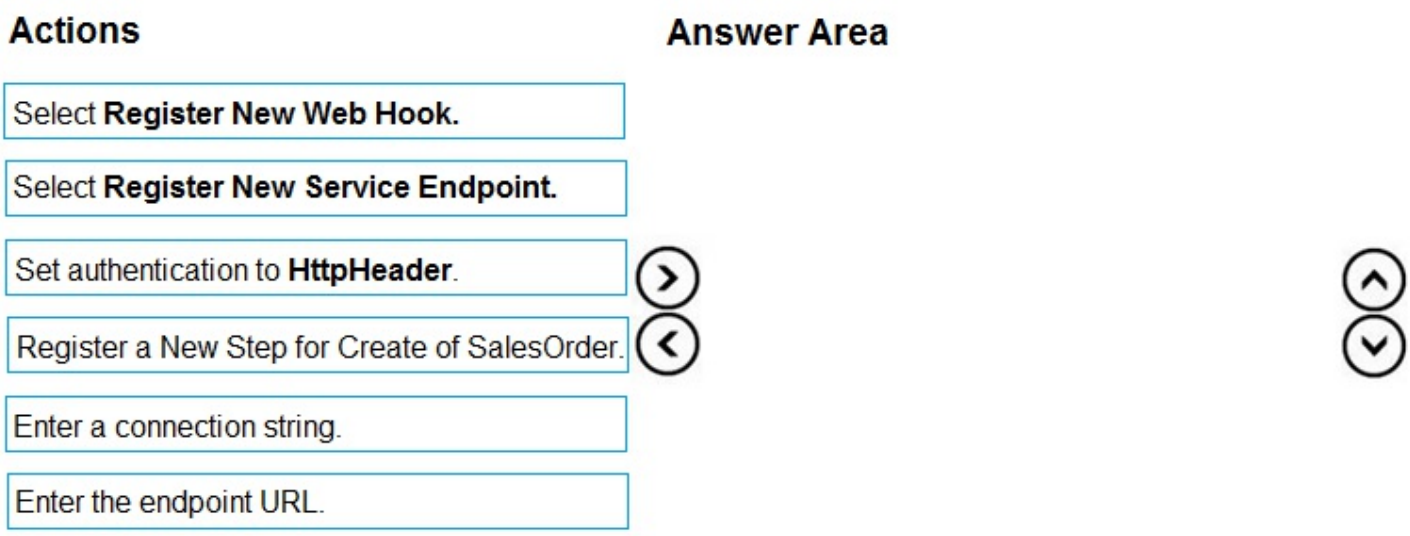

Answer:

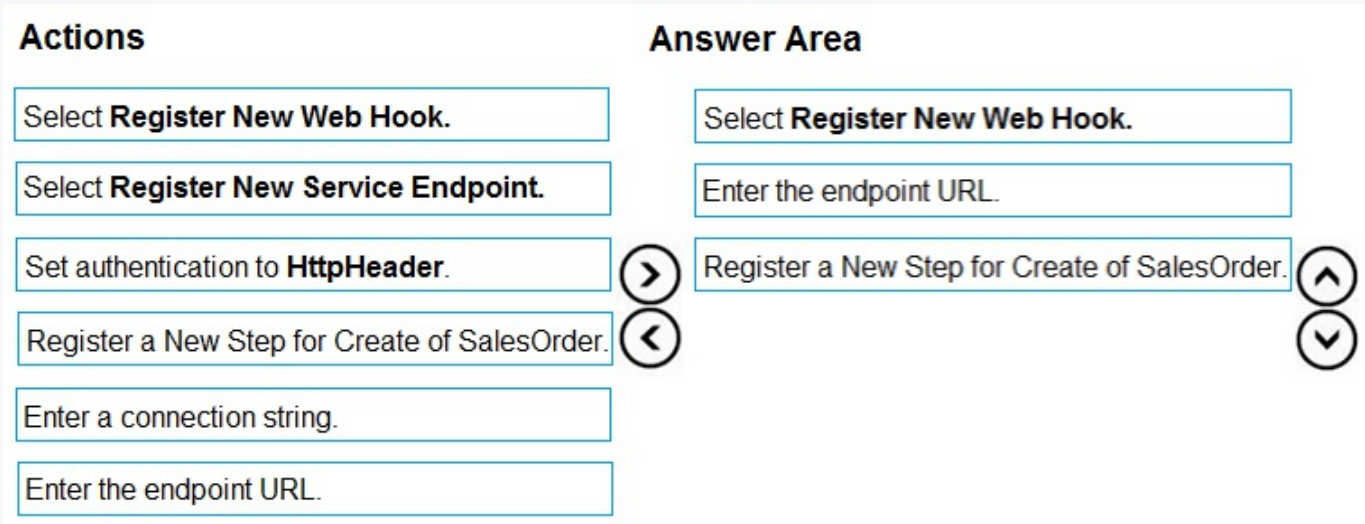

Explanation:

Step 1:SelectRegister New Web Hook.

Configure Dynamics 365 Sales to Call Your Webhook in Azure Functions

1. Open the Plug-in Registration Tool and connect to your organization.
2. Select Register->Register New Web Hook

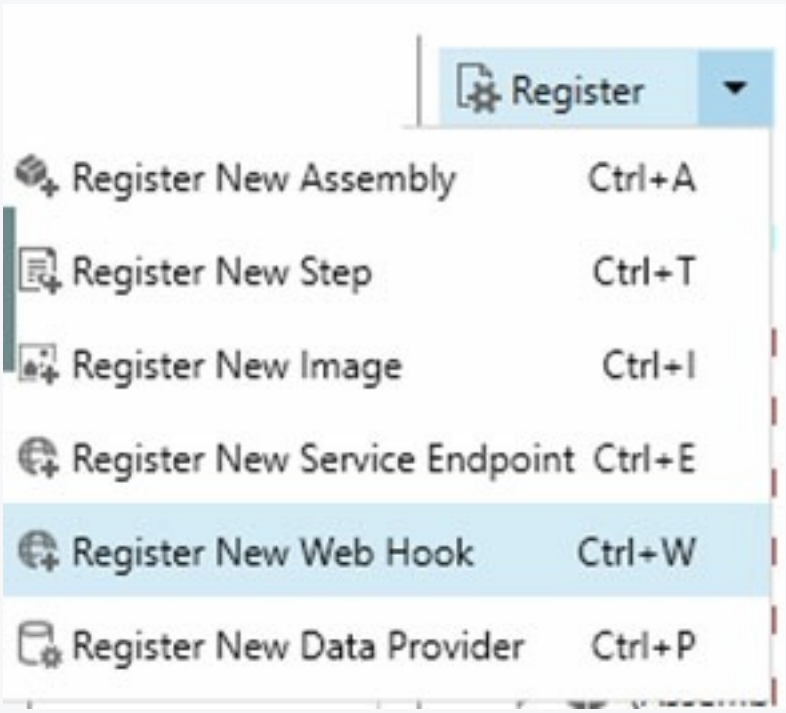

Step 2: Enter the endpoint URL -

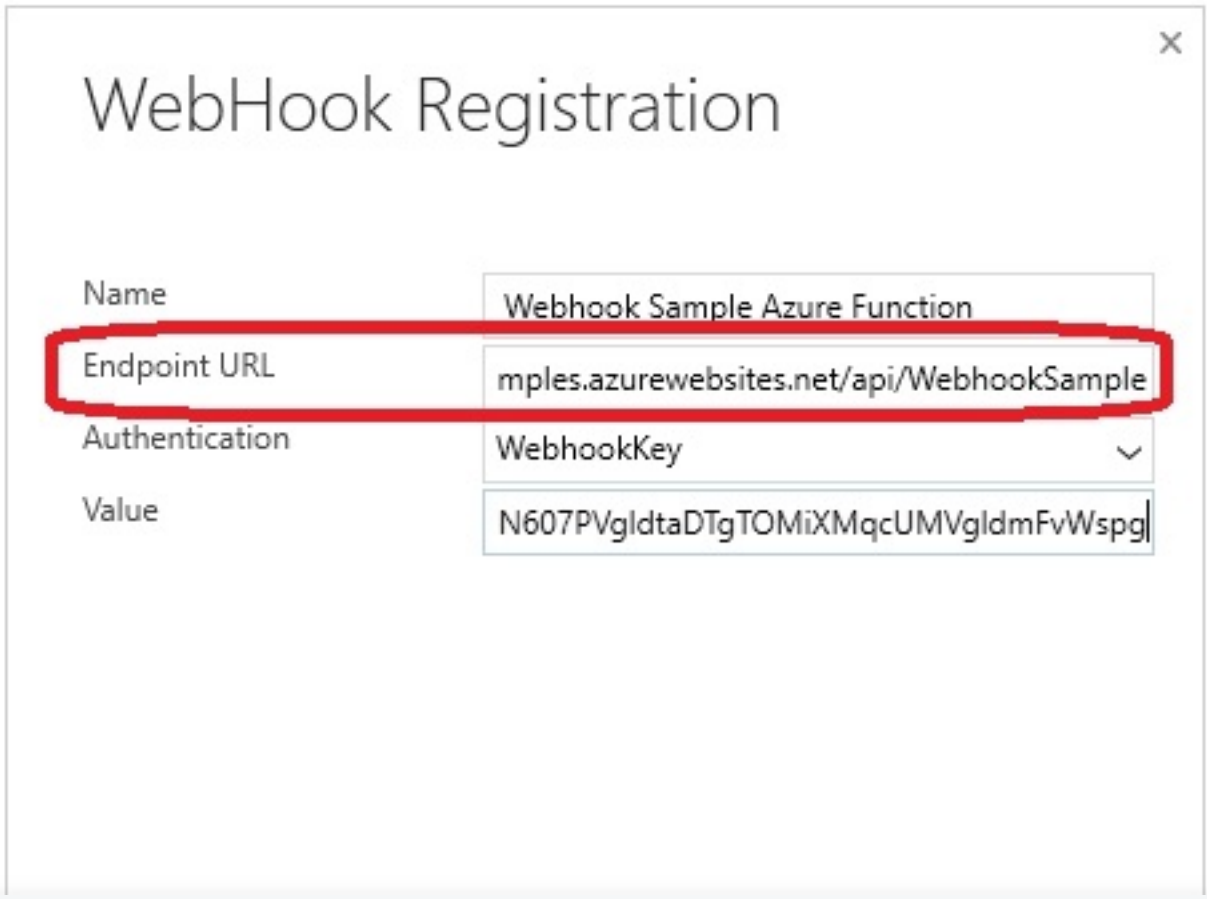

Step 3: Register a New Step for Create of SalesOrder.

Register a new webhook, and then tie that webhook to an event in Dynamics 365 Sales. Select your newly registered webhook, right-click it, and then choose

"Register New Step."

Note that the webhook here is set to execute whenever a change to an account record is detected within Dynamics 365 Sales.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/tutorial-write-plug-in

Question: 288 CertyIQ

A company needs to illustrate the relationships of the entities in Dynamics 365 Sales.
You need to select the appropriate tool to show this graphic.
Which tool should you select?

A. Metadata diagram
B. Sales Insights
C. Power Automate
D. Security model

Answer: A

Explanation:
Visual representation of metadata can be useful, especially when you are trying to describe the relationship between entities in the system. You can use the
Metadata Diagram sample code provided for Dynamics 365 Customer Engagement (on-premises) to generate the entity relationship diagrams.
You can create a diagram that shows a relationship for just one entity, or a complex diagram that includes dozens of related entities, including custom and system entities.

Reference:
https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/use-metadata-generate-entity-diagrams

Question: 289 CertyIQ

HOTSPOT -
A travel agency uses Dynamics 365 Sales.
Customers are allowed to add up to three regions to their travel preferences from the website. Customer preferences must be stored in the Contact entity. An error message must display if customers enter data incorrectly. You create a plug-in.
You need to register the plug-in to meet the requirements.
Which value should you apply for each parameter? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Parameter	Value
message	create associate update
primary entity	none region contact
secondary entity	none region contact
execution mode	synchronous asynchronous

Answer:

Answer Area

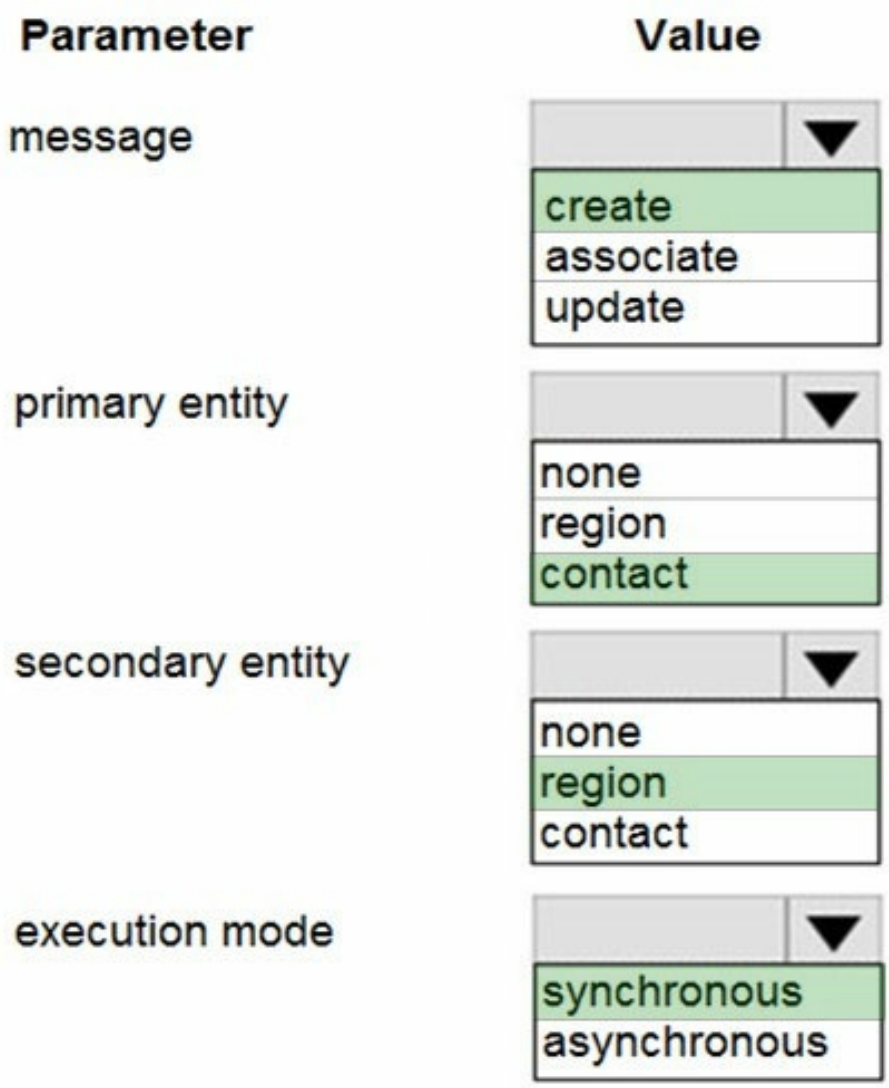

Explanation:

Box 1: create -

An error message must display if customers enter data incorrectly.

The message must be created -

Box 2: contact -

Customers are allowed to add up to three countries/regions to their travel preferences from the website. Their preferences must be stored in the Contact entity.

Box 3: region -

Customers are allowed to add up to three regions to their travel preferences from the website. Customer preferences must be stored in the Contact entity

Box 4: synchronous -

A synchronous plug-in will cause the operation to wait until the code in the plug-in completes. This has an impact on perceived performance of the system. The operations in an asynchronous plug-in are placed in a queue and are executed after the operation is completed so that the operation can complete with minimal interruption.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/tutorial-write-plug-in

Question: 290 CertyIQ

A company uses a third-party shipping company to deliver products to customers.
You need to design a custom connector that retrieves the shipping fees from the shipping company API.
Which three elements should you define for the custom connector? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Authentication model
B. Address parameter
C. OpenAPI definition
D. Fee parameter
E. Fee reference

Answer: ABC

Explanation:
C: You can create a custom connector using a OpenAPI definition file or a URL to OpenAPI definition.
A: On the Security page you get to choose how to authenticate to the API.

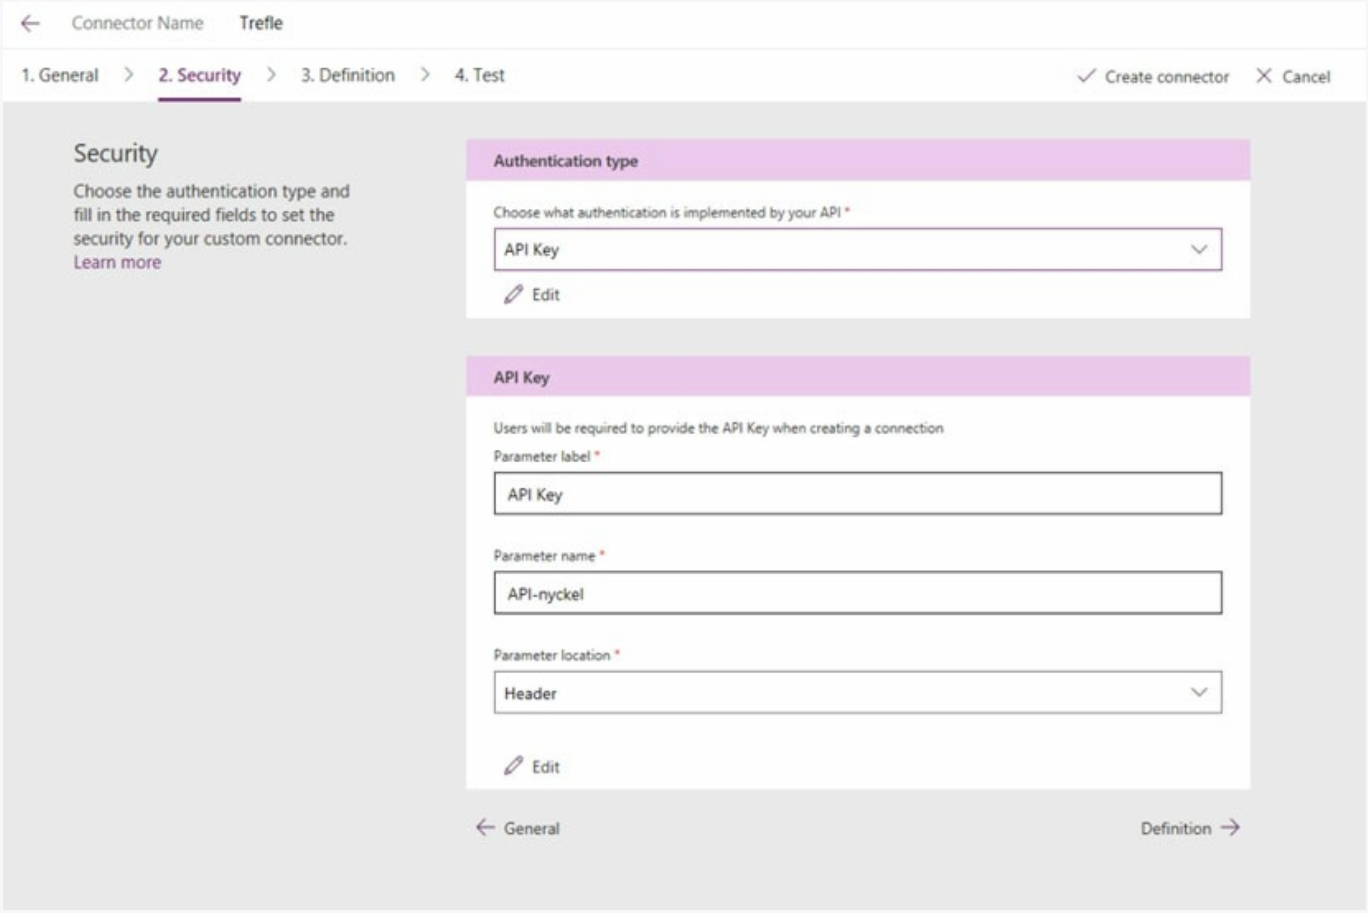

B: Address parameter.
If you were to create a Custom Connector from scratch, then you would have to study the API you have chosen and type in the URL manually here.

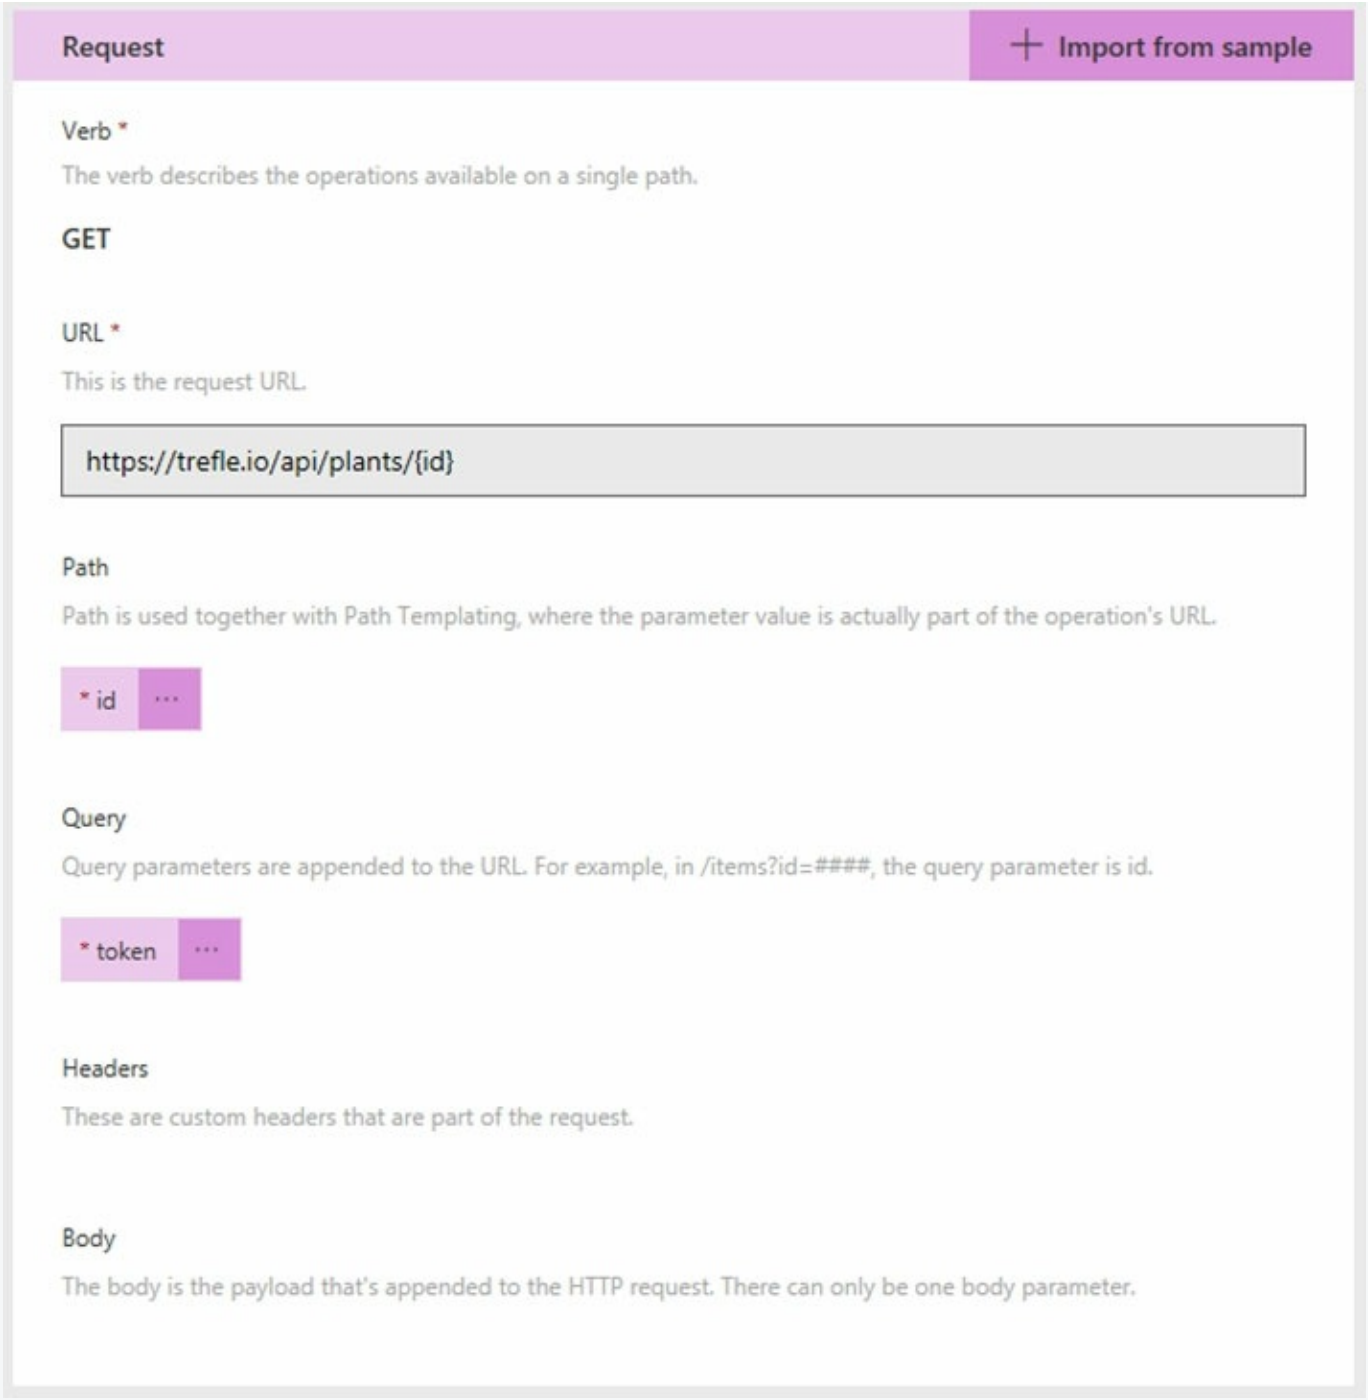

Reference:
https://carinaclaesson.com/2019/09/06/setting-up-a-custom-connector-from-an-openapi-file-and-utilizing-it-in-powerapps-and-flow/

Question: 291 CertyIQ

You are creating a Power Apps app that retrieves customer information from Azure Active Directory when you use the app to look up a customer record.
You create an Azure Function by using JSON code to retrieve the customer information.
You need to make the application work.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Create a Power Automate flow to import data.
B. Create a custom connector that uses the Azure Function API.
C. Copy your JSON code to the app.
D. Create a custom connector that uses the JSON code.

E. Create an API definition for the Azure Function.

Answer:

BE

Explanation:

E: Before exporting an API, you must describe the API using an OpenAPI definition.

B: This OpenAPI definition contains information about what operations are available in an API and how the request and response data for the API should be structured. PowerApps and Microsoft Flow can create custom connectors for any OpenAPI 2.0 definition.

Reference:

https://github.com/MicrosoftDocs/azure-docs/blob/master/articles/azure-functions/app-service-export-api-to-powerapps-and-flow.md

Question: 292 CertyIQ

HOTSPOT -
A manufacturing company takes online orders.
The company requires automatic validation of order changes. Requirements are as follows:
- If validation is successful, the order changes must be submitted.
- If exceptions are encountered, a message must be shown to the customer and the order changes must not be submitted.

You need to set up and deploy a plug-in that encapsulates the rules.
Which options should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Settings	Options
Execution stage	PreValidation PreOperation PostOperation
Execution mode	Asynchronous Synchronous
Image	Pre image Post image
Error message	throw new InvalidPluginExecutionException("Your error message", ex); tracingService.Trace("Your error message: {0}", ex.ToString());

Answer:

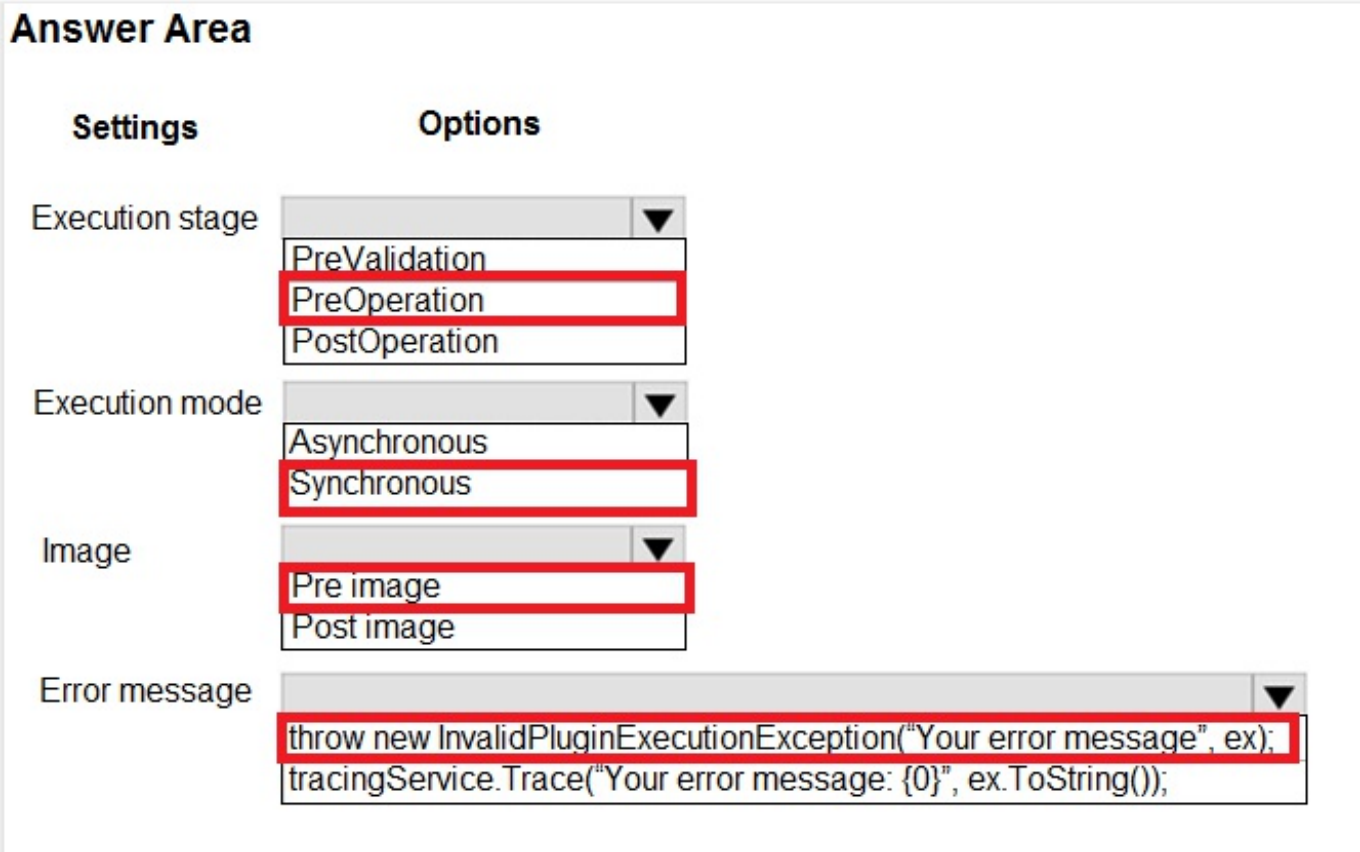

Explanation:

Box 1: Pre operation

Box 2: Synchronous -

Ideally, you should only cancel operations using synchronous plug-ins registered in the PreValidation stage.

Box 3: Pre Image -

Box 4: throw ..

When you throw an InvalidPluginExecutionException exception within a synchronous plug-in an error dialog with your message will be displayed to the user.

Question: 293 CertyIQ

DRAG DROP -
You are designing new functionality for an existing model-driven app.
A field must display multiple selections to the user, enabling the user to select a value.
You need to determine which column type can support the required scenarios.
Which column type should you use? To answer, drag the appropriate column types to the correct scenarios. Each column type may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

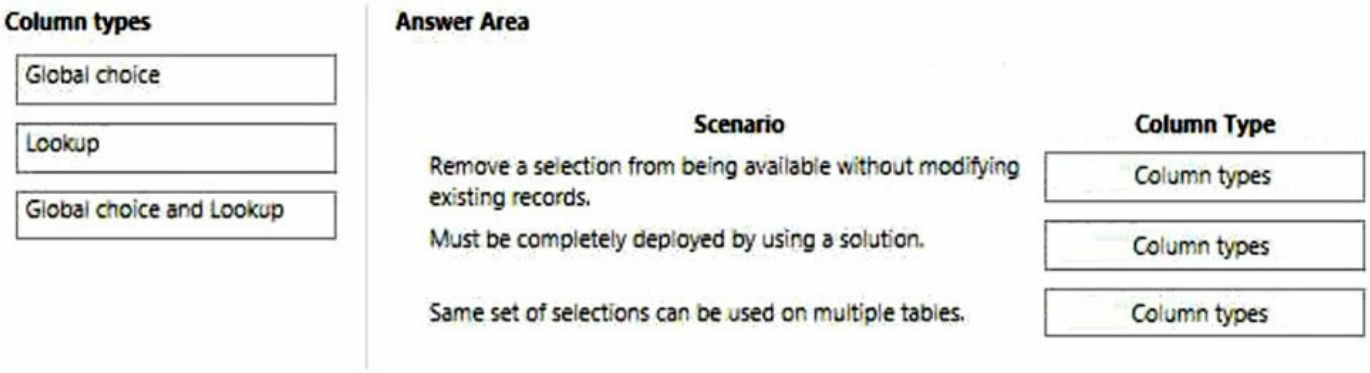

Answer:

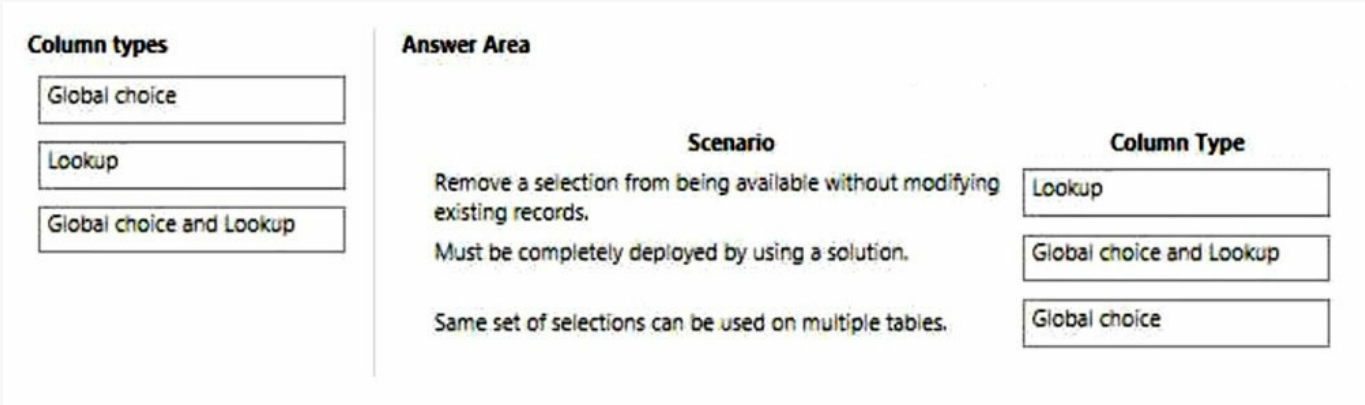

Explanation:

Box 1: Lookup -

The LookUp function finds the first record in a table that satisfies a formula. Use LookUp to find a single record that matches one or more criteria.

Besides the normal formula operators, you can use the in and exactin operators for substring matches.

[!INCLUDE [record-scope]../../includes/record-scope.md)]

Example:

Filter(IceCream, OnOrder > 0) - Returns records where OnOrder is greater than zero.

Box 2: Global choice and Lookup -

Box 3: Global choice -

A choice column provides a list of values for users to pick from. They help streamline data entry in turn ensuring clean data. There are two types - local and global.

Local choices can are local to the table and column that they are created for. They cannot be reused on other tables. For example, a list of statuses for an application may not apply anywhere else (e.g. Submitted, In Review, Approved, Rejected). On the other hand, global choices are available across all tables and columns allowing them to be reused.

Reference:

https://docs.microsoft.com/en-us/power-platform/power-fx/reference/function-filter-lookup
https://thepoweraddict.com/how-to-work-with-choice-columns-in-dataverse/

Question: 294 CertyIQ

You create a plug-in to validate data.
Users report that validation is not working as expected.
You need to debug the plug-in.
Which tool should you use?

A. Plug-in profiler
B. Power Platform Tools for Visual Studio
C. Plug-in dashboard
D. Plug-in Registration Tool

Answer: B

Explanation:

Plug-in Profiler is not the best tool to use when debugging a plug-in that is not working as expected. The Plug-in Profiler is designed to troubleshoot performance issues with a plug-in by analyzing the execution of the plug-in on a remote server. It captures a profile of an executing plug-in and allows you to re-play the execution of the plug-in using Visual Studio on your local computer. However, it does not allow you to attach a debugger to the plug-in process and step through the code in real-time, which is typically necessary when debugging a plug-in. The Power Platform Tools for Visual Studio, on the other hand, is a tool that allows you to develop, debug, and deploy customizations for Dynamics 365 and Power Platform. It allows you to attach a debugger to the plug-in process, which allows you to step through the code and see what is happening at each stage of the validation process. This makes it more suitable for debugging the plug-in when the validation is not working as expected.

Question: 295 CertyIQ

DRAG DROP -
You are creating a Web API.
The API must be able to perform the following actions:
✑ Create a column in a Microsoft Dataverse table.
Update a column for an existing row.

Which HTTP methods should you use? To answer, drag the appropriate HTTP methods to the correct requirements. Each HTTP method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

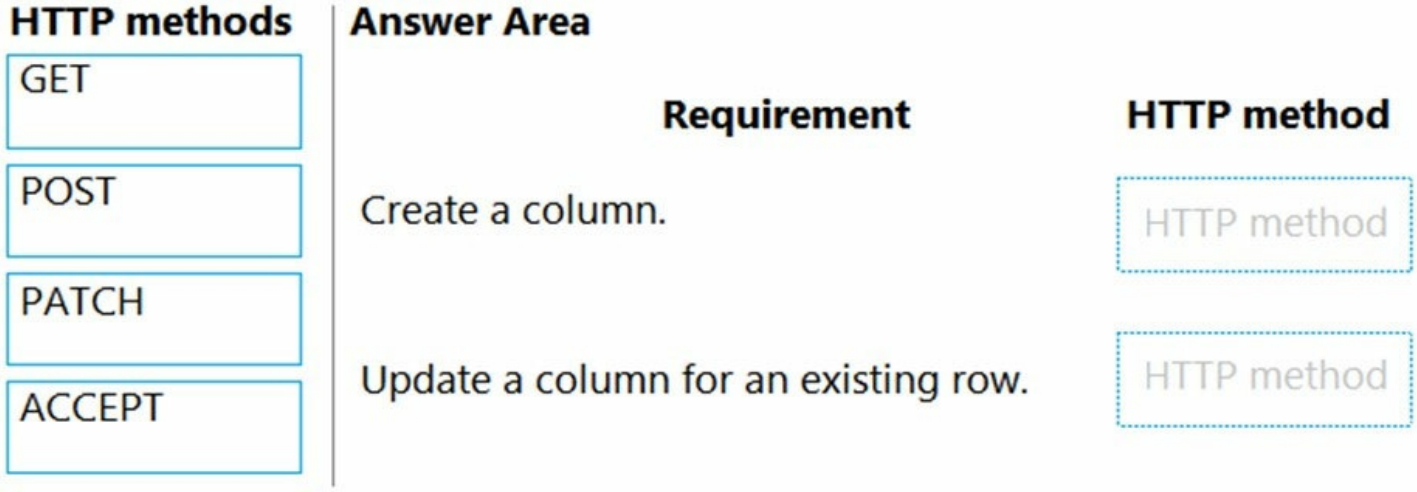

Answer:

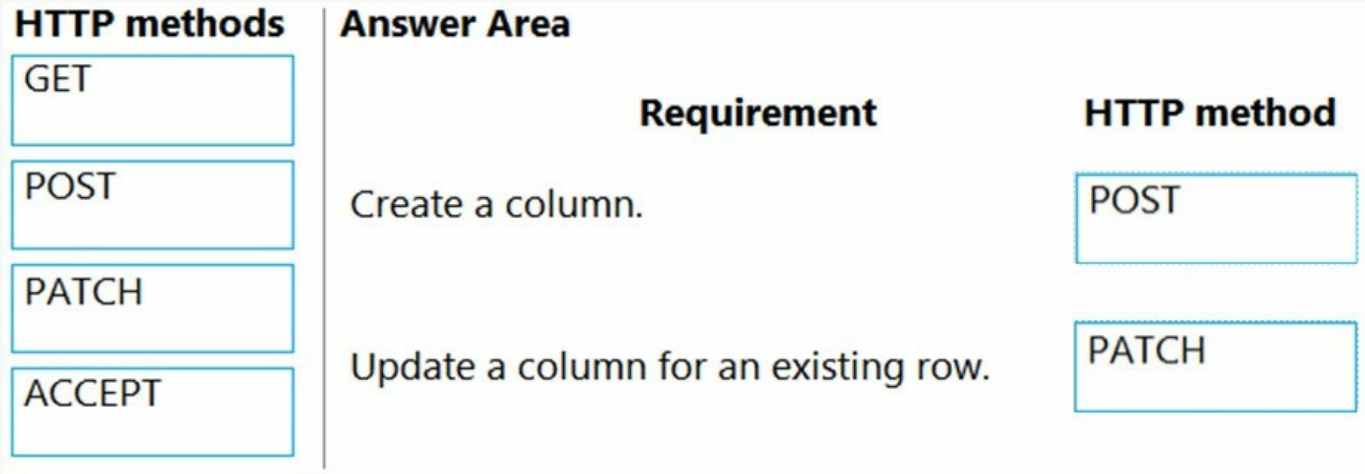

Explanation:
Box 1: POST -

Create table definitions -
To create a table definition, POST the JSON representation of the entity definition data to the EntityDefinitions entity set path. The entity must include the definition for the primary name attribute. You don't need to set values for all the properties. The items on this list except for Description are required, although setting a description is a recommended best practice.

Box 2: PATCH -

Basic update -
Update operations use the HTTP PATCH verb. Pass a JSON object containing the properties you want to update to the URI that represents the record.

Reference:
https://docs.microsoft.com/en-us/power-apps/developer/data-platform/webapi/create-update-entity-definitions-using-web-api https://docs.microsoft.com/en-us/power-apps/developer/data-platform/webapi/update-delete-entities-using-web-api

Question: 296 CertyIQ

HOTSPOT
-
You have a plug-in that performs business logic on contact records. The plug-in is registered in the post-operation stage and is executed when a field named custom_field3 is updated.
The plug-in contains the following code:

```
var cols = new ColumnSet("lastname", "custom_field1");
var contact = service.Retrieve("contact", ctx.PrimaryEntityId, cols);
var updatedValue = contact.GetAttributeValue<string>("lastname");
updatedValue += contact.GetAttributeValue<string>("custom_field1");
contact["custom_field2"] = updatedValue;
service.Update(contact);
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can improve code performance by using the following code instead of retrieving individual fields: `new ColumnSet(true)`	○	○
You can avoid retrieving the changed entity by using plug-in images.	○	○
You can avoid updating the changed entity by registering the plug-in in the pre-operation stage.	○	○

Answer:

Answer Area

Statements	Yes	No
You can improve code performance by using the following code instead of retrieving individual fields: `new ColumnSet(true)`	○	○
You can avoid retrieving the changed entity by using plug-in images.	○	○
You can avoid updating the changed entity by registering the plug-in in the pre-operation stage.	○	○

Explanation:

no

yes

yes

Question: 297

CertyIQ

DRAG DROP

-

You are creating various Power Apps apps for a company. Power Automate flows must connect securely to the following external systems:

External system	Comments
Accounts receivable	This is a proprietary database. You must access the database by using an API. The API uses the client credentials grant type.
Bing Maps	You must access the API by sending a unique identifier in the query string of requests.

You need to create custom connectors to access the external systems.

Which type of security should you use for the connectors?

To answer, drag the appropriate security types to the correct external systems. Each security type may be used

once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

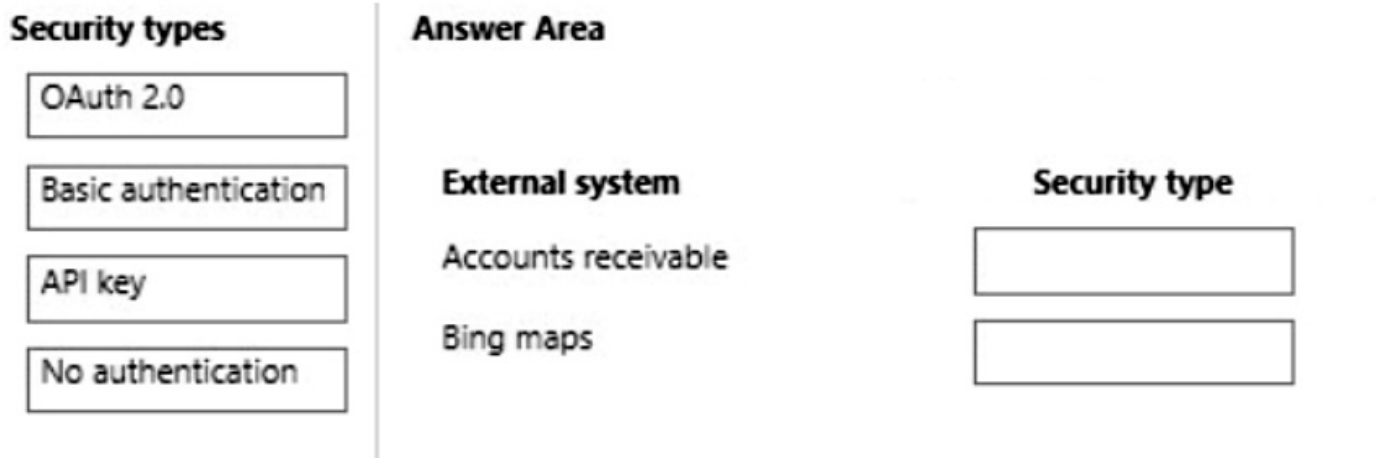

Answer:

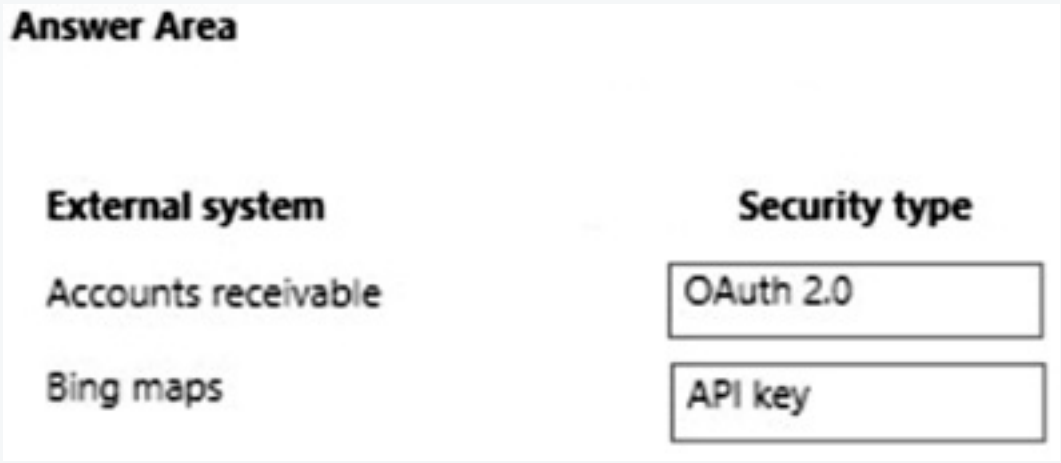

Question: 298 CertyIQ

HOTSPOT
-
You are developing a Power Platform solution that uses a plug-in. The plug-in includes the following code (line numbers are included for reference):

```
01 public class updateACCOLmt:IPIugin
02 {
03   public void Execute(IServiceprovider serViceprovider) {
04     var context = (IPluginExecutionContext)serviceProvider.GetService(typeof(IPluginExecutionContext)):
05     if (context.Stage !=20)
06       return;
07     var account = (Entity)context.InputParameters["Target"];
08     if (!account.TryGetAttributeValue("name", out string _))
09       throw new InvalidPluginExcecustionException("Account name is missing");
10     account["accountnumber"] = GenerateAccountNumber();
11   }
12   public string GenerateAccountNumber() {
13     . . .
14   return accountNumber;
15   }
16 }
```

The plug-in includes a step that is registered in the execution pipeline within the PreOperation stage for the Create message.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The GenerateAccountNumber method runs if the plug-in step registration is changed to the PostOperation stage.	○	○
Creating an account in a model-driven app while excluding a name generates the error message "Account name is missing".	○	○
The Organization service's Update method must run to update the database after setting the accountnumber value.	○	○

Answer:

Answer Area

Statements	Yes	No
The GenerateAccountNumber method runs if the plug-in step registration is changed to the PostOperation stage.	○	●
Creating an account in a model-driven app while excluding a name generates the error message "Account name is missing".	●	○
The Organization service's Update method must run to update the database after setting the accountnumber value.	○	●

Explanation:

1. The GenerateAccountNumber method runs if the plug-in step registration is changed to the PostOperation stage \(\rightarrow \) No

Technical Reason: Standard enterprise plug-in boilerplate code includes explicit guard clauses at the top of the execution block to verify the pipeline stage (e.g., if (context.Stage != 20) return; where 20 is PreOperation). If the step registration is modified to a different stage like PostOperation (Stage 40), the condition evaluates as true, causing the method to exit immediately before executing the main generation code block.

2. Creating an account in a model-driven app while excluding a name generates the error message "Account name is missing" \(\rightarrow \) Yes

Technical Reason: The custom plug-in logic contains a validation check that evaluates incoming target attributes. When a user tries to save an account record without providing a name value, the validation block intercepts the message and throws a synchronous InvalidPluginExecutionException("Account name is missing");, which displays that exact error dialog directly on the user's form.

3. The Organization service's Update method must run to update the database after setting the accountnumber value \(\rightarrow \) No

Technical Reason: When a plug-in executes in the **PreOperation (Stage 20)** stage, modifications made to the Target entity's attribute collection in the execution context are automatically carried forward into the main database transaction. Calling service.Update(account) explicitly within PreOperation is a severe architectural anti-pattern that can trigger redundant database transactions or cause an infinite loop.

Question: 299

CertyIQ

You are creating a plug-in for an app that helps government employees get a proof of vaccination card.
You must add the following information to a vaccination record before a proof of vaccination card is created:
• Vaccination type
• Date of vaccination
• Name of person administering the vaccine
You need to register the plug-in.
In which stage should you register the plug-in?

A. PreValidation
B. PostOperation
C. MainOperation
D. PreOperation

Answer: D

Explanation:

pre operation is a correct answer.

Question: 300

CertyIQ

HOTSPOT
-
You are developing a new model-driven app.
You must create a custom connector to connect the app to the Microsoft Graph API.
You need to configure the environment before creating the custom connector.
Which actions should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Scenario	Action
Enable connector to authenticate with Microsoft Azure Active Directory.	Register Application and specify permissions Open Postman and create collections Export collection Export solution
Enable Postman calls to be available for the custom connector.	Register Application and specify permissions Open Postman and create collections Export collection Export solution

Answer:

Answer Area

Scenario	Action
Enable connector to authenticate with Microsoft Azure Active Directory.	Register Application and specify permissions
Enable Postman calls to be available for the custom connector.	Open Postman and create collections

Register Application and specify permissions
Open Postman and create collections
Export collection
Export solution

Question: 301 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment -
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)

- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications -
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews -
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines -
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.

• Email notifications need to be kept to a minimum.
Issues -
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to determine the cause for the issue reported by the interviewers.
What is the root cause of the issue?

A.There was an error in the event pipeline and the entire transaction was rolled back.

B.There is no plug-in registered to run when an interview record is created.

C.The plug-in used to synchronize the Person of Interest field from Contact to Interview was not triggered.

Answer: B

Explanation:

Interviewers must get an email notification when the Person of Interest field on the "interview record" is successfully updated. Nothing mentioned over a contact record.

Question: 302

CertyIQ

HOTSPOT
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.

The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information

criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You develop the following code for the plug-in that sends email notifications to recruiters.

```
var target = (Entity)context.InputParameters["Target"];
var contact = service.Retrieve(target.LogicalName, target.Id, new ColumnSet("fullname"));
var fetchXml = @"<fetch>
                  <entity name='pro_application'>
                    <attribute name='pro_recruiterassignedid' />
                    <filter type='and'>
                      <condition attribute='statecode' operator='eq' value='0' />
                      <condition attribute='pro_contactid' operator='eq' value='" + target.Id + @"' />
                    </filter>
                  </entity>
                </fetch>";
var fetchRecruiters = new FetchExpression(fetchXml);
var recruiters = service.RetrieveMultiple(fetchRecruiters);
foreach (var recruiter in recruiters.Entities)
{
  SendEmail(recruiter.Id, contact.GetAttributeValue<string>("fullname"));
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can use data from the contact's name without explicitly retrieving the value from the fullname column.	○	○
You can use the same plug-in to send notifications to interviewers.	○	○
Recruiters only receive a single email notification per applicant.	○	○

Answer:

Answer Area

Statements	Yes	No
You can use data from the contact's name without explicitly retrieving the value from the fullname column.	○	◉
You can use the same plug-in to send notifications to interviewers.	○	◉
Recruiters only receive a single email notification per applicant.	◉	○

Explanation:

1. You can use data from the contact's name without explicitly retrieving the value from the fullname column \(\rightarrow \) No

Technical Reason: In Dataverse plug-ins, the input execution context only contains the attributes that were explicitly sent in the web request or captured in a registered pre/post-image. If the plug-in targets a table with a lookup to the Contact entity, the context will only provide the contact's unique GUID and basic reference reference. To access the contact's actual **fullname** value, the plug-in code must explicitly execute a **service.Retrieve()** request to fetch the full record data from the database.

2. You can use the same plug-in to send notifications to interviewers \(\rightarrow \) No

Technical Reason: Plug-in logic should adhere to Single Responsibility design principles, but more importantly, notifications for recruiters and notifications for interviewers trigger on **completely different tables and pipeline messages** (e.g., an Application submission vs. an Interview schedule creation). Because the triggers, target data context, and messaging targets are entirely distinct, they require separate step registrations and separate plug-in classes.

3. Recruiters only receive a single email notification per applicant \(\rightarrow \) Yes

Technical Reason: This lines up directly with the specific business logic constraints stated in the recruiting

case study. The automation contains conditional checks or state flags to ensure that when a candidate applies, the recruiter notification is throttled or locked to a single instance execution per application record, preventing duplicate email alert spam.

Question: 303 CertyIQ

DRAG DROP
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting

• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-

• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to implement scoring.
Which methods should you use? To answer, drag the appropriate methods to the correct actions. Each method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

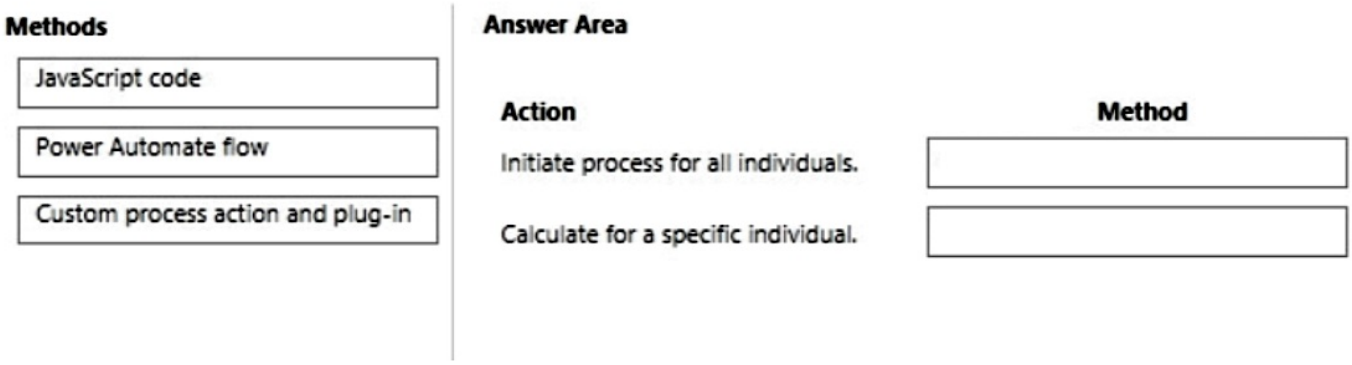

Answer:

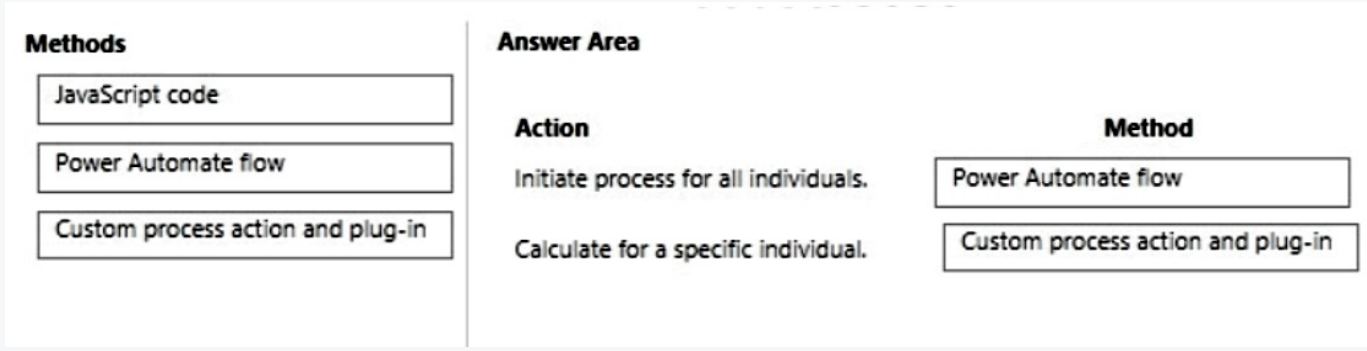

Explanation:

Power automate flow

Custom process action and plug-in

Question: 304 CertyIQ

HOTSPOT
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Background

-

Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.

Current environment

-

Environment

-

•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.

Data

-

•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.

Web API

-

•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.

Requirements

-

Custom connector

-

•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.

Process

-

•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.

Issues

-

•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.

You need to configure security for the Azure Function and custom connector.

Which security tool should you configure for each item? To answer, select the appropriate options in the answer

area.
NOTE: Each correct selection is worth one point.

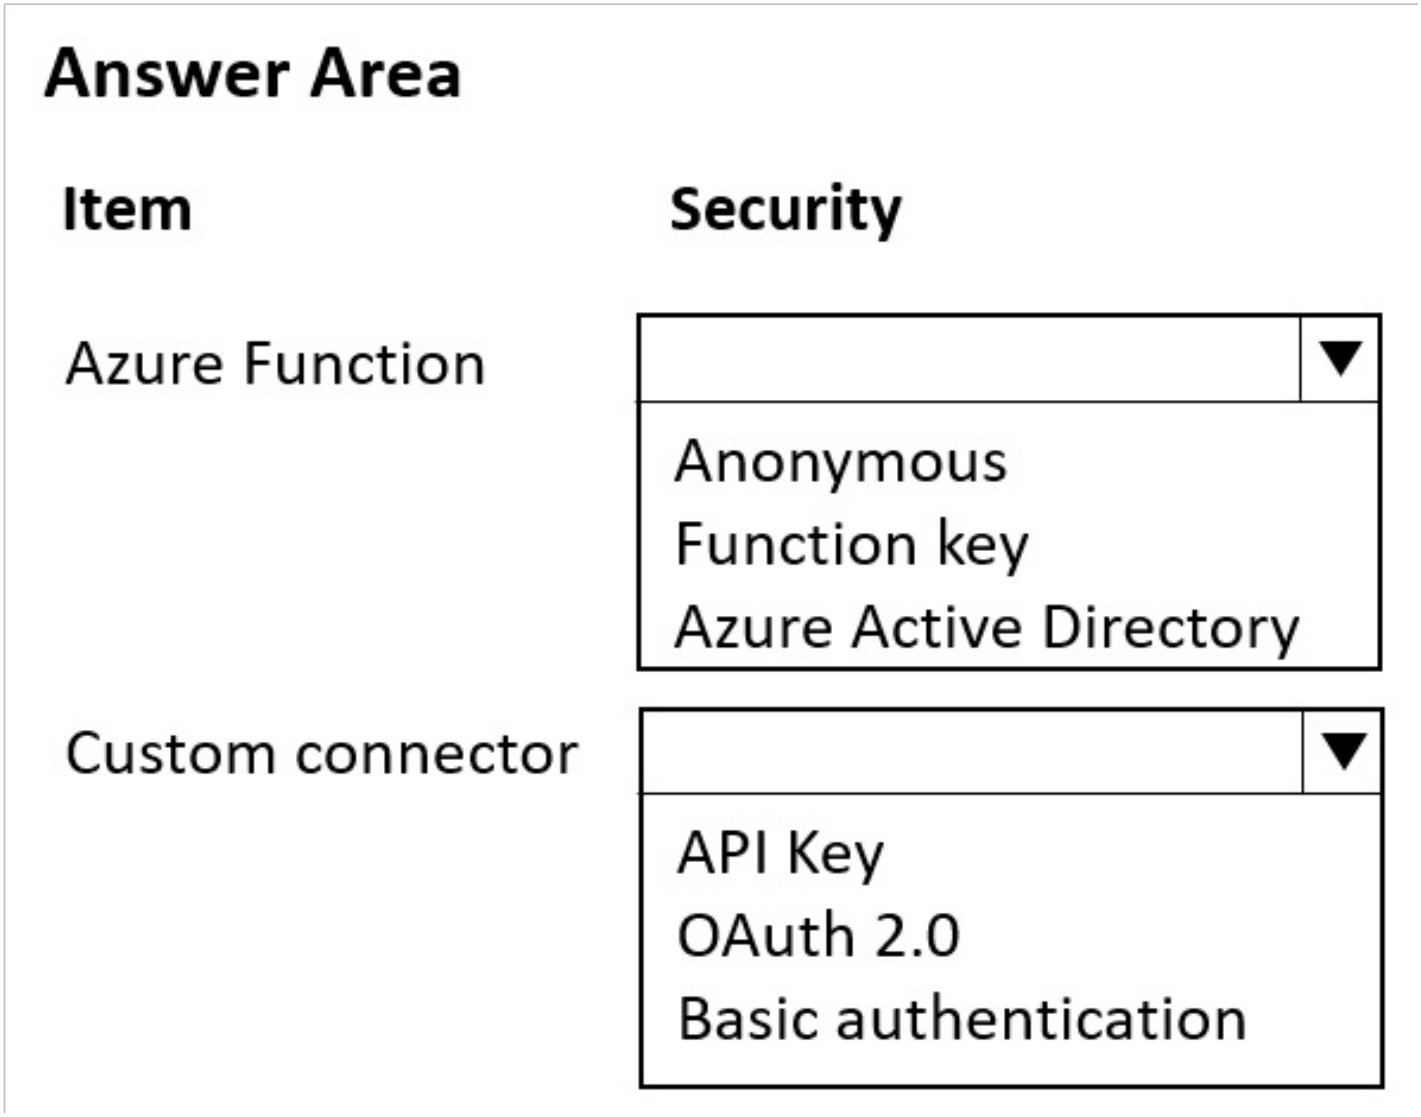

Answer:

Answer Area

Item	Security
Azure Function	Anonymous **Function key** Azure Active Directory
Custom connector	API Key **OAuth 2.0** Basic authentication

Question: 305 CertyIQ

HOTSPOT
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment

-
Environment
-
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data
-
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API
-
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements
-
Custom connector
-
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process
-
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues
-
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to configure the Web API and create the custom connector.
Which action should you perform for each step? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Step	Action
Configure the Web API.	Import a WSDL file. Add an OpenAPI definition. Import a PostMan collection.
Create the custom connector.	Import a solution. Import an OpenAPI file. Import a PostMan collection.

Answer:

Answer Area

Step	Action
Configure the Web API.	Import a WSDL file. **Add an OpenAPI definition.** Import a PostMan collection.
Create the custom connector.	Import a solution. **Import an OpenAPI file.** Import a PostMan collection.

Explanation:

Add a open API definition.

import an open api file.

Question: 306 CertyIQ

DRAG DROP
-
You are developing a Power Apps app for a company. The app will interact with the company's enterprise resource planning (ERP) system. The app allows users to create quotes for customers. You are creating a plug-in for the app. The solution must meet the following requirements:
•Display an error message if there is no account associated with a quote and prevent changes to the quote.
•Synchronize quotes with the external ERP system.
You need configure the plug-in execution pipeline.
Which pipeline stages should you use? To answer, drag the appropriate pipeline stages to the correct requirements. Each pipeline stage may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

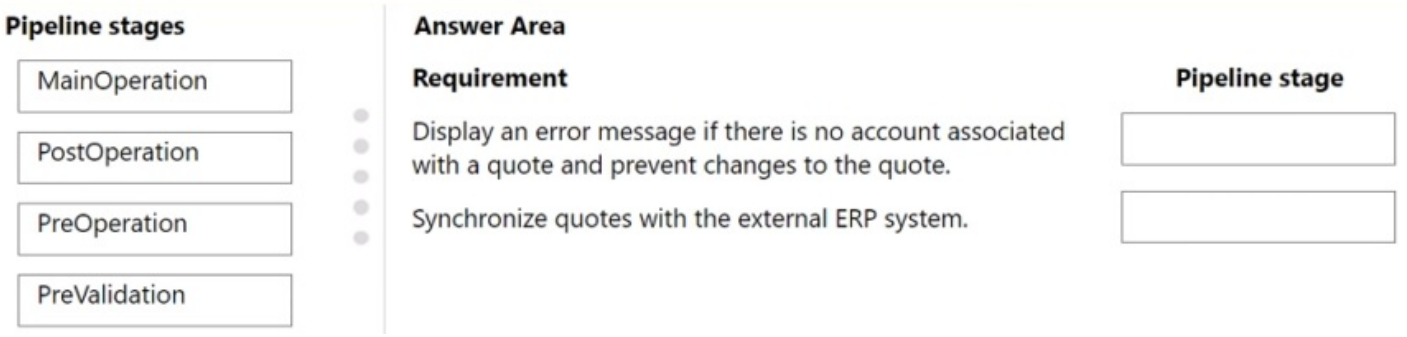

Answer:

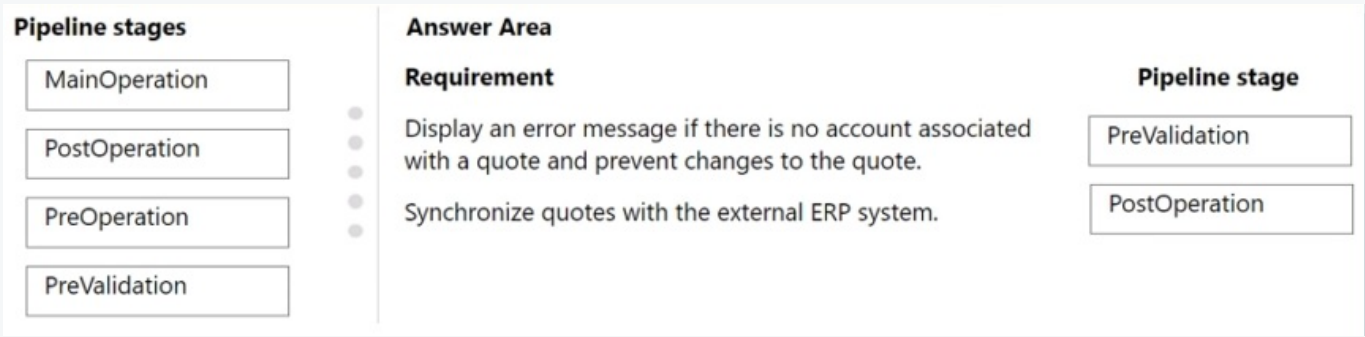

Explanation:

Pre Validation.

Post Operation.

Question: 307

CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.

•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to determine the cause of the 404 error when connecting to the production instance of the Web API.
What do you identify?

A.The web service lacks data for the record.

B.An authentication error occurred.

C.The request timed-out.

D.The host name in the URL is missing a valid value.

Answer: D

Explanation:

The error message indicating that the remote name could not be resolved suggests that the host name specified in the URL (https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID]) could not be resolved to a valid IP address, indicating a DNS resolution issue or a misconfiguration in the environment name specified in the URL. Therefore, the host name in the URL might be missing a valid value.

Question: 308 CertyIQ

You manage a Microsoft Power Automate cloud flow. The cloud flow queries Microsoft Dataverse data by using the List rows action.

You need to configure the cloud flow to process 10,000 records in a single run.
What should you do? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.Set the row count parameter to 10,000.
B.Return the first 5,000 records and use the @odata.nextLink in the response to return the remaining records.
C.Create the query by using FetchXML and set the top parameter to 10,000.
D.Turn on pagination and set the threshold to 10,000.

Answer: BD

Explanation:

Method 1 (Option D - Low-Code Automatic): Turning on **Pagination** in the action's advanced configuration settings allows Power Automate to handle page loops natively. Setting the **Threshold to 10,000** instructs the flow to fetch multiple pages automatically until it reaches the specified number, outputting them all in a single array.
Method 2 (Option B - Manual Control): If you leave pagination turned off, the initial action execution will stop at 5,000 rows but include an **@odata.nextLink URL** token in the body output. You can use a **Do until** loop container to make subsequent HTTP/Dataverse calls using that token until no more records or next links remain.

Why Other Options Are Incorrect

A is incorrect: Simply setting the **Row count** parameter to 10,000 without turning on pagination will still cap the response at the default platform limit of 5,000 records.
C is incorrect: While FetchXML allows you to query data, setting the top parameter or count attribute to 10,000 will still fail or truncate at the 5,000-row mark if pagination settings are not configured in the action configuration wrapper.

Question: 309 CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.
What should you do?

A.Assign the IOrganizationService object to a member variable.
B.Register the plug-in to run synchronously.
C.Register the plug-in step once for each web service request.
D.Set the HTTP connection KeepAlive property to false.

Answer: D

Explanation:

D. Set the HTTP connection KeepAlive property to false.

Why This Is the Correct Choice

This question belongs to a classic Microsoft Power Platform PL-400 scenario where a custom plug-in communicates with an external REST API or web service.

Preventing Socket Exhaustion & Timeouts: When a plug-in executes within the sandbox isolation environment, it is subject to a strict **2-minute execution timeout** limit. If a plug-in makes multiple calls to an external service that is running slow or unresponsive, persistent TCP connections (KeepAlive = true) can hold sockets open, causing them to pool and exhaust available connections, eventually leading to a timeout error. By explicitly setting the **KeepAlive property to false**, you force each HTTP request to close the channel immediately upon completion or failure. This ensures that resources are freed instantly, preventing connection hanging and helping the plug-in avoid hitting the 2-minute timeout limit when external services fail.

Why Other Options Are Incorrect

A is incorrect: You should **never** assign the IOrganizationService or execution context to a member variable. Dataverse plug-in classes are instantiated as stateless singletons. Storing request-specific services in global class fields will cause severe **thread-safety issues** and data corruption across concurrent executions.
B is incorrect: Registering a web-service-reliant plug-in to run **synchronously** is an anti-pattern. If the external web service delays, the synchronous execution will freeze the user interface and database transaction, directly worsening user experience and increasing timeout risk.
C is incorrect: Registering the step multiple times does not solve timeout problems and causes redundant executions, degrading platform performance.

Question: 310 CertyIQ

HOTSPOT
-
Field technicians use a canvas app to update Microsoft Dataverse data. The app is designed to work when it is not connected to the internet.
The app requires a plug-in to apply business logic after records are updated. Unhandled exceptions must not prevent records from saving or syncing.
You need to register the plug-in step to apply the business logic.
Which values should you use for each plug-in step setting? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Plug-in step settings

Setting	Value
Plug-in deployment	Managed Offline Server
Plug-in step event	OnChange PreOperation PostOperation

Answer:

Answer Area

Plug-in step settings

Setting	Value
Plug-in deployment	Managed Offline **Server**
Plug-in step event	OnChange PreOperation **PostOperation**

Explanation:

1. Plug-in deployment: Server

Why Server is correct: In modern cloud-based Microsoft Dataverse environments, custom business logic executes completely on the cloud server.
Why others are incorrect: The **Offline** deployment option is a legacy setting primarily intended for execution within the local client storage of the Outlook offline client or specialized offline mobile frameworks, which does not apply to default cloud data pipeline workflows.

2. Plug-in step event: PostOperation

Why PostOperation is correct: The server-side event execution pipeline contains specific architectural stages (PreValidation [Stage 10], PreOperation [Stage 20], and PostOperation [Stage 40]). The **PostOperation** stage is utilized when the plug-in code relies on the primary database transaction successfully completing — such as when it requires the newly generated database record GUID/ID to create related child records, or when registering an **Asynchronous** background task.
Why others are incorrect:
OnChange: This is a client-side UI event triggered via JavaScript on model-driven forms, not a server-side plug-in platform stage.
PreOperation: This runs before the database main operation executes, meaning database-generated values (like auto-numbers or record IDs) are not yet available.

Question: 311 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment -
Get Energy Fit Program -
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments.

About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment -
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair: oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements -
Overview -
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements -
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application -
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII. oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters. oRecords the details of the home improvements installed for the customer. oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed. oSend an approval to a senior manager to review and approve in Microsoft Teams. oUpload the information to the API endpoint. oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team. oMust record the status on the funding application.
Suitability Assessment Tool -
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting -
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues -
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to resolve the issue with the eligibility assessment tool.
Which two commands should you run? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A.pac solution version

B.pac solution import

C.pac pcf push

D.pac pcf version --strategy manifest

Answer: AD

Explanation:

pac solution version: This command is used to manage the version of your solution. It helps ensure that the solution is correctly versioned, which is crucial for tracking changes and ensuring compatibility.

pac pcf version --strategy manifest: This command is used to update the version of Power Apps Component Framework (PCF) controls within your solution. The --strategy manifest option ensures that the version is updated based on the manifest file, which is important for maintaining consistency and resolving version-related issues.

Question: 312

CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment
-
Get Energy Fit Program
-
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an

application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment
-
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair:
oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements
-
Overview
-
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements
-
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application
-
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII.
oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters.
oRecords the details of the home improvements installed for the customer.
oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed.
oSend an approval to a senior manager to review and approve in Microsoft Teams.
oUpload the information to the API endpoint.
oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team.
oMust record the status on the funding application.
Suitability Assessment Tool
-
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting
-
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues
-
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.

•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to configure a custom connector for the claim submission portal API.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

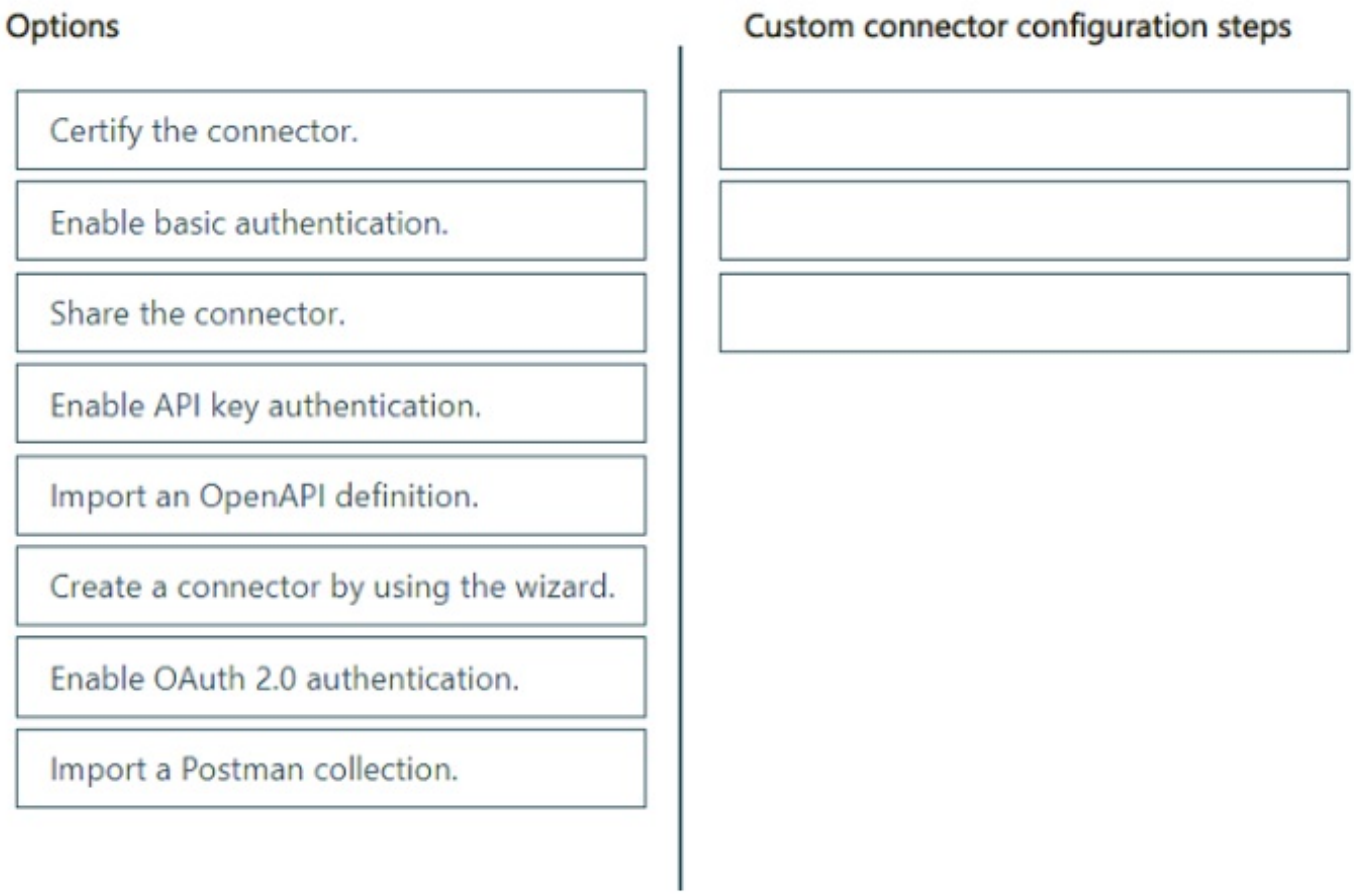

Answer:

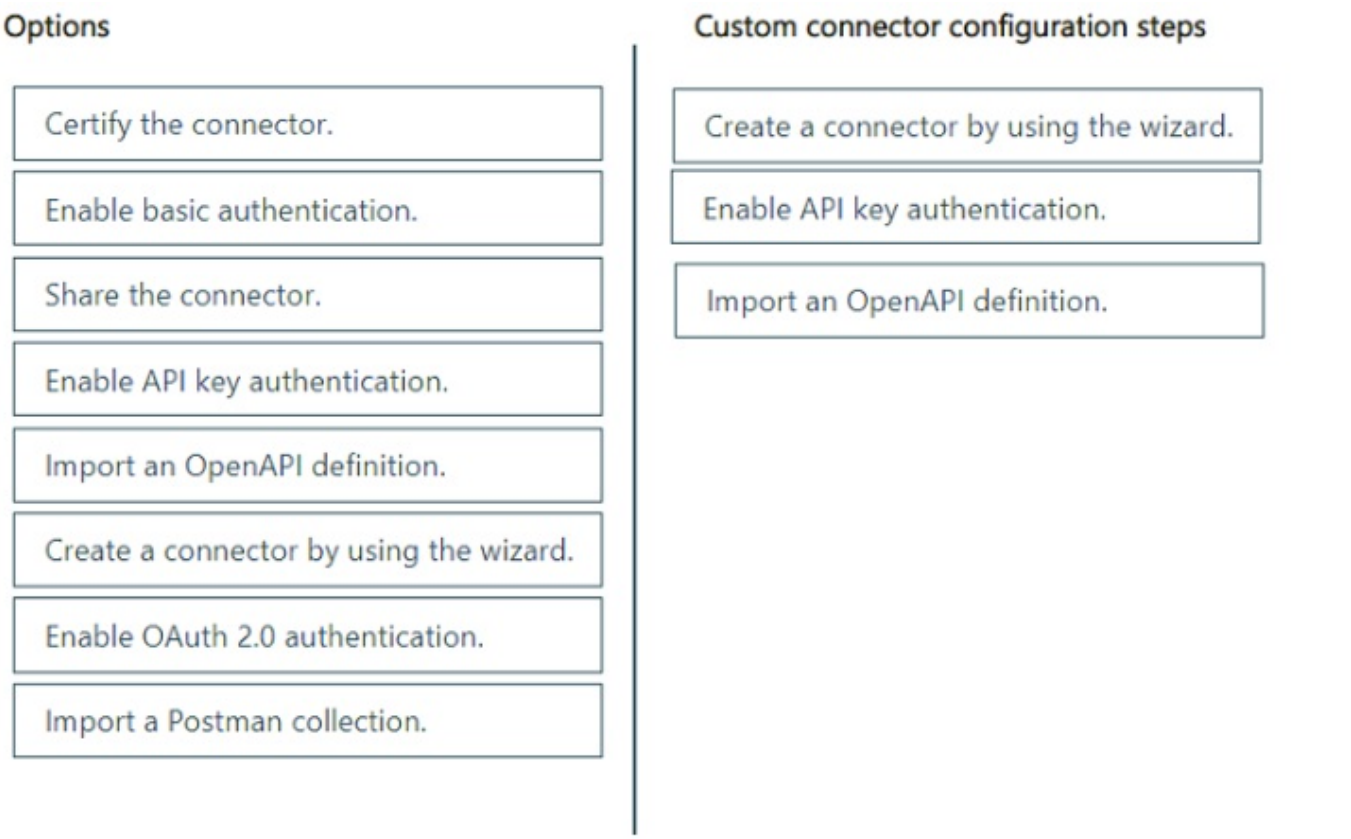

Explanation:

Create a Connector by Using the Wizard: This involves using a guided wizard to create a custom connector. The wizard simplifies the process by providing step-by-step instructions and prompts.

Enable API Key Authentication: This allows the connector to use API keys for authentication. API keys are a common method for controlling access to APIs and are often used in conjunction with other security measures.

Import an OpenAPI Definition: OpenAPI (formerly Swagger) is a specification for building APIs. Importing an OpenAPI definition allows you to quickly create a connector based on the API's documented endpoints and parameters.

Question: 313 CertyIQ

HOTSPOT
-
You are creating an application using the Microsoft Dataverse SDK for .NET.
A record must be created by using the column types of lookup and choices.
You need to set the record's column values.
Which attribute type should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

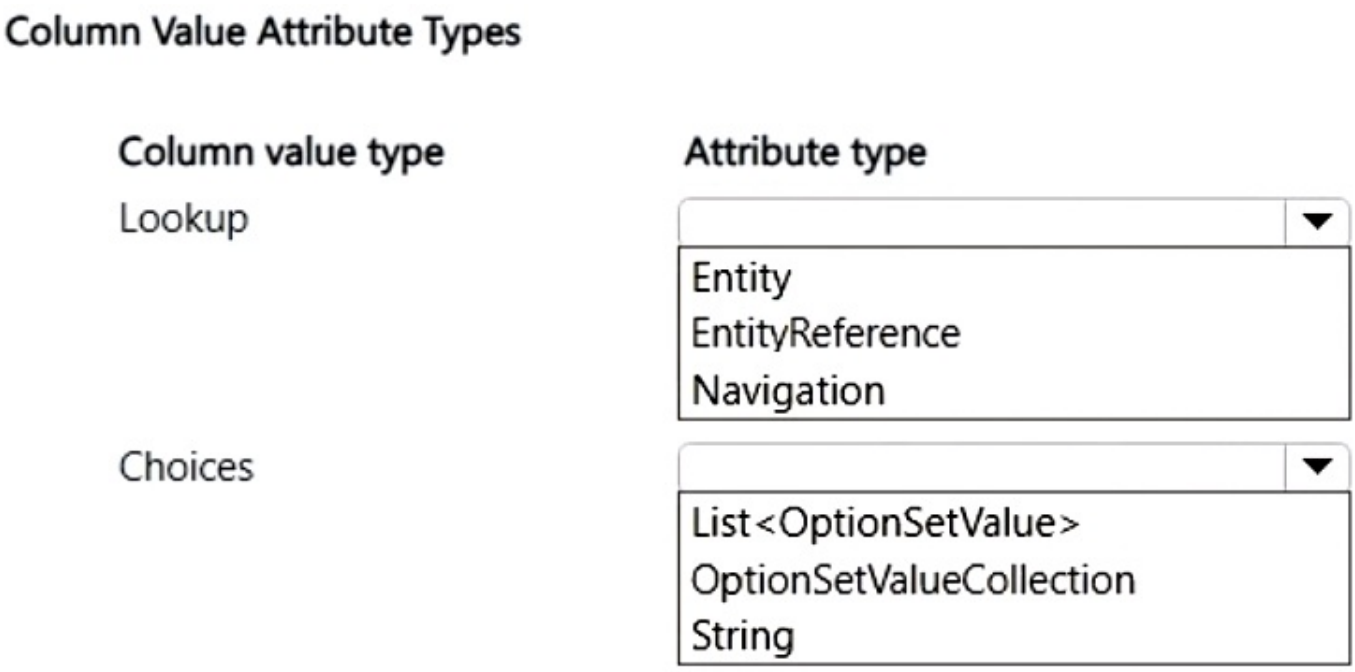

Answer:

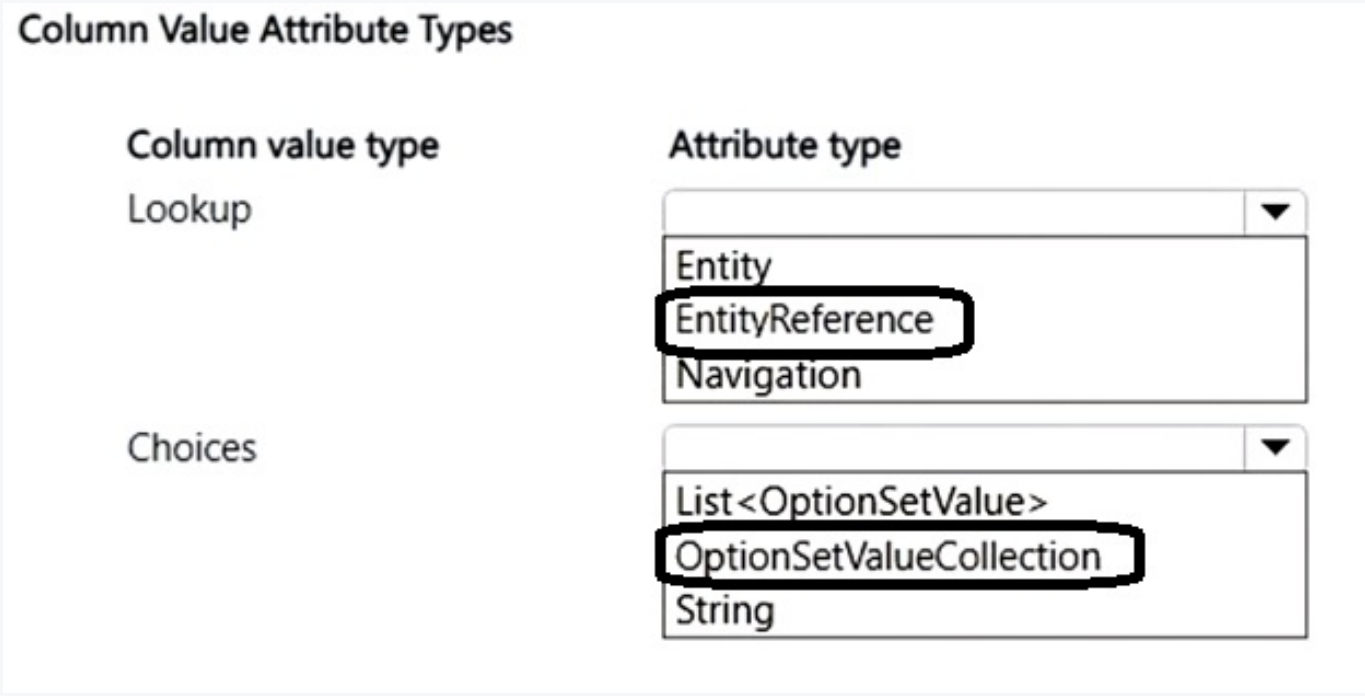

Question: 314 CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.
What should you do?

A.Send requests to use multiple threads.

B.Register the plug-in to run synchronously.

C.Register the plug-in step once for each web service request.

D.Set the HTTP connection timeout value explicitly to limit how long each connection can remain open.

Answer: B

Explanation:

B. Register the plug-in to run synchronously.

Synchronous execution: When a plug-in is registered to run synchronously, it executes in real-time and waits for the external web service to respond before proceeding. This ensures that multiple web service requests can be handled sequentially, preventing timeouts due to slow responses from the web service.

Question: 315 CertyIQ

DRAG DROP
-
You are creating a model-driven app that requires complex business logic when a Dataverse record is updated. The app must provide the following functionality:
•Update a record using a REST API and able to manually retry in the event of a failure without additional development.
•Validate the record values and display an error message next to those that are invalid.
You need to configure the app with the required business logic.
Which implementation method should you use? To answer, move the appropriate implementation methods to the correct functionalities. You may use each implementation method once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

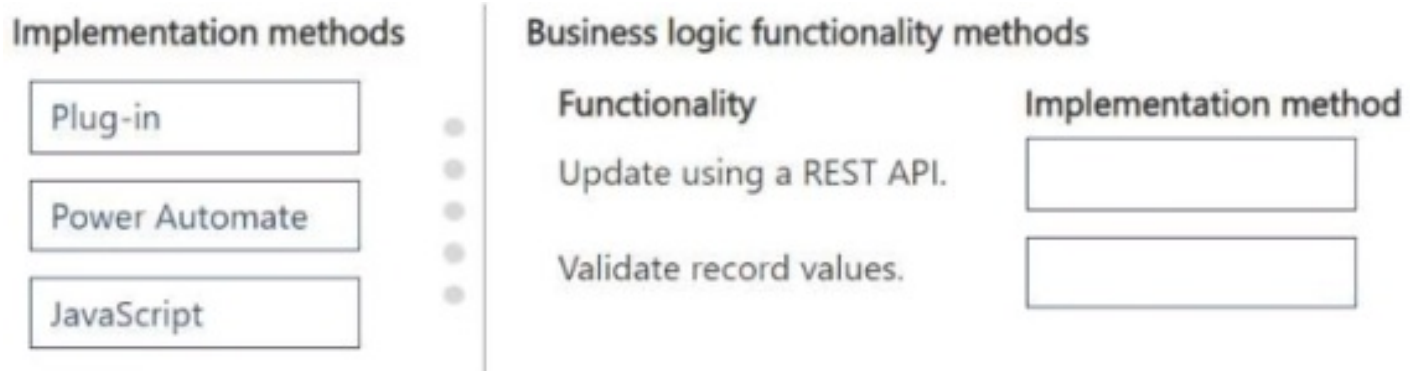

Answer:

Explanation:

Power Automate is used for REST API-based updates and asynchronous automation.

JavaScript is used for client-side record validation.

Question: 316 CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.
What should you do?

A.Register the plug-in to run synchronously.

B.Set the HTTP connection KeepAlive property to false.

C.Register the plug-in by using isolation mode = none.

D.Assign the IOrganizationService object to a member variable.

Answer: A

Explanation:

A is correct because registering the plug-in to run synchronously ensures that all operations complete before returning control to the caller, thus preventing timeouts during external service calls.

Reasoning:

When a plug-in is registered to execute synchronously, it runs in the same thread context as the operation triggering it, allowing for real-time processing of the tasks, including making multiple web service calls. This is crucial for ensuring that the required actions are completed sequentially and that no premature termination occurs due to timeouts associated with asynchronous processing. Real-time interaction with web services necessitates robust error handling to manage responses effectively, improving the reliability of the application.

Evaluation of Other Options:

B. Set the HTTP connection KeepAlive property to false: Setting KeepAlive to false may optimize certain requests, but it does not directly influence the handling of multiple requests or mitigate timeouts. In scenarios of slow response from the service, this setting could lead to increased latency due to the overhead of establishing new connections for each request.
C. Register the plug-in by using isolation mode = none: Using isolation mode level "none" allows the plug-in to run in the same process as the calling assembly but may expose it to more risks and potential failure points. This mode can lead to issues if the external service fails, impacting the stability of the main process and increasing the likelihood of timeouts, rather than addressing the core issue of handling external calls effectively.
D. Assign the IOrganizationService object to a member variable: While this may help optimize service calls by reusing the service instance, it doesn't specifically address the timeout scenario or the handling of slow external requests. The plug-in would still ultimately fail if the external service is unresponsive, regardless of how the service object is managed.

References:

1. Microsoft Docs - Register a plug-in
2. Microsoft Docs - Plug-in and Custom Workflow Activity Registration Tool
3. Microsoft Docs - Performance considerations and best practices

Question: 317 CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.

What should you do?

A.Register the plug-in to run synchronously.
B.Register the plug-in by using isolation mode = none.
C.Set the HTTP connection timeout value explicitly to limit how long each connection can remain open.
D.Register the plug-in step once for each web service request.

Answer: C

Explanation:

C is correct because setting the HTTP connection timeout value explicitly allows for better control over the duration of external web service requests, thereby preventing timeouts during slow responses.

In the context of plug-ins in the Microsoft Power Platform, managing external web service calls is critical for ensuring smooth operational flows. By configuring the HTTP connection timeout, a developer can specify how long the system should wait for a response before it considers the connection failed. This is particularly beneficial when external services are unreliable or slow, as it allows the application to remain responsive rather than timing out abruptly, which can lead to incomplete operations.

Critical Evaluation of Incorrect Options:

A. Register the plug-in to run synchronously. This approach would lead to a synchronous operation that blocks the execution thread until the service responds. If the external service is slow or unresponsive, this can cause significant delays or timeouts in the overall process, defeating the purpose of robustness against slow responses.
B. Register the plug-in by using isolation mode = none. Isolation mode = none runs the plug-in in the same process as the calling code, which can cause stability issues. If the external web service hangs or crashes, it could also crash the entire application, making it unsuitable for handling unreliable services.
D. Register the plug-in step once for each web service request. This approach would unnecessarily complicate the registration process and increase maintenance overhead. It does not enhance the robustness of handling slow responses, as each registered instance would still suffer from the same timeout limitations as a single request.

By opting for option C, a developer ensures that the plug-in maintains high responsiveness and resilience against external service latencies, facilitating overall application stability and user experience.

References:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/plugins
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/web-service-requests
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/plug-ins-isolation-modes

Question: 318 CertyIQ

You are creating a canvas app that will create rows in a Dataverse table.
When a row is created, additional business logic must be performed on a related row. A cloud flow triggered by the canvas app must perform the business logic.
You need to create the cloud flow.
Which trigger should you use?

A. Dataverse - When an action is performed
B. Manually trigger a flow

C. Dataverse - When a row is added

D. Power Apps (V2)

Answer: C

Explanation:

The correct trigger for the cloud flow is **C. Dataverse - When a row is added**.

Here's why: The canvas app creates rows in a Dataverse table. The core requirement is that when a new row is created, additional business logic must be executed on a related row. The "Dataverse - When a row is added" trigger is specifically designed to fire automatically whenever a new row is inserted into the specified Dataverse table. This aligns directly with the scenario's need to react to row creation events.

Option A, "Dataverse - When an action is performed," requires a specific action to be called which isn't the intent here, as the trigger should simply react to row creation.

Option B, "Manually trigger a flow," requires manual initiation, contradicting the automatic execution requirement following row creation in the canvas app. This option would not provide the automatic response that is necessary for this scenario.

Option D, "Power Apps (V2)," is suitable when the cloud flow needs to be initiated from within the Power App and passed information from the app. While the app is involved in the broader process, it is the row creation event in Dataverse that should trigger the business logic, not the Power App directly. The Power Apps (V2) trigger is designed primarily to accept input from the Power App, which is not required in this scenario - we only want to respond to the new row creation.

Therefore, the "Dataverse - When a row is added" trigger is the most appropriate choice because it directly addresses the scenario's need for automated execution of business logic based on the creation of a new row in a Dataverse table. It's an event-driven approach that simplifies the workflow and ensures that the logic executes immediately after a new row is added without requiring manual intervention or action calls.

For further reading on Power Automate triggers, particularly those involving Dataverse, refer to these resources:

Use triggers to start a cloud flow
Dataverse connector - Triggers

Question: 319 CertyIQ

You have a Power Automate flow. The flow uses an HTTP action to connect to a web service and update a Microsoft Dataverse record with the result.
You must modify the flow to send an email if the web service connection fails.
You need to update the flow.
Which two actions should you perform? Each correct answer presents part of the solution. Choose two.
NOTE: Each correct selection is worth one point.

A. Configure the send email step to run when the previous step fails.

B. Add a send email step after the update Dataverse record step.

C. Add a send email step after the HTTP step.

D. Update the HTTP step settings and set the retry policy to: None.

Answer: AC

Explanation:

Technical justification (exam-style)

OptionA – Configure the Send Email step to run when the previous step fails
Sets the **Run-after** condition to "has failed". This explicitly tells the flow to execute the email action only when the preceding HTTP activity throws an error, which is exactly the requirement (notify on connection failure).

OptionC – Add a Send Email step after the HTTP step
Places the email action in the flow sequence immediately downstream of the HTTP call. Because the email step follows the HTTP step, it can be triggered by the failure condition defined inA. The order is important: the email must be evaluated after the HTTP action so that its execution context reflects the success/failure of that call.

Why the other options are unsuitable

B – Add a Send Email step after the Update Dataverse record step – This would cause the email to fire only when the **record-update** step fails, not when the HTTP call fails. The failure point is mis-aligned with the requirement.
D – Update the HTTP step settings and set the retry policy to: None – Changing the retry policy does not provide any notification mechanism; it merely controls how retries are attempted. It does not trigger an email on failure.

Conclusion – The combination of **A** (defining the failure-triggered run-after condition) and **C** (positioning the email action right after the HTTP step) correctly implements the needed error-notification logic in the Power Automate flow.

Question: 320 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are an integration that sends created records from a custom Dataverse table to an exposed REST API.
When the REST API is unavailable, you must be able to retry if the response status code is 500.
You need to select a solution that meets the requirement.
Solution: Register a webhook by using the REST API as the endpoint. Wait for the webhook to automatically retry when a failure occurs.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:

Answer: B – No

Registering a webhook only creates the subscription; the platform does **not** automatically retry on HTTP500 responses.
Webhook retry behavior is limited to transient connectivity failures (e.g., network timeouts) and is not

configurable for specific status codes such as 500.
To meet the requirement you must implement explicit retry logic (e.g., exponential back-off) that inspects the response status and retries only when the code is 500.
Therefore the proposed solution does not satisfy the “retry on 500” condition, making option **B** the correct choice.

(Alternative approaches such as using Azure Logic Apps, Azure Functions, or a custom connector with built-in retry policies would be appropriate.)

Question: 321 CertyIQ

HOTSPOT
-
You are implementing a Power Automate flow in a model-driven app. The flow will facilitate an approval process to increase customer credit limits.
A user must be able to initiate the process from a customer record. The user must be prompted for the amount of the increase.
Once the increase is approved, the customer record must update to reflect the new amount.
You need to add a trigger to the flow and locate the ID of the record to update. The flow should be written to use the least number of steps.
How should you create the flow? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

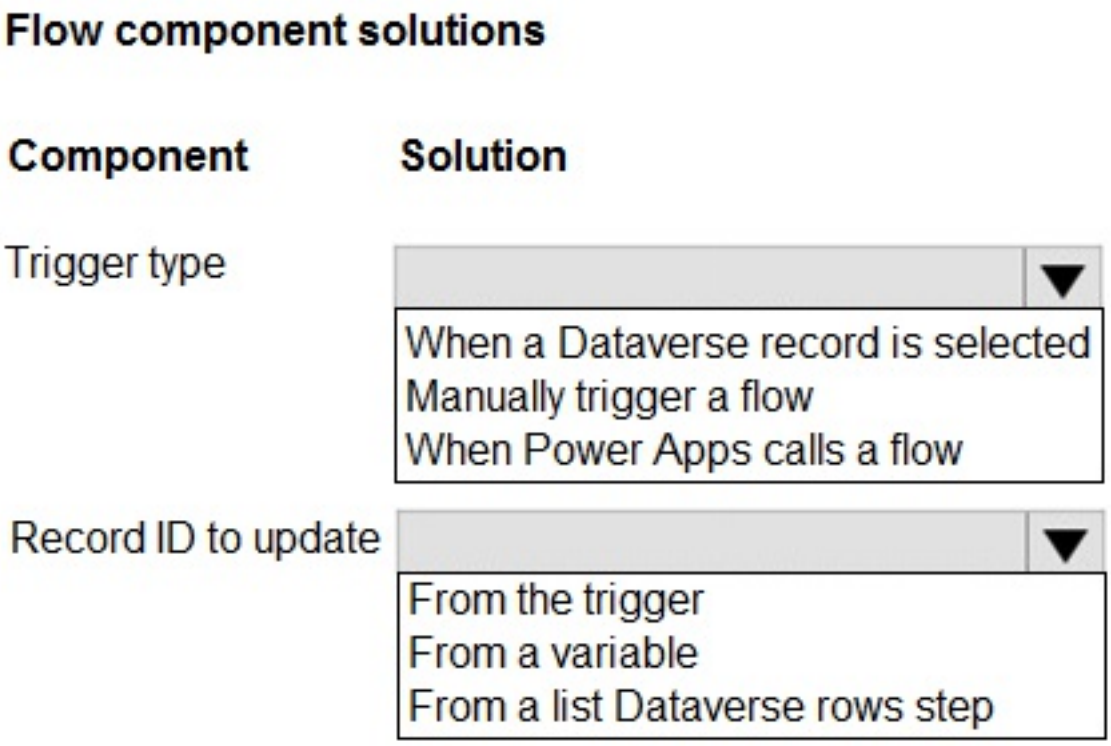

Answer:

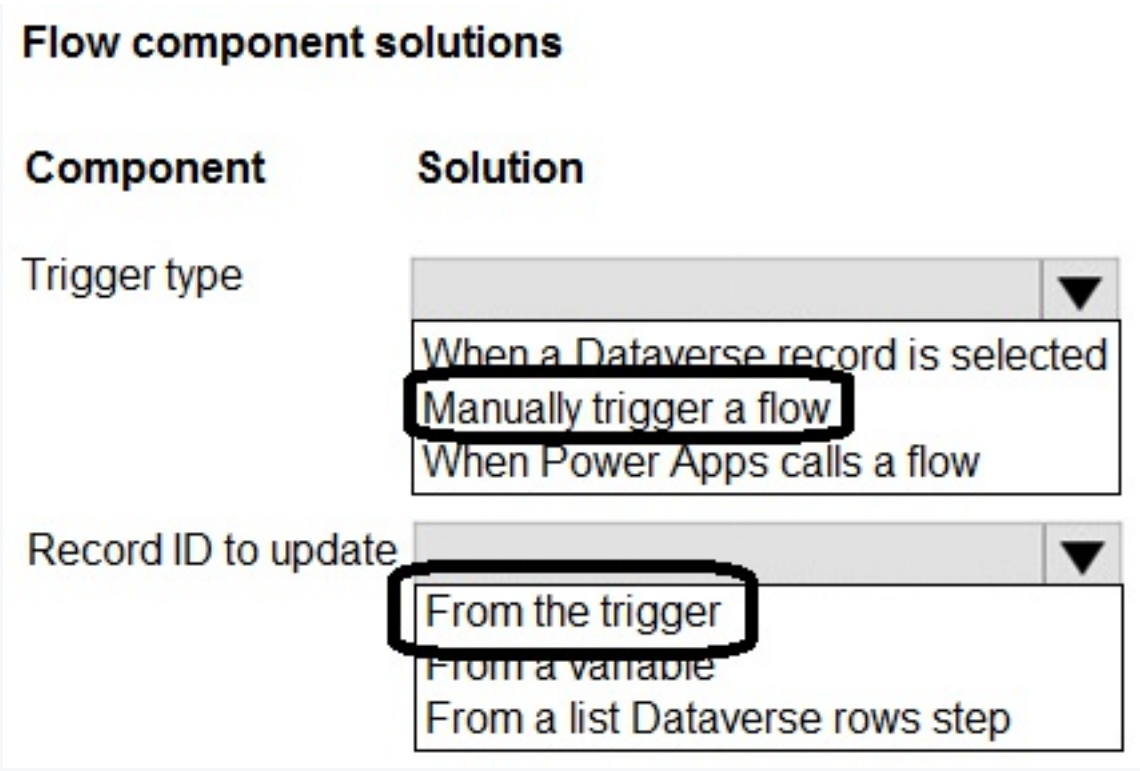

Explanation:

1. Trigger type: Manually trigger a flow

Why: This trigger is used when an automation needs to run instantly based on an explicit user action (like clicking a button in a canvas app, a mobile app, or inputting on-demand data). It allows the flow to accept input parameters directly from the user at the exact moment of execution.

2. Record ID to update: From the trigger

Why: When using an instant or manual trigger, any record context or unique identifiers (IDs) captured during the initiation phase are exposed as dynamic content outputs immediately under the trigger block. Selecting **From the trigger** ensures the flow passes that exact identifier downstream to a Dataverse "Update a row" action without needing extra query steps or variables.

Question: 322 CertyIQ

You write a plug-in that creates a row in a custom table.
Only some users have permission to create rows in the custom table.
You need to allow the plug-in to run for all users by using the principle of least privilege.
What should you do?

A. Initiate the iOrganizationService by passing the ID of a user with permissions to create rows in the custom table.

B. Ensure all users have been granted the Environment Maker role.

C. Set Run in the User's Context to Calling User in the plug-in step.

D. Ensure all users have the Acton Behalf of Another User permission assigned to one of their security roles.

Answer: A

Explanation:

Why optionA is correct

The plug-in must execute under an account that actually possesses the **Create** privilege on the custom table. By initializing IOrganizationService with the **GUID of a user** (or a service account) that already has that permission, the plug-in runs with the **minimum set of rights required** – only that user can create rows, and the plug-in inherits those rights.
This satisfies the **principle of least privilege**: the plug-in does not grant every user full access; instead it relies on a dedicated privileged identity to perform the privileged operation on behalf of the caller.

Why the other options are unsuitable

B – Environment Maker role – This role is intended for environment-level customizations, not for granting table-level write permissions. Granting it to all users would give them broad admin capabilities, violating least-privilege and creating security over-reach.

C – Run in the User's Context (Calling User) – When a plug-in runs in the calling user's context, it inherits that user's security rights. Since most users lack the **Create** privilege on the custom table, the plug-in would fail for them; the approach does not provide the needed privilege.

D – "Act on Behalf Of Another User" permission – This permission is used for **impersonation** scenarios (e.g., when a user explicitly chooses to act on behalf of another). It does not automatically grant the ability to create rows, nor does it ensure the plug-in runs with the required rights for all callers.

Implementation tip

```
using Microsoft.Xrm.Sdk;var service = new OrganizationService(Guid.Parse("UserIdWithCreatePermission"));Entity newF
```

By passing the GUID of a user (or a dedicated service account) that holds the **Create** right on the custom table, the plug-in can create rows for any caller while still adhering to least-privilege principles.

Question: 323 CertyIQ

DRAG DROP
-
You are building a webhook-based integration for a Microsoft Azure Function.
Each environment has a separate Azure Function endpoint that it must be connected to. You must successfully complete testing in each environment before changes are applied in production. You copy the endpoint details from the Azure Portal by using the Get function URL option.
You need to configure the webhooks.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions	Configure a webhook-based integration
Select Register New Web Hook.	
Configure WebhookKey authentication.	
Configure the webhook manually in production after testing.	
Navigate to a Power Apps Maker portal solution.	
Configure a HttpHeader authentication.	
Deploy the solution to production after testing.	
Open the Plug-in Registration tool.	
Create an environment variable for the endpoint URL.	

Answer:

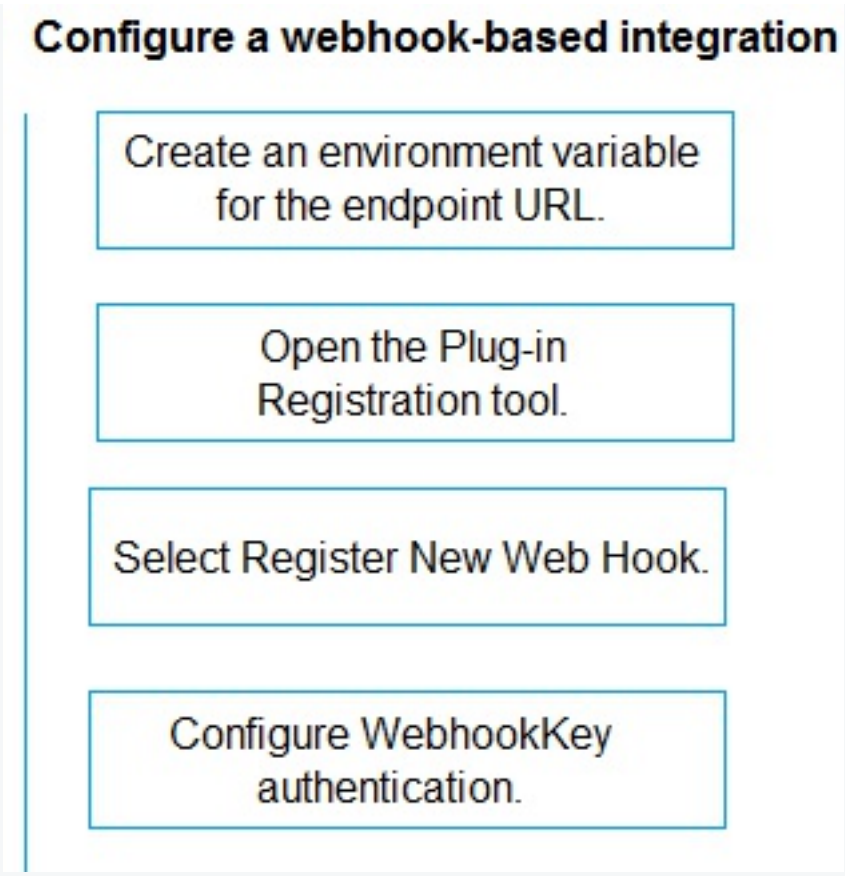

Explanation:

Create an environment variable for the endpoint URL

While environment variables are highly recommended for managing app deployment configuration transport within solutions, **the Plug-in Registration tool cannot natively read or reference Dataverse environment variables** inside its registration wizard properties. The endpoint URL must be supplied as a direct string value during manual webhook definition registration.

Open the Plug-in Registration tool.

To interact with Dataverse's event pipeline framework at a deep architectural layer (including webhooks, plugins, and custom workflow activities), you must use the desktop **Plug-in Registration Tool** from the Power Platform SDK.

Select Register New Web Hook.

Once connected to your targeted Dataverse sandbox or production environment inside the tool, you click the top-level **Register** menu and select **Register New Web Hook**. This opens the specific endpoint registration dialog wizard.

Configure WebhookKey authentication.

Within the registration wizard interface, you must input the destination endpoint URL and supply security keys. Selecting and configuring **WebhookKey authentication** ensures that incoming HTTP POST data payloads transmitted by Dataverse can be securely verified and trusted by your target hosting environment (such as an external web service or Azure Function).

Question: 324 CertyIQ

You have a model-driven app form that uses Xrm.WebApi.updateRecord during the OnSave event to update a related record.

You observe during testing that the related record does not always update when it should.
You need to ensure that the current record is saved and the related record is updated consistently.
Which two actions should you perform? Each correct answer presents part of the solution. Choose two.
NOTE: Each correct selection is worth one point.

A. Add logic before the update to ensure that the request is made only when the value has changed.
B. Enable the Async OnSave app setting.
C. Wrap the update in a promise.
D. Add executionContext.getEventArgs[].disableAsyncTimeout[] before the update.
E. Add executionContext.getEventArgs[].preventDefault[] before the update.

Answer: BC

Explanation:

WhyBandC are the correct choices

B – Enable the AsyncOnSave app setting

When this setting is turned on, the OnSave event runs asynchronously, giving the platform enough time to complete the Xrm.WebApi.updateRecord call without aborting the form save.
Asynchronous execution prevents the “record not saved” race condition that occurs when the update is forced synchronously during the save transaction.

C – Wrap the update in a promise

Returning a promise from the OnSave handler tells the framework that the operation is asynchronous and that the save should wait until the promise resolves.
This guarantees that the related record is successfully updated before the current record’s save completes, ensuring consistent state across both records.

Why the other options are not appropriate

A – Add logic to fire only when the value has changed

While this reduces unnecessary calls, it does not address the underlying timing issue that causes the related record to be missed; the problem is not about unnecessary calls but about reliable completion of the async update.

D – Add executionContext.getEventArgs[].disableAsyncTimeout[]

This method does not exist in the XRM SDK; attempting to use it would cause a runtime error and cannot influence the async timeout behavior.

E – Add executionContext.getEventArgs[].preventDefault[]

preventDefault is not a supported API for the OnSave event and would have no effect on the asynchronous update; it is unrelated to ensuring the related record is saved.

Conclusion
Enabling the AsyncOnSave setting (B) and properly handling the asynchronous operation with a promise (C) together guarantee that the current record is saved and the related record is updated reliably and consistently. The other options either do not solve the timing problem or are not valid APIs.

Question: 325 CertyIQ

HOTSPOT
-
Users are directed to a form in a model-driven app through a special URL that passes values for three lookup columns.
The form consists of three tabs: A, which is the default tab, B, and C. The form has JavaScript code registered on the OnLoad and OnSave events as follows:
•OnLoad: A lookup column on each tab is used to retrieve data. The data is used to populate columns on that same tab.
•OnSave: Data validation involves calculations of columns on the form. If a value is outside the acceptable range, the record must not be saved.
Users report that loading and saving the form takes too long when they create a new record.
You need to shorten the time it takes to load and save the form without losing functionality.
Which new event registrations should you create? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Event	Modification
OnLoad	TabStateChange events on tabs B and C TabStateChange events on tabs A, B, and C OnChange events for the lookup columns on tabs B and C OnChange events for the lookup columns on tabs A, B, and C
OnSave	PostSave event for the form OnChange events for the columns involved in the calculations OnOutputChange events for the columns involved in the calculations

Answer:

Answer Area

Event	Modification
OnLoad	TabStateChange events on tabs B and C **TabStateChange events on tabs A, B, and C** OnChange events for the lookup columns on tabs B and C OnChange events for the lookup columns on tabs A, B, and C
OnSave	PostSave event for the form **OnChange events for the columns involved in the calculations** OnOutputChange events for the columns involved in the calculations

Explanation:

1. OnLoad Event: TabStateChange events on tabs B and C

Why it is correct: Tab A is expanded by default, while tabs B and C are collapsed. Registering OnChange events for fields located on collapsed tabs during the form's initial load causes an unnecessary performance hit.

By shifting the script registration to the **TabStateChange events of tabs B and C**, the browser only loads and binds those event handlers lazily — meaning the code executes **only if and when** a user explicitly clicks to expand those specific tabs. This keeps the initial form loading time fast and responsive.

OnSave Event: OnChange events for the columns involved in the calculations

Why it is correct: Running synchronous, heavy calculation logic during a form's OnSave event is a major architectural anti-pattern. It blocks the saving pipeline, increases form submission latency, and risks creating dirty data fields or infinite loops.

Moving this calculation logic to the individual fields' **OnChange events** ensures that calculations run immediately as soon as a user alters a dependent value. This provides real-time visual feedback to the user and leaves the OnSave pipeline clean and lightweight.

Question: 326 CertyIQ

HOTSPOT -
A company updates their client contact information periodically. The contact entity has alternate keys defined.
You have the following code. (Line numbers are included for reference only.)

```
1. Entity contact = new Entity()
2. {
3.   LogicalName = "contact",
4.   KeyAttributes =
5.   {
6.     {"lastname", "Smith"},
7.     {"clientnumber", "abc123"}
8.    }
9.  },
10 contact["lastname"] = "Doe";
11. UpsertRequest updcontact = new UpsertRequest ();
12. {
13.   Target = contact;
14.  }
15. UpsertResponse response = ( UpsertResponse )service.Execute(updcontact);
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statement	Yes	No
If the last name is an alternate key and there are no contacts with the last name Smith, the stored value of the last name is Smith.	○	○
If the client number is an alternate key and the client number exists, the stored value of the last name is Smith.	○	○
If the last name is an alternate key and there are people who have the last name Smith, the stored value of the last name is Smith.	○	○
If the client number is an alternate key and the client number does not exist, the stored value of the last name is Smith.	○	○

Answer:

Answer Area

Statement	Yes	No
If the last name is an alternate key and there are no contacts with the last name Smith, the stored value of the last name is Smith.	○	◉
If the client number is an alternate key and the client number exists, the stored value of the last name is Smith.	◉	○
If the last name is an alternate key and there are people who have the last name Smith, the stored value of the last name is Smith.	◉	○
If the client number is an alternate key and the client number does not exist, the stored value of the last name is Smith.	○	◉

Explanation:

No: attributecollection has prio over keyattributes, so the created contact would have doe

Yes: No change to the exisitng contact, so same as before

Yes: one or multiple contacts found, doesn't matter, stored value stays the same

No: Same as first question, a newly created contact would be named Doe

Question: 327

CertyIQ

HOTSPOT -
A company is building a new model-driven app.

The app must integrate with a number of on-premises and cloud solutions. No VPNs are in place.
You need to determine the method for each integration.
Which methods should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Integration	Method
Outbound synchronous calls to a third-party Web API service	Webhook / Microsoft Flow / Azure Event Hub / Azure Service Bus
Calls to and from a website hosted in Azure with high peak loads	Plug-in / Webhook / Azure Event Hub / Azure Service Bus
Outbound calls to multiple on-premises and cloud systems to notify of customer address changes	Plug-in / Azure Event Hub / Webhook

Answer:

Answer Area

Integration	Method
Outbound synchronous calls to a third-party Web API service	**Webhook** / Microsoft Flow / Azure Event Hub / Azure Service Bus
Calls to and from a website hosted in Azure with high peak loads	Plug-in / Webhook / Azure Event Hub / **Azure Service Bus**
Outbound calls to multiple on-premises and cloud systems to notify of customer address changes	Plug-in / **Azure Event Hub** / Webhook

Explanation:

Box 1: Webhook -

With Dataverse, you can send data about events that occur on the service to a web app by using webhooks. A webhook is a lightweight HTTP pattern for connecting web APIs and services with a publish-and-subscribe model. Webhook senders notify receivers about events by making requests to receiver endpoints with some information about the events.

Webhooks enable developers and ISVs to integrate Dataverse data with their own custom code hosted on external services.

Box 2: Azure Service Bus -

Service Bus provides a secure and reliable communication channel between Dataverse runtime data and external, cloud-based line-of-business apps. This capability is especially useful in keeping disparate Dataverse systems or other Dataverse servers synchronized with business data changes.

Box 3: Azure Event hub -

Azure Event Hubs is a big data streaming platform and event ingestion service. It can receive and process millions of events per second. Data sent to an event hub can be transformed and stored by using any real-time analytics provider or batching/storage adapters.

Note: The most popular approaches in Dataverse involve webhooks, Azure messaging (Service Bus, Event Hubs), Azure Logic Apps, or Power Automate.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/why-cds-any-type-app

Question: 328 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are designing a one-way integration from the Microsoft Dataverse to another system.
You must use an Azure Function to update the other system. The integration must send only newly created records to the other system. The solution must support scenarios where a component of the integration is unavailable for more than a few seconds to avoid data loss.
You need to design the integration solution.
Solution: Register a webhook in the Dataverse instance that connects to the Azure Function. Register a step on the webhook which runs synchronously on the record's Create message and in the post-operation stage.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:
Instead use asynchronous communication.

Question: 329 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are designing a one-way integration from the Common Data Service to another system.
You must use an Azure Function to update the other system. The integration must send only newly created records to the other system. The solution must support scenarios where a component of the integration is unavailable for more than a few seconds to avoid data loss.
You need to design the integration solution.
Solution: Register a webhook in the Common Data Service that connects to the Azure Function. Register a step on the webhook which runs synchronously on the record's Create message and in the post-operation stage.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:
Instead use asynchronous communication.

Question: 330 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are designing a one-way integration from the Microsoft Dataverse to another system.
You must use an Azure Function to update the other system. The integration must send only newly created records to the other system. The solution must support scenarios where a component of the integration is unavailable for more than a few seconds to avoid data loss.
You need to design the integration solution.
Solution: Configure the Azure Function with a timer trigger that runs every five minutes. The function will query the Dataverse instance and process records created in the last five minutes.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:
Instead use Azure Service Bus queue solution with asynchronous communication.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/azure-integration

Question: 331 CertyIQ

DRAG DROP -
An organization uses plug-ins to retrieve specific information from legacy data stores each time a new order is submitted.

You review the Microsoft Dataverse analytics page. The average plug-in execution time is increasing.
You need to replace the plug-in with another component, reusing as much of the current plug-in code as possible.
Which five actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

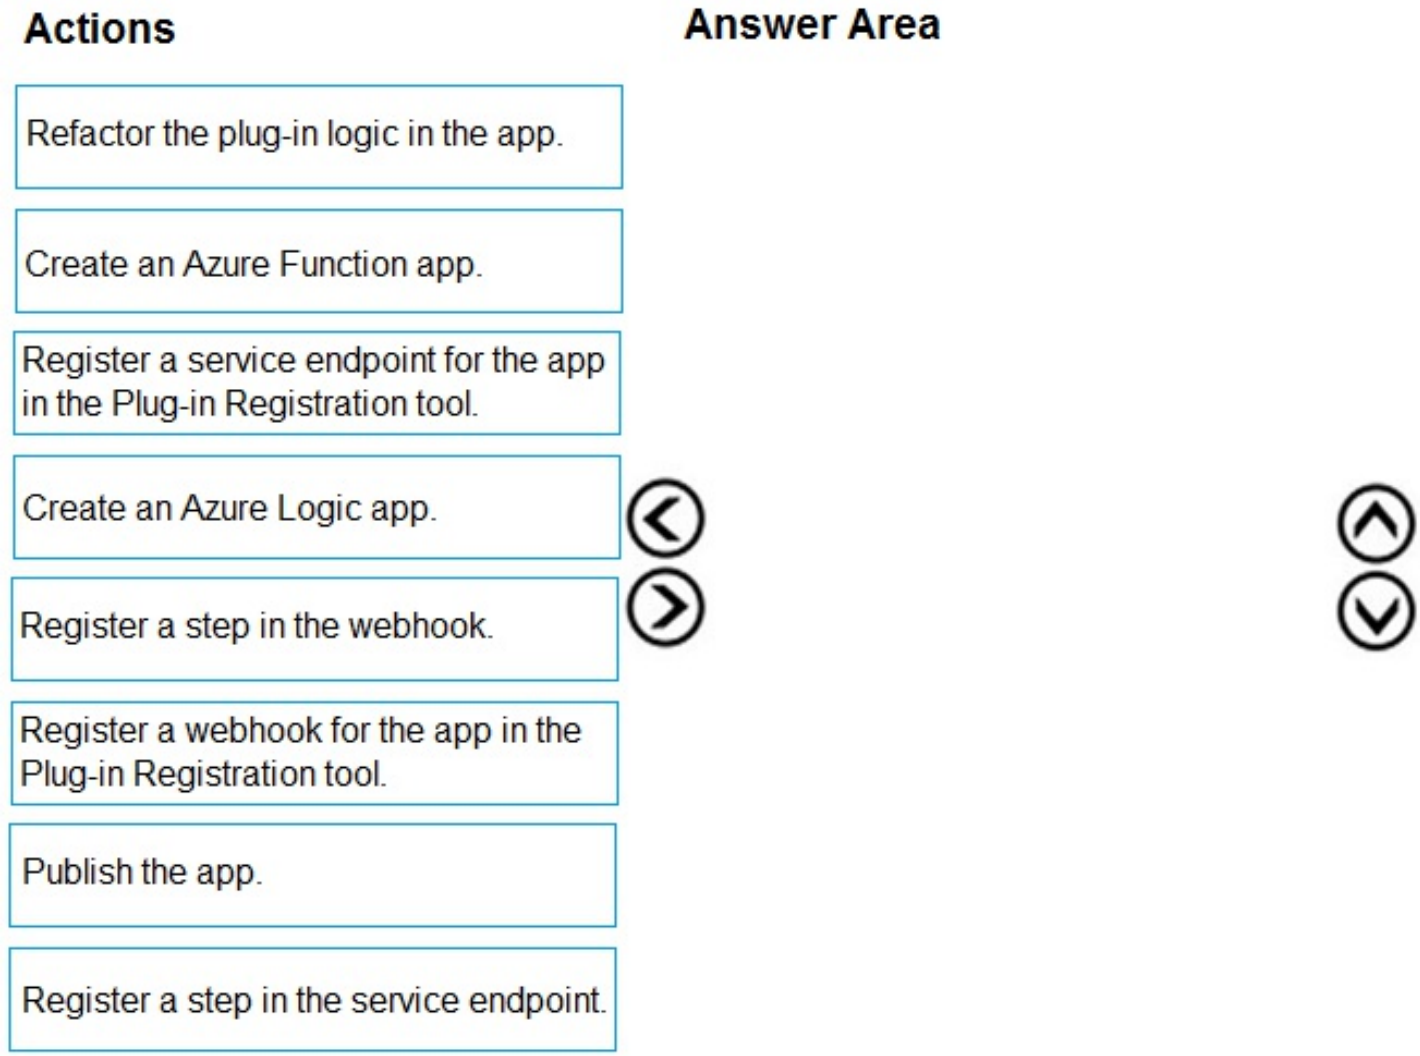

Answer:

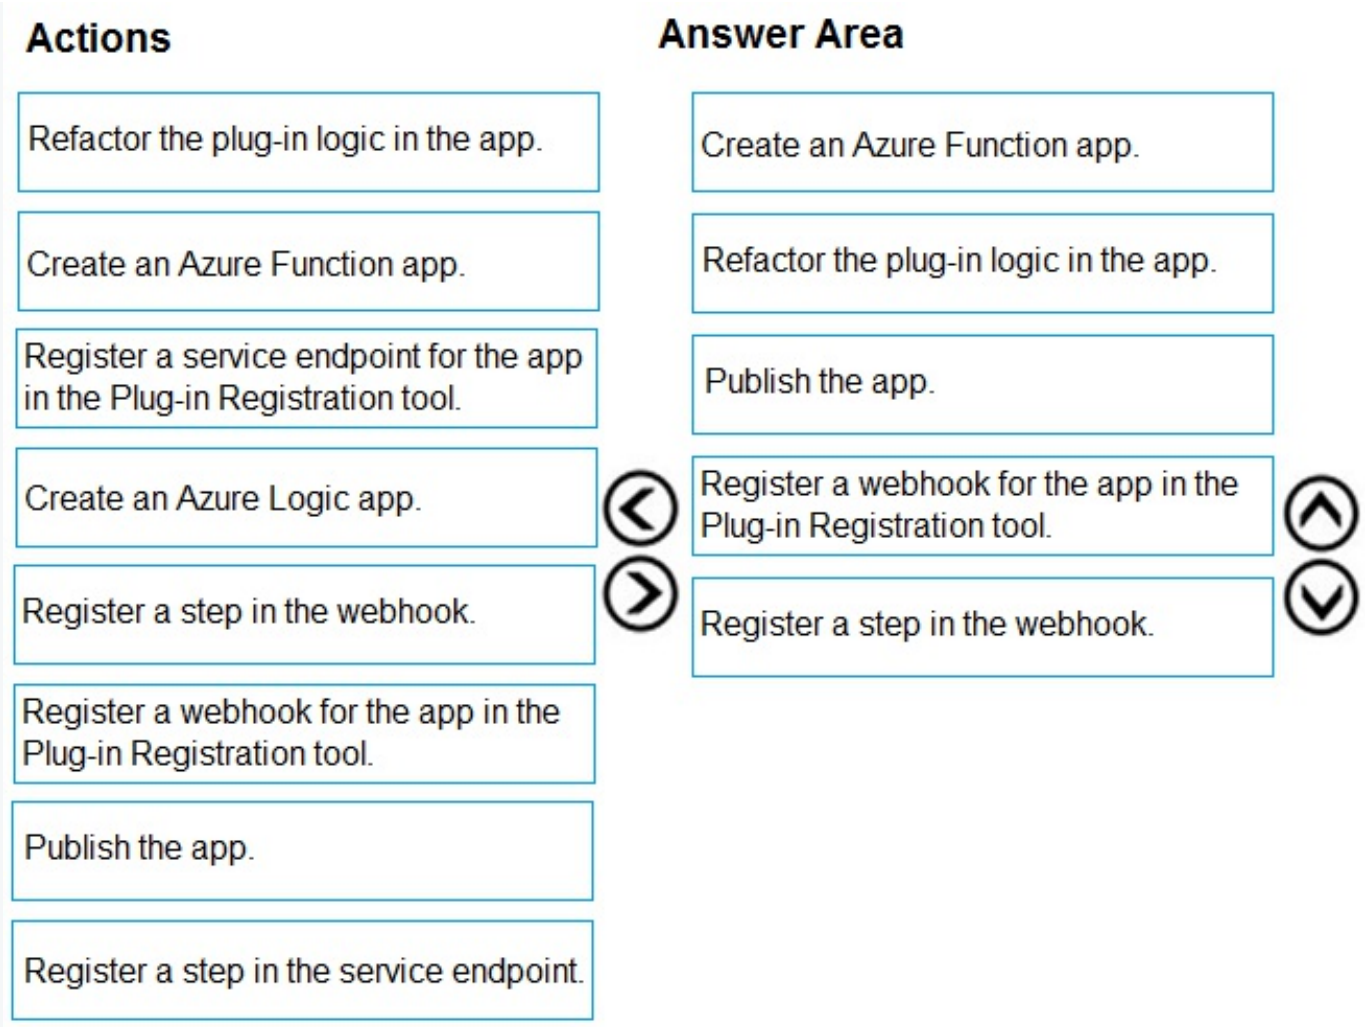

Explanation:
Step 1: Create an Azure Function app
Azure Functions provide an excellent way to deliver a solution using WebHooks.
Step 2: Refactor the plug-in logic in the app.

Step 3: Publish the app -
You can publish your function app to Azure directly from Visual Studio.
Step 4: Register a webhook for the app in the Plug-in Registration tool
Use the Plug-in Registration tool to register a WebHook.
Step 5: Register a step in the webhook.
Registering a step for a WebHook is like registering a step for a plug-in.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/use-webhooks
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/register-web-hook

Question: 332 CertyIQ

DRAG DROP -
You need to select the appropriate methods using Azure Event Grid.
Which method should you use for each requirement? To answer, drag the appropriate methods to the correct requirements. Each method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

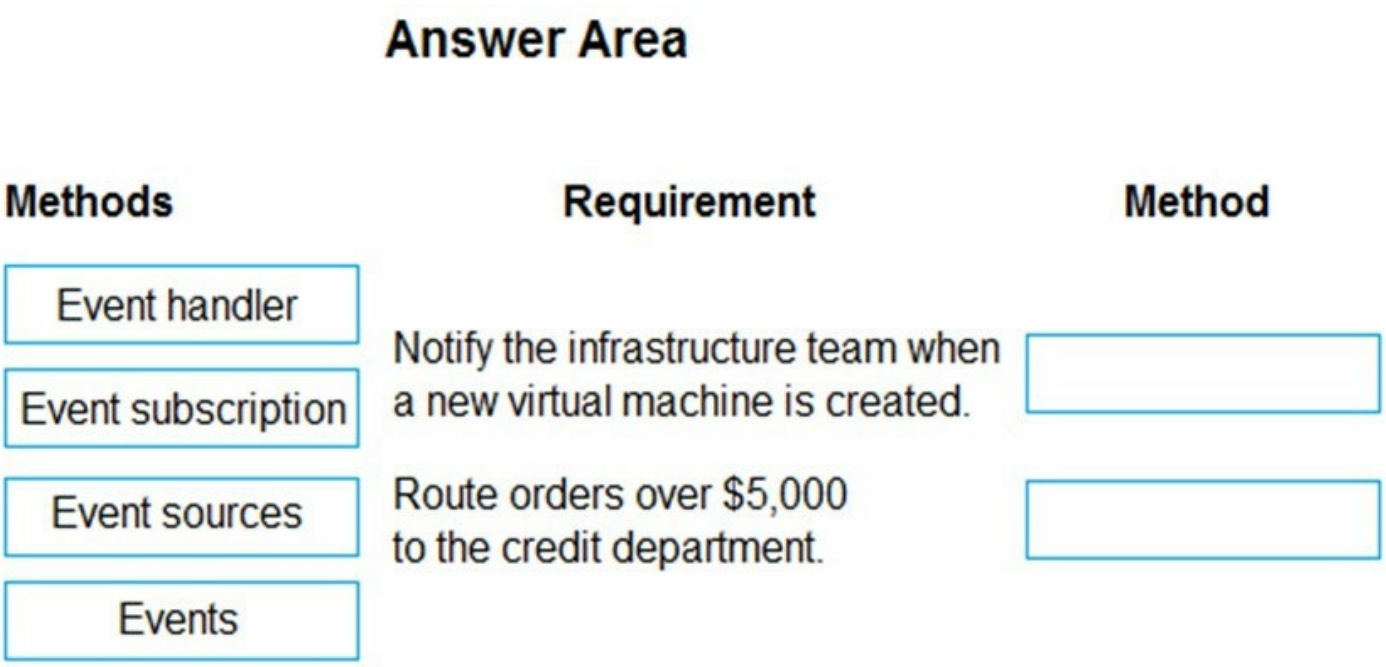

Answer:

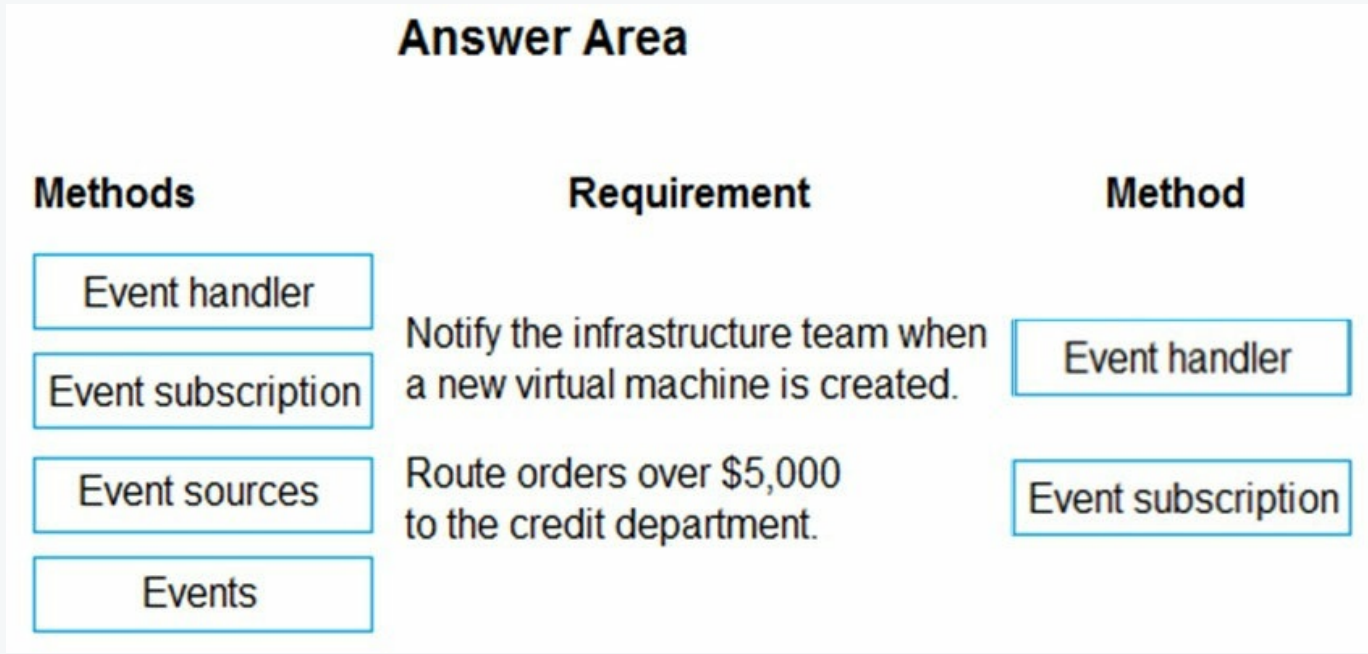

Explanation:
Box 1: Event handler -
An event handler is the place where the event is sent. The handler takes some further action to process the event.

Box 2: Event subscription -
Event subscriptions - The endpoint or built-in mechanism to route events, sometimes to more than one handler. Subscriptions are also used by handlers to intelligently filter incoming events.
Incorrect Answers:
Events - What happened.
Event sources - Where the event took place.

Reference:
https://docs.microsoft.com/en-us/azure/event-grid/event-handlers https://docs.microsoft.com/en-us/azure/event-grid/overview

Question: 333 CertyIQ

HOTSPOT -
You create a Power Platform solution to track purchasing requirements for bills of material (BOMs) and their subcomponents.
The solution must meet the following requirements:
- Ensure that the BOMs are enabled to include the necessary subcomponents.
- Report changes to the BOMs or their sub-components that are made by engineers.

You need to configure the solution.
What should you do to meet each requirement? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

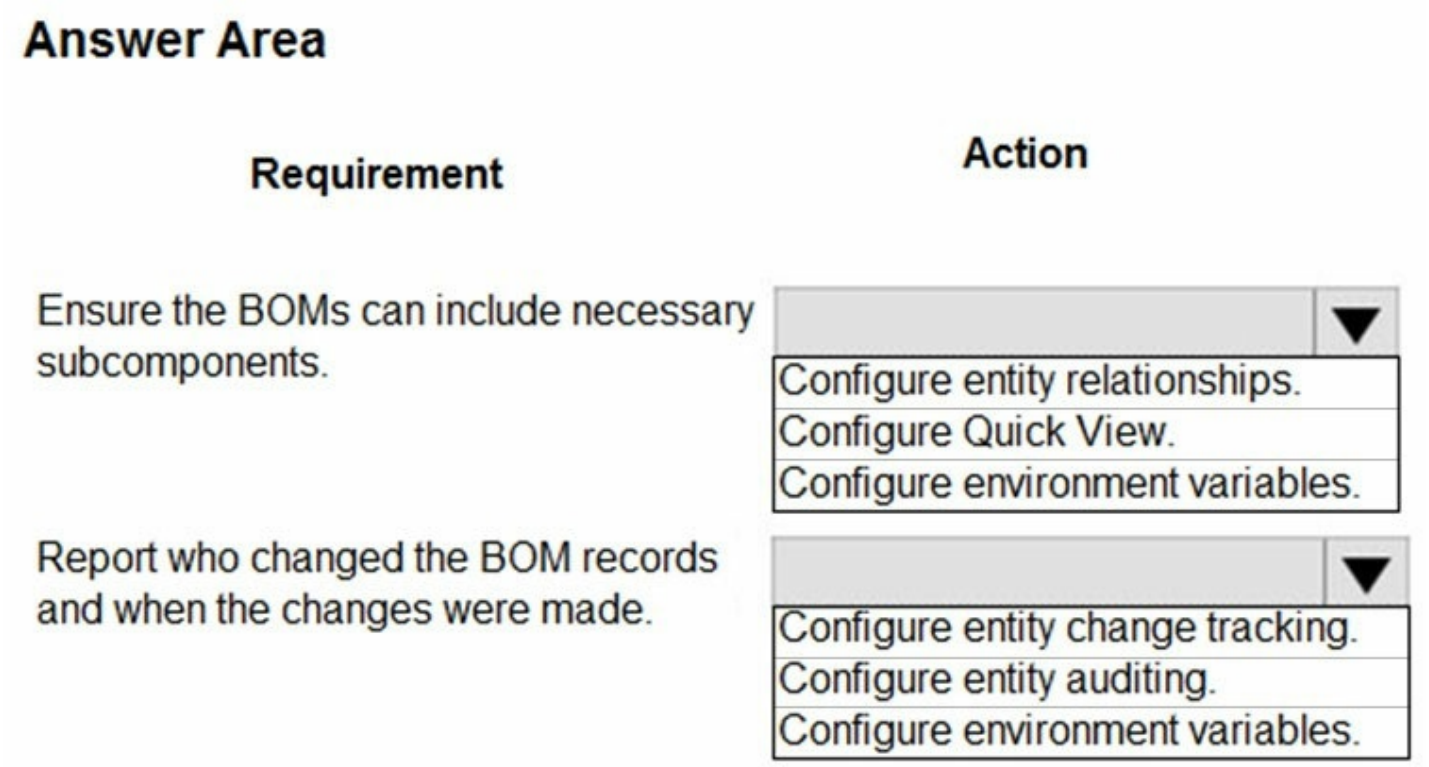

Answer:

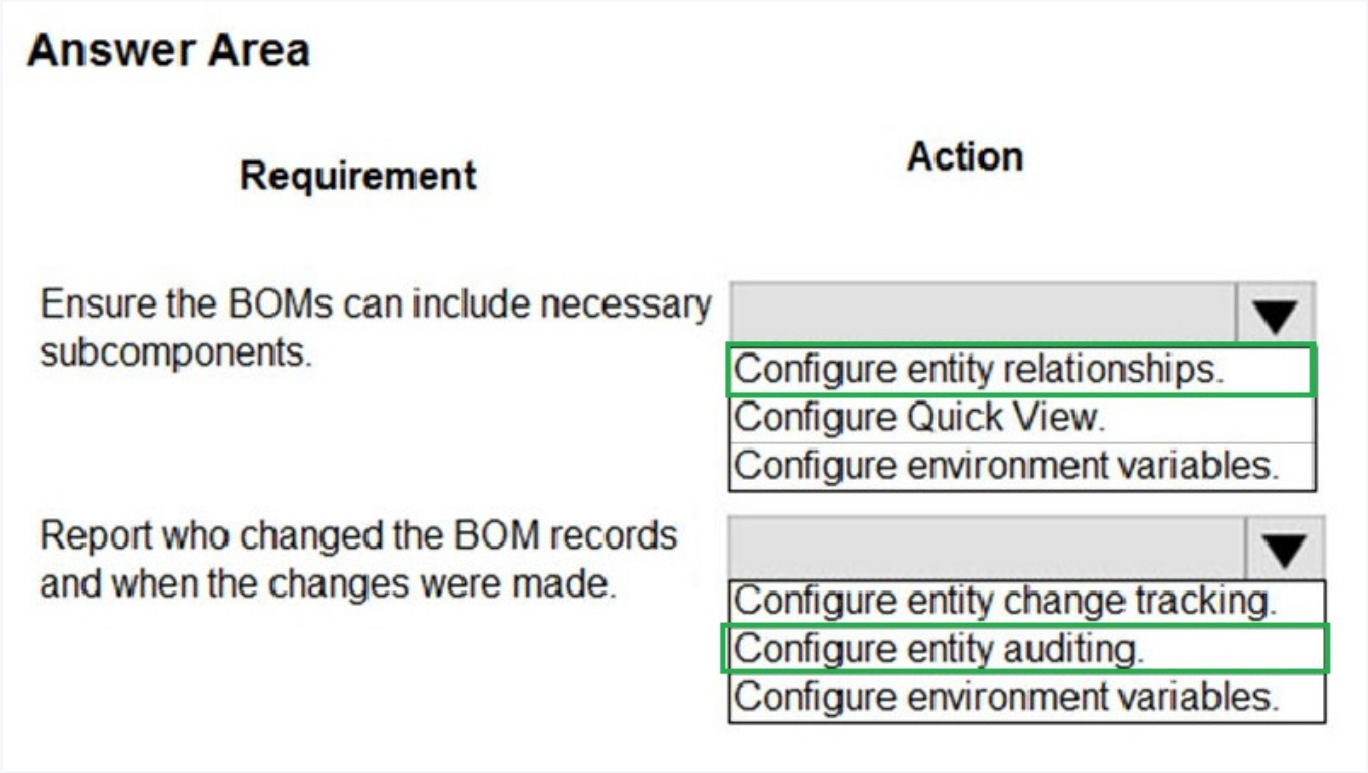

Explanation:

Requirement 1: Ensure the BOMs can include necessary subcomponents.

Correct Action: Configure entity relationships.

Explanation:
To enable BOMs (Bills of Materials) to include subcomponents, it is necessary to define relationships between entities. In this case, the BOM entity would have a one-to-many (1:N) or many-to-many (N:N) relationship with the Subcomponent entity (or itself if subcomponents are part of the same entity). Entity relationships are essential for linking data, supporting hierarchical structures, and ensuring that subcomponents can be logically associated with the parent BOM.

Why this is correct:

It enables the BOM to include subcomponents in a structured and reusable way.
Entity relationships allow for deeper integration, such as cascading behaviors or related views.

Requirement 2: Report who changed the BOM records and when the changes were made.

Correct Action: Configure entity auditing.

Explanation:
Entity auditing is designed to capture details about changes made to records, including which user made the changes and when they were made. This feature provides a detailed audit history for records, which can be used for reporting purposes to track modifications.

Why this is correct:

It provides historical data that includes timestamps and user information for all updates.
Change tracking, while useful for synchronization, does not provide this level of detail for reporting.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/use-change-tracking-synchronize-data-external-systems

Question: 334 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are designing a one-way integration from the Microsoft Dataverse to another system.
You must use an Azure Function to update the other system. The integration must send only newly created records to the other system. The solution must support scenarios where a component of the integration is unavailable for more than a few seconds to avoid data loss.
You need to design the integration solution.
Solution: Register a service endpoint in the Dataverse instance that connects to an Azure Service Bus queue.
Create and register an Azure-aware plug-in that uses the service endpoint.
Register a step on the plug-in that runs asynchronously on the record's Create message and in the post-operation stage.
Configure the Azure Function to process records as they are added to the queue.

Does the solution meet the goal?

A. Yes
B. No

Answer: A

Explanation:
Plug-ins are one of two methods used to initiate posting the message containing the data context to the Azure Service Bus, the other method being a custom workflow activity.
Note: Microsoft Dataverse supports integration with Azure.
For the Dataverse and Azure connection to work, there must be at least one solution in an Azure Service Bus solution account, where the solution contains one or more service endpoints.
For a queue endpoint contract, a listener doesn't have to be actively listening.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/azure-integration

Question: 335 CertyIQ

HOTSPOT -
You create an alternate key named AlternateKey1 on the Account entity. The definition for AlternateKey1 is shown in the following exhibit:

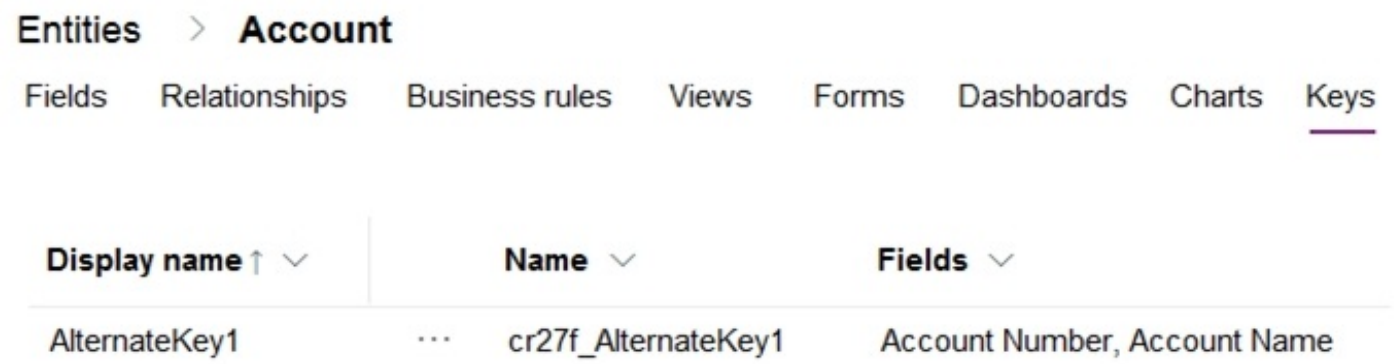

Use the drop-down menus to select the answer choice that answers each question based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

How is uniqueness enforced based on the definition of AlternateKey1?

- The combination of Account Number and Account Name must be unique
- Either Account Number or Account Name must be unique
- Account Number and Account Name must both be unique

You must add a third field to AlternateKey1. What should you do?

- Update AlternateKey1 and add the missing field
- Delete AlternateKey1 and re-create it with all three fields
- Create a new alternate key named AlternateKey2 with only the missing field

Answer:

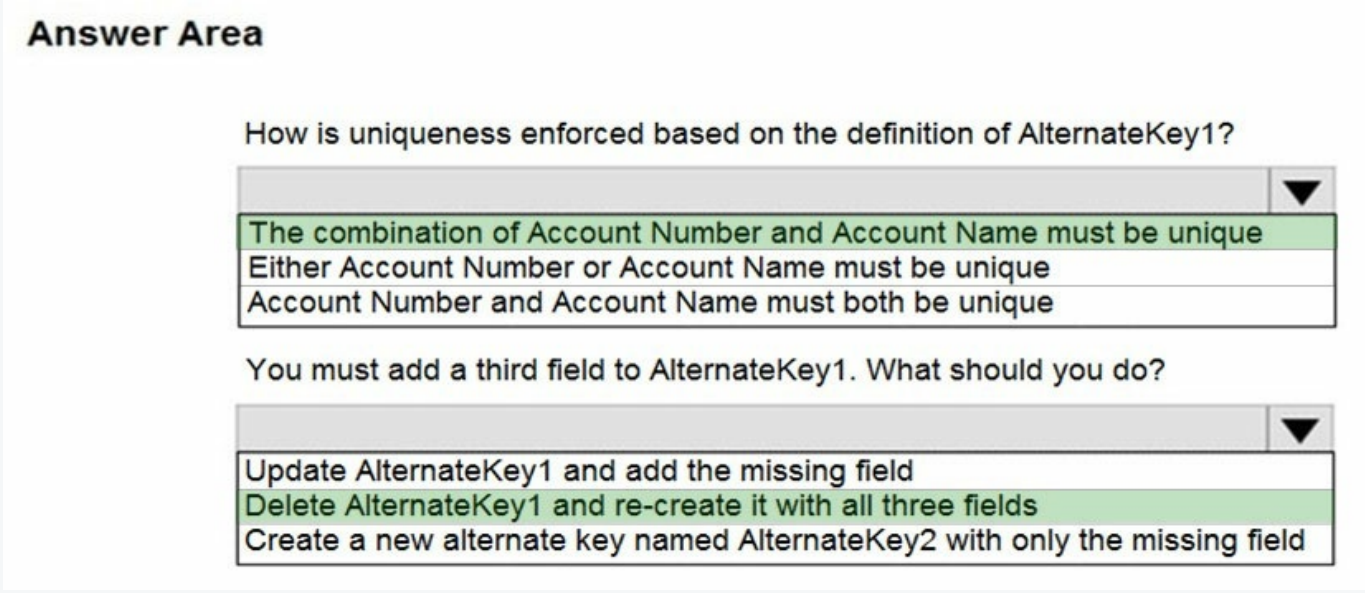

Explanation:

Box 1: The combination of Account Number and Account Name must be unique

With alternate keys you can now define a column in a Dataverse table to correspond to a unique identifier or unique combination of columns.

Box 2: Delete AlternateKey1 and re-create it with all three fields

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/define-alternate-keys-entity

Question: 336 CertyIQ

HOTSPOT -

A delivery service uses a canvas app to track and deliver packages. The app uses SQL Server as a data store. The database includes the following tables:

Table	Comments
Receivers	Stores information about customers who receive delivered goods. The table uses an identity column named SBsqlid to uniquely identify each record.
Packages	Stores information about package details. Employees update package details during delivery to reference the person who received the package.

The app includes the following code to save all required information. (Line numbers are included for reference only.)

```
ClearCollect(
  Result,
    Patch(
      Receivers,
      Defaults(Receivers),
      {
          SignedByFN: txtInFirstName.Text,
          SignedByID: txtInID.Text
      }
    )
);
Patch(
  Packages,
  Defaults(Packages),
  {
    SBsqlid: First(Result).SBsqlid,
    TrackingNo: lblPackage.Text
  }
);
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

	Yes	No
The Patch statement populates the identity column when a record is created.	○	○
The Patch statement at line 03 creates a reference to the customer who received a specific package.	○	○
You must add a lookup function to ensure that the code correctly creates a reference to the customer who receives a package.	○	○
The Patch statement at line 12 merges records.	○	○

Answer:

Answer Area

	Yes	No
The Patch statement populates the identity column when a record is created.	○	○
The Patch statement at line 03 creates a reference to the customer who received a specific package.	○	○
You must add a lookup function to ensure that the code correctly creates a reference to the customer who receives a package.	○	○
The Patch statement at line 12 merges records.	○	○

Explanation:

The ClearCollect function deletes all the records from a collection.

Syntax: ClearCollect(Collection, Item, ...)

Collection " Required. The collection that you want to clear and then add data to.

Item(s) - Required. One or more records or tables to add to the data source.

Box 1: Yes -

The Patch function in Power Apps modifies or creates one or more records in a data source, or merges records outside of a data source.

Use Patch with the Defaults function to create records.

Box 2: No -

The return value of Patch is the record that you modified or created. If you created a record, the return value may include properties that the data source generated automatically. However, the return value doesn't provide a value for fields of a related table.

For example, you use Set(MyAccount, Patch(Accounts, First(Account), 'Account Name': "Example name"); and then MyAccount.'Primary Contact'.'Full Name'. You can't yield a full name in this case. Instead, to access the fields of a related table, use a separate lookup such as:

LookUp(Accounts, Account = MyAccount.Account).'Primary Contact'.'Full Name

Box 3: Yes -

Box 4: Yes -

Merge records outside of a data source.

Specify two or more records that you want to merge. Records are processed in the order from the beginning of the argument list to the end, with later property values overriding earlier ones.

Patch returns the merged record and doesn't modify its arguments or records in any data sources.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-clear-collect-clearcollect

Question: 337

CertyIQ

A company plans to replicate a Dynamics 365 Sales database into an Azure SQL Database instance for reporting purposes. The Data Export Service solution has been installed.
You need to configure the Data Export service.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Enable auditing for all entities that must be replicated to Azure SQL Database.
B. Create an export profile that specifies all the entities that must be replicated.
C. Set up server-based integration.
D. Enable change tracking for all entities that must be replicated to Azure SQL Database.
E. Create an Azure SQL Database service in the same tenant as the Dynamics 365 Sales environment.

Answer:

ABD

Explanation:

B: The Export Profile is the core concept of the Data Export Service. The Export Profile gathers set up and configuration information to synchronize data with the destination database. As part of the Export Profile, the administrator provides a list of entities to be exported to the destination database.

D: Only entities that have change tracking enabled can be added to the Export Profile.

Incorrect Answers:

E: To use the Data Export Service the customer engagement apps (i.e., Dynamics 365 Sales, Dynamics 365 Customer Service, Dynamics 365 Field Service,

Dynamics 365 Marketing, and Dynamics 365 Project Service Automation) and Azure Key Vault services must operate under the same tenant and within the same

Azure Active Directory. However, the Azure SQL Database service can be in the same or a different tenant.

Reference:

https://docs.microsoft.com/en-us/power-platform/admin/replicate-data-microsoft-azure-sql-database

Question: 338 CertyIQ

HOTSPOT -
A company must copy customer account data changes from a Microsoft Dataverse instance into an external system. Azure Storage Queues are used to pass the changes from Dataverse to the external system.
You have the following code. (Line numbers are included for reference only.)

```
01 string token = null;
02 token = ProcessAccountChanges(_service, token, changeQueue, deleteQueue);
03 …
04 token = ProcessAccountChanges(_service, token, changeQueue, deleteQueue);
05 …
06 private static string ProcessAccountChanges(IOrganizationService orgservice,
string token, CloudQueue changeQueue, CloudQueue deleteQueue)
07 {
08   var request = new RetrieveEntityChangeRequest();
09   request.EntityName = "account";
10   request.Columns = new ColumnSet("name", "accountnumber", "creditlimit",
"ownerid");
11   request.DataVersion = token;
12   RetrieveEntityChangeResponse response = (RetrieveEntityChangeResponse)
orgservice.Execute(request);
13   token = response.EntityChanges.DataToken;
14   foreach (var change in response.EntityChanges.Changes)
15   {
16   if (change.Type == ChangeType.NewOrUpdated)
17   {
18    var changedItem = (NewOrUpdatedItem)change;
19   Entity newOrChangedEntity = (Entity)changedItem.NewOrUpdatedEntity;
20   CloudQueueMessage changemessage = new CloudQueueMessage
(newOrChangedEntity.Id.ToString());
21   changeQueue.AddMessage(changemessage);
22  }
23   else if (change.Type == ChangeType.RemoveOrDeleted)
24  {
25   var deleteditem = (RemovedOrDeletedItem) change;
26   EntityReference deletedEntityReference = deleteditem.RemovedItem;
27   CloudQueueMessage deletemessage = new CloudQueueMessage
(deletedEntityReference.Id.ToString());
28   deleteQueue.AddMessage(deletemessage);
29      }
30  }
31  return token;
32 }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statement	Yes	No
The first call to ProcessAccountChanges at line 2 adds changes made to account records to the storage queues.	○	○
The second call to ProcessAccountChanges at line 4 adds changes made to account records to the storage queues.	○	○
The messages in changeQueue specify whether the accounts are new or updated.	○	○
A message is added to deleteQueue if an account is created and subsequently deleted at line 3.	○	○

Answer:

Answer Area

Statement	Yes	No
The first call to ProcessAccountChanges at line 2 adds changes made to account records to the storage queues.	○	○
The second call to ProcessAccountChanges at line 4 adds changes made to account records to the storage queues.	○	○
The messages in changeQueue specify whether the accounts are new or updated.	○	○
A message is added to deleteQueue if an account is created and subsequently deleted at line 3.	○	○

Explanation:

yes

yes

No

Either new/updated or removed/deleted.

yes

Question: 339 CertyIQ

You are creating a Power Automate flow.
You create an Azure Service Bus listener app that receives requests from a third-party application.
When the flow calls the message queue, it must delete the message as soon as it is read.
You need to ensure that the queue is cleared properly.
Which method or class should you use?

A. ReceiveMode
B. BrokeredMessage
C. EventHubReceiver
D. EventHubSender

Answer: A

Explanation:
ReceiveMode enumerates the values for the receive mode. The default is PeekLock.
Fields:
PeekLock: Specifies the PeekLock receive mode. This is the default value for ReceiveMode.
ReceiveAndDelete: Specifies the ReceiveAndDelete receive mode.
Note: You can specify two different modes in which Service Bus receives messages.
- Receive and delete. In this mode, when Service Bus receives the request from the consumer, it marks the message as being consumed and returns it to the consumer application.
- Peek lock.

Reference:
https://docs.microsoft.com/en-us/azure/service-bus-messaging/service-bus-queues-topics-subscriptions
https://docs.microsoft.com/en-us/dotnet/api/microsoft.servicebus.messaging.receivemode

Question: 340 CertyIQ

As part of the month-end financial closing process, a company uses a batch job to copy all orders into a staging database.
The staging database is used to calculate any outstanding amounts owed by clients, and must process all historical data.
You need to ensure that only the data affected during the month is included in the integration process.
What are two possible ways to achieve this goal? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Use change tracking on the orders and run the integration to retrieve new orders and the orders that have the total amount changed in the last month.
B. Create a system view with the orders that have the Modified On field in the last month and run the integration on this subset.
C. Use change tracking on the order lines and run the integration every week and retrieve only the order lines that have been created or deleted in the last month.
D. Create a system view with the order lines that have the Modified On field in the last month and run the integration on this subset.

Answer:

CD

Explanation:

C: The change tracking feature in Microsoft Dataverse provides a way to keep the data synchronized in an efficient manner by detecting what data has changed since the data was initially extracted or last synchronized. Deletions and creations are tracked.

D: On modified Order Lines, not on Modified Orders.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/use-change-tracking-synchronize-data-external-systems https://docs.microsoft.com/en-us/powerapps/developer/data-platform/behavior-format-date-time-attribute

Question: 341 CertyIQ

A company is creating a one-way integration from Microsoft Dataverse to an external system. Data will be sent from a webhook to an Azure Function.
You need to configure the Azure Function to handle data from the webhook.
Which class and data type must the Azure Function handle?

A. RemoteExecutionContext in .NET binary format
B. RemoteExecutionContext in JSON format
C. RemoteExecutionContext in XML format
D. IPluginExecutionContext in JSON format
E. IPluginExecutionContext in XML format

Answer: B

Explanation:
The body will contain string that represents the JSON value of an instance of the RemoteExecutionContext class.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/use-webhooks

Question: 342 CertyIQ

HOTSPOT -
An online store has a custom web page that allows customers to place their orders against a Microsoft Dataverse database that uses custom products. The custom web page uses Web API patterns to create and update records.
Customers report that orders can be placed for out-of-stock items.
You need to update the page code to ensure that inventory is available before confirming an order.
Which pattern should you use for each step? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Step	Pattern
Check the inventory table before retrieving the inventory record.	ChangeTrackingEnabled DaysSinceRecordLastModified IsOptimisticConcurrencyEnabled
Update the quantity on the inventory record using PATCH.	If-Match: * If-Match: Etag If-None-Match: * If-None-Match: Etag

Answer:

Answer Area

Step	Pattern
Check the inventory table before retrieving the inventory record.	ChangeTrackingEnabled DaysSinceRecordLastModified **IsOptimisticConcurrencyEnabled**
Update the quantity on the inventory record using PATCH.	If-Match: * **If-Match: Etag** If-None-Match: * If-None-Match: Etag

Explanation:

Box 1: IsOptimisticConcurrencyEnabled

On a multi-threaded and multi-user system like Power Apps, operations and data changes often happen in parallel. A problem arises when two or more update or delete operations on the same piece of data happen at the same time. This situation could potentially result in data loss. The optimistic concurrency feature provides the ability for your applications to detect whether a table record has changed on the server in the time between when your application retrieved the record and when it tries to update or delete that record.

Box 2: If-Match: Etag -

Use If-Match and If-None-Match headers with ETag values to check whether the current version of a resource matches the one last retrieved, matches any previous version or matches no version. These comparisons form the basis of conditional operation support. Dataverse provides ETags to support conditional retrievals, optimistic concurrency, and limited upsert operations.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/optimistic-concurrency
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/webapi/perform-conditional-operations-using-web-api

Question: 343 CertyIQ

HOTSPOT -
You need to package and deploy a Power Apps code component to an environment.
Which commands should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Action	Command
Package	pac solution init --publisher-name Contoso --publisher-prefix cto pac auth create --url https://contoso.crm.dynamics.com pac pcf push --publisher-prefix pac solution add-reference --path c:\downloads\mysamplecomponent
Connect	pac solution init --publisher-name Contoso --publisher-prefix cto pac auth create --url https://contoso.crm.dynamics.com pac pcf push --publisher-prefix pac solution add-reference --path c:\downloads\mysamplecomponent
Deploy	pac solution init --publisher-name Contoso --publisher-prefix cto pac auth create --url https://contoso.crm.dynamics.com pac pcf push --publisher-prefix pac solution add-reference --path c:\downloads\mysamplecomponent

Answer:

Answer Area

Action	Command
Package	pac solution init --publisher-name Contoso --publisher-prefix cto
Connect	pac auth create --url https://contoso.crm.dynamics.com
Deploy	pac pcf push --publisher-prefix

pac solution add-reference --path c:\downloads\mysamplecomponent

Explanation:

Box 1: pac solution init --publisher-name

Create a new solutions project using the following command. The solution project is used for bundling the code component into a solution zip file that is used for importing into Dataverse. pac solution init --publisher-name developer --publisher-prefix de

Box 2: pac auth create -

Connecting to your environment.

Auth commands are used to authenticate to Dataverse.

Creates the authentication profile for your organization by passing the url parameter. Shows AAD dialog if sign in credentials are not specified.

Example: pac auth create --url https://Myorg.crm.dynamics.com

Box 3: pac pcf push --publisher-prefix

Deploying code components -

After you have successfully created an authentication profile, you can start pushing the code components to the Dataverse instance with all the latest changes.

The push capability speeds up the inner-developer cycle development because it bypasses the code component versioning requirements and does not require that you build your solution (cdsproj) to import the code component.

To use the push capability, do the following:

1. Ensure that you have a valid authentication profile created.

2. Navigate to the directory where the sample component file is located.

3. Run the command.

pac pcf push --publisher-prefix <your publisher prefix>

Incorrect:

Commands for working with Dataverse solution projects include:

Parameter init -

Initializes the solution project. It has the following parameters: publisher-name: Publisher name of the organization. publisher-prefix: Publisher prefix of the organization.

Reference:

https://docs.microsoft.com/en-us/power-apps/developer/component-framework/import-custom-controls

Question: 344 CertyIQ

You are creating an integration between Microsoft Dataverse and an external system.
Messages from Dataverse must be sent to Microsoft Azure Service Bus. An Azure Function will process the messages. Events must be published directly to the ServiceEndpoint for Azure Service Bus.
You need to create code for the messages.
Which class should you use?

A.RemoteExecutionContext
B.IWorkflowContext
C.IPluginExecutionContext
D.IExecutionContext

Answer: A

Explanation:

A. RemoteExecutionContext.

Why This Is the Correct Choice

When Microsoft Dataverse publishes data directly to an **Azure Service Bus** endpoint (via a ServiceEndpoint), the platform serializes the full data payload and execution details before pushing it out.

The Cloud Receiver Contract: The specific class that represents the execution context received by listening applications in the cloud (such as an **Azure Function** or an Azure Service Bus queue/topic listener) is **RemoteExecutionContext**.
This class is a streamlined version of the internal Dataverse context, specifically designed to contain the target entity properties, pre/post images, and user details in a format easily deserialized outside of the Dataverse application domain.

Why Other Options Are Incorrect

B & C are incorrect: IWorkflowContext and IPluginExecutionContext are internal interfaces used exclusively

inside Dataverse by custom workflows or plug-ins running within the sandbox isolation engine. They cannot be instantiated or directly received by external Azure services.
D is incorrect: IExecutionContext is the base interface that defines properties common to execution contexts, but it is not the concrete class used by external Azure integration consumers.

Question: 345

CertyIQ

You are developing a Power Platform solution. The solution connects to a third-party accounting system by using a Web API through a Power Apps app that automatically exchanges contacts with the sales data.
You have the following code: (Line numbers are included for reference only.)

```
01 GET https://contoso.crm.dynamics.com/api/data/v9.1/accounts?$select=name,accountnumber,telephone1 &$top=5 HTTP/1.1
02
03 Cache-Control: no-cache
04 OData-Version: 4.0
05 Content-Type: application/json
```

You need to ensure that the code only synchronizes data that was not previously synchronized.
Which code segment should you insert at line 02?

A. Prefer: odata.track-changes
B. Prefer: odata.allow-entityreferences
C. Prefer: odata.include-annotations

Answer: A

Explanation:

Prefer: odata.track-changes is a correct answer.

Question: 346

CertyIQ

A company uses a custom Power Platform app to create and manage programs. The company has a public website that uses TLS 1.0.
The public website is outside of the corporate domain. The website uses POST requests to save data.
You need to automate the transfer of data to the public website.
What should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Step	Action
Move program data to the public website.	Create an Azure Function app Create an asynchronous webhook Create a Power Automate instant cloud flow Create a plug-in that uses a secure connection
Package the program details.	Use the Power Automate HTTP request trigger. Configure a shared access signature for the Azure Function. Register a pre-image for the program create message step in the Plug-in Registration tool. Register a step for the program create message step by using the Plug-in Registration tool.

Answer:

Answer Area

Step	Action
Move program data to the public website.	Create an Azure Function app Create an asynchronous webhook Create a Power Automate instant cloud flow **Create a plug-in that uses a secure connection**
Package the program details.	Use the Power Automate HTTP request trigger. Configure a shared access signature for the Azure Function. Register a pre-image for the program create message step in the Plug-in Registration tool. **Register a step for the program create message step by using the Plug-in Registration tool.**

Explanation:

1. Move program data to the public website

Selected Action: Create a plug-in that uses a secure connection
Why it is correct: When transferring internal enterprise data safely from Microsoft Dataverse out to a public website, building a custom server-side **plug-in** provides full execution control. By establishing a secure connection (such as using OAuth or secure credentials managed inside Dataverse configuration), you guarantee the integrity and confidentiality of the data during transfer while utilizing the sandboxed execution environment.

2. Package the program details

Selected Action: Register a step for the program create message step by using the Plug-in Registration tool.
Why it is correct: For a plug-in to react to a specific business event (like a new "program" record being created), you must hook it into the Dataverse event pipeline. The standard workflow dictates using the standalone **Plug-in Registration tool** to bind the compiled assembly to the Create message of that target table. This step ensures that whenever the trigger occurs, Dataverse packages the execution context and feeds it directly into your plug-in code.

Question: 347 CertyIQ

The communication department for a company plans to add a publicly accessible survey page to the company's public website.
You must add the new survey page to the company's public website and capture data from the page to a Microsoft Dataverse environment.
Explicit user credentials must not be required to write survey data to Dataverse.
You need to implement authentication.
Which authentication mechanism should you implement?

A.Claims based
B.Microsoft 365
C.Azure guest account
D.Client secret

Answer: D

Explanation:

client secret the correct answer

Question: 348 CertyIQ

A company has a model-driven app that uses Microsoft Dataverse.
The company requires a web application that retrieves information from the model-driven app. The requirements for the web application include:
•Must be a single-page web application that uses the Web API.
•Must display the correct company information.
•Must authenticate using OAuth without additional verification.
You need to configure the web application.
Which two methods should you use?
Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.NTLM authentication

B.Kerberos Authentication

C.Microsoft Azure Active Directory Authentication Libraries (ADAL)

D.Microsoft Authentication Library (MSAL)

E.multifactor authentication

Answer: CD

Explanation:

C.Microsoft Azure Active Directory Authentication Libraries (ADAL)

D.Microsoft Authentication Library (MSAL)

Question: 349 CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-

Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.

Current environment

-

Environment

-

•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.

Data

-

•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.

Web API

-

•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.

Requirements

-

Custom connector

-

•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.

Process

-

•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.

Issues

-

•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.

You need to configure a Power Automate flow to update account records by using the response from the Web API.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

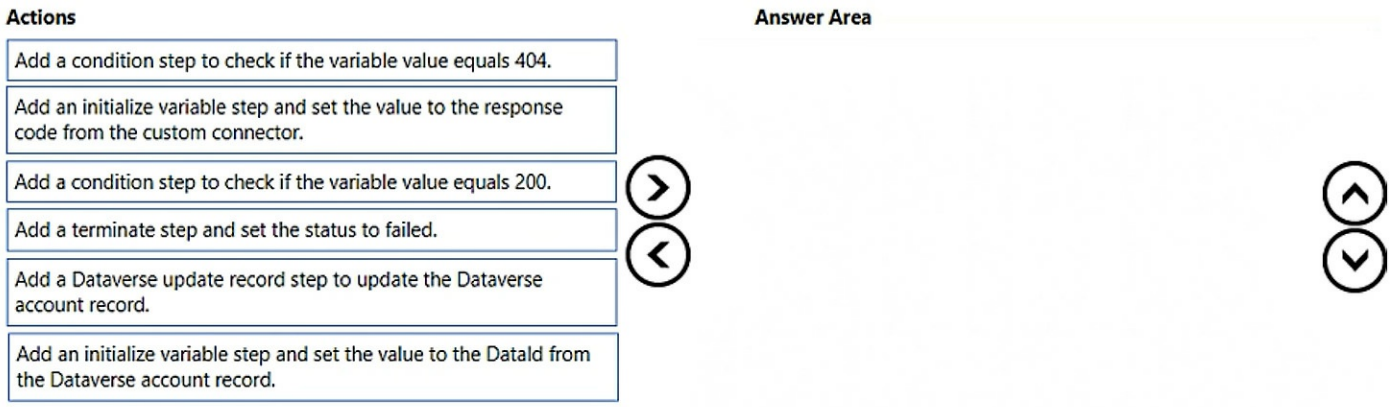

Answer:

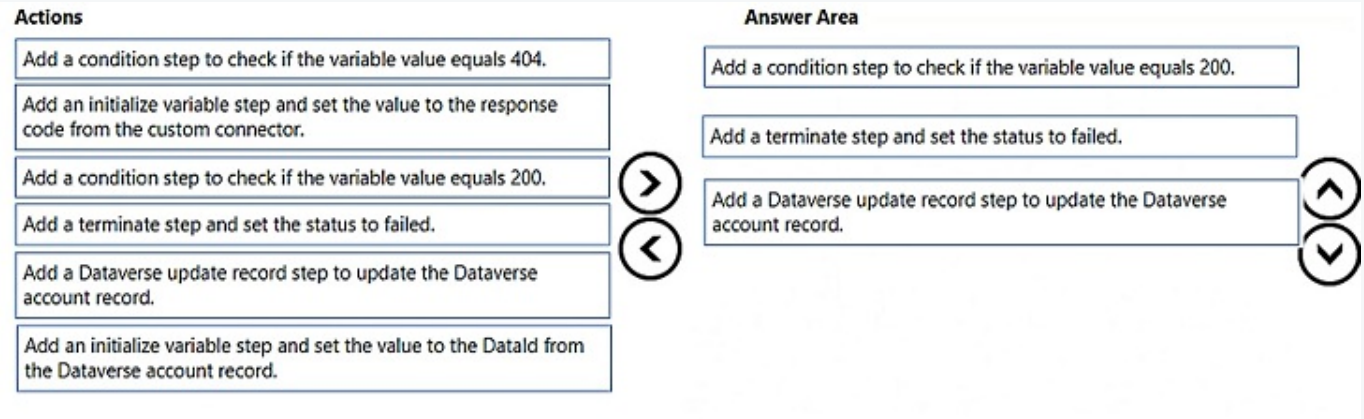

Explanation:

Add a condition step to check if the variable value equals 200.

Add a terminate step and set the status to field.

Add a Dataverse update record step to update the Dataverse account record.

Question: 350 CertyIQ

The communication department for a company plans to add a publicly accessible survey page to the company's public website.
You must add the new survey page to the company's public website and capture data from the page to a Microsoft Dataverse environment.
Explicit user credentials must not be required to write survey data to Dataverse.
You need to implement authentication.
Which authentication mechanism should you implement?

A.Azure AD Conditional Access

B.Azure guest account

C.X.509 certificate

D.OAuth 2.0

Answer: D

Explanation:

D. OAuth 2.0.

Why This Is the Correct Choice

The scenario requires a public survey page accessible to anonymous web users, where data must be securely submitted to Microsoft Dataverse **without requiring the end-users to provide their own login credentials**.

To achieve this, the application needs to use a **Server-to-Server (S2S)** integration:

Application User Authentication: The backend server hosting the public website connects to Dataverse using an Azure App Registration configured as a Dataverse Application User.
OAuth 2.0 Client Credentials Grant: The server authenticates against Microsoft Entra ID (formerly Azure AD) behind the scenes using OAuth 2.0 client credentials (via a client secret or an X.509 certificate). This obtains an access token to write data natively into Dataverse on behalf of the anonymous public submissions.

Why the Suggested Answer (B) and Other Options Are Incorrect

B (Azure guest account) is incorrect: If you use an Azure guest account, every single public visitor filling out the survey would be prompted to log in or accept a tenant invitation, which explicitly violates the requirement that "explicit user credentials must not be required."
A is incorrect: Conditional Access is an enterprise policy framework used to restrict or step-up authentication for internal corporate users based on signals like location or device state; it cannot be applied to handle anonymous public API submissions.
C is incorrect: While an X.509 certificate can be used inside the OAuth 2.0 flow as a credential type, the overarching authentication protocol mechanism itself is **OAuth 2.0**.

Question: 351

CertyIQ

HOTSPOT
-
You develop the following code as part of a plug-in that handles the Create message of the Account table.

```
01    Entity target = context.InputParameters["Target"] as Entity;
02
03    string accountNumber = target.GetAttributeValue<string>("accountnumber");
04
05    if (string.IsNullOrEmpty(accountNumber))
06    {
07          return;
08    }
09
10    QueryByAttribute accountsQuery = new QueryByAttribute("account")
11    {
12          ColumnSet = new ColumnSet(false),
13          TopCount = 1
14    };
15    accountsQuery.AddAttributeValue("accountnumber", accountNumber);
16    accountsQuery.AddAttributeValue("statecode", 0);
17
18    Entity[] existingAccounts = service.RetrieveMultiple(accountsQuery).Entities.ToArray();
19
20    if (existingAccounts.Length == 0)
21    {
22          return;
23    }
24
25    throw new InvalidPluginExecutionException($"Record with Account Number '${accountNumber}' exists in the system");
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statement	Yes	No
The code performs the validation for any value of the account number.	○	○
The code checks only active accounts available in the system.	○	○
The code generates an exception that contains information about the number of existing duplicated records.	○	○

Answer:

Answer Area

Statement	Yes	No
The code performs the validation for any value of the account number.	○	◉
The code checks only active accounts available in the system.	◉	○
The code generates an exception that contains information about the number of existing duplicated records.	○	◉

Explanation:

Statement 1 (\(\rightarrow \) No): The code skips processing entirely if the field is empty or null, so it does not validate any or every value.
Statement 2 (\(\rightarrow \) Yes): The query specifically includes a state filter checking for statecode == 0, which isolates **Active** records only.
Statement 3 (\(\rightarrow \) No): The validation failure triggers a static error string rather than a dynamic message that counts and lists the number of duplicates found.

Question: 352 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company requires custom validation when users save form records that use a synchronous plug-in.
If validation fails, a message that explains how to resolve the issue must be displayed on the form to the user.
You need to implement the custom validation.
Solution: Throw an InvalidPluginExecutionException with the message.
Does the solution meet the goal?

A.Yes
B.No

Answer: A

Explanation:

The Correct Answer A. YesTo achieve the goal of displaying a user-friendly message on the form when validation fails, you should consider using the OrganizationServiceContext.ThrowInvalidPluginException method with a custom error message.

Question: 353 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company requires custom validation when users save form records that use a synchronous plug-in.
If validation fails, a message that explains how to resolve the issue must be displayed on the form to the user.
You need to implement the custom validation.
Solution: Include the message in the output parameters of the plug-in.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

Output Parameter is the output of the CDS operation, not output to the form. Besides Output Parameter is only available to plugins registered to Post Operation step.

Reference:

https://learn.microsoft.com/en-us/power-apps/developer/data-platform/understand-the-data-context

Question: 354 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company requires custom validation when users save form records that use a synchronous plug-in.
If validation fails, a message that explains how to resolve the issue must be displayed on the form to the user.
You need to implement the custom validation.
Solution: Use the tracing service to log the message.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

No.

Why This Solution Does Not Meet the Goal

Using the **tracing service** (ITracingService) only writes diagnostic text to the **Plugin Trace Log** (plugintracelog) table in Dataverse. It does not stop the execution of the platform, it does not prevent the record from being saved, and it **does not display a message on the form** to the end user.

Question: 355 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A company requires custom validation when users save form records that use a synchronous plug-in.
If validation fails, a message that explains how to resolve the issue must be displayed on the form to the user.
You need to implement the custom validation.
Solution: Throw a custom exception with the message.
Does the solution meet the goal?

A.Yes
B.No

Answer: A

Explanation:

The Correct A. Yes To achieve the goal of displaying a user-friendly message on the form when validation fails, you should consider using the Organization Service Context .Throw Invalid Plugin Exception method with a custom error message.

Question: 356 CertyIQ

You develop code that will perform an update to existing records in a table.
The update must occur based on the alternate key configured for the table.
You need to perform the update.
Which two requests should you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.UpdateRequest
B.UpsertRequest
C.CreateRequest
D.RetrieveRequest

Answer: AB

Explanation:

A.UpdateRequest

B.UpsertRequest

Question: 357 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment -
Get Energy Fit Program -
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment -
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair: oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements -
Overview -
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements -
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.

•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application -
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII. oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters. oRecords the details of the home improvements installed for the customer. oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed. oSend an approval to a senior manager to review and approve in Microsoft Teams. oUpload the information to the API endpoint. oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team. oMust record the status on the funding application.
Suitability Assessment Tool -
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting -
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues -
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to create the eligibility assessment app.
Which command should you run?

A.pac application install

B.pac pcf init

C.pac plugin init

D.pac solution init

Answer: B

Explanation:

pac pcf init - Initializes a directory with a new Power Apps component framework project.

Question: 358

CertyIQ

DRAG DROP
-

You are the lead Microsoft Power Platform developer for a company.
Your team of developers are unable to work on the same components at the same time.
The developers have the following requirements:
•A mechanism to automatically push individual changes they make into the existing environments for testing.
•A dedicated environment for all development work.
•The ability to run, but not create, deployments from directly within Microsoft Power Platform.
You need to implement a process to manage the development activities.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

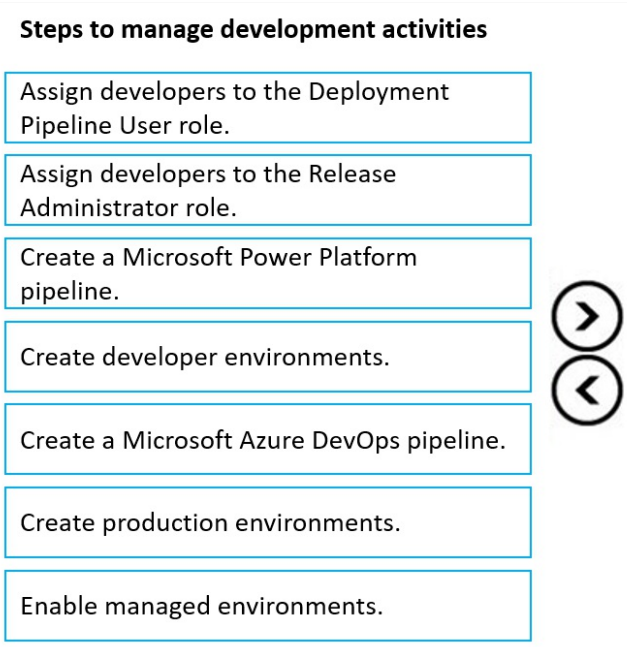

Answer:

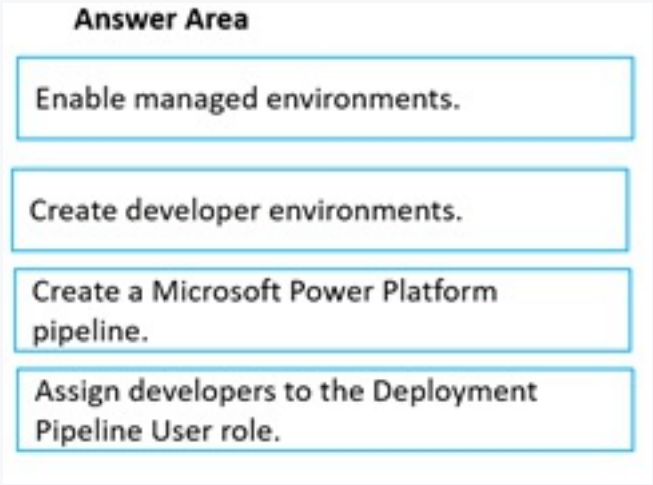

Explanation:

1. **Enable Managed Environments.**

Managed environments in Microsoft Power Platform provide additional governance, security, and monitoring capabilities.

Enabling managed environments allows administrators to enforce data policies, monitor resource usage, and enhance security.

This option is used when organizations want better control over their Power Platform environments.

2.**Create Developer Environments.**

Developer environments are sandbox environments where developers can build, test, and debug their applications without affecting production environments.

These environments are personal to each developer and allow for safe experimentation.

This option is relevant when setting up individual workspaces for developers.

3. **Create a Microsoft Power Platform Pipeline.**

Power Platform Pipelines allow organizations to automate the deployment of solutions across environments (e.g., from development to testing to production).

Pipelines help in application lifecycle management (ALM) by ensuring a structured release process.

This is an essential feature for streamlining deployments in Power Platform.

4. **Assign Developers to the Deployment Pipeline User Role.**

The Deployment Pipeline User role grants developers the ability to deploy solutions using pipelines within Power Platform.

Without this role, developers may not have permission to move solutions between environments.

Assigning this role ensures that developers can actively participate in the deployment process.

Question: 359 CertyIQ

DRAG DROP
-
You are designing a custom connector for an internal API used by Contoso, LLC.
Authentication to the API is carried out by using an API key. The API key is stored within Azure Key Vault. Each environment has a separate instance of the API with a different API key.
You need to reference the API key from Key Vault in the custom connector.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

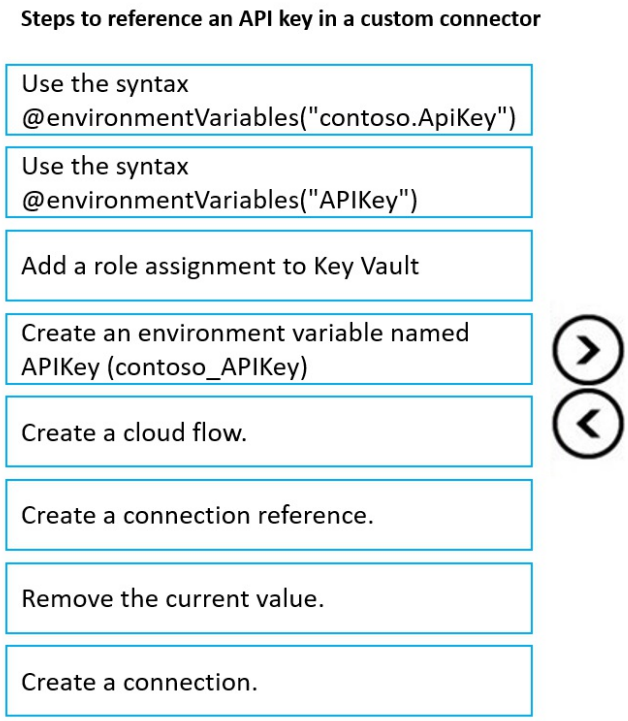

Answer:

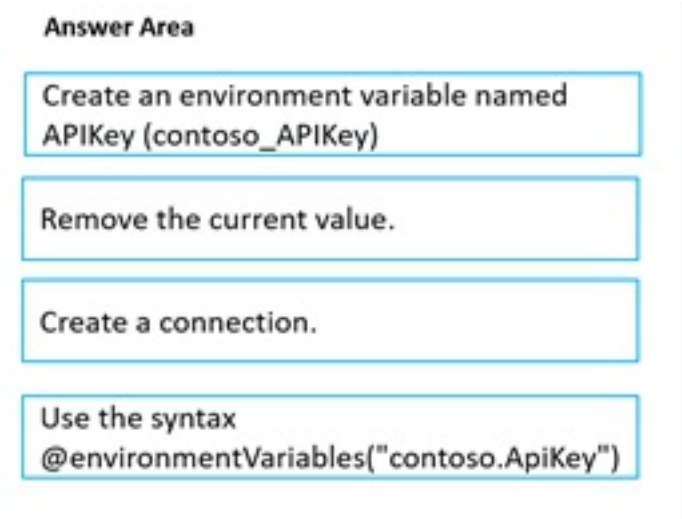

Explanation:

Create an environment variable named APIKey (contoso_APIKey)

Use the syntax @environmentVariables("contoso_APIKey")

Remove the current value.

Use the syntax.

Question: 360

CertyIQ

You are creating a plug in that connects to a third-party REST API.
The API credentials must be secured so they are visible only to system administrators. The API credentials must not interfere with other system functionality.
You need to store the credentials.
Which method should you use?

A.Plug-in secure configuration
B.Text environment variable
C.Connection reference
D.Plug-in unsecure configuration

Answer: A

Explanation:

Plug-in secure configuration.

Question: 361

CertyIQ

DRAG DROP
-
You plan to integrate Microsoft Dataverse data to a system using a Microsoft Azure function.
You configure the message containing the data to be sent asynchronously. You need to plan for the following errors:
•The failure of business logic that uses a synchronous plug-in.
•The Azure function is unreachable.

You need to determine the behavior when an error occurs.
Which retry behavior will be used? To answer, move the appropriate retry behaviors to the correct error scenarios. You may use each retry behavior once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

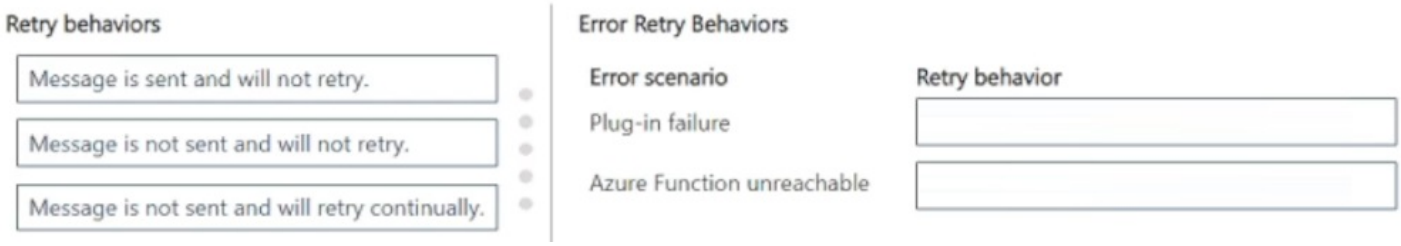

Answer:

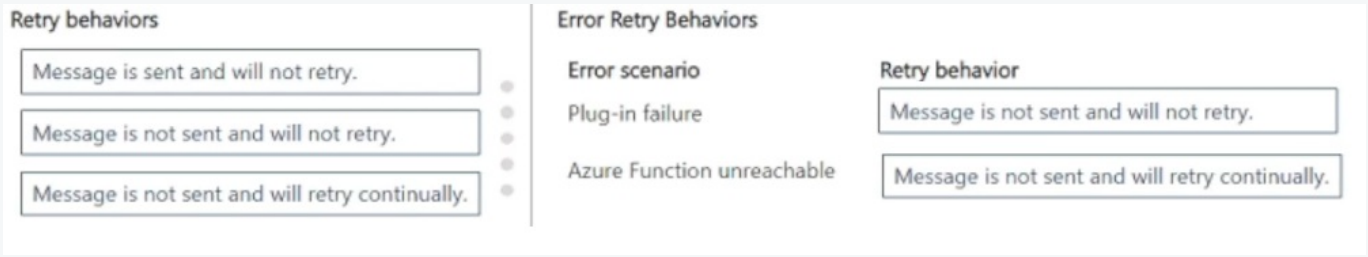

Explanation:

1.**Message is not sent and will not retry.**

The message is not sent at all, and the system will not retry sending it.

This could happen due to validation failures, permissions issues, or pre-configured rules.

2.**Message is not sent and will retry continually.**

The message is not initially sent, but the system will keep retrying until it succeeds.

This is useful for transient failures where the destination system is temporarily unavailable.

Question: 362

CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.
What should you do?

A.Assign the IOrganizationService object to a member variable.
B.Register the plug-in to run synchronously.
C.Register the plug-in step once for each web service request.
D.Set the HTTP connection timeout value explicitly to limit how long each connection can remain open.

Answer: D

Explanation:

D. Set the HTTP connection timeout value explicitly to limit how long each connection can remain open.

By explicitly setting the HTTP connection timeout value, you can control how long the plug-in waits for a

response from the external web service. This helps prevent the plug-in from timing out and ensures that it can handle slow or unresponsive web services more gracefully.

Question: 363 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result these questions will not appear on the review screen.
You are designing an integration that sends created records from a custom Dataverse table to an exposed REST API.
When the REST API is unavailable, you must be able to retry if the response status code is 500.
You need to select a solution that meets the requirement.
Solution: Register a synchronous plug-in that makes an HTTP request to the REST API. Raise an InvalidPluginExecutionException when the request fails.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

No, because raising an exception does not include any retry behavior at all.

Question: 364 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result these questions will not appear on the review screen.
You are designing an integration that sends created records from a custom Dataverse table to an exposed REST API.
When the REST API is unavailable, you must be able to retry if the response status code is 500.
You need to select a solution that meets the requirement.
Solution: Register an asynchronous plug-in that makes an HTTP request to the REST API. Raise an InvalidPluginExecutionException that is configured to retry when the request fails.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

B. No.

Why This Solution Does Not Meet the Goal

While Microsoft Dataverse asynchronous plug-ins can be configured to retry using a specific constructor (InvalidPluginExecutionException with OperationStatus.Retry), using a custom plug-in for this integration is **not** the recommended architecture or the intended correct solution for this scenario for the following reasons:

1. **Lack of Fine-Grained Status Code Control:** A plug-in cannot natively filter retries out-of-the-box based strictly on an external HTTP status code of 500 without complex manual coding inside the sandbox environment.
2. **Platform Best Practices:** For external integrations that require robust retry mechanisms when a REST API is down, Microsoft recommends using native out-of-the-box features like **Dataverse Webhooks** or **Azure Service Bus integrations**. Webhooks automatically retry failed invocations when receiving HTTP server errors (like 500 Internal Server Error), making them far more resilient and scalable than writing custom plug-in logic.

Question: 365 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result these questions will not appear on the review screen.
You are designing an integration that sends created records from a custom Dataverse table to an exposed REST API.
When the REST API is unavailable, you must be able to retry if the response status code is 500.
You need to select a solution that meets the requirement.
Solution: Register a service endpoint for an Azure Service Bus queue. Use an Azure Function to process messages from the queue and forward them to the REST API. Redirect failed messages to the dead-letter queue.
Does the solution meet the goal?

A.Yes
B.No

Answer: B

Explanation:

No, because sending failed messages to the dead-letter queue means that they are NOT processed again after failure. They are just sent to the dead-letter queue to die there.

Question: 366 CertyIQ

A company creates a custom connector for its cloud-based ERP system.
The company requires an authentication method that can be consumed by the custom connector.
You need to configure the authentication method.
Which authentication method should you use?

A.basic authentication
B.Windows Active Directory authentication
C.certificate-based authentication
D.password less authentication

Answer: A

Explanation:

A. Basic authentication is the most suitable choice for configuring the authentication method for a custom connector to the company's cloud-based ERP system.

Basic authentication allows for straightforward implementation, where the client sends a username and password directly encoded in the HTTP headers. This method is particularly applicable for RESTful APIs, which many cloud-based ERP systems use, providing a familiar mechanism to access the system's features securely. Furthermore, it does not require complex setup and is widely supported across various programming environments.

Critique of Other Options:

B. Windows Active Directory authentication: This method is suited for scenarios requiring integration with on-premises systems or environments heavily relying on Active Directory. However, it adds complexity in cloud environments and is rarely supported for custom connectors outside enterprise applications, making it less versatile than basic authentication in a cloud context.
C. Certificate-based authentication: Although this method offers high security by utilizing digital certificates, it requires additional setup and management overhead, such as issuing and storing certificates. For many cloud-based applications, this complexity can be excessive if basic authentication meets the security requirements.
D. Passwordless authentication: While this method improves security by eliminating the need for passwords, it is still relatively nascent and may lack the straightforward implementation needed for custom connectors. Additionally, it often relies on multi-factor authentication frameworks that might not be fully compatible with all ERP systems.

In summary, basic authentication strikes a balance between simplicity, compatibility, and sufficient security for cloud-based ERP systems deployed through custom connectors.

References:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/authentication/authentication-types
https://docs.microsoft.com/en-us/connectors/custom-connectors/authentication
https://docs.microsoft.com/en-us/azure/active-directory/develop/v2-overview

Question: 367 CertyIQ

You are creating a .NET application to load a large volume of data into a Dataverse table with one default column value. A synchronous plug-in already sets the same default column value for new rows in the table.
To speed up the process, you must disable the plug-in during the data load. The data load must run during business hours. The load must not affect rows users may be creating.
You need to perform the operations.
What are two possible ways to achieve this goal? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.Send the BypassCustomPluginExecution as an optional parameter with the create request.
B.Send the SuppressCallbackRegistrationExpanderJob as an optional parameter with the request.
C.Disable the plug-in step prior to starting the data load.
D.Set the BypassPluginExecution property on the CrmServiceClient.

Answer: AD

Explanation:

AD is correct because it provides two effective methods to disable the synchronous plug-in during a data load without affecting user operations.

Reasoning for Correct Answers:

1. **BypassCustomPluginExecution**: By providing this optional parameter in the create request, the system can execute the creation of records without invoking the associated plug-ins. This allows the data load operation to proceed rapidly, as it circumvents the overhead introduced by the synchronous execution of plug-ins, which can cause performance bottlenecks.
2. **BypassPluginExecution property on the CrmServiceClient**: Setting this property directly on the client instance ensures that all operations conducted via this client instance bypass plug-in execution. This method applies to all operations initiated by the client throughout the data load process, ensuring consistency and avoiding interaction with the synchronous plug-in for the entire duration.

Evaluation of Incorrect Options:

1. **SuppressCallbackRegistrationExpanderJob**: This option is irrelevant as it does not address the need to bypass plug-in execution directly during record creation. Instead, it is related to asynchronous job processing and would not expedite data load without invoking the corresponding plug-ins.
2. **Disable the plug-in step prior to starting the data load**: While technically feasible, this approach may introduce risks. Disabling a plug-in during operational hours could cause issues for other processes or users creating records concurrently, which contradicts the operational requirement not to affect user actions. It also necessitates additional steps for re-enabling the plug-in post-load, which adds administrative overhead and potential for errors.

In conclusion, options A and D provide structured, scalable solutions that conform to the requirements of the scenario without risking simultaneous user operations.

References:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/plugin-execution-context
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/crmserviceclient
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/webapi/create-entity

Question: 368 CertyIQ

A company creates a custom connector for its cloud-based ERP system.
The company requires an authentication method that can be consumed by the custom connector.
You need to configure the authentication method.
Which authentication method should you use?

A. basic authentication
B. Windows Active Directory authentication
C. biometric authentication
D. two-factor authentication

Answer: A

Explanation:

The correct answer is A, basic authentication. Here's why:

When developing custom connectors for the Microsoft Power Platform to interact with external systems like a cloud-based ERP, selecting the right authentication method is crucial. The goal is to securely and efficiently allow Power Apps, Power Automate, and Power BI to access the ERP system's data and functionality.

Basic authentication involves sending a username and password with each request to the ERP system. While not the most secure option, it is frequently the simplest to implement and is widely supported by various APIs and web services, making it a common choice for initial integration, especially when other, more complex options are not immediately viable or supported by the target ERP system.

Options B, C, and D are generally less suitable for custom connectors in the Power Platform context for several reasons. Windows Active Directory authentication (B) is typically used within a Microsoft network environment and relies on Kerberos or NTLM, which aren't typically exposed directly for cloud-to-cloud integrations via custom connectors. Biometric authentication (C) and two-factor authentication (D), while more secure, are designed for user-interactive scenarios. Custom connectors usually operate in the background, requiring non-interactive authentication that is programmatically accessible. Implementing biometric or two-factor would require significant overhead to handle authentication challenges, which often is not feasible with current custom connector capabilities in Microsoft Power Platform.

Given the scenario emphasizes a simple and consumable authentication method, basic authentication provides an easy-to-implement solution that aligns with the common capabilities supported in Power Platform's custom connectors for backend ERP integrations. The simplicity makes it attractive as a starting point or when the ERP's API only provides this less secure approach. Security should be improved as subsequent phases allow.

For further research on custom connectors and authentication in Power Platform, consult the official Microsoft documentation:

Create a custom connector from scratch
Authentication options in Power Platform Connectors

Question: 369 CertyIQ

A company has a new implementation that will use Dynamics 365 Field Service.
A developer adds two custom tables to the solution in a development environment. The custom tables have lookup columns to Field Service tables.
The developer creates a new test environment and imports the solution. The developer receives an error that states dependencies are missing.
You need to recommend a solution for the missing dependencies issue.
What should you recommend?

A. Add the Field Service tables to the solution.
B. Export the solution as unmanaged.
C. Add the custom tables to the solution.
D. Install the Field Service application in test.

Answer: A

Explanation:

The correct answer is A: Add the Field Service tables to the solution. Here's why:

The error message indicating missing dependencies directly points to the core issue: the custom tables within

the solution rely on components (tables, columns, etc.) that exist within the Dynamics 365 Field Service application. When the solution is imported into the test environment, the system checks for these dependencies. If the Field Service application (and therefore its components) is not present in the test environment, the import fails because the custom tables cannot find the lookup targets they are designed to interact with.

Option B (Exporting the solution as unmanaged) does not address the root cause. Unmanaged solutions are meant for development environments where customization and changes are frequently made. While exporting as unmanaged might allow for more flexible modifications in the target environment, it doesn't magically resolve missing dependencies. The dependencies are still missing, and the solution will likely still fail to function correctly or import properly.

Option C (Adding the custom tables to the solution) is misleading because the custom tables are already in the solution – that's where the problem originates. The issue isn't about including the custom tables, but about including the things the custom tables depend on.

Option D (Install the Field Service application in test) is the most direct and effective approach. Installing the Field Service application installs all the base tables, entities, workflows, and other components that the custom tables reference through their lookup columns. Once Field Service is installed, the import of the solution containing the custom tables should succeed because the dependencies will be resolved. The system will find the Field Service tables and columns, allowing the lookup relationships to be established.

Cloud computing principles relevant here are dependency management and environment consistency. In cloud environments, ensuring that all necessary components and dependencies are present in each environment is critical for successful deployment and execution of applications. Reproducible environments are essential for reliable testing and deployment practices. Failing to include dependencies will lead to errors and application failures.

Therefore, the correct solution is to ensure the Field Service application, the source of the missing dependencies, is present in the test environment by installing it.

Authoritative Links:

Microsoft Power Platform Solutions: https://learn.microsoft.com/en-us/power-platform/alm/solution-concepts-alm
Dependency Tracking in Solutions: https://learn.microsoft.com/en-us/power-platform/alm/solution-dependencies

Question: 370 CertyIQ

A company creates a custom connector for its cloud-based ERP system.
The company requires an authentication method that can be consumed by the custom connector.
You need to configure the authentication method.
Which authentication method should you use?

A. two-factor authentication
B. Windows Active Directory authentication
C. biometric authentication
D. generic OAuth authentication

Answer: D

Explanation:

The correct authentication method for a custom connector connecting to a cloud-based ERP system, as stated, is **D. Generic OAuth authentication**. Here's why:

OAuth (Open Authorization) is a widely adopted, open standard protocol that enables secure delegated access. It allows a user to grant a third-party application (in this case, the custom connector) limited access to their resources on a service (the cloud-based ERP system) without sharing their credentials (username and password). This aligns perfectly with modern cloud security best practices.

Let's analyze why the other options are less suitable:

A. Two-factor authentication (2FA): While 2FA enhances security, it's not an authentication method per se. It's an additional layer on top of an existing method. 2FA typically relies on an underlying authentication mechanism like username/password or OAuth. It doesn't provide the initial delegated access a connector needs.

B. Windows Active Directory authentication: Active Directory is primarily used for managing users and computers within an on-premises Windows domain. While Azure Active Directory (Azure AD) exists for cloud environments, directly using Windows Active Directory authentication for a custom connector connecting to a generic cloud-based ERP system would be cumbersome and might not be natively supported. Even if Azure AD is in use, directly exposing user credentials for automated tasks is generally discouraged.

C. Biometric authentication: Biometric authentication (fingerprint, facial recognition, etc.) relies on physical attributes and is generally suitable for direct user interaction, not for automated connectors that need to run in the background without user intervention. It's impractical for a custom connector to authenticate using biometric data.

Generic OAuth is the most flexible and secure choice because it can be easily configured within the custom connector settings. The connector can request an access token from the ERP system's authorization server using the user's consent, and then use this token to access protected resources. The ERP system's authorization server will often support OAuth and allow the custom connector to be registered as a valid client. This approach allows for granular control over the permissions granted to the connector, minimizing security risks and adhering to the principle of least privilege. Furthermore, if the user's access rights change in the ERP system, the access token can be revoked, immediately cutting off the connector's access. Therefore, OAuth offers a secure, scalable, and manageable authentication mechanism ideally suited for integrating custom connectors with cloud-based ERP systems.

Supporting links:

OAuth 2.0: https://oauth.net/2/
Microsoft Power Platform Connectors: https://learn.microsoft.com/en-us/connectors/custom-connectors/
Azure Active Directory (Azure AD) Authentication: https://learn.microsoft.com/en-us/azure/active-directory/develop/authentication-vs-authorization

Question: 371 CertyIQ

A company plans to implement an integration between Microsoft Dataverse and Azure Service Bus.
When an Account row is updated, if the Credit Limit is set to over $25,000, information about the row must post to an Azure Service Bus queue. The previous Credit Limit value must also be included.
You use the Microsoft Power Platform CLI to create the plug-in package.
You need to implement an interface.
Which interface should you implement next?

A. IServiceEndpointNotificationService
B. IPluginExecutionContext
C. IWebHttpServiceEndpointPlugin

D. IServiceEndpointPlugin

Answer: B

Explanation:

The correct answer is **B. IPluginExecutionContext**.

Here's why:

The scenario describes a synchronous operation within Dataverse where a plugin needs to execute upon an update to an Account record. The core requirement is to access the data related to that execution, specifically the record being updated (including the old and new credit limit values).

IPluginExecutionContext is the fundamental interface that provides the context for plugin execution within Dataverse. It offers access to essential data, including:
InputParameters: Values passed into the execution pipeline, such as the updated account record.
OutputParameters: Values being passed out of the execution pipeline.
PreEntityImages and PostEntityImages: Snapshots of the entity before and after the update, respectively, which are crucial for comparing the old and new credit limits.
IServiceEndpointNotificationService is used for sending notifications asynchronously to external services, not for retrieving data within a synchronous Dataverse operation.
IWebHttpServiceEndpointPlugin is a specialized interface for plugins that communicate with external web services. While the overall solution involves Azure Service Bus, this interface isn't used for the initial trigger and data access during the Dataverse update event. This interface would be used when sending the message to Azure Service Bus after the plugin determines that the credit limit exceeds $25,000.
IServiceEndpointPlugin is a generic interface for creating service endpoints; it is not involved in triggering plugins upon a data update or providing access to the execution context of that update.

Therefore, to access the pre- and post-update entity images and input parameters, the plugin must implement **IPluginExecutionContext**. This interface provides the necessary tools to inspect the data changes and determine if the credit limit has exceeded the specified threshold, triggering the subsequent logic for posting to the Azure Service Bus. Without this, the plugin has no awareness of the changes happening in Dataverse.

Further reading:

Event Execution Pipeline in Microsoft Dataverse
IPluginExecutionContext Interface
Write a plug-in

Question: 372 CertyIQ

DRAG DROP
-
You are implementing data integration that involves Dataverse. You have a table named Table1 that has the following two custom columns: ColumnA and ColumnB.
You need to integrate the data to meet the following requirements:
•The integration must create or update a single record based on the Dataverse unique identifier value.
•The integration must create or update a single record based on the value within the two custom columns.
•Uniqueness must be enforced in the two custom columns.
•An automation must be able to retrieve records by referencing the two custom column values.
•The use of custom code must be minimized.
You need to complete the integration.
Which platform features should you use? To answer, move the appropriate features to the correct requirements. You may use each feature once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Features

- Alternate key
- Plug-in
- UpsertRequest
- Workflow extension

Dataverse data integration requirements

Requirement	Feature
Create or update a record by using the primary value.	
Create or update a record by using custom columns.	
Enforce uniqueness by using custom columns.	
Retrieve records by using custom column values.	

Answer:

Dataverse data integration requirements

Requirement	Feature
Create or update a record by using the primary value.	UpsertRequest
Create or update a record by using custom columns.	UpsertRequest
Enforce uniqueness by using custom columns.	Alternate key
Retrieve records by using custom column values.	Plug-in

Explanation:

UpsertRequest.

The term "Upsert" is a combination of Update and Insert. The UpsertRequest message checks if a record already exists based on the primary key (GUID). If the record exists, it updates it. If it does not exist, it automatically creates a new record. This eliminates the need to perform a separate retrieval request first, minimizing API roundtrips.

UpsertRequest

External data systems rarely store Dataverse's system-generated GUIDs. Instead, they rely on business keys like an EmployeeID or SKU (custom columns). By targeting an Alternate key configured with these custom columns, UpsertRequest can determine whether a matching record exists in Dataverse. It then triggers either an update or a create operation exactly as it would with a primary key.

Alternate key

When you define an Alternate key on one or more custom fields, Dataverse builds a unique database index behind the scenes. This strictly ensures that no two records can share the exact same value combination for those columns. If a user or an integration tries to duplicate these values, Dataverse blocks the action and returns an error.

Plug in.

Question: 373 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
A university implements Dynamics 365 Sales. Several departments use opportunity records to bid for funding for projects within their own departments. You configure the system to ensure that each department can only work on their own records.
Employees in multiple departments often need to work together on an opportunity. Employees report that they are not able to see opportunities from other departments.
You need to ensure that employees from more than one department can work on the same opportunities when necessary.
Solution: Share the individual opportunity that members of one department are working on with all members of the second department, and give those members the appropriate permissions.
Does the solution meet the goal?

A. Yes
B. No

Answer: A

Explanation:

By sharing the individual opportunity with members of the second department and giving them the appropriate permissions, employees from multiple departments will be able to work together on the same opportunity when necessary, which meets the goal.

Question: 374 CertyIQ

DRAG DROP -
You need to develop a Power Apps Component Framework (PCF) component for a company.
You must follow Microsoft's application lifecycle management (ALM) process for code components.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

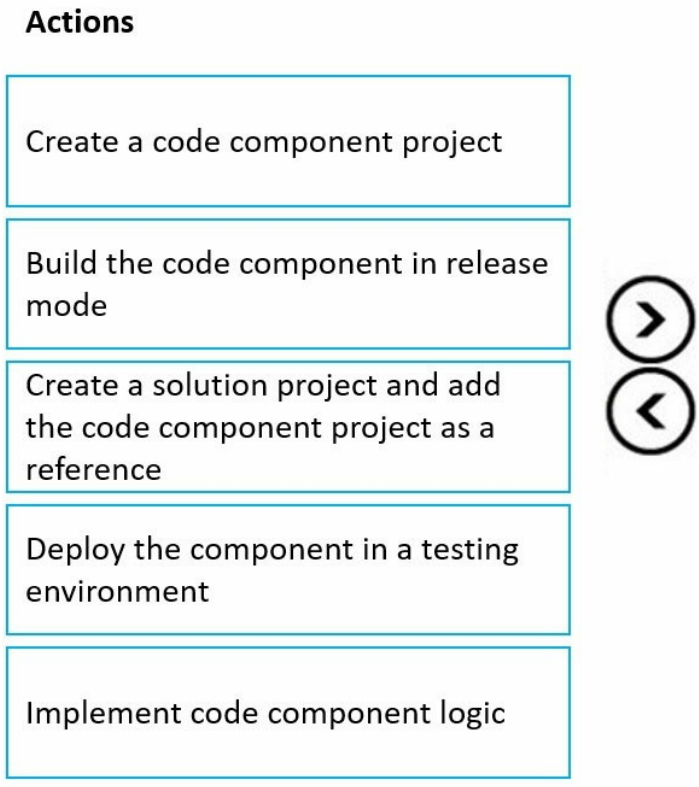

Answer:

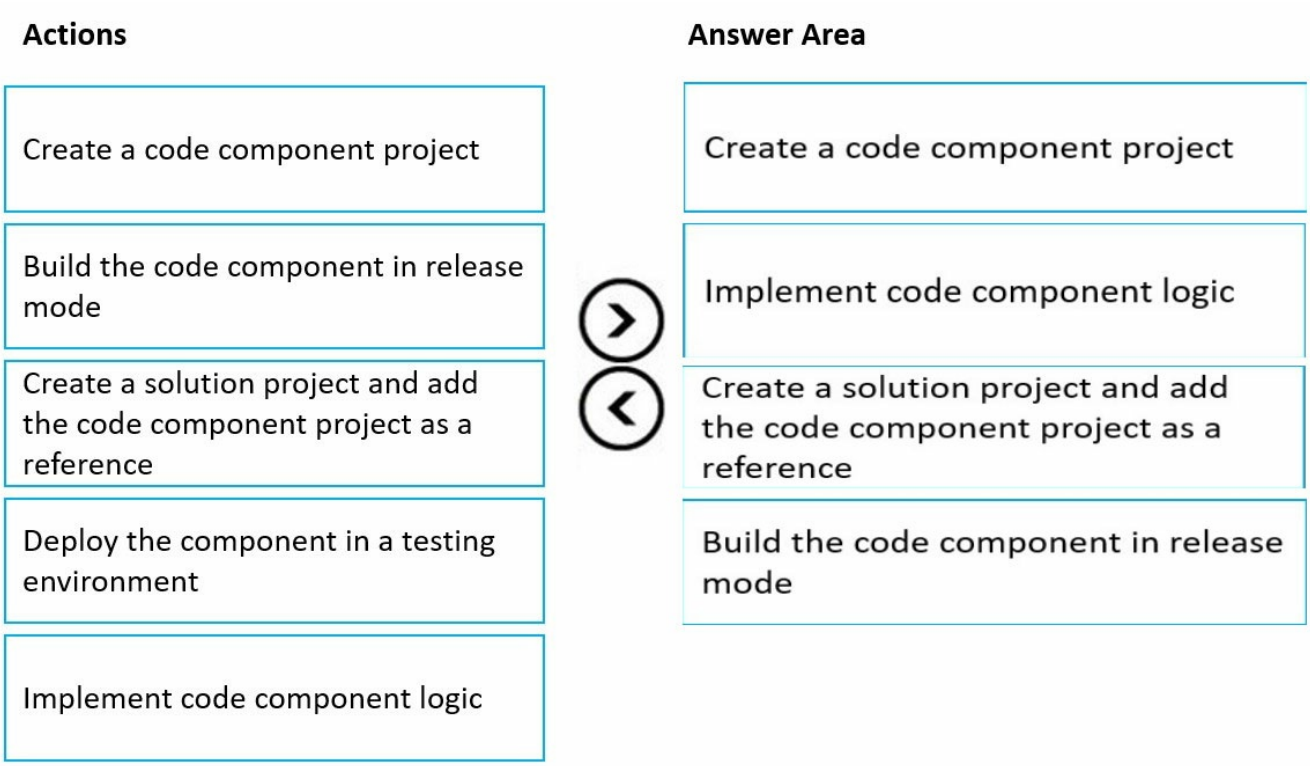

Explanation:

Development and debugging ALM considerations

When developing code components, you would follow the steps below:

1. Create code component project (pcfproj) from a template using pac pcf init.

2. Implement code component logic.

3. Debug the code component using the local test harness.

4. Create a solution project (cdsproj) and add the code component project as a reference.

5. Build the code component in release mode for distribution and deployment.

Reference:

https://docs.microsoft.com/en-us/power-apps/developer/component-framework/code-components-alm#building-pcfproj-code-component-projects

Question: 375 CertyIQ

DRAG DROP -
You create a new canvas app.
You update a test case and must test the app in a separate browser.
You need to test the app by using Test Studio.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

Actions	Answer Area
Select a test suite	
Publish the test	
Select the OnTestSuiteComplete action	
Select Copy play link	
Open a browser and paste the URL for the app into the address bar	
Send the results from the test to a flow in Power Automate	

Answer:

Actions	Answer Area
Select a test suite	Select a test suite
Publish the test	Select Copy play link
Select the OnTestSuiteComplete action	Publish the test
Select Copy play link	Open a browser and paste the URL for the app into the address bar
Open a browser and paste the URL for the app into the address bar	
Send the results from the test to a flow in Power Automate	

Explanation:

Step 1: Select a test suite -

Step 2: Select Copy play link -

Playing tests in a browser -

You can copy a link to play a test in separate browser outside Test Studio. It helps integrate your tests in a continuous build and release pipeline such as Azure

DevOps.

The play link for the selected test is persisted. It doesn't change for the test suite or test case. You can update your tests without the need to modify build and release processes.

To play tests in your browser:

1. Select a test suite or test case in the right pane.

2. Select Copy play link.

3. You're prompted to publish your tests if there are any unpublished changes.

4. You can select to skip the publish process and copy the play link. New test changes don't play if you skip.

5. Open a browser and paste the URL into the address bar to play the test.

6. View your test playing back.

Step 3: Publish the test -

Step 4: Open a browser and paste the URL for the app inte the address bar

Reference:

https://docs.microsoft.com/en-us/power-apps/maker/canvas-apps/working-with-test-studio

Question: 376 CertyIQ

HOTSPOT -
You create a Power Apps component framework component.
You need to test the component.
Which option should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Action	Option
Debug the component in Microsoft Edge	F12 and select component F7 and select Turn on F1 and select topic F11
Display all the properties and their types or type-groups as defined in the manifest file	Data Inputs Context Inputs Outputs npm start
Test the code component by using multiple form factors	Context Inputs Outputs Data Inputs Code component

Answer:

Answer Area

Action	Option
Debug the component in Microsoft Edge	**F12 and select component** F7 and select Turn on F1 and select topic F11
Display all the properties and their types or type-groups as defined in the manifest file	**Data Inputs** Context Inputs Outputs npm start
Test the code component by using multiple form factors	**Context Inputs** Outputs Data Inputs Code component

Explanation:

Box 1: F12 and select component -

Using browser developer tools to debug your code component

Modern browsers have a built-in set of developer tools that allow you to inspect the HTML, CSS, and JavaScript loaded on the current page. You can access these developer tools using the keyboard shortcut Ctrl+Shift+I. Using the F12 key is also a common keyboard shortcut to open the developer tools.

Box 2: Data Inputs -
Data Inputs is an interactive UI that displays all the properties and their types or type-groups defined in the manifest file. The contents of this area are dependent on the properties and datasets defined in the ControlManifest.Input.xml and allows providing mock data for test purposes.

Box 3: Context Inputs -
Context Inputs is shown for all code component types:
* Form Factor: Provides a way to specify the form factor and test the code component with each form factor (web, tablet, phone). This is helpful when the code component changes its layout depending on where the component is loaded. You can detect the form factor in the code using context.client.getFormFactor().
* etc.

Reference:
https://docs.microsoft.com/en-us/power-apps/developer/component-framework/debugging-custom-controls
Power Apps debug component in Microsoft Edge

Question: 377 CertyIQ

You are implementing business logic for a model-driven app form by using multiple JavaScript web resources. The business logic, number of JavaScript files, and the columns that the business logic requires are expected to change frequently. Some form fields will not be visible. Occasionally, non-developers will also make changes to the form.
You need to prevent columns referenced by the JavaScript from accidentally being removed from the form based. What should you do?

A. Hide columns that should not be displayed.
B. Set all columns as business required.
C. Add all columns as non-event dependencies to the form.
D. Add columns in each JavaScript file as a dependency.

Answer:

D

Explanation:

Column dependencies -

Starting with model-driven apps, if your JavaScript web resource depends on a table column value that you don't want to display in the form, you can set the column as a dependency for the JavaScript web resource. This means that the column will be available within the client API columns collection so you can get or set the value in your code. When you add a dependency this way, the controls collection of the column will be empty because there will be no control on the form.

Before this feature you would need to manually add the column to the form and then configure the control to be hidden. Now you can establish this dependency more directly and eliminate the possibility that someone will remove the hidden column from the form.

Incorrect:

Not A: Hiding form elements is not a recommended way to enforce security. There are several ways people can view all the elements and data in the form when elements are hidden.

Reference:

https://docs.microsoft.com/en-us/power-apps/maker/model-driven-apps/visibility-options-legacy

Question: 378 CertyIQ

You are creating a model-driven app for Contoso, Ltd. You add a button to the account page. The button must send a text message to the company's account team when a user selects the button.
The account team reports that they are not receiving messages when users select the button. You are troubleshooting the app by using the following hyperlink: https://contoso.com.dynamics.com/main.aspx?appid=3b157789-5e5b-ec11-8f8f-002248087922&ribbondebug=true
What is the purpose of the hyperlink?

A. Run Command Checker for all buttons on the page.

B. Add the Power Apps Checker button to the page.

C. Run Power Apps Checker for all buttons on the page.

D. Add the Command Checker button to the page.

Answer: D

Explanation:
To enable Command Checker, pass ribbondebug=true as a URL parameter (ex: https://myorg.crm.dynamics.com/main.aspx?appid=c26d1c44-e7c0-4c72-9d6d-0e82768cb5bd&ribbondebug=true). You'll see two new UI features light up. The first is a new button in the top right of the header which lets you inspect the global command bar

Next, each command bar contains a new Command checker button. Note that this shows up at the end of the ribbon, so you may have to click the overflow flyout.

Reference:
https://powerapps.microsoft.com/en-us/blog/introducing-command-checker-for-model-app-ribbons/

Question: 379 CertyIQ

A company uses Microsoft Dataverse rollup fields to calculate insurance exposure and risk profiles for customers. Users report that the system does not update values for the rollup fields when new insurance policies are written. You need to recalculate the value of the rollup fields immediately after a policy is created.
What should you do?

A. Create new calculated fields on the customer entity for insurance exposure and risk. Create a formula to calculate the sum of values from policy records.

B. Change the frequency of the Calculate Rollup Field recurring job from every hour to every five minutes.

C. Create a plug-in that uses the update method for the rollup fields. Configure a step on the Create event for the policy entity for this plug-in.

D. Create a plug-in that uses the CalculateRollupFieldRequest method for the rollup field. Configure a step on the Create event for the policy entity for this plug-in.

Answer: D

Explanation:
Retrieve a calculated rollup column value immediately
Rollup columns support a CalculateRollupField message that developers can use to calculate a rollup column value on demand. The request and response, along with the members, are shown in the following table.

Request/Response	Members
CalculateRollupFieldRequest	`Target`: EntityReference for the record. `FieldName`: String representing the logical name of the column.
CalculateRollupFieldResponse	`Entity`: Entity containing the rollup column and the supporting *<attribute SchemaName>*`_Date` and *<attribute SchemaName>*`_State` columns.

This message is a synchronous operation for just the column identified in the request. If the value of that record is included as part of other rollup columns, the values of those columns won't take the possible value change caused by calling this method into consideration until the regularly scheduled asynchronous jobs that perform those calculations occur.

Question: 380 CertyIQ

You are developing a Power Platform app.
The app must implement a two-way listener to an on-premises system by using Microsoft Azure Service Bus. You create an Azure Service Bus namespace and messaging entity. You must add the shared access policies.
You need to select the permissions for the messaging entity.
Which two permissions should you use? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. System customizer
B. Listen
C. Read
D. Send
E. Manage

Answer: BD

Explanation:
The messaging entity must have the Send policy permission at a minimum. For a two-way relay, the policy must also have the Listen permission.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/walkthrough-configure-azure-sas-integration

Question: 381 CertyIQ

DRAG DROP -
You are creating a model-driven app for a company. Sales team members will use the app to manage leads. The app will interact with the Microsoft Dataverse
Leads table.
You must configure the app to meet the following requirements:
1. If the estimated value for a lead is greater than $10,000 the app must:
- Send an email to a manager.
- Display a field named Sponsor on the lead form.
2. If the estimated value for a lead is greater than $100,000 the app must:
- Send an email to the company's vice president.
- Display the following message as a notification while the lead record is open: High value customer, handle with care.
You need to configure the app. The solution must minimize the use of code.
Which options should you use? To answer, drag the appropriate options to the correct requirements. Each option may be used once, more than once, or not at all.
You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

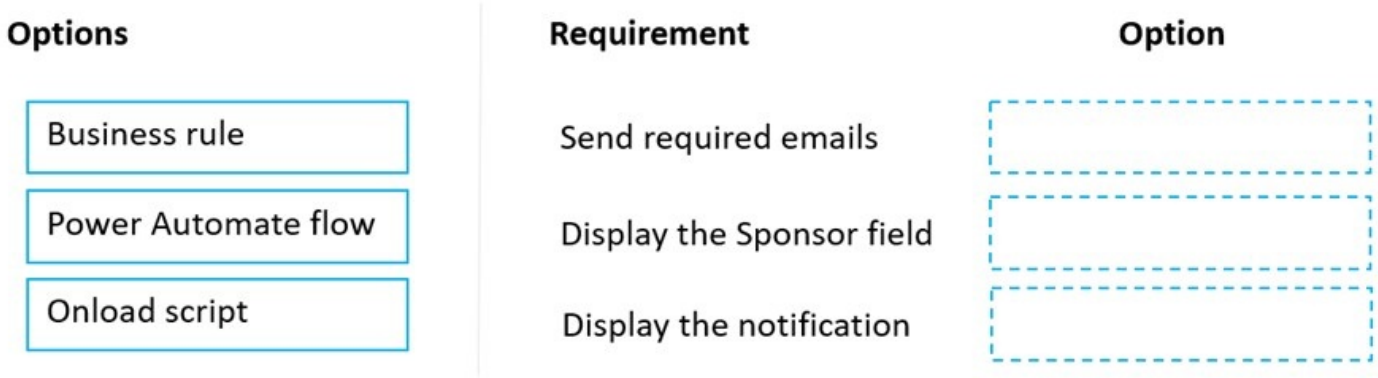

Answer:

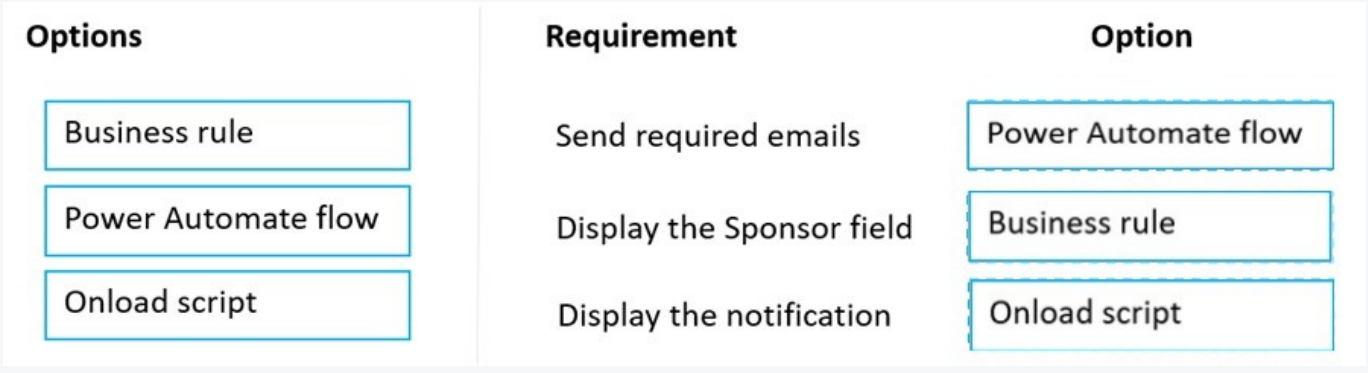

Explanation:
Box 1: Power Automate flow -
Here are the top how-to scenarios for email in Microsoft Power Automate, with examples of how to achieve them.
1. Send a beautifully formatted email.
2. Add an image to your email.
3. Send email to a distribution list.
4. Send automatic replies from a shared mailbox.
5. Change the date and time format of an email.

Box 2: Business rule -

Business Rules in PowerApps -
Set values of a field.
Clear values of a field.

Set field requirement levels.
Show or hide fields.
Enable or disable fields.
Validate data and show error messages.
Create business recommendations based on business intelligence.

Box 3: Onload script -
Display the following message as a notification while the lead record is open: High value customer, handle with care.

Reference:
https://docs.microsoft.com/en-us/power-automate/email-customization
https://imperiumdynamics.com/blog/business-rules-in-powerapps.html

Question: 382 CertyIQ

HOTSPOT -
Contoso, Ltd. has a database that stores proprietary stock market information that the company has accumulated over many years.
You create a RESTful service for the company that exposes specific information about stocks. You must make the service available to the company's brokers. The service must be certified by Microsoft.
You need to create a custom connector for the service APIs.
How should you configure the connector? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

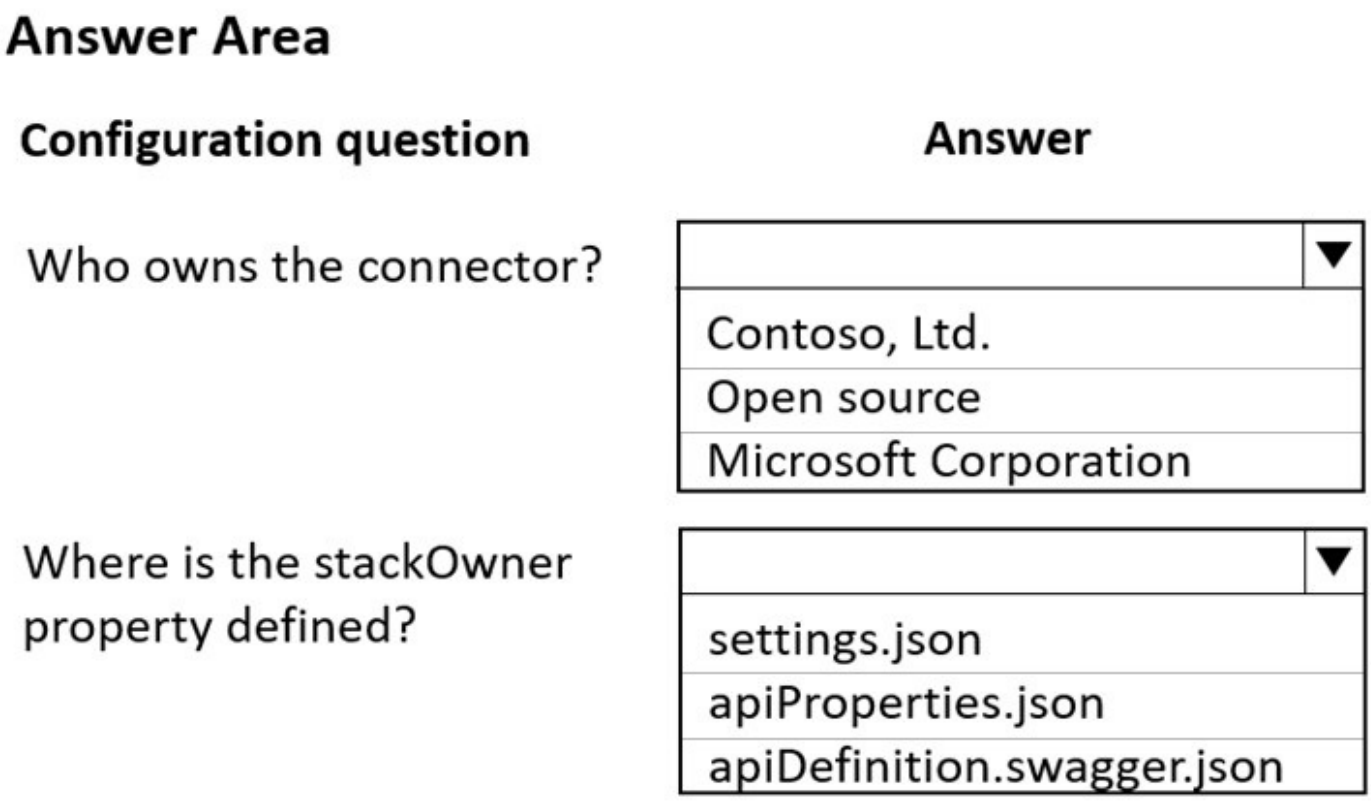

Answer:

Answer Area

Configuration question	Answer
Who owns the connector?	Contoso, Ltd. / Open source / Microsoft Corporation
Where is the stackOwner property defined?	settings.json / apiProperties.json / apiDefinition.swagger.json

Explanation:
Box 1:Contoso, Ltd.
publisher and stackOwner properties
"publisher" is the name of your company or organization. Provide the full company name (for example, "Contoso Corporation"). This must be in alphanumeric format.
"stackOwner" is the owning company or organization of the back-end service stack that the connector is connecting to. This must be in alphanumeric format

Box 2: apiProperties.json -
The publisher and stackOwner properties exist as top-level properties within the apiProperties.json file.

Reference:
https://docs.microsoft.com/en-us/connectors/custom-connectors/certification-submission

Question: 383 CertyIQ

You are troubleshooting a new canvas app.
Users report the app loads slowly. You use the Monitor tool to view various events being performed in the app.
Events performed in the app do not have formula details.
You need to enable formulas to be included with the Monitor tool events.
What should you do?

A. Add the Microsoft Azure Application Insights data source to the canvas app
B. After each event, implement the trace function within the canvas app
C. Turn on the Debug published app setting in the canvas app
D. Validate the Application Insights instrumentation key has been populated in the app object's properties within the canvas app

Answer: C

Explanation:

Setting: Debug published app -
If you want to view the source expressions in Monitor for the published app, you need to turn on the setting to publish the expressions with the app. This setting is similar to generating a debug file in traditional development. Publishing source expressions with your app is optional. Even when this setting is off, you'll be able to see the events happening in your app, but you won't be able to map these events to specific expressions or formulas.
To enable this setting, go to File > Settings, and then turn on Debug published app.

Reference:
https://docs.microsoft.com/en-us/power-apps/maker/monitor-canvasapps

Question: 384 CertyIQ

DRAG DROP -
You have several model-driven apps.
You must ensure that app creators and system administrators can customize the apps. You must follow the principle of least privilege.
You need to assign the permissions that are needed for app creators and system administrators.
Which security roles should you assign? To answer, drag the appropriate roles to the correct requirements. Each role may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point
Select and Place:

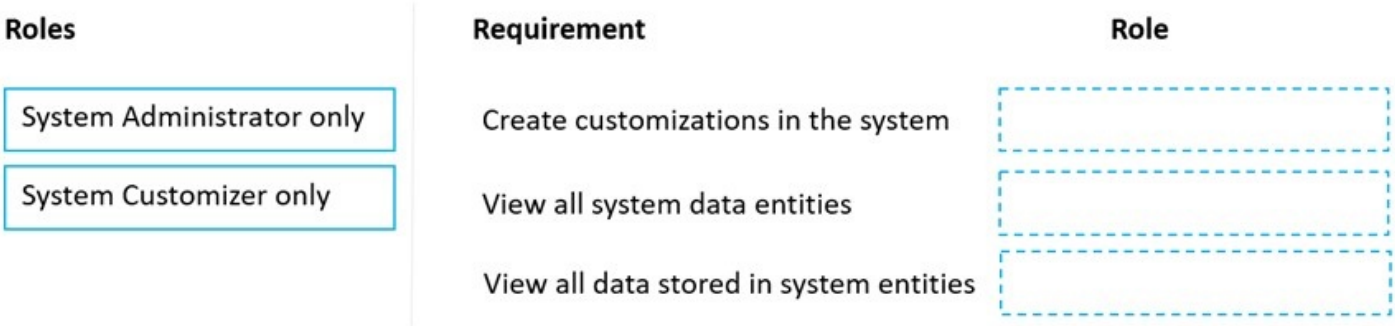

Answer:

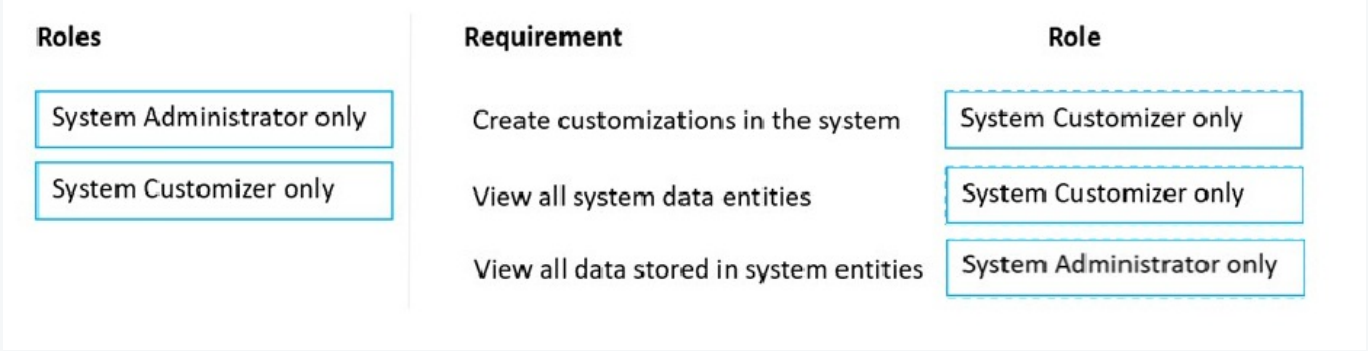

Explanation:

Box 1: System Customizer -

System Customizer - Create (self), Read (self), Write (self), Delete (self), Customizations

Has full permission to customize the environment. However, can only view records for environment tables that they create.

Box 2: System Customizer -

System Administrator has Organization level access to all system (Out Of Box) entities while System Customizer has only User level access to all system entities. While both System Administrator and System Customizer have Organization level access to all custom entities.

Box 3: System Administrator only

Reference:

https://docs.microsoft.com/en-us/power-apps/maker/model-driven-apps/share-model-driven-app

Question: 385 CertyIQ

DRAG DROP -
You are creating a plug-in for a Power Apps app for the human resources department at the company. The app will be used to process new employees and help employees apply for an identification card.
You have the following requirements:
- Applications must not be marked as complete if the employee has not completed mandatory drug screening.
- Add logic that stores the name of the human resources team member that approves an application. This step must be completed before an ID card is created for the applicant.
- Successful validation and ID card printing.

You need to configure the event pipeline.
Select and Place:

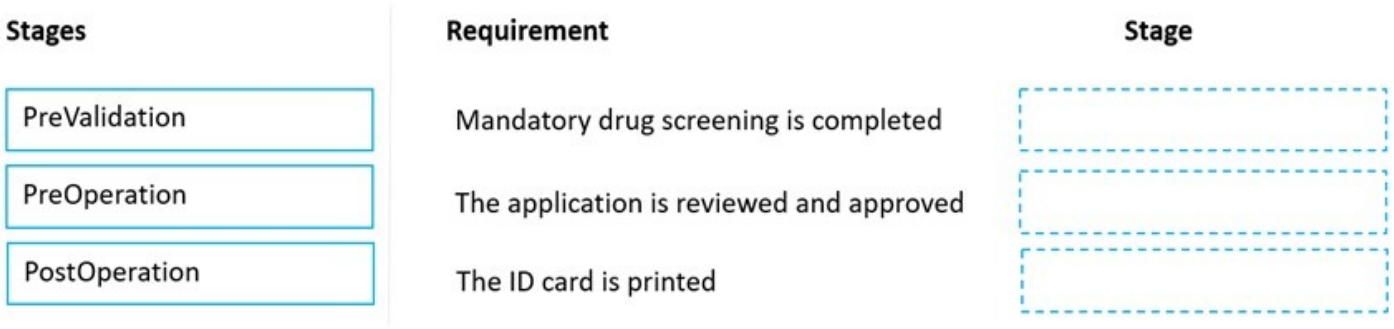

Answer:

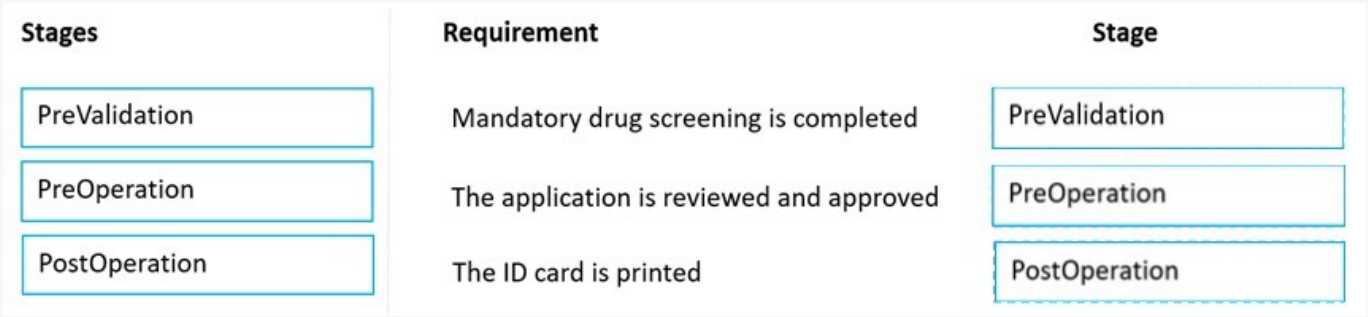

Explanation:
Box 1: PreValidation -
Applications must not be marked as complete if the employee has not completed mandatory drug screening.
If you want to change any values for an entity included in the message, you should do it here.
Pre-validation stage executes outside Database Transaction which will not rollback the entire operations written in the plugin if there is any runtime error occurs in one operation. This provides an opportunity to include logic to cancel the operation before the database transaction.

Box 2: PreOperation -
Add logic that stores the name of the human resources team member that approves an application. This step

must be completed before an ID card is created for the applicant.
Pre-Operation stage executes inside database transaction due to which any runtime error occurs in a single operation in the plugin will rollback entire operations which are part of the plugin.

Box 3: PostOperation -
Successful validation and ID card printing.
Post Operation - Plug-ins registered in this stage are executed within the database transaction. Plugin will run after the values have been inserted/changed on the database

Reference:
https://softchief.com/2021/03/23/prevalidation-v-s-preopration-in-dynamics-365/
http://mscrmtechie.blogspot.com/2016/02/plugin-stages-pre-validation-pre.html

Question: 386 CertyIQ

DRAG DROP -
You are developing a Power Platform solution. You are modifying a business process flow. You have created a new radial knob for the Total amount value and have added the radial knob to the form.
The Total amount value must be entered at initiation before moving to the next step.
You need to configure the business process flow.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

Actions	Answer Area
Create a new solution and add the business process flow and export the solution. Delete the solution after export.	
Open the business process in the Business Process Flow designer and select Activate/Update.	
Add another step to the business process flow.	
Import the solution into Dataverse.	
Delete the business process flow.	
Copy custom control configurations to the business process flow FormXML for the related entity form.	

Answer:

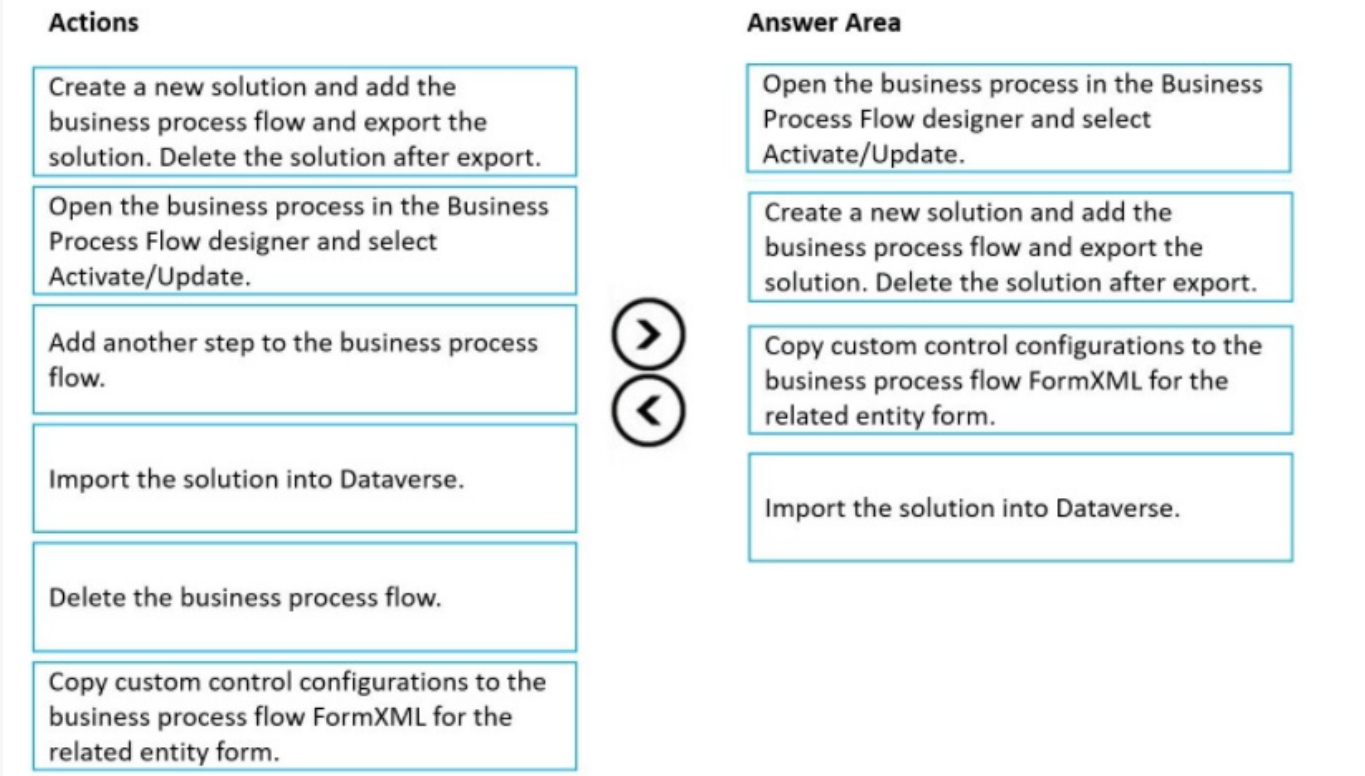

Explanation:

1.Open the business process in the Business Process Flow designer and select Activate/Update:

Before exporting the solution, the business process flow must be active or updated to ensure the latest changes are included. Using the **Business Process Flow designer**, you can activate or update the flow to reflect changes.

2.Create a new solution and add the business process flow and export the solution. Delete the solution after export:

To move the business process flow and its configurations, you must package it into a solution. Once the solution is exported, it is no longer needed in the current environment, and you can delete it to avoid redundancy.

3.Copy custom control configurations to the business process flow FormXML for the related entity form:

The FormXML is a key part of the solution's metadata and includes control configurations. To customize the business process flow, you need to manually update the FormXML file by adding the required configurations for the related entity form.

4.Import the solution into Dataverse:

After making the necessary updates to the FormXML, the solution is imported back into Dataverse. This step deploys the updated business process flow along with the customizations.

Reference:

https://powerusers.microsoft.com/t5/Power-Automate-Community-Blog/Preview-Custom-Controls-in-Business-Process-Flows/ba-p/263237

Question: 387

CertyIQ

DRAG DROP -

You need to select connectors for the app.
Which types of connectors should you use? To answer, drag the appropriate connectors to the correct requirements. Each connector may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

Answer Area

Connectors	Requirement	Connectors
Create a custom connector.	View full registration records.	
Use an AppSource connector.	View customer names.	
Use a native application function.	View daily registrations.	
Create a connector with a Postman collection.		

Answer:

Answer Area

Connectors	Requirement	Connectors
Create a custom connector.	View full registration records.	Create a custom connector.
Use an AppSource connector.	View customer names.	Use an AppSource connector.
Use a native application function.	View daily registrations.	Use a native application function.
Create a connector with a Postman collection.		

Explanation:
Box 1: Create a custom connector
A custom connector is a wrapper around a REST API (Logic Apps also supports SOAP APIs) that allows Logic Apps, Power Automate, or Power Apps to communicate with that REST or SOAP API.
Box 2: Use an AppSource connector
You can only retrieve the Customer, UnifiedActivity, and Segments entities through the Power Apps connector. Other entities are shown because the underlying connector supports them through triggers in Power Automate.
Scenario: Customer information is stored in the Accounts entity.
Box 3: Use a native application function
You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.

Reference:
https://docs.microsoft.com/en-us/connectors/custom-connectors/ https://docs.microsoft.com/en-us/dynamics365/customer-insights/audience-insights/export-power-apps

Question: 388 CertyIQ

You need to handle errors in UpdateRecord.js.
Which code segment should you add at line UR06?

A. catch(error) alert("Caught error: " + error.message);
B. Exception exception = Server.GetLastError() ; if(exception != null)

C. catch(exception e) console.writeline(e)

D. function (error) console.log(error.message)

Answer: D

Explanation:

Missing image shows the intention to update the record using xrm.webapi

https://encrypted-tbn0.gstatic.com/images?
q=tbn:ANd9GcSe_qy4o0O_2s3mgY9ZtYn9r1nuxKKDtWsbyr5Wm_SsUjNvkPTjzZ8uFcqzCN9QF4CX5xc&usqp=CAU

Syntax:

// define the data to update a record

var data =

"": "/opportunities(61a0e5b9-88df-e311-b8e5-6c3be5a8b200)"

// update the record

Xrm.WebApi.updateRecord("task", "5531d753-95af-e711-a94e-000d3a11e605", data).then(

function success(result)

console.log("Task updated");

// perform operations on record update

,

function (error)

console.log(error.message);

// handle error conditions

);

Question: 389 CertyIQ

You need to configure the system to support automation for referrals.
What are two possible ways to achieve the goal? Each correct selection presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Azure Function that uses the Discovery service

B. workflow extension

C. Azure Function that uses a listener

D. Power Automate flow

Answer: CD

Explanation:

(Azure Function and Power Automate)

Referrals are submitted by a marketing company in a Excel file that is uploaded to a FTP.

We can't add external trigger to workflow.

Question: 390 CertyIQ

DRAG DROP -
You need to determine how to implement rules for players who register for a soccer tournament.
Which business rule actions should you use? To answer, drag the appropriate business rule actions to the correct fields. Each business rule action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

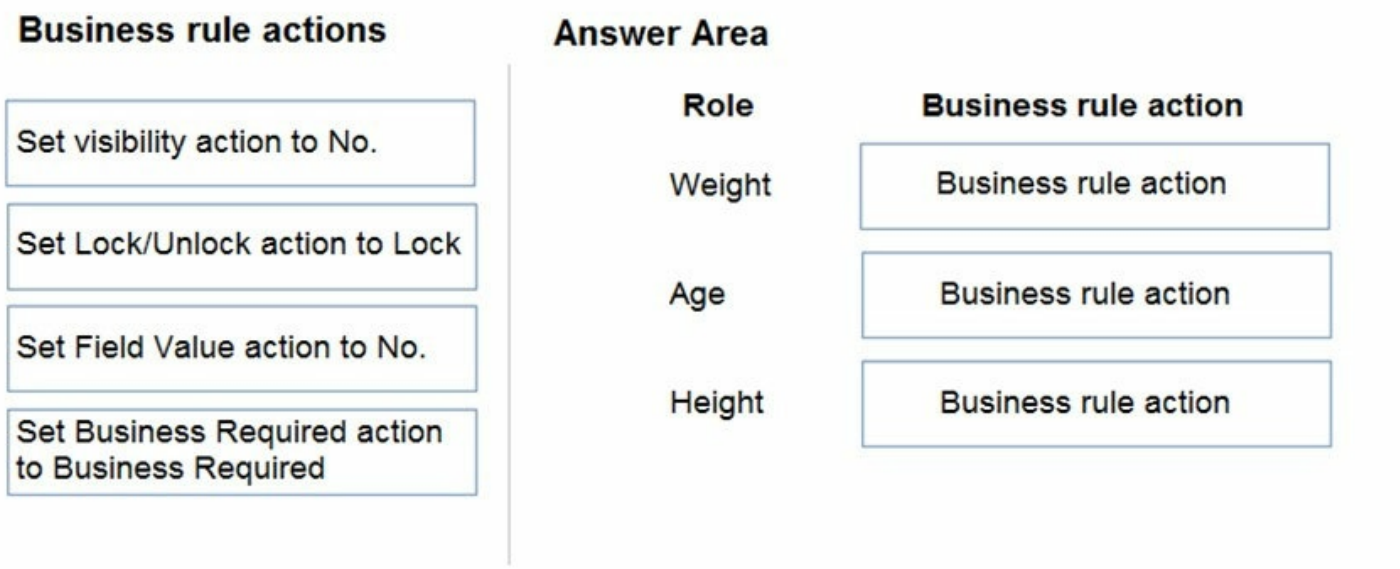

Answer:

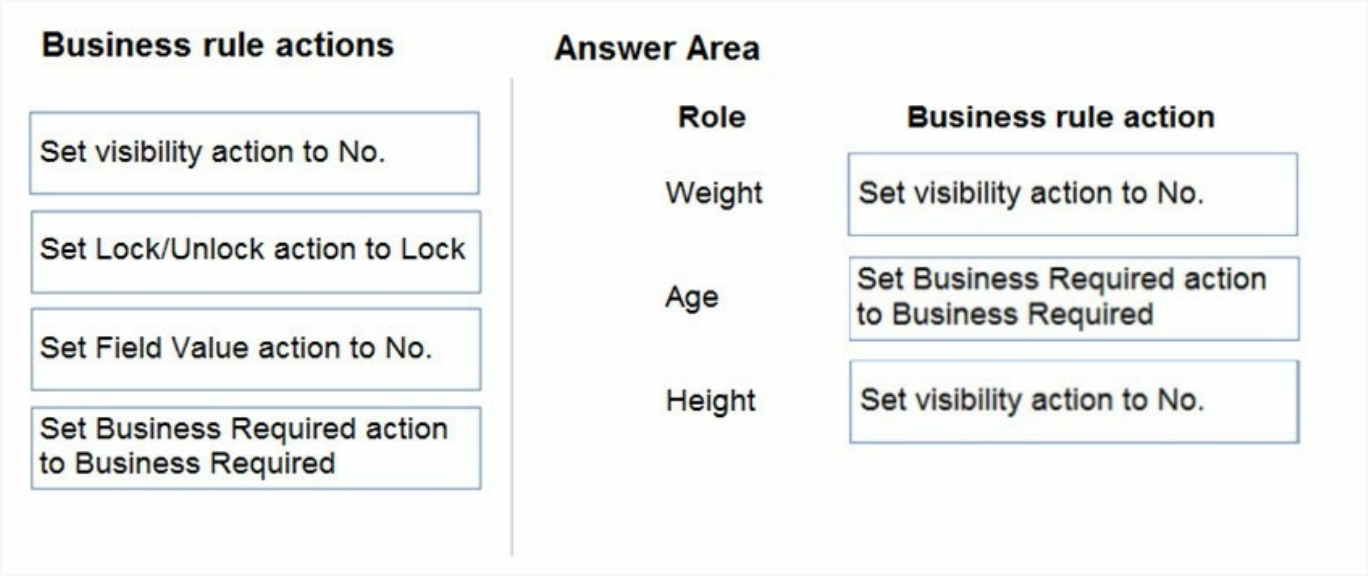

Explanation:
Scenario:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Weight: Set visibility action to No.
Age: Set Business Required action to Business required
Height: Set visibility action to No.

Question: 391 CertyIQ

DRAG DROP -
You need to select a process to create each function.
Which process should you use? To answer, drag the appropriate processes to the correct functions. Each process may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

Answer Area

Processes	Function	Process
Power Automate	Create a Slack notification from a lead.	
Business rule	Change the priority field.	
Business process flow	Ensure appropriate information is added to leads	

Answer:

Answer Area

Processes	Function	Process
Power Automate	Create a Slack notification from a lead.	Power Automate
Business rule	Change the priority field.	Business rule
Business process flow	Ensure appropriate information is added to leads	Business process flow

Explanation:
Box 1: Power Automate -
Ensure that notifications are sent to the sales team when a lead is added by using Slack
Power Automate is a service that helps you create automated workflows between your favorite apps and services to synchronize files, get notifications, collect data, and more.

Box 2: Business rule -
By combining conditions and actions, you can do any of the following with business rules:

Set column values -

Clear column values -

Set column requirement levels -

Show or hide columns -

Enable or disable columns -
Validate data and show error messages
Create business recommendations based on business intelligence.

Box 3: Business process flow -
Ensure that leads have a review stage added to the sales process.
Use business process flows to define a set of steps for people to follow to take them to a desired outcome.
These steps provide a visual indicator that tells people where they are in the business process.

Reference:
https://docs.microsoft.com/en-us/power-automate/
https://docs.microsoft.com/en-us/power-apps/maker/data-platform/data-platform-create-business-rule
https://docs.microsoft.com/en-us/power-automate/business-process-flows-overview

Question: 392 CertyIQ

You need to add the script for the registration form event handling.
Which code segment should you use?

A. formContext.data.entity.addOnSave(myFunction)
B. formContext.data.addOnLoad(myFunction)
C. formContext.data.removeOnLoad(myFunction)
D. addOnPreProcessStatusChange
E. formContext.data.isValid()

Answer: B

Explanation:

Scenario: Information about upcoming tournaments must be pre-located into the registration form when the registration form loads. addOnLoad adds event handlers to the Subgrid OnLoad event event.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/grids/gridcontrol/addonload

Question: 393 CertyIQ

You need to add the script to populate event data on the form.
Which code segment should you use?

A. formContext.data.addOnLoad(myFunction)

B. formContext.data.removeOnLoad(myFunction)

C. formContext.data.entity.addOnSave(myFunction)

D. addOnPreProcessStatusChange

E. formContext.data.isValid()

Answer: A

Explanation:

formContext.data.addOnLoad(myFunction)

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/formcontext-data/addonload

Question: 394 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.
The company is organized into the following divisions:
Baseball
Hockey
Soccer
Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.
Current environment -
Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.
The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Requirements -
Tournaments -
Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.
Registration form -
You must create a form to allow players to register for tournaments. The registration form must meet the following

requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.
Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.
The form must include a custom button that sends an email confirmation to the player after the player registers.
The button must not be visible until after the form is saved.
Security -
The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.
Data automation -
Customer name must be added to Dynamics 365 Finance automatically after it is entered.

- You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
- You must implement mechanisms to handle all code-related errors.
- When a customer record is updated, the system must look up the account number for the customer in the accounting system.
- Referrals must be imported into the system as soon as they are available.

Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question You need to handle errors in UpdateRecord.js.
Which code segment should you add at line UR04?

A. catch(error) alert("Caught error: " + error.message);

B. Exception exception = Server.GetLastError(); if(exception != null)

C. Catch(exception e) console.writeline(e)

D. function (error) console.log(error.message)

Answer:

A

Explanation:

The catch statement lets you handle the error.

Syntax: catch(err)

Block of code to handle errors -

Reference:

https://www.w3schools.com/js/js_errors.asp

Question: 395 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.
The company is organized into the following divisions:
Baseball
Hockey
Soccer
Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.
Current environment -
Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.
The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Requirements -
Tournaments -
Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.
Registration form -
You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.
Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.
The form must include a custom button that sends an email confirmation to the player after the player registers. The button must not be visible until after the form is saved.
Security -
The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.
Data automation -
Customer name must be added to Dynamics 365 Finance automatically after it is entered.

- You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
- You must implement mechanisms to handle all code-related errors.
- When a customer record is updated, the system must look up the account number for the customer in the accounting system.
- Referrals must be imported into the system as soon as they are available.

Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question You need to configure the system to support automation for referrals.
What are two possible ways to achieve the goal? Each correct selection presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Azure Function that uses the Discovery service

B. workflow extension

C. Azure Function that uses a listener

D. Power Automate flow

Answer: CD

Explanation:
C: You can use the File watcher function in Azure function app to process coping of files from source to destination.
Note: The FileSystemWatcher class listens to the file system change notifications and raises events when a directory, or file in a directory, changes.
Use FileSystemWatcher to watch for changes in a specified directory. You can watch for changes in files and subdirectories of the specified directory. You can create a component to watch files on a local computer, a network drive, or a remote computer.
D: Power Automate is a service that helps you create automated workflows between your favorite apps and services to synchronize files, get notifications, collect data, and more.
Note: The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Referrals must be imported into the system as soon as they are available.

Reference:
https://docs.microsoft.com/en-us/dotnet/api/system.io.filesystemwatcher https://docs.microsoft.com/en-us/power-automate/

Question: 396 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Background -

Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.

The company is organized into the following divisions:

Baseball

Hockey

Soccer

Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.

Current environment -

Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.

The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.

Requirements -

Tournaments -

Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.

Registration form -

You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.

Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.

The form must include a custom button that sends an email confirmation to the player after the player registers. The button must not be visible until after the form is saved.

Security -

The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.

Data automation -

Customer name must be added to Dynamics 365 Finance automatically after it is entered.

- You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
- You must implement mechanisms to handle all code-related errors.
- When a customer record is updated, the system must look up the account number for the customer in the accounting system.
- Referrals must be imported into the system as soon as they are available.

Issues -

Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question DRAG DROP -
You need to determine how to implement rules for players who register for a soccer tournament.
Which business rule actions should you use? To answer, drag the appropriate business rule actions to the correct fields. Each business rule action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

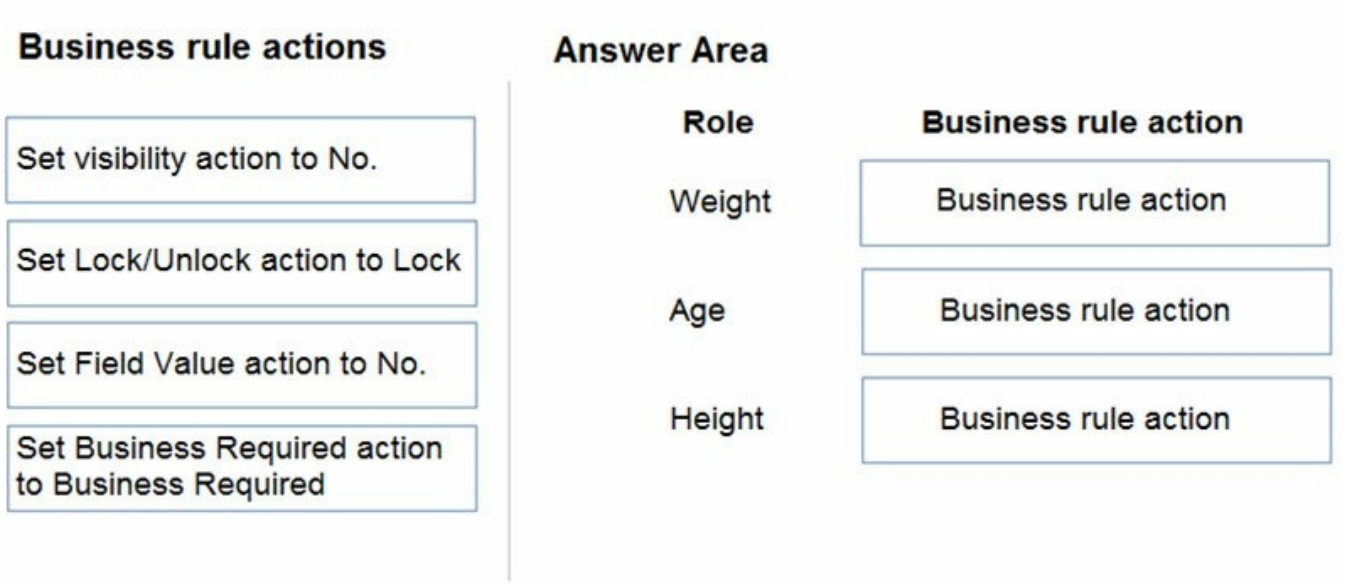

Answer:

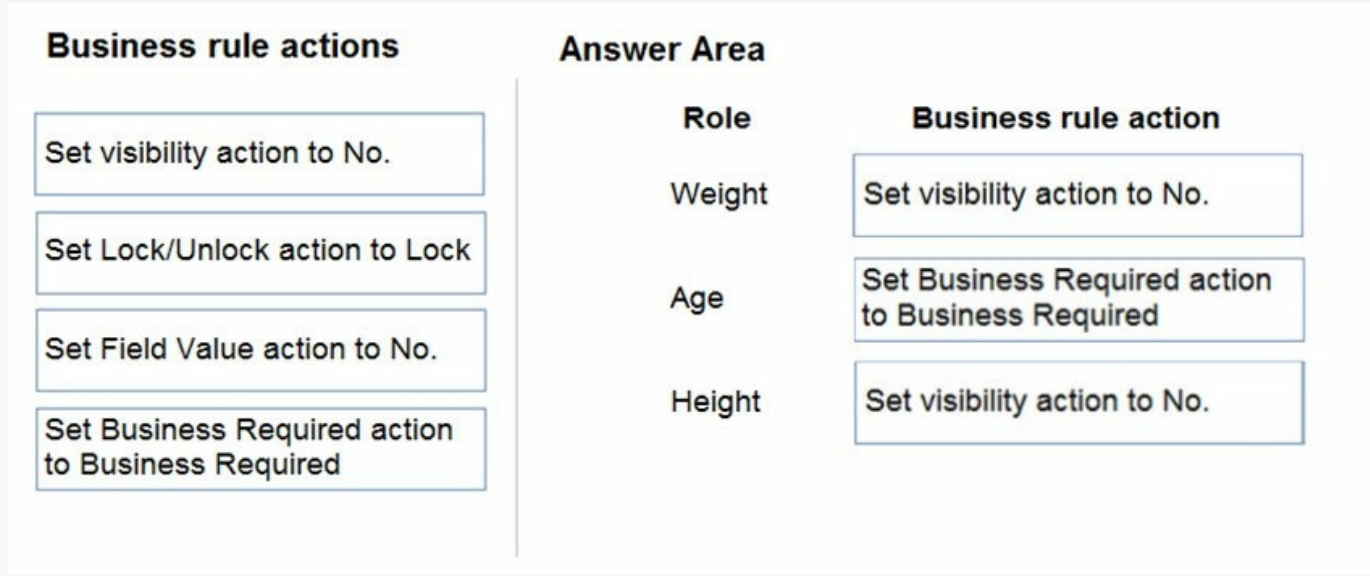

Explanation:

Scenario:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Weight: Set visibility action to No.

Age: Set Business Required action to Business required

Height: Set visibility action to No.

Question: 397

CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage

your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.
Current Environment -
The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.
The IT department performs all system customizations.
Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -
Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.
Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses an API key for authentication.
Driving record verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses a username and password for authentication. • The password expires periodically and must be changed by a member of the HR department.
Background check	• The company has provided a WSDL document to describe its SOAP-based API. • An SSL certification has been issued to use for authentication.

Requirements. General -
This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft
Azure resources is approved for use if necessary.
Requirements. Address verification
The system must perform address validation any time an address is added or updated in the model-driven app user interface.
Validation must not be performed unless an address is changed.
Users must initiate address validation by selecting a button on the command bar.
The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.
The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.
The user must re-enter the address information to trigger validation.
Requirements. Driving record verification
Driving record verification must only be performed once for each candidate.
Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.
The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.

Requirements. Background check verification
Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
AV01 var parameters = {};
AV02 parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
AV03 . . .
AV04 var contoso_ValidateAddressRequest = {
AV05     Line1In: parameters.Line1In,
AV06    . . .
AV07    getMetadata: function () {
AV08      return {
AV09        boundParameter: null,
AV10        parameterTypes: {
AV11          "Line1In": {
AV12            "typeName": "Edm.String",
AV13            "structuralProperty": 1
AV14          },
AV15          . . .
AV16        },
AV17        operationType: 0,
AV18        operationName: "northwind_ValidateAddress"
AV19      };
AV20    }
AV21 };

AV22 Xrm.WebApi.online.execute(ACTIONNAME).then(
AV23   function success(result) {
AV24     . . .
AV26   },
AV27   function error(error) {
AV28     . . .
AV29   }
AV30 );
```

Question You need to connect to the background check API.
Which mechanism should you use?

A. JavaScript

B. Flow with a custom connector

C. Azure Function

D. Plug-in

Answer: B

Explanation:
While Azure Logic Apps, Microsoft Power Automate, and Microsoft Power Apps offer over 325+ connectors to connect to Microsoft and verified services, you may want to communicate with services that aren't available as prebuilt connectors. Custom connectors address this scenario by allowing you to create (and even share) a connector with its own triggers and actions.
Note:
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Reference:
https://docs.microsoft.com/en-us/connectors/custom-connectors/

Question: 398

CertyIQ

You need to reduce the number of Azure consumption API calls for User2.
Which markup segment should you use?
A.

```
<policies>
  <inbound>
    <base />
    <rate-limit-by-key calls="100"
    renewal-period= "30"
    increment-condition= "@(context.Response.StatusCode = = 200)"
    counter-key= "@(context.Request.IpAddress)"/>
  </inbound>
  <outbound>
    <base />
  </outbound>
</policies>
```

B.

```
<policies>
  <inbound>
    <base />
    <rate-limit calls="1000" renewal-period= "90" />
  </inbound>
  <outbound>
    <base />
  </outbound>
</policies>
```

C.

```
<policies>
  <inbound>
    <base />
    <rate-limit-by-key calls="1"
    renewal-period= "60"
    increment-condition= "@(context.Response.StatusCode = = 200)"
    counter-key="@(context.Request.IpAddress)"/>
  </inbound>
  <outbound>
    <base />
  </outbound>
</policies>
```

praw709528

D.

```
<policies>
  <inbound>
    <base />
    <quota calls="100" bandwidth="400" renewal-period="30" />
  </inbound>
    <outbound>
        <base />
  </outbound>
</policies>
```

praw709528

Answer: C

Explanation:

Scenario: User2 reports that Azure consumption for API calls has increased significantly to 100 calls per minute in the last month.

Example:

In the following example, the rate limit of 10 calls per 60 seconds is keyed by the caller IP address. After each policy execution, the remaining calls allowed in the time period are stored in the variable remainingCallsPerIP.

<policies>
<inbound>
<base />
<rate-limit-by-key calls="10"
renewal-period="60"
increment-condition="@(context.Response.StatusCode == 200)"
counter-key="@(context.Request.IpAddress)"
remaining-calls-variable-name="remainingCallsPerIP"/>
</inbound>
<outbound>
<base />
</outbound>
</policies>

Note: The rate-limit-by-key policy prevents API usage spikes on a per key basis by limiting the call rate to a specified number per a specified time period. The key can have an arbitrary string value and is typically provided using a policy expression. Optional increment condition can be added to specify which requests should be counted towards the limit. When this call rate is exceeded, the caller receives a 429 Too Many Requests response status code.

Incorrect Answers:

A: With renewal-period="30" 200 calls/minute would be allowed.

B: This would increase the calls/minute limit to 1000.

Reference:
https://docs.microsoft.com/en-us/azure/api-management/api-management-access-restriction-policies

Question: 399 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.
The company is organized into the following divisions:
Baseball
Hockey
Soccer
Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.
Current environment -
Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.
The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Requirements -
Tournaments -
Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.
Registration form -
You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.
Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.
The form must include a custom button that sends an email confirmation to the player after the player registers. The button must not be visible until after the form is saved.
Security -
The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.
Data automation -
Customer name must be added to Dynamics 365 Finance automatically after it is entered.

- You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
- You must implement mechanisms to handle all code-related errors.
- When a customer record is updated, the system must look up the account number for the customer in the accounting system.
- Referrals must be imported into the system as soon as they are available.

Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question DRAG DROP -
You need to address the user interface issues.
What should you do? To answer, drag the appropriate actions to the correct issues. Each action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

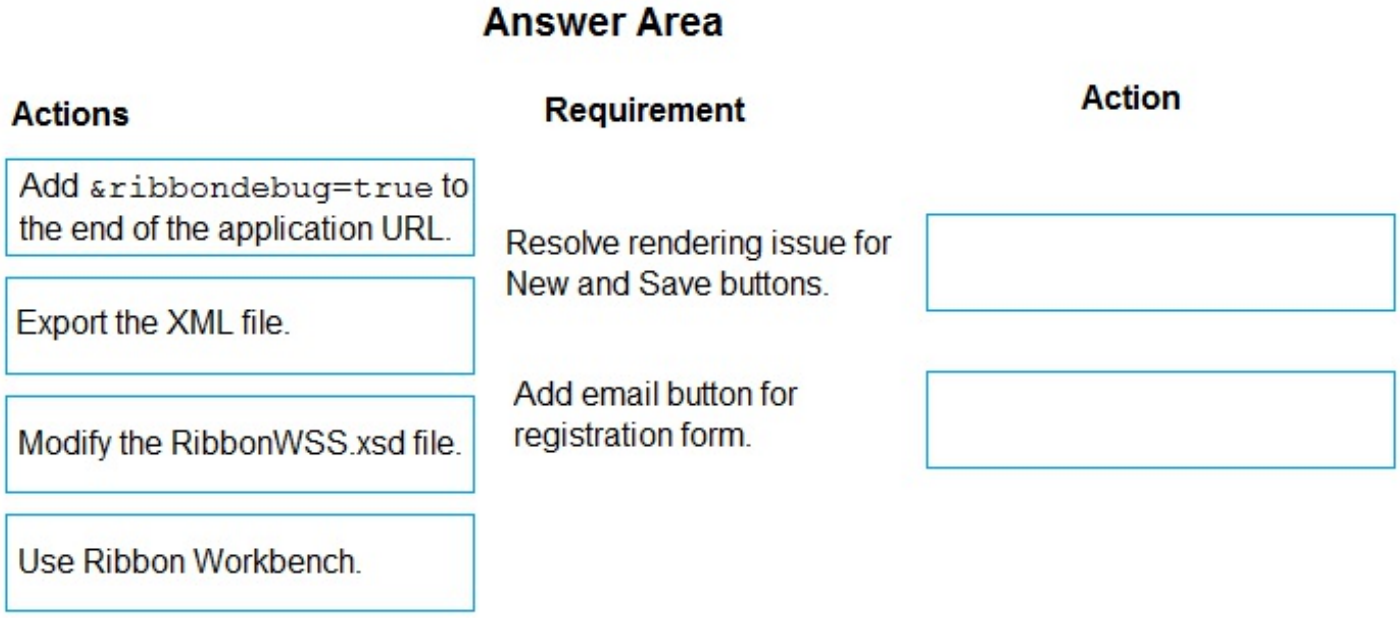

Answer:

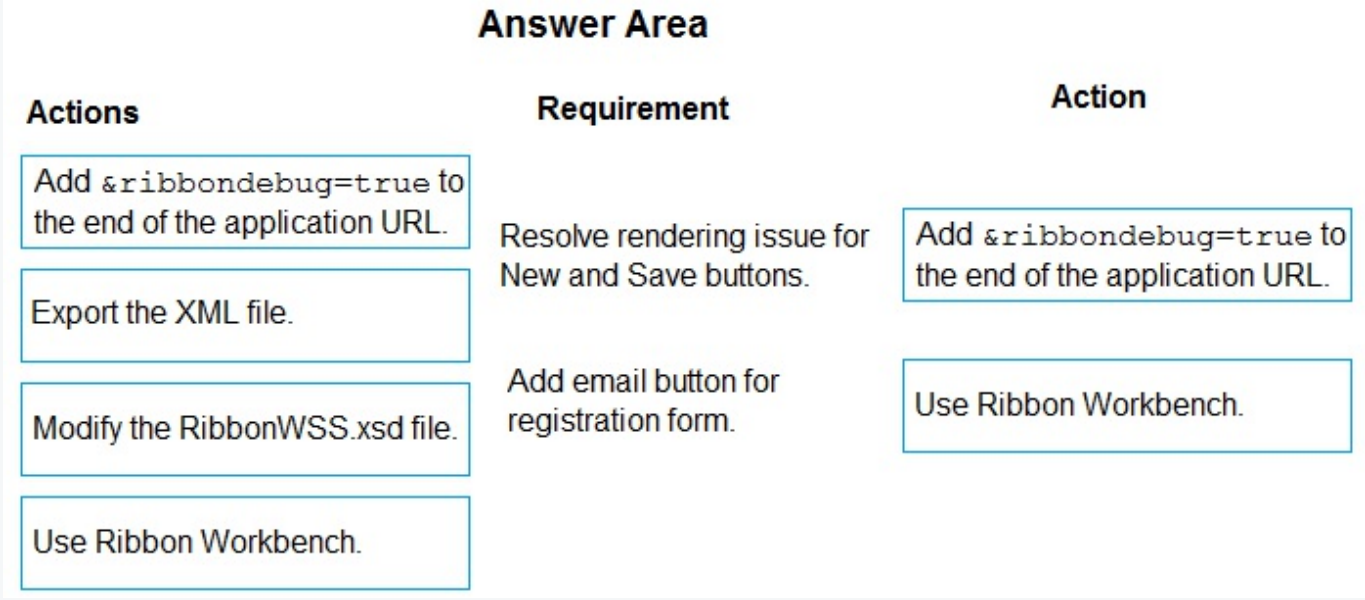

Explanation:

Box 1: Add &ribbondebug=true to the end of the application URL.
Scenario: The captions for the New and Save buttons do not render properly on the form.
You can use the an in-app tool called the Command Checker to inspect the ribbon component definitions to help us determine why the button is not rendered correctly.
To enable the Command Checker, you must append a parameter &ribbondebug=true to your D365 application URL. For example: https:// yourorgname.crm.dynamics.com/main.aspx?appid=9ab590fc-d25e-ea11-a81d-000d3ac2b3e6&ribbondebug=true

Box 2: Use the Ribbon Workbench -

Adding Buttons to Ribbons -
1. Download and install Ribbon Workbench.
2. Select a suitable ICON for your button.
3. Create a solution.
4. Edit the button in Ribbon Workbench.
5. Publish and test.

Reference:
https://support.microsoft.com/en-us/help/4552163/ribbon-troubleshooting-guide
https://neilparkhurst.com/2015/10/19/adding-buttons-to-ribbons/

Question: 400 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.
The company is organized into the following divisions:
Baseball
Hockey
Soccer
Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.
Current environment -
Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.
The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Requirements -
Tournaments -
Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.

Registration form -
You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.
Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.
The form must include a custom button that sends an email confirmation to the player after the player registers.
The button must not be visible until after the form is saved.
Security -
The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.
Data automation -
Customer name must be added to Dynamics 365 Finance automatically after it is entered.

You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
You must implement mechanisms to handle all code-related errors.
When a customer record is updated, the system must look up the account number for the customer in the accounting system.
Referrals must be imported into the system as soon as they are available.
Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question You need to add the script for the registration form event handling.
Which code segment should you use?

A. formContext.data.entity.addOnSave(myFunction)
B. formContext.data.addOnLoad(myFunction)
C. formContext.data.removeOnLoad(myFunction)
D. addOnPreProcessStatusChange
E. formContext.data.isValid()

Answer:

B

Explanation:

Scenario: Information about upcoming tournaments must be pre-located into the registration form when the registration form loads. addOnLoad adds event handlers to the Subgrid OnLoad event event.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-

apps/clientapi/reference/grids/gridcontrol/addonload

Question: 401 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.
The company is organized into the following divisions:
Baseball
Hockey
Soccer
Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.
Current environment -
Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.
The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Requirements -
Tournaments -
Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.
Registration form -
You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.
Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.
The form must include a custom button that sends an email confirmation to the player after the player registers. The button must not be visible until after the form is saved.
Security -
The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.
Data automation -
Customer name must be added to Dynamics 365 Finance automatically after it is entered.

- You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
- You must implement mechanisms to handle all code-related errors.
- When a customer record is updated, the system must look up the account number for the customer in the accounting system.
- Referrals must be imported into the system as soon as they are available.

Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question You need to add the script to populate event data on the form.
Which code segment should you use?

A. formContext.data.addOnLoad(myFunction)
B. formContext.data.removeOnLoad(myFunction)
C. formContext.data.entity.addOnSave(myFunction)
D. addOnPreProcessStatusChange
E. formContext.data.isValid()

Answer: A

Explanation:
data.addOnLoad adds a function to be called when form data is loaded.
Syntax: formContext.data.addOnLoad(myFunction)
The function to be executed when the form data loads. The function will be added to the bottom of the event handler pipeline.
Incorrect:
Not D: Wrong syntax. Need a function parameter.
Note: addOnPreProcessStatusChange adds a function as an event handler for the OnPreProcessStatusChange event so that it will be called before the business process flow status changes.

Syntax: Syntax - formContext.data.process.addOnPreProcessStatusChange(myFunction);
The function to be executed when the business process flow status changes. The function will be added to the start of the event handler pipeline.
Not E: IsValid() gets a boolean value indicating whether all of the form data is valid. This includes the main table and any unbound columns. If the form has empty, required columns on it, control-level error notifications is shown.
Description: true if all of the form data is valid; false otherwise.

Reference:
https://docs.microsoft.com/en-us/power-apps/developer/model-driven-apps/clientapi/reference/formcontext-data/addonload https://docs.microsoft.com/en-us/power-apps/developer/model-driven-apps/clientapi/reference/formcontext-data-process/eventhandlers/addonpreprocessstatuschange https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/formcontext-data/isvalid

Question: 402 CertyIQ

You need to improve warehouse counting efficiency.
What should you create?

A. a flow that updates the warehouse counts as the worker performs the count
B. a model-driven app that allows the user to key in inventory counts
C. A Power BI dashboard that shows the inventory counting variances
D. a canvas app that scans barcodes to allow a warehouse worker to select inventory counts

Answer: D

Explanation:
Scenario: Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.

Question: 403

CertyIQ

You need to replace the bicycle inspection forms.
Which two solutions should you use? Each answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. a flow that maps inspection data to Dynamics 365 Field Service
B. a logic app that guides the technician through the inspection
C. a canvas app that guides the technician through the inspection
D. a model-driven app based on customer service entities

Answer: AC

Explanation:

A. a flow that maps inspection data to Dynamics 365 Field Service

C. a canvas app that guides the technician through the inspection

Question: 404

CertyIQ

HOTSPOT -
You need to correct the portal query issues.
Which code should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Portal issue	Code change
New registrations	GET [Organization URI]/api/data/v9.1/accounts?$select=name, sport GET [Organization URI]/api/data/v9.1/accounts?$apply=name, sport GET [Organization URI]/api/data/v9.1/accounts?$filter=name, sport
All registered users	$apply=groupby(sport ne null) $filter = name, sport $orderby = name, sport

Answer:

Answer Area

Portal issue	Code change
New registrations	GET [Organization URI]/api/data/v9.1/accounts?$select=name, sport GET [Organization URI]/api/data/v9.1/accounts?$apply=name, sport GET [Organization URI]/api/data/v9.1/accounts?$filter=name, sport
All registered users	$apply=groupby(sport ne null) $filter = name, sport $orderby = name, sport

Explanation:

Scenario: The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Box 1: GET ..$select=name, sport

Use select to return only the Name and Sport fields.

Box 2: $apply(groupby(sport ne null)

Categorize by division, that is to sports.

Question: 405 CertyIQ

You need to ensure that Adventure Works Cycles can track information from visitors to bike fairs.
What should you create?

A.a Power Automate flow that connects with the bike fair Power Apps app to create a lead in Dynamics 365 Sales

B.a Power Automate flow that generates a new customer record in SharePoint.

C.a Power Automate flow to capture customer data from the bike fair Power Apps app in SharePoint and create a lead in Microsoft Teams.

D.a business process flow in Dynamics 365 Sales for capturing leads.

Answer: A

Explanation:
Scenario:
✑ Qualified leads must be collected from local bike fairs.
✑ Adventure Works Cycles uses a Power Apps app for local bike fairs to attract new customers.
By using a Dynamics 365 connector, you can create flows that initiate when an event occurs in Dynamics 365, or some other service, which then performs an action in Dynamics 365, or some other service.
In Power Automate, you can set up automated workflows between your favorite apps and services to synchronize files, get notifications, collect data, and more.

Reference:
https://docs.microsoft.com/en-us/power-automate/connection-dynamics365

Question: 406 CertyIQ

DRAG DROP -
You need to assign security roles to groups of users.
Which security roles should you use? To answer, drag the appropriate security types to the correct roles. Each security type may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

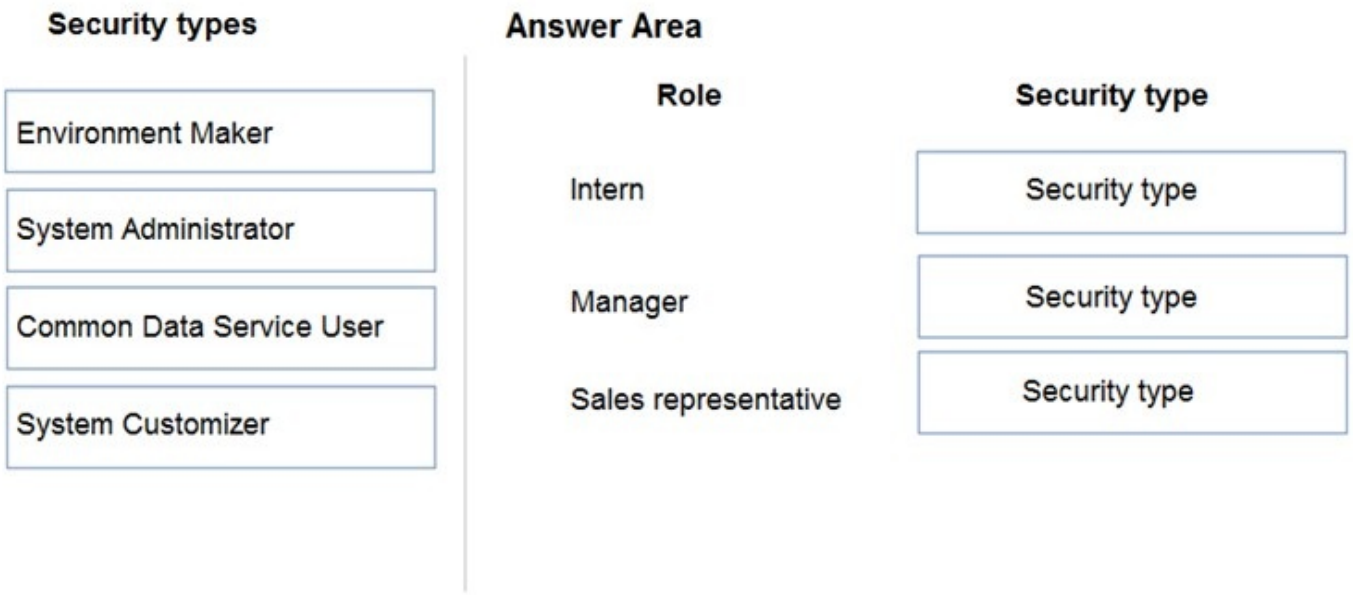

Answer:

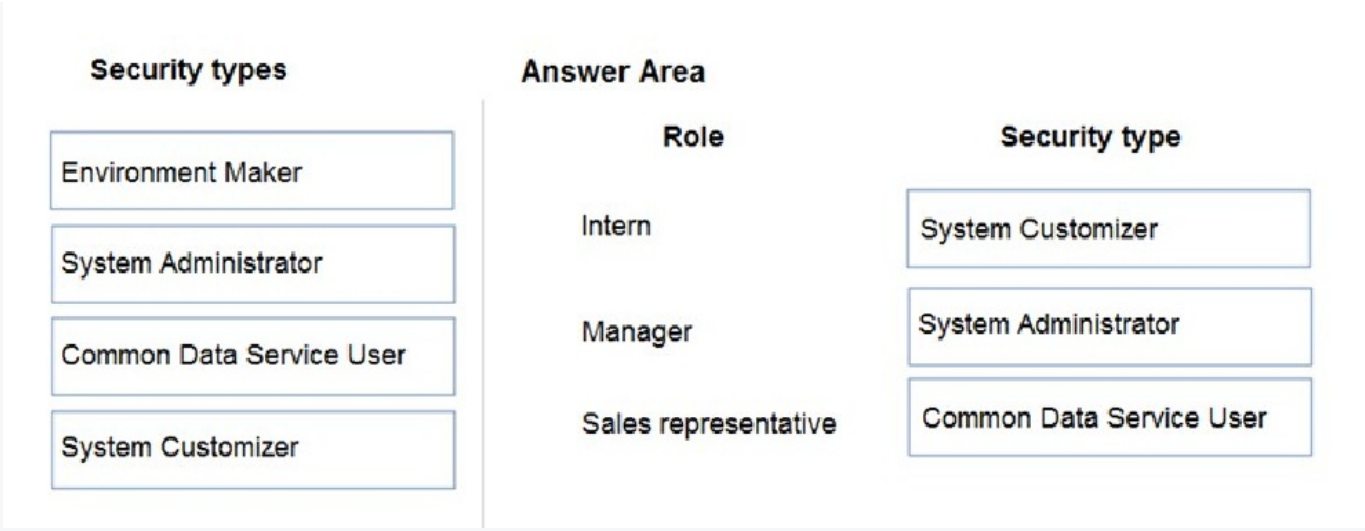

Explanation:

Scenario: The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.

Intern: System Customizer

the interns still create apps, so they need system customization security role.

Manager: System Administrator:

System Administrator: Has full permission to customize or administer the environment, including creating, modifying, and assigning security roles. Can view all data in the environment.

Sales representative: Common Data Service User

Basic User/ Common Data Service User: Read (self), Create (self), Write (self), Delete (self)

Can run an app within the environment and perform common tasks for the records that they own.

Question: 407

CertyIQ

HOTSPOT -
You need to select data types for required fields.
Which data types should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Field	Data type
Division	Text Option Set Unique Identifier Owner
End date	Text Duration Date Only Option Set
Tournament owner	Text Lookup Option Set Unique Identifier

Answer:

Answer Area

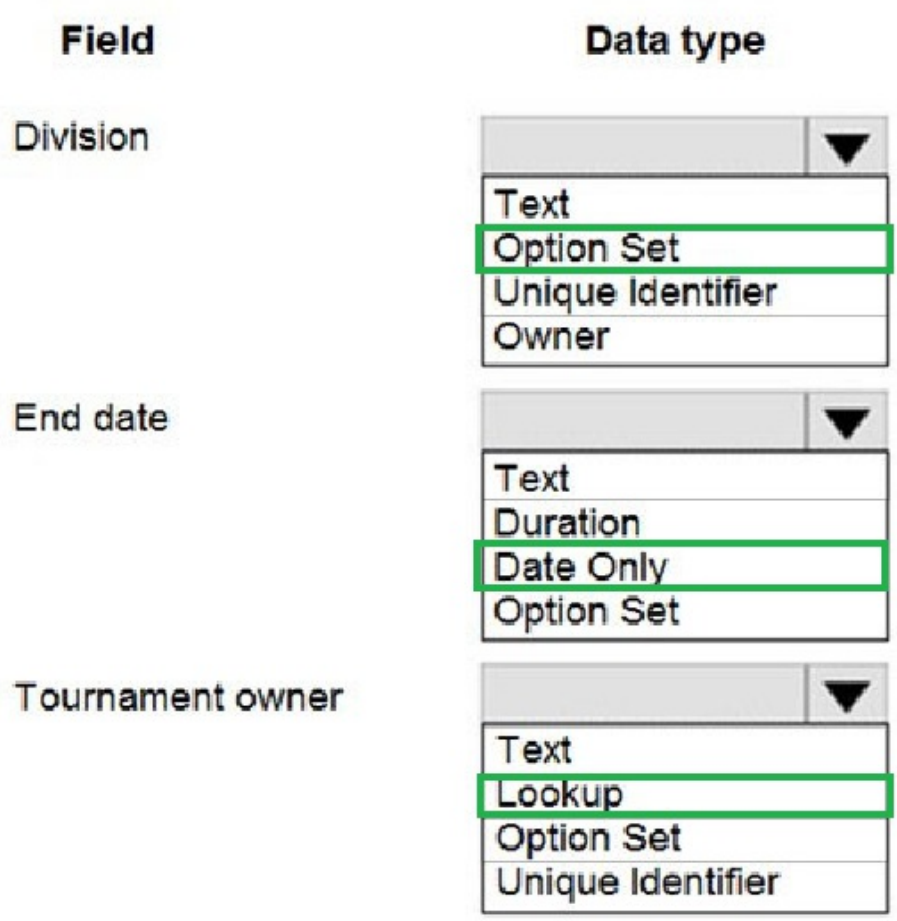

Explanation:

Box 1: Option Set -

Option Set removes any chance of user error

Box 2: Date only -

When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.

Box 3: Lookup -

Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner.

Note: When you create a new lookup column you are creating a new Many-to-One (N:1) table relationship between the table you're working with and the Target

Row Type defined for the lookup. There are additional configuration options for this relationship that are described in Create and edit relationships between tables.

But all custom lookups can only allow for a reference to a single row for a single target row type.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/data-platform/types-of-fields

Question: 408 CertyIQ

You need to create the customer mobile app.
Which type of function expression should you use?

A. Filter
B. Find
C. LookUp

Answer: A

Explanation:

A custom mobile app must be created to allow salespeople to add or search by pharmacy name. Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.

as we need to search by pharmacy name but pharmacies are uniquely identified by name, address, contact name and phone number, the results if we are searching by name only may contains more records --> filter

Question: 409 CertyIQ

You need to resolve CustomerB's issues with the check-in application.
Which two options can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. LookUp to Filter
B. Filter to LookUp
C. Search to LookUp
D. LookUp to Search

Answer: AD

Explanation:
CustomerB reports that the check-in app returned only one search result for their last name, which is not the correct name.
The Filter function finds records in a table that satisfy a formula. Use Filter to find a set of records that match one or more criteria and to discard those that don't.
The LookUp function finds the first record in a table that satisfies a formula. Use LookUp to find a single record that matches one or more criteria.
The Search function finds records in a table that contain a string in one of their columns.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-filter-lookup
Create and configure Power Apps

Question: 410 CertyIQ

You need to improve warehouse counting efficiency.
What should you create?

A. a flow that updates the warehouse counts as the worker performs the count
B. a model-driven app that allows the user to key in inventory counts
C. A Power BI dashboard that shows the inventory counting variances
D. a canvas app that scans barcodes to allow a warehouse worker to select inventory counts

Answer: D

Explanation:
Scenario: Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.

Question: 411 CertyIQ

You need to replace the bicycle inspection forms.
Which two solutions should you use? Each answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. a flow that maps inspection data to Dynamics 365 Field Service
B. a logic app that guides the technician through the inspection
C. a canvas app that guides the technician through the inspection
D. a model-driven app based on customer service entities

Answer: AC

Explanation:

. A. "A flow that maps inspection data to Dynamics 365 Field Service" is a solution that allows you to automate the process of capturing inspection data by using Microsoft Power Automate to create a flow that maps the data from the inspection form to the appropriate fields in Dynamics 365 Field Service. This will save time and reduce errors by eliminating the need for manual data entry. C. "A canvas app that guides the technician through the inspection" is a solution that uses a Microsoft PowerApps canvas app to guide the technician through the inspection process. The app can be customized to match the needs of the retail location and can provide step-by-step instructions, as well as data validation, to ensure that the technician completes the inspection correctly. This will also provide real-time data and reduce errors.

Question: 412 CertyIQ

You need to resolve CustomerB's issues with the check-in application.
Which two options can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. LookUp to Filter
B. Filter to LookUp
C. Search to LookUp
D. LookUp to Search

Answer: AD

Explanation:
CustomerB reports that the check-in app returned only one search result for their last name, which is not the correct name.
The Filter function finds records in a table that satisfy a formula. Use Filter to find a set of records that match one or more criteria and to discard those that don't.
The LookUp function finds the first record in a table that satisfies a formula. Use LookUp to find a single record that matches one or more criteria.
The Search function finds records in a table that contain a string in one of their columns.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-filter-lookup

Question: 413 CertyIQ

DRAG DROP -
You need to identify why employees are not receiving notification that nine customers are checked in and waiting in the repair area.
Which components should you test for each step? To answer, drag the appropriate components to the correct steps. Each component may be used once, more than once, or not at all.
You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

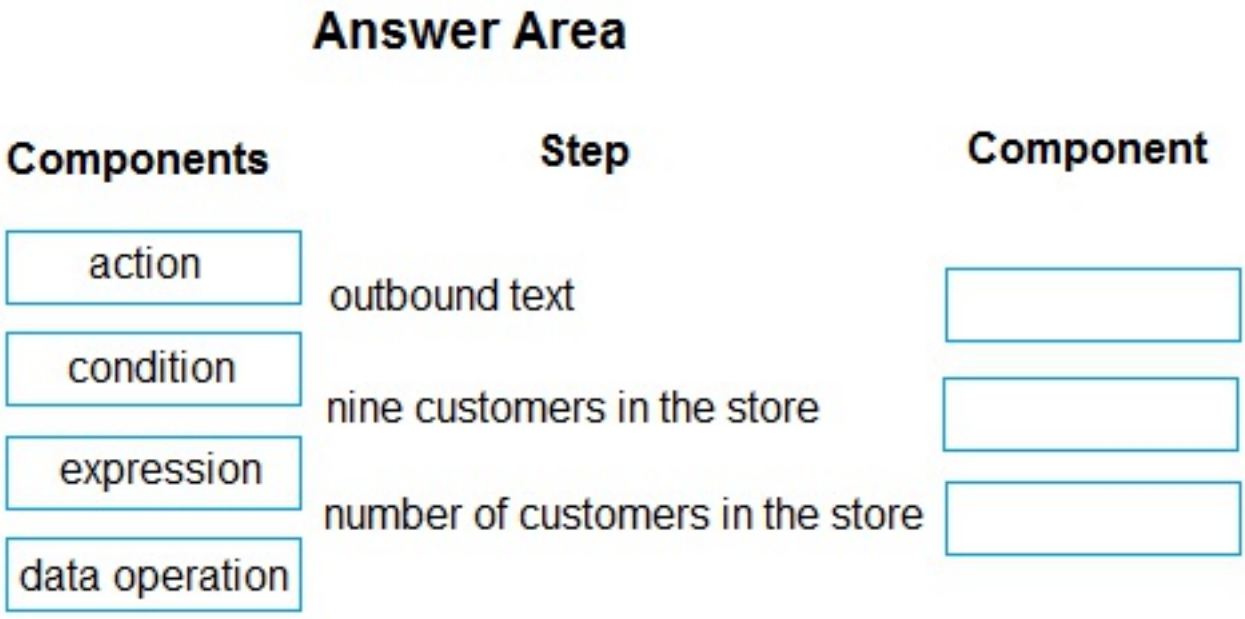

Answer:

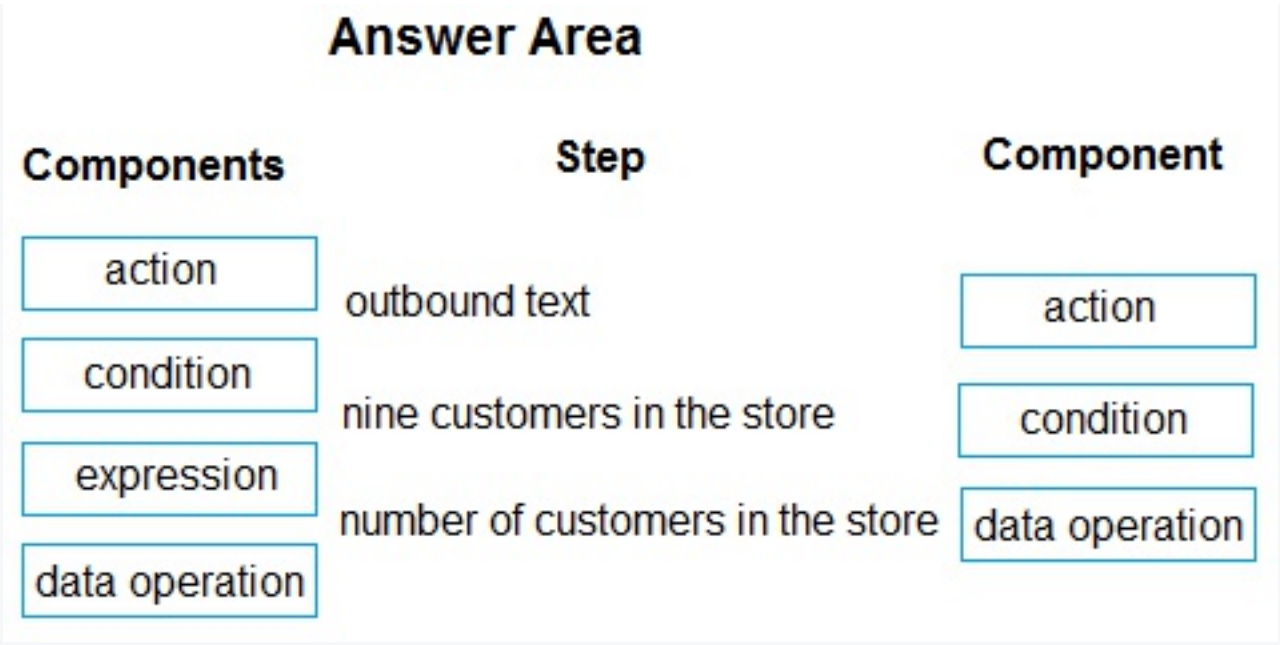

Explanation:

1) Action - send alert / email action

2) Condition - We only send an alert "IF the number of repair check-ins exceeds eight" which is clearly mentioned in the text

3) Data Operation or Expression - for me 2 answers are correct here but we can choose only one so not sure... To retrieve number of customers in the store, we need to count rows from "Get Rows" action. To do that, we need to use "Compose" step (which is DATA OPERATION) and then we need to use EXPRESSION @length(body('Get_rows')?['value']).

Question: 414 CertyIQ

You need to improve the efficiency of counting warehouse inventory.
What should you create?

A. a model-driven app that allows the user to key in inventory counts
B. a Power BI dashboard that shows the inventory counting variances
C. a flow that updates the warehouse counts as the worker performs the count
D. a canvas app that scans barcodes to allow a warehouse worker to select inventory counts

Answer: D

Explanation:
Scenario: Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.
Barcode scanner control for canvas apps: Scans barcodes, QR codes, and data-matrix codes on an Android or iOS device.

Description -
The control opens a native scanner on an Android or iOS device. The scanner automatically detects a barcode, a QR code, or a data-matrix code when in view.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/controls/control-new-barcode-scanner

Question: 415 CertyIQ

HOTSPOT -
You need to select visualization components.
What should you use? To answer, select the appropriate options from the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Component
Mailing list opt-in/opt-out	Flip switch Linear gauge Radial knob Linear slider
Number of store visits	Linear gauge Flip switch Pen control Input mask
Purpose of visit	Linear gauge Flip switch Radial knob Option set

Answer:

Answer Area

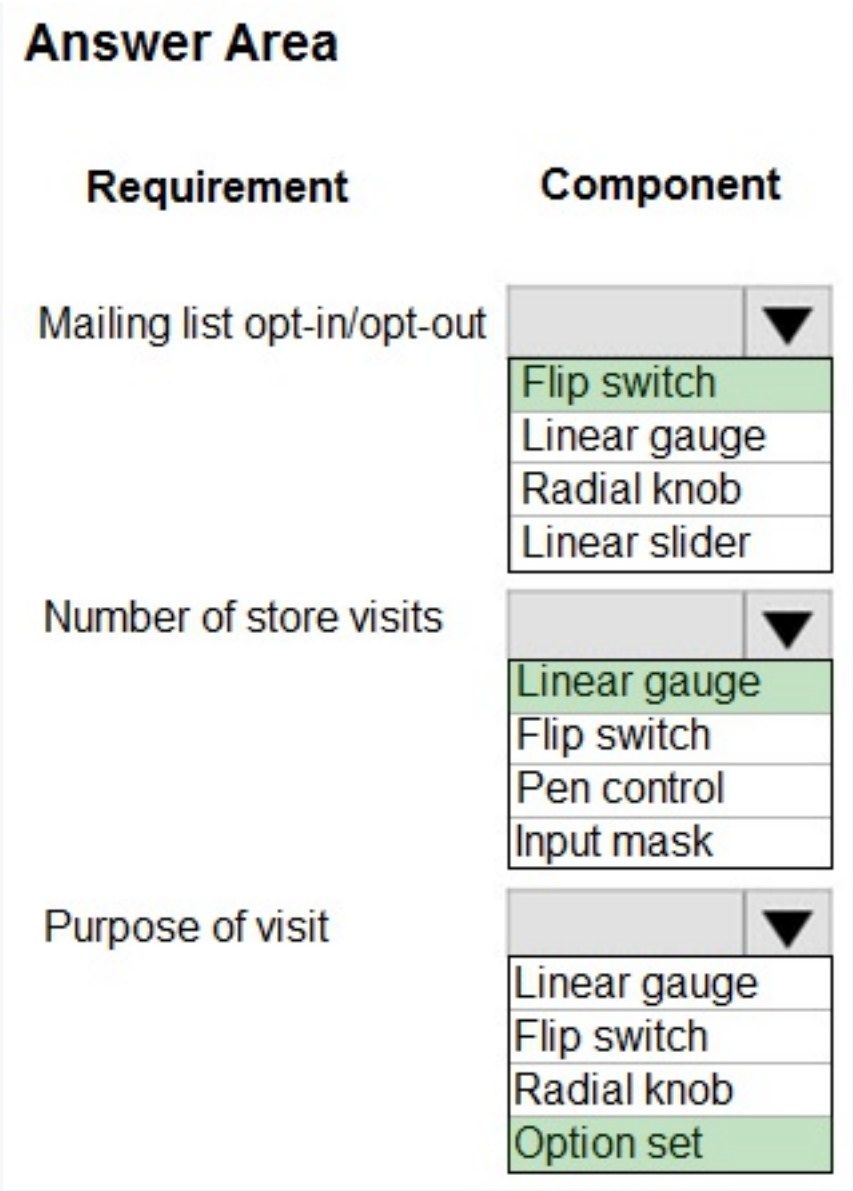

Explanation:
Scenario: Customer satisfaction surveys are recorded with Microsoft Forms Pro.

Box 1: Flip switch -
The flip switch is like an on/off switch, providing a choice between two values.

Box 2: Linear gauge -
The linear gauge lets your users input numerical values by dragging a slider instead of typing in the exact quantity. The slider provides whole number input and display only. Use this control for any numerical and money columns.

Box 3: Option set -
The choice control presents a set of options for your users to choose from when entering data.
You can customize forms (main, quick create, and quick view) and email templates by adding multi-select columns that are called Choices. When you add a choices column, you can specify multiple values that will be available for users to select. When users fill out the form they can select one, multiple, or all the values displayed in a drop-down list.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/model-driven-apps/additional-controls-for-dynamics-365-for-phones-and-tablets

Question: 416 CertyIQ

You need to configure the app to meet the address verification requirements.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Make the address fields read-only after they have been verified.
B. Open a confirmation dialog when the command bar button is selected.
C. Enable the command bar button only when the address shows as not verified.
D. Clear the field indicating the address is valid when an address field changes.

Answer: CD

Explanation:

The question is about address verification, but answers are for driving records verification... CD is the correct answer...

Address requirement: > The system must perform address validation any time an address is added or updated in the model-driven app user interface. > Validation must not be performed unless an address is changed. > Users must initiate address validation by selecting a button on the command bar. > The user must re-enter the address information to trigger validation. From those, we can get 2 points:

1.) Address can be changed after it's verified. 2.) Ability to run validation can be disabled if there are no changes to the address. So C&D.

Question: 417 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.
Current Environment -
The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.
The IT department performs all system customizations.
Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -
Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.
Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses an API key for authentication.
Driving record verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses a username and password for authentication. · The password expires periodically and must be changed by a member of the HR department.
Background check	· The company has provided a WSDL document to describe its SOAP-based API. · An SSL certification has been issued to use for authentication.

Requirements. General -
This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft
Azure resources is approved for use if necessary.
Requirements. Address verification
The system must perform address validation any time an address is added or updated in the model-driven app user interface.
Validation must not be performed unless an address is changed.
Users must initiate address validation by selecting a button on the command bar.
The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.
The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.
The user must re-enter the address information to trigger validation.
Requirements. Driving record verification
Driving record verification must only be performed once for each candidate.
Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.
The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.
Requirements. Background check verification
Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -

Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
AV01 var parameters = {};
AV02 parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
AV03 . . .
AV04 var contoso_ValidateAddressRequest = {
AV05     Line1In: parameters.Line1In,
AV06     . . .
AV07     getMetadata: function () {
AV08       return {
AV09         boundParameter: null,
AV10         parameterTypes: {
AV11           "Line1In": {
AV12             "typeName": "Edm.String",
AV13             "structuralProperty": 1
AV14           },
AV15           . . .
AV16         },
AV17         operationType: 0,
AV18         operationName: "northwind_ValidateAddress"
AV19       };
AV20     }
AV21 };

AV22 Xrm.WebApi.online.execute(ACTIONNAME).then(
AV23   function success(result) {
AV24     . . .
AV26   },
AV27   function error(error) {
AV28     . . .
AV29   }
AV30 );
```

Question You need to configure the solution to meet the requirements for driving record verifications.
What are two possible ways to achieve the goal? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Create an Azure Logic Apps connector.

B. Use a connector provided by the driving record verification service.

C. Share a custom connector for the driving record verification service with a member of the talent department.

D. Share the flow with a member of the talent department.

Answer: BC

Explanation:

Service provider	Comments
Address verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses an API key for authentication.
Driving record verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses a username and password for authentication. • The password expires periodically and must be changed by a member of the HR department.
Background check	• The company has provided a WSDL document to describe its SOAP-based API. • An SSL certification has been issued to use for authentication.

Requirements. Driving record verification

✑ Driving record verification must only be performed once for each candidate.

✑ Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.

✑ The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.

Question: 418 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.
Current Environment -
The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.
The IT department performs all system customizations.
Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -
Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.
Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses an API key for authentication.
Driving record verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses a username and password for authentication. · The password expires periodically and must be changed by a member of the HR department.
Background check	· The company has provided a WSDL document to describe its SOAP-based API. · An SSL certification has been issued to use for authentication.

Requirements. General -
This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft
Azure resources is approved for use if necessary.
Requirements. Address verification
The system must perform address validation any time an address is added or updated in the model-driven app user interface.
Validation must not be performed unless an address is changed.
Users must initiate address validation by selecting a button on the command bar.
The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.
The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.
The user must re-enter the address information to trigger validation.
Requirements. Driving record verification
Driving record verification must only be performed once for each candidate.
Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.
The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.
Requirements. Background check verification
Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
AV01 var parameters = {};
AV02 parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
AV03 . . .
AV04 var contoso_ValidateAddressRequest = {
AV05     Line1In: parameters.Line1In,
AV06    . . .
AV07    getMetadata: function () {
AV08      return {
AV09        boundParameter: null,
AV10        parameterTypes: {
AV11          "Line1In": {
AV12            "typeName": "Edm.String",
AV13            "structuralProperty": 1
AV14           },
AV15           . . .
AV16        },
AV17        operationType: 0,
AV18        operationName: "northwind_ValidateAddress"
AV19      };
AV20    }
AV21 };

AV22 Xrm.WebApi.online.execute(ACTIONNAME).then(
AV23   function success(result) {
AV24     . . .
AV26   },
AV27   function error(error) {
AV28     . . .
AV29   }
AV30 );
```

Question HOTSPOT -
You need to implement the driving record check functionality.
What should you implement? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Implementation option
Trigger a driving record check	After the address validation field is saved to Dataverse After the address validation field changes on the screen Before the address validation field is saved to Dataverse
Perform a driving record check	Plug-in JavaScript Cloud flow

Answer:

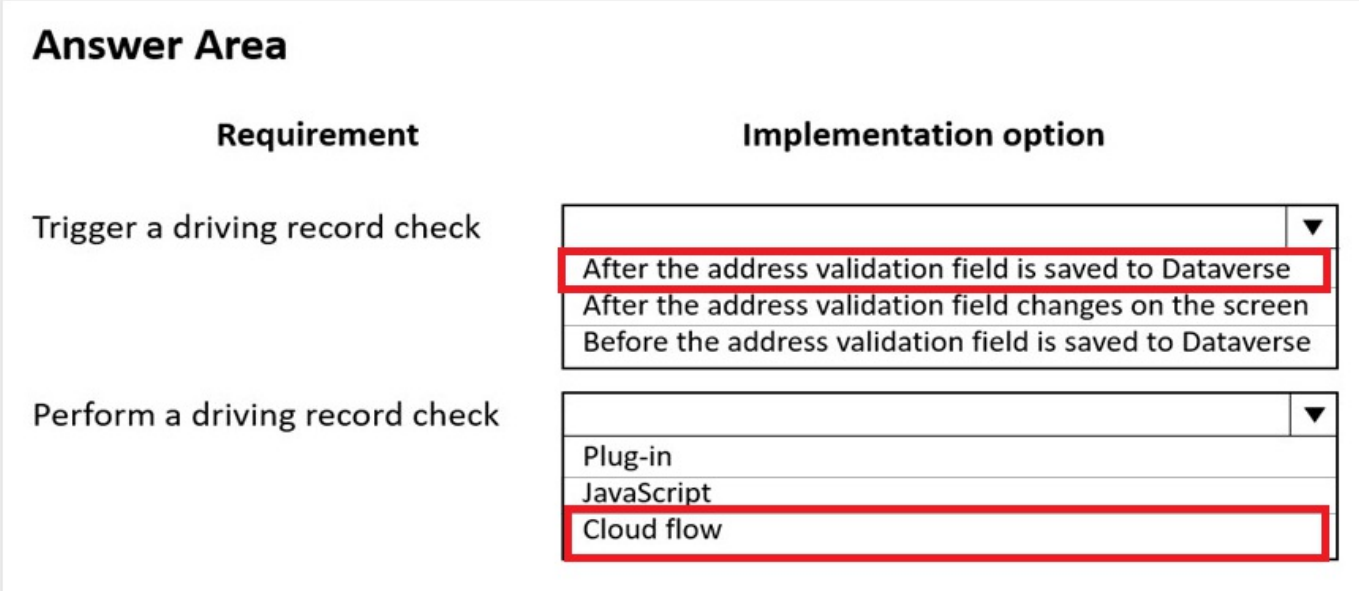

Explanation:

Box 1: after the address validation field is asaved to dataverse

Box 2: Cloud Flow -

Driving record verification -

The company has provided an OpenAPI document to describe its RESTFUL Api.

Use Custom APIs to create your own APIs in Dataverse. You can consolidate one or more operations into a Custom API that you and other developers can call in their code or from Power Automate. The Microsoft Dataverse connector enables calling actions in Power Automate.

Question: 419 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study. At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.

Background -

Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.

Current Environment -

The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.

The IT department performs all system customizations.

Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -

Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.

Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.

Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses an API key for authentication.
Driving record verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses a username and password for authentication. • The password expires periodically and must be changed by a member of the HR department.
Background check	• The company has provided a WSDL document to describe its SOAP-based API. • An SSL certification has been issued to use for authentication.

Requirements. General -

This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft

Azure resources is approved for use if necessary.

Requirements. Address verification

The system must perform address validation any time an address is added or updated in the model-driven app user interface.

Validation must not be performed unless an address is changed.

Users must initiate address validation by selecting a button on the command bar.

The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.

The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.

The user must re-enter the address information to trigger validation.

Requirements. Driving record verification

Driving record verification must only be performed once for each candidate.

Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.

The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.

Requirements. Background check verification

Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
var parameters = {};
parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
. . .
var contoso_ValidateAddressRequest = {
    Line1In: parameters.Line1In,
   . . .
   getMetadata: function () {
     return {
       boundParameter: null,
       parameterTypes: {
         "Line1In": {
           "typeName": "Edm.String",
           "structuralProperty": 1
         },
         . . .
       },
       operationType: 0,
       operationName: "northwind_ValidateAddress"
     };
   }
};

Xrm.WebApi.online.execute(ACTIONNAME).then(
  function success(result) {
    . . .
  },
  function error(error) {
    . . .
  }
);
```

Question HOTSPOT -
You need to configure the environments.
What should you do? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Action
Configure the development environment	Compile the plug-in in debug mode Enable trace logging in the environment Install the plug-in profiler solution in the environment
Configure the production environment	Write code to throw an InvalidPluginExecutionException exception Write information to the trace log Enable trace log in the environment

Answer:

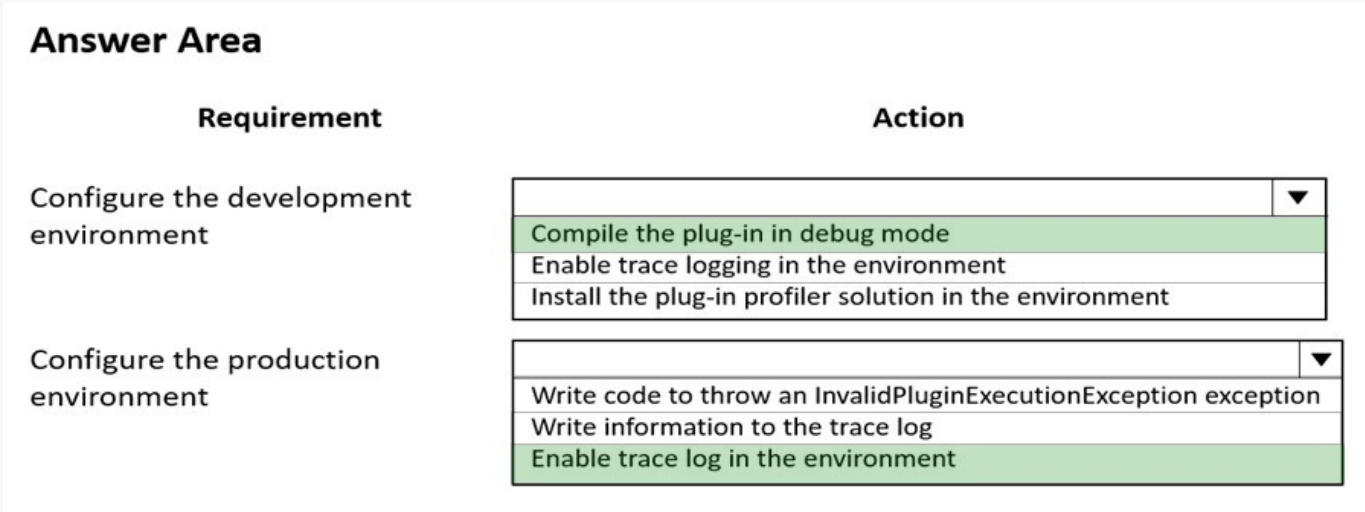

Explanation:

Box 1: Compile the plug-in in debug mode

Development: You must be able to step through code and inspect the value of variables.

Box 2: Enable trace log in the environment

Production: You must be able to view tracing service logs.

Question: 420 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.
Current Environment -
The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.
The IT department performs all system customizations.
Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -

Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.
Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses an API key for authentication.
Driving record verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses a username and password for authentication. · The password expires periodically and must be changed by a member of the HR department.
Background check	· The company has provided a WSDL document to describe its SOAP-based API. · An SSL certification has been issued to use for authentication.

Requirements. General -
This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft
Azure resources is approved for use if necessary.
Requirements. Address verification
The system must perform address validation any time an address is added or updated in the model-driven app user interface.
Validation must not be performed unless an address is changed.
Users must initiate address validation by selecting a button on the command bar.
The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.
The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.
The user must re-enter the address information to trigger validation.
Requirements. Driving record verification
Driving record verification must only be performed once for each candidate.
Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.
The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.
Requirements. Background check verification
Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
var parameters = {};
parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
. . .
var contoso_ValidateAddressRequest = {
    Line1In: parameters.Line1In,
   . . .
   getMetadata: function () {
     return {
       boundParameter: null,
       parameterTypes: {
         "Line1In": {
           "typeName": "Edm.String",
           "structuralProperty": 1
          },
          . . .
       },
       operationType: 0,
       operationName: "northwind_ValidateAddress"
     };
   }
};

Xrm.WebApi.online.execute(ACTIONNAME).then(
  function success(result) {
    . . .
  },
  function error(error) {
    . . .
  }
);
```

Question HOTSPOT -
You need to configure the address verification API.
Which values should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Property	Value
Address validation message	Update Execute northwind_ValidateAddress
Execution mode	Synchronous Asynchronous Post-Operation

Answer:

Answer Area

Property	Value
Address validation message	Update **Execute** northwind_ValidateAddress
Execution mode	**Synchronous** Asynchronous Post-Operation

Explanation:

Box 1: Execute -

You need to configure the address verification API.

Action: A user enters the candidate address into a third-party website to verify that the address entered is valid.

Box 2: Synchronous -

The address verification process provides a response almost immediately on screen.

Question: 421 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.
Current Environment -
The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.
The IT department performs all system customizations.
Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -
Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.
Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses an API key for authentication.
Driving record verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses a username and password for authentication. • The password expires periodically and must be changed by a member of the HR department.
Background check	• The company has provided a WSDL document to describe its SOAP-based API. • An SSL certification has been issued to use for authentication.

Requirements. General -
This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft
Azure resources is approved for use if necessary.
Requirements. Address verification

The system must perform address validation any time an address is added or updated in the model-driven app user interface.
Validation must not be performed unless an address is changed.
Users must initiate address validation by selecting a button on the command bar.
The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.
The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.
The user must re-enter the address information to trigger validation.
Requirements. Driving record verification
Driving record verification must only be performed once for each candidate.
Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.
The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.
Requirements. Background check verification
Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
var parameters = {};
parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
. . .
var contoso_ValidateAddressRequest = {
    Line1In: parameters.Line1In,
   . . .
   getMetadata: function () {
     return {
       boundParameter: null,
       parameterTypes: {
         "Line1In": {
           "typeName": "Edm.String",
           "structuralProperty": 1
          },
          . . .
       },
       operationType: 0,
       operationName: "northwind_ValidateAddress"
     };
   }
};

Xrm.WebApi.online.execute(ACTIONNAME).then(
  function success(result) {
    . . .
  },
  function error(error) {
    . . .
  }
);
```

Question HOTSPOT -
You need to design functionality to process background check results.
What should you implement? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Implementation option
Select an implementation pattern	Push / Pull / Event-based
Apply stage changes to Dataverse	Update / Upsert / Alternate key

Answer:

Answer Area

Requirement	Implementation option
Select an implementation pattern	Push / **Pull** / Event-based
Apply stage changes to Dataverse	**Update** / Upsert / Alternate key

Explanation:

Box 1: Pull -

After submitting candidate information, users must periodically check the website to see if a response has been posted.

Box 2: update

The background check process goes through a number of stages before reaching the final result.

Need just to update the state changes, not to insert.

Note:

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Reference:

https://docs.microsoft.com/en-us/power-apps/developer/data-platform/use-upsert-insert-update-record

Question: 422 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.
Current Environment -
The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.
The IT department performs all system customizations.
Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -
Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.
Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses an API key for authentication.
Driving record verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses a username and password for authentication. · The password expires periodically and must be changed by a member of the HR department.
Background check	· The company has provided a WSDL document to describe its SOAP-based API. · An SSL certification has been issued to use for authentication.

Requirements. General -
This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft
Azure resources is approved for use if necessary.
Requirements. Address verification
The system must perform address validation any time an address is added or updated in the model-driven app user interface.
Validation must not be performed unless an address is changed.
Users must initiate address validation by selecting a button on the command bar.
The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.
The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.
The user must re-enter the address information to trigger validation.
Requirements. Driving record verification
Driving record verification must only be performed once for each candidate.
Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.
The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.
Requirements. Background check verification
Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
AV01 var parameters = {};
AV02 parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
AV03 . . .
AV04 var contoso_ValidateAddressRequest = {
AV05     Line1In: parameters.Line1In,
AV06    . . .
AV07    getMetadata: function () {
AV08      return {
AV09        boundParameter: null,
AV10        parameterTypes: {
AV11          "Line1In": {
AV12            "typeName": "Edm.String",
AV13            "structuralProperty": 1
AV14          },
AV15          . . .
AV16        },
AV17        operationType: 0,
AV18        operationName: "northwind_ValidateAddress"
AV19      };
AV20    }
AV21 };

AV22 Xrm.WebApi.online.execute(ACTIONNAME).then(
AV23   function success(result) {
AV24     . . .
AV26   },
AV27   function error(error) {
AV28     . . .
AV29   }
AV30 );
```

Question You need to resolve the address validation API error.
Which method should you use to connect?

A. an Azure function triggered by a webhook

B. JavaScript code

C. a custom connector used in a cloud flow

D. a plug-in attached to a custom action called from JavaScript

Answer: C

Explanation:

* Issues. Address verification

Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.

* Cross-origin resource sharing (CORS) is disabled for all three APIs.

Question: 423 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.
Current Environment -
The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.
The IT department performs all system customizations.
Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -
Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.
Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses an API key for authentication.
Driving record verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses a username and password for authentication. · The password expires periodically and must be changed by a member of the HR department.
Background check	· The company has provided a WSDL document to describe its SOAP-based API. · An SSL certification has been issued to use for authentication.

Requirements. General -
This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft
Azure resources is approved for use if necessary.
Requirements. Address verification
The system must perform address validation any time an address is added or updated in the model-driven app user interface.
Validation must not be performed unless an address is changed.
Users must initiate address validation by selecting a button on the command bar.
The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.
The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.
The user must re-enter the address information to trigger validation.
Requirements. Driving record verification

Driving record verification must only be performed once for each candidate.
Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.
The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.
Requirements. Background check verification
Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
AV01 var parameters = {};
AV02 parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
AV03 . . .
AV04 var contoso_ValidateAddressRequest = {
AV05     Line1In: parameters.Line1In,
AV06    . . .
AV07    getMetadata: function () {
AV08      return {
AV09        boundParameter: null,
AV10        parameterTypes: {
AV11          "Line1In": {
AV12            "typeName": "Edm.String",
AV13            "structuralProperty": 1
AV14          },
AV15          . . .
AV16        },
AV17        operationType: 0,
AV18        operationName: "northwind_ValidateAddress"
AV19      };
AV20    }
AV21 };

AV22 Xrm.WebApi.online.execute(ACTIONNAME).then(
AV23   function success(result) {
AV24     . . .
AV26   },
AV27   function error(error) {
AV28     . . .
AV29   }
AV30 );
```

Question HOTSPOT -
You need to correct the JavaScript code that communicates with the address verification API.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
You must replace ACTIONNAME in line AV22 with northwind_ValidateAddress	◯	◯
You can add code at line AV28 to display an error message returned by the address validation API.	◯	◯
Calling the address validation API from the custom action eliminates the error reported by users.	◯	◯

Answer:

Answer Area

Statements	Yes	No
You must replace ACTIONNAME in line AV22 with northwind_ValidateAddress	○	○
You can add code at line AV28 to display an error message returned by the address validation API.	○	○
Calling the address validation API from the custom action eliminates the error reported by users.	○	○

Explanation:

You must replace ACTIONNAME in line AV22 with northwind_ValidateAddress: No.

In Dataverse, when executing a custom action from code, the Execute request typically uses the unique name of the custom action. If the action is bound or unbound, the syntax might differ, but replacing a placeholder with a hardcoded string directly into a line variable like that is generally not the correct way to handle Action names in standard Dataverse SDK patterns.

You can add code at line AV28 to display an error message returned by the address validation API: Yes.

This is a valid practice. When calling an external API from a custom action, it is standard procedure to parse the API response. If the response indicates a failure or validation error, you can catch that error and throw a InvalidPluginExecutionException to display a meaningful message back to the user interface.

Calling the address validation API from the custom action eliminates the error reported by users: No.

Simply invoking an API does not inherently "eliminate" errors. If the API is called correctly but returns a validation failure, the user will still see an error message. Furthermore, if the integration is not handled with proper error boundaries (like try-catch blocks) or if the API endpoint is unavailable, the custom action itself could fail, resulting in a system error rather than eliminating the user's issue.

Question: 424 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.
Current Environment -
The HR department uses a model-driven app to manage candidate information. Regional managers report that it is

difficult to determine where a candidate is in the background check process without having to contact HR.
The IT department performs all system customizations.
Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -
Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.
Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.
Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses an API key for authentication.
Driving record verification	· The company has provided an OpenAPI document to describe its RESTful API. · The service uses a username and password for authentication. · The password expires periodically and must be changed by a member of the HR department.
Background check	· The company has provided a WSDL document to describe its SOAP-based API. · An SSL certification has been issued to use for authentication.

Requirements. General -
This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft
Azure resources is approved for use if necessary.
Requirements. Address verification
The system must perform address validation any time an address is added or updated in the model-driven app user interface.
Validation must not be performed unless an address is changed.
Users must initiate address validation by selecting a button on the command bar.
The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.
The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.
The user must re-enter the address information to trigger validation.
Requirements. Driving record verification
Driving record verification must only be performed once for each candidate.
Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.
The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.
Requirements. Background check verification
Background check verification must be performed only once for each candidate.
The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.
The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
AV01 var parameters = {};
AV02 parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
AV03 . . .
AV04 var contoso_ValidateAddressRequest = {
AV05     Line1In: parameters.Line1In,
AV06    . . .
AV07    getMetadata: function () {
AV08      return {
AV09        boundParameter: null,
AV10        parameterTypes: {
AV11          "Line1In": {
AV12            "typeName": "Edm.String",
AV13            "structuralProperty": 1
AV14           },
AV15           . . .
AV16        },
AV17        operationType: 0,
AV18        operationName: "northwind_ValidateAddress"
AV19      };
AV20    }
AV21 };

AV22 Xrm.WebApi.online.execute(ACTIONNAME).then(
AV23   function success(result) {
AV24     . . .
AV26   },
AV27   function error(error) {
AV28     . . .
AV29   }
AV30 );
```

Question HOTSPOT -
You need to configure a connector for the driving record verification API.
How should you configure the system? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Configuration option	Implementation
Configure authentication.	Basic OAuth 2.0 API Key
Provide credentials to the API.	Authentication section in the connector configuration. Prompt when the connector is used for the 1st time. Pass Credentials as parameters to the action being invoked in the flow or app.

Answer:

Answer Area

Configuration option	Implementation
Configure authentication.	Basic OAuth 2.0 API Key
Provide credentials to the API.	Authentication section in the connector configuration. Prompt when the connector is used for the 1st time. Pass Credentials as parameters to the action being invoked in the flow or app.

Explanation:

Box 1: OAuth 2.0 -

Use API keys if you expect developers to build internal applications that don't need to access more than a single user's data. Use OAuth access tokens if you want users to easily provide authorization to applications without needing to share private data or dig through developer documentation.

Requirements. Driving record verification

• Driving record verification must only be performed once for each candidate.

• Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.

• The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.

Box 2: Pass Credentials as parameters

User makes an API call with the authorization header and the token gets validated by using validate-jwt policy in APIM by Azure AD.

Note, see step 4 below.

In this Diagram we can see the OAUTH flow with API Management in which:

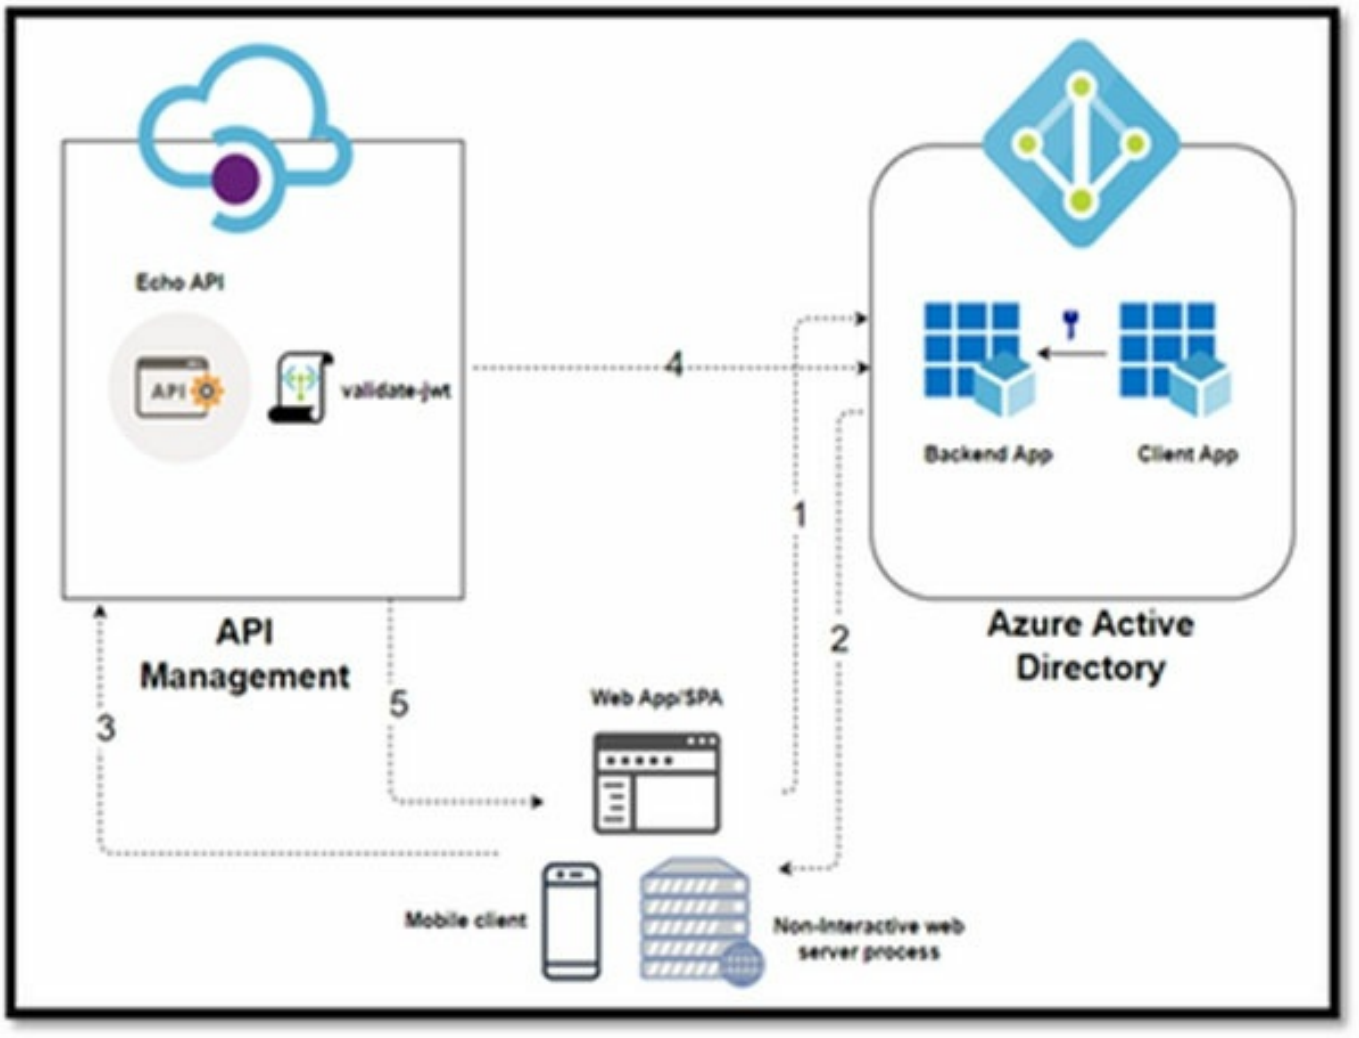

1. The Developer Portal requests a token from Azure AD using app registration client id and client secret.

2. In the second step, the user is challenged to prove their identity by supplying User Credentials.

3. After successful validation, Azure AD issues the access/refresh token.

4. User makes an API call with the authorization header and the token gets validated by using validate-jwt policy in APIM by Azure AD.

5. Based on the validation result, the user will receive the response in the developer portal.

Reference:

https://zapier.com/engineering/apikey-oauth-jwt/

https://techcommunity.microsoft.com/t5/azure-paas-blog/protect-api-s-using-oauth-2-0-in-apim/ba-p/2309538

Question: 425 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.

Background -

Northwind Electric Cars' ride sharing service is growing rapidly. The company is expanding to offer ride sharing in new cities. The company reports that their ability to perform background checks for potential employees is outpacing the capacity of the human resources (HR) department. The current background check process requires significant manual work.

Current Environment -

The HR department uses a model-driven app to manage candidate information. Regional managers report that it is difficult to determine where a candidate is in the background check process without having to contact HR.

The IT department performs all system customizations.

Verification process -

Step	Action	Comments
1	A user enters the candidate's address into a third-party website to verify that the address entered is valid.	The address verification process provides a response almost immediately on screen.
2	The user telephones a different third-party company and provides the candidate's information. The third-party company verifies that the candidate has an acceptable driving record.	The process of verifying driving records can take more than a minute to complete. The user must wait on the phone call to receive a result.
3	The user submits the candidate's information to a third-party website that performs in-depth background checks. After submitting candidate information, users must periodically check the website to see if a response has been posted.	The background check process may take as little as five minutes or as long as several days. The background check process goes through a number of stages before reaching the final result.

Service providers -

Each of the third-party services has an API available. Northwind wants to automate the verification process by calling the APIs from a Microsoft Power Platform solution.

Each of the third-party services charge per result. Northwind wants to perform the background check processes only when necessary to minimize costs.

Cross-origin resource sharing (CORS) is disabled for all three APIs.

Service provider	Comments
Address verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses an API key for authentication.
Driving record verification	• The company has provided an OpenAPI document to describe its RESTful API. • The service uses a username and password for authentication. • The password expires periodically and must be changed by a member of the HR department.
Background check	• The company has provided a WSDL document to describe its SOAP-based API. • An SSL certification has been issued to use for authentication.

Requirements. General -

This project is a top priority for the Northwind. The company has provided time for developers to write code as needed to support the project. Use of Microsoft

Azure resources is approved for use if necessary.

Requirements. Address verification

The system must perform address validation any time an address is added or updated in the model-driven app user interface.

Validation must not be performed unless an address is changed.

Users must initiate address validation by selecting a button on the command bar.

The API must return a version of the address in a uniform format. The returned address must replace the address entered by the user.

The API must return an error if the address entered cannot be validated. If the API returns an error, the user must contact the candidate to resolve the issue.

The user must re-enter the address information to trigger validation.

Requirements. Driving record verification

Driving record verification must only be performed once for each candidate.

Information required for driving record verification must be sent to the driving record verification service automatically after the candidate's address is verified.

The API must return a value of either Approved or Rejected to indicate whether the candidate has met the company's requirements.

Requirements. Background check verification

Background check verification must be performed only once for each candidate.

The candidate's information must be sent to the background check service automatically if the candidate's driving record check is approved.

The API must return a submission identification number to the caller. The identification number can be used to return the latest stage information from the service.
The API also returns one of ten possible values. The value returned identifies the current stage of the verification process. The returned value may signify whether the candidate is automatically rejected, automatically passed, or calls for further manual investigation.
The content and number of stage values is subject to change. The HR department must be able to update the stage values.
In cases where further investigation is required, users must manually update the value to reflect the final result.
Regional managers must be able to use the model-driven app to identify the current stage of each of the verification processes for any candidate. The solution must include fields for the candidate's record to represent each stage.
The solution must connect to the service and update the background check stage for candidates at least once per hour for incomplete background checks.
Requirements. Environments -

Environment	Comments
Development	You must be able to step through code and inspect the value of variables.
Production	You must not install debug solutions or development tools. You must be able to view tracing service logs.

Issues. Address verification -
Users report that the address verification API returns the following error message: The Same Origin Policy disallows reading the remote resource.
Issues. Background check verification
While reviewing API information for the background check verification process you observe that the API uses an IP address and not a fully-qualified domain name.
Code -
AddressVerificationAPI.js -
You create a custom action to communicate with the address verification API by using the following code. (Line numbers are included for reference only.)

```
AV01 var parameters = {};
AV02 parameters.Line1In = formContext.getAttribute("address1_line1").getValue();
AV03 . . .
AV04 var contoso_ValidateAddressRequest = {
AV05     Line1In: parameters.Line1In,
AV06    . . .
AV07    getMetadata: function () {
AV08      return {
AV09        boundParameter: null,
AV10        parameterTypes: {
AV11          "Line1In": {
AV12            "typeName": "Edm.String",
AV13            "structuralProperty": 1
AV14          },
AV15          . . .
AV16        },
AV17        operationType: 0,
AV18        operationName: "northwind_ValidateAddress"
AV19      };
AV20    }
AV21  };

AV22 Xrm.WebApi.online.execute(ACTIONNAME).then(
AV23   function success(result) {
AV24     . . .
AV26   },
AV27   function error(error) {
AV28     . . .
AV29   }
AV30 );
```

Question You need to implement the background verification check stage field.
Which type of field should you use?

A. Choice
B. Status
C. Choices
D. Lookup

Answer:

D

Explanation:

D. Lookup.

the **Northwind case study** context for the Microsoft PL-400 exam, there is a critical business requirement linked to this background verification check:

The content, sequence, and **total number of stage values are subject to frequent change**.

Non-technical business users (the **HR department**) must have the ability to dynamically add, rename, or update these stage values directly within the app without requiring an IT administrator or developer to modify the underlying code or solution components.

Question: 426 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment -
Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
Pharmacies submit order requests through email.
All information at customer locations is handwritten by customer representatives.
Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
Some accounts are referrals from other pharmacies.
Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
A field named Priority_Trigger must be created to trigger the Priority field.
A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users -
UserA must be able to create and publish Power Apps apps.
UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
UserC must be able to create apps connected to the systems and update the security roles and entities.
Pharmacy representatives must only be able to run the apps and access their own records.
Access to the accounting Power Apps app must be restricted to accounting team members.
End users must have minimum access to the required systems.
Only supervisors must be able to view phone numbers in the Accounts form.
Developers must be able to create new apps for all users.
Sales users must only have access to their own records.
Reporting -

Pharmacy orders must be displayed in four graphs as follows:
Annual revenue over $100,000
Annual revenues under $100,000
Research facilities
Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -
Ensure that notifications are sent to the sales team when a lead is added by using Slack.
Ensure that leads have a review stage added to the sales process.
Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
Fields for the doctor's name and phone number must be displayed in the customer record.
The doctor entered on the customer's record must be validated against doctors that exist in the system.
The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.

The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app -
A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits. Question
HOTSPOT -
You need to configure the fields with the appropriate type.
Which type should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

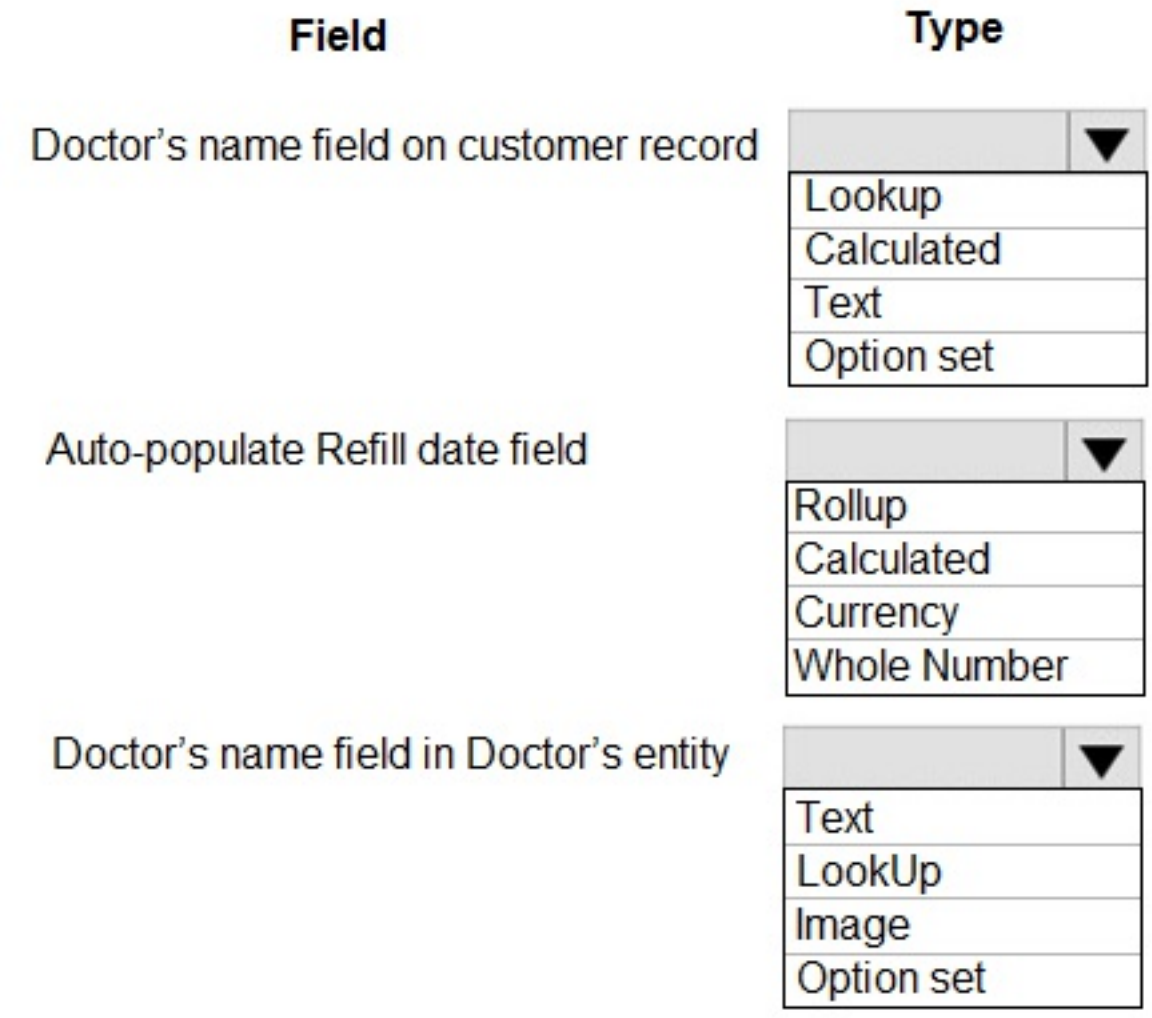

Answer:

Answer Area

Field	Type
Doctor's name field on customer record	Lookup / Calculated / Text / Option set
Auto-populate Refill date field	Rollup / Calculated / Currency / Whole Number
Doctor's name field in Doctor's entity	Text / LookUp / Image / Option set

Explanation:

Box 1: Lookup -

Fields for the doctor's name and phone number must be displayed in the customer record.

Lookup: A field that allows setting a reference to a single record of a specific type of entity.

Box 2: Calculated -

Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.

Calculated field: Contains calculations that use fields from the current entity or related parent entities.

Box 3: Text -

Field data type: Single Line of Text:

This field can contain up to 4,000 text characters. You can set the maximum length to be less than this. This field has several format options that will change the presentation of the text. These options are Email, Text, Text Area, URL, Ticker Symbol, and Phone.

Reference:

https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/customize/types-of-fields

Question: 427 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment -
Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
Pharmacies submit order requests through email.
All information at customer locations is handwritten by customer representatives.
Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
Some accounts are referrals from other pharmacies.
Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
A field named Priority_Trigger must be created to trigger the Priority field.
A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users -
UserA must be able to create and publish Power Apps apps.
UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
UserC must be able to create apps connected to the systems and update the security roles and entities.
Pharmacy representatives must only be able to run the apps and access their own records.
Access to the accounting Power Apps app must be restricted to accounting team members.
End users must have minimum access to the required systems.
Only supervisors must be able to view phone numbers in the Accounts form.
Developers must be able to create new apps for all users.
Sales users must only have access to their own records.
Reporting -
Pharmacy orders must be displayed in four graphs as follows:
Annual revenue over $100,000
Annual revenues under $100,000
Research facilities
Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -

Ensure that notifications are sent to the sales team when a lead is added by using Slack.
Ensure that leads have a review stage added to the sales process.
Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
Fields for the doctor's name and phone number must be displayed in the customer record.
The doctor entered on the customer's record must be validated against doctors that exist in the system.
The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.
The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app -
A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits. Question
DRAG DROP -
You need to assign the minimum environmental security role to the appropriate users.
Which security roles should you use? To answer, drag the appropriate security roles to the correct users. Each security role may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

Answer:

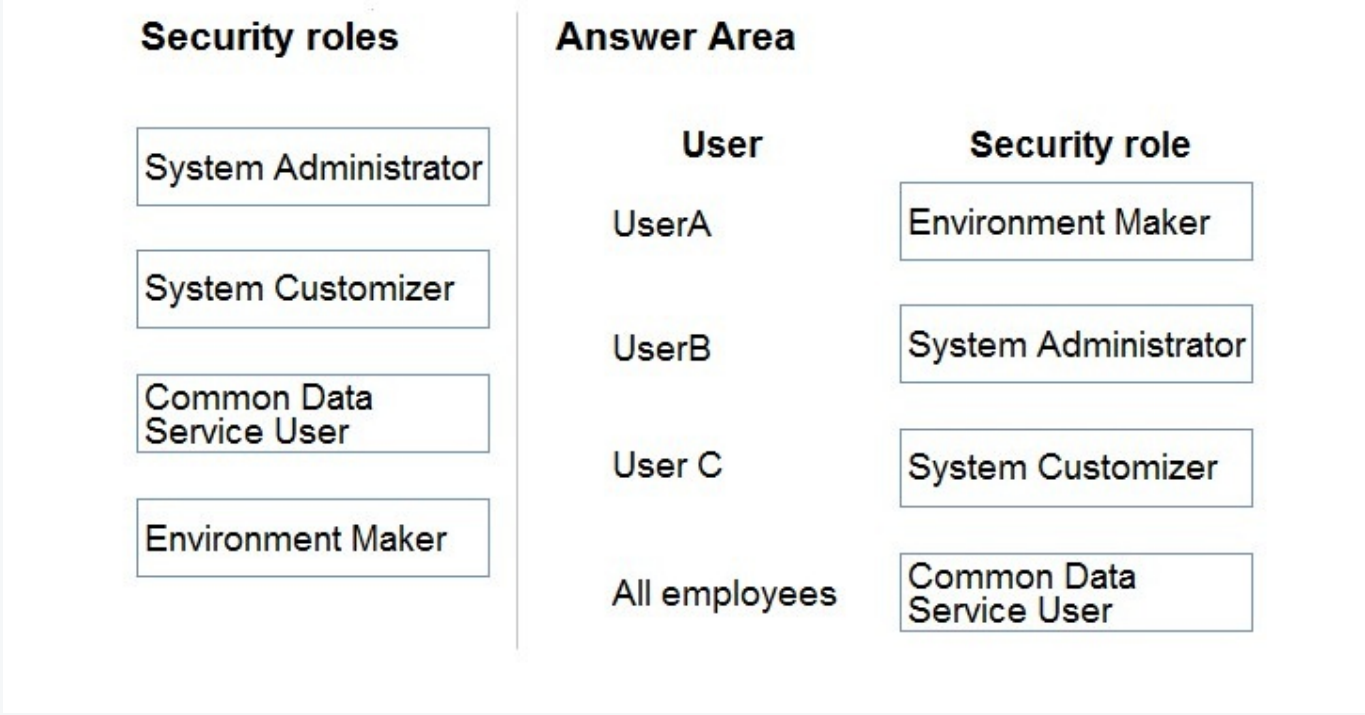

Explanation:
Box 1: Environment Maker -
UserA must be able to create and publish Power Apps apps.
The Environment Maker role can create resources within an environment including apps, connections, custom connectors, gateways, and flows using Power
Automate.

Box 2: System Administrator -
UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
The System Administrator has full permission to customize the system. Can view all data in the system.

Box 3: System Customizer -
UserC must be able to create apps connected to the systems and update the security roles and entities.
The System Customizer has full permission to customize the system. Can only view rows for system tables that they create.
The difference between the System Administrator and System Customizer security roles is that a system administrator has read privileges on most rows in the system and can see everything. Assign the System Customizer role to someone who needs to perform customization tasks but shouldn't see any data in the system tables.

Box 4: Common Data Service User -
To stay consistent with our product rebranding effort, the security role Common Data Service User is being changed to Basic User.
The Basic User security role primarily contains Basic privileges for core entities where the user can write, update, and delete records that they created or owned.

Reference:
https://docs.microsoft.com/en-us/power-platform/admin/environments-overview
https://docs.microsoft.com/en-us/powerapps/maker/model-driven-apps/privileges-required-customization#system-administrator-and-system-customizer-security- roles https://docs.microsoft.com/en-us/power-platform-release-plan/2020wave2/data-platform/common-data-service-user-security-role-renamed-basic-user

Question: 428 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment -
Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
Pharmacies submit order requests through email.
All information at customer locations is handwritten by customer representatives.
Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
Some accounts are referrals from other pharmacies.
Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
A field named Priority_Trigger must be created to trigger the Priority field.
A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users -
UserA must be able to create and publish Power Apps apps.
UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
UserC must be able to create apps connected to the systems and update the security roles and entities.
Pharmacy representatives must only be able to run the apps and access their own records.
Access to the accounting Power Apps app must be restricted to accounting team members.
End users must have minimum access to the required systems.
Only supervisors must be able to view phone numbers in the Accounts form.
Developers must be able to create new apps for all users.
Sales users must only have access to their own records.
Reporting -
Pharmacy orders must be displayed in four graphs as follows:
Annual revenue over $100,000
Annual revenues under $100,000
Research facilities
Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -
Ensure that notifications are sent to the sales team when a lead is added by using Slack.
Ensure that leads have a review stage added to the sales process.
Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.

Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
Fields for the doctor's name and phone number must be displayed in the customer record.
The doctor entered on the customer's record must be validated against doctors that exist in the system.
The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.
The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app -
A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits. Question
You need to create an application to deploy to other pharmacies.
What should you do?

A. Recreate customizations in a new environment.

B. Create a customer connector to connect the pharmacies' systems to the company's systems.

C. Export the solution as a managed solution.

D. Write a Web API to move customizations.

Answer: C

Explanation:
When you export a managed solution, it contains all the changes that have been applied for that solution into a file that you can then import into a different
Dataverse environment.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/introduction-solutions

Question: 429 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment -
Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
Pharmacies submit order requests through email.
All information at customer locations is handwritten by customer representatives.
Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
Some accounts are referrals from other pharmacies.
Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -

You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
A field named Priority_Trigger must be created to trigger the Priority field.
A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users -
UserA must be able to create and publish Power Apps apps.
UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
UserC must be able to create apps connected to the systems and update the security roles and entities.
Pharmacy representatives must only be able to run the apps and access their own records.
Access to the accounting Power Apps app must be restricted to accounting team members.
End users must have minimum access to the required systems.
Only supervisors must be able to view phone numbers in the Accounts form.
Developers must be able to create new apps for all users.
Sales users must only have access to their own records.
Reporting -
Pharmacy orders must be displayed in four graphs as follows:
Annual revenue over $100,000
Annual revenues under $100,000
Research facilities
Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -
Ensure that notifications are sent to the sales team when a lead is added by using Slack.
Ensure that leads have a review stage added to the sales process.
Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
Fields for the doctor's name and phone number must be displayed in the customer record.
The doctor entered on the customer's record must be validated against doctors that exist in the system.
The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.
The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app -
A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits. Question
DRAG DROP -
You need to set up security to meet the requirements.
How should you configure security? To answer, drag the appropriate security mechanisms to the correct users. Each security mechanism may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

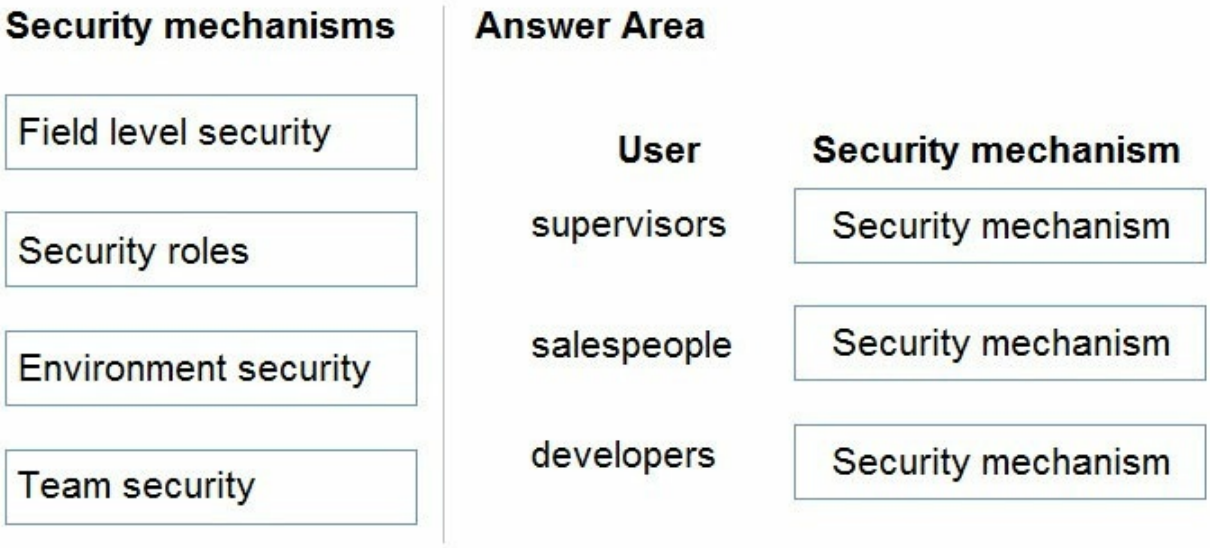

Answer:

Explanation:

Box 1: Field level security -

Only supervisors must be able to view phone numbers in the Accounts form.

You use field security tables to apply field-level security, which restricts field access to specified users and teams. The scope of field-level security is global, which means that it applies to all records within the organization, regardless of the business unit hierarchical level to which the record or the user belongs. Field security works in all Microsoft Dataverse clients, including the Web client, Dynamics 365 for Outlook, and Dynamics. It applies to all components, such as the Dataverse web services, reports, search, offline, filtered views, auditing, and duplicate detection.

Box 2: Team Security -

Sales users must only have access to their own records.

Owner team: An owner team owns records and has security roles assigned to the team. A user's privileges can come from their individual security roles, those of the teams that they're part of or the ones they inherit. A team has full access rights on the records that the team owns. Team members are added manually to the

owner team.

Box 3: Environment security -

Developers must be able to create new apps for all users.

Environment maker: Can create new resources associated with an environment, including apps, connections, custom APIs, gateways, and flows using Microsoft

Power Automate. However, this role doesn't have any privileges to access data within an environment.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/field-security-entities https://docs.microsoft.com/en-us/power-platform/admin/database-security https://docs.microsoft.com/en-us/power-platform/admin/manage-teams#types-of-teams

Question: 430 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.
The company is organized into the following divisions:
Baseball
Hockey
Soccer
Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.
Current environment -
Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.
The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Requirements -
Tournaments -
Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.
Registration form -
You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.
Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.
The form must include a custom button that sends an email confirmation to the player after the player registers.
The button must not be visible until after the form is saved.
Security -
The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.
Data automation -
Customer name must be added to Dynamics 365 Finance automatically after it is entered.

You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
You must implement mechanisms to handle all code-related errors.
When a customer record is updated, the system must look up the account number for the customer in the accounting system.
Referrals must be imported into the system as soon as they are available.
Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question You need to determine the primary cause of the issue reported by interns when they use the app.
What is the primary cause?

A. Interns have the System Customizer security role but need the Environment Maker security role.
B. Interns have the Common Data Service User security role but need the Environment Maker security role.
C. Interns have the Environment Maker security role but need the Common Data Service User security role.
D. Interns have the Environment Maker security role but need the System Customizer security role.
E. Interns have the Environment Maker security role but need the Delegate security role.

Answer: D

Explanation:
Scenario: Interns can create apps but cannot interact with their own data.
Environment Maker role: Can create new resources associated with an environment, including apps, connections, custom APIs, gateways, and flows using
Microsoft Power Automate. However, this role doesn't have any privileges to access data within an environment.
System Customizer role: full permission to customize the environment. However, users with this role can only view records for environment entities that they create.

Reference:
https://docs.microsoft.com/en-us/power-platform/admin/database-security

Question: 431 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.
The company is organized into the following divisions:
Baseball
Hockey
Soccer
Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.
Current environment -
Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.
The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Requirements -
Tournaments -
Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.
Registration form -
You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.
Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.
The form must include a custom button that sends an email confirmation to the player after the player registers. The button must not be visible until after the form is saved.
Security -
The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.
Data automation -
Customer name must be added to Dynamics 365 Finance automatically after it is entered.

- You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
- You must implement mechanisms to handle all code-related errors.
- When a customer record is updated, the system must look up the account number for the customer in the accounting system.
- Referrals must be imported into the system as soon as they are available.

Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question DRAG DROP -
You need to assign security roles to groups of users.
Which security roles should you use? To answer, drag the appropriate security types to the correct roles. Each security type may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

Answer:

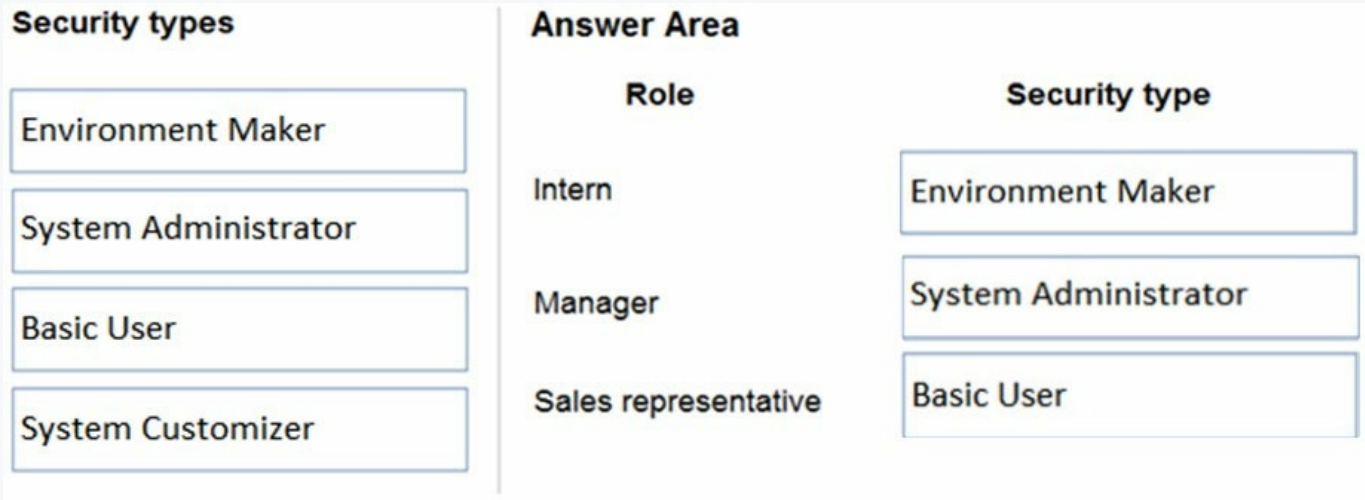

Explanation:

intern: system customizer

Manager: System Administrator:

System Administrator: Has full permission to customize or administer the environment, including creating, modifying, and assigning security roles. Can view all data in the environment.

Sales representative: basic user

Basic User/ Common Data Service User: Read (self), Create (self), Write (self), Delete (self)

Can run an app within the environment and perform common tasks for the records that they own.

Question: 432 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.
The company is organized into the following divisions:
Baseball
Hockey
Soccer
Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.
Current environment -
Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.
The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.
Requirements -
Tournaments -
Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.
Registration form -
You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.
Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.
The form must include a custom button that sends an email confirmation to the player after the player registers. The button must not be visible until after the form is saved.
Security -

The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.
Data automation -
Customer name must be added to Dynamics 365 Finance automatically after it is entered.
You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.
You must implement mechanisms to handle all code-related errors.
When a customer record is updated, the system must look up the account number for the customer in the accounting system.
Referrals must be imported into the system as soon as they are available.
Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:

UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question HOTSPOT -
You need to select data types for required fields.
Which data types should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer:

Answer Area

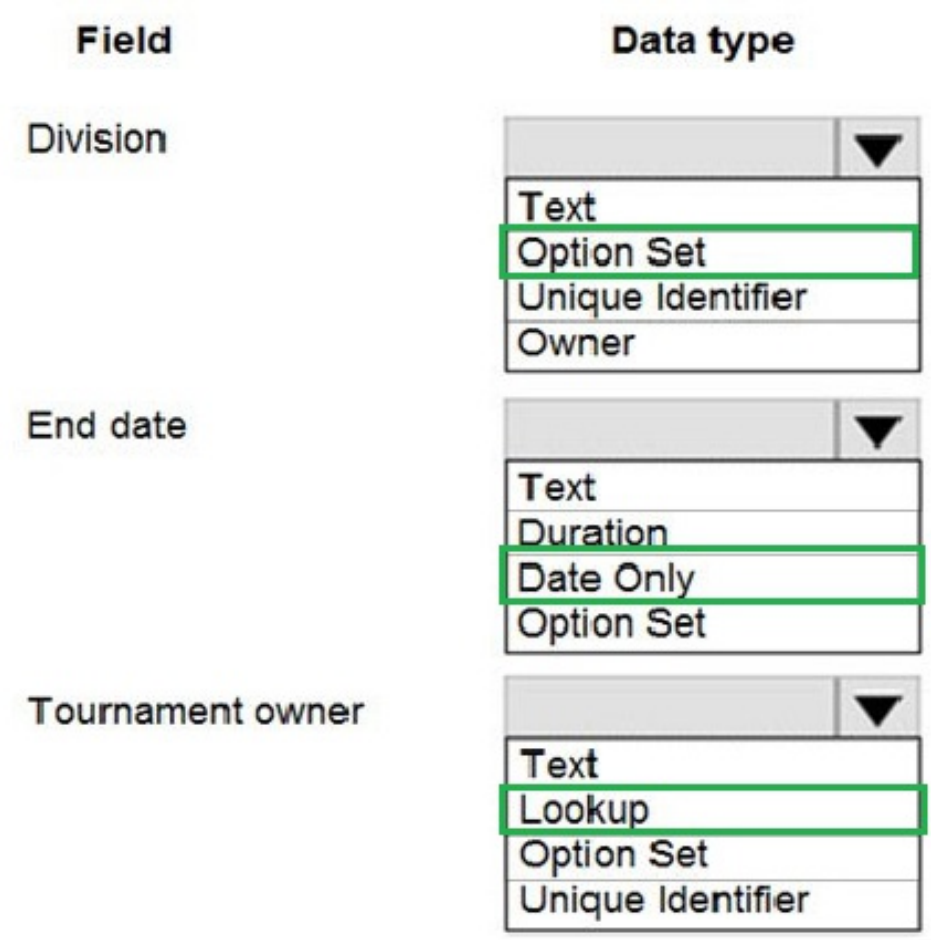

Explanation:

Box 1: Option Set -

If Division is Text type then anyone can create random divisions which sounds wrong. Hence answer is Option Set.

Box 2: Date only -

When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.

Box 3: Lookup -

Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner.

Note: When you create a new lookup column you are creating a new Many-to-One (N:1) table relationship between the table you're working with and the Target

Row Type defined for the lookup. There are additional configuration options for this relationship that are described in Create and edit relationships between tables.

But all custom lookups can only allow for a reference to a single row for a single target row type.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/data-platform/types-of-fields

Question: 433 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Current environment -
Adventure Works Cycles wants to replace their paper-based bicycle manufacturing business with an efficient paperless solution. The company has one manufacturing plant in Seattle that produces bicycle parts, assembles bicycles, and distributes finished bicycles to the Pacific Northwest.
Adventure Works Cycles has a retail location that performs bicycle repair and warranty repair work. The company has six maintenance vans that repair bicycles at various events and residences.
Adventure Works Cycles recently deployed Dynamics 365 Finance and Dynamics 365 Manufacturing in a Microsoft-hosted environment for financials and manufacturing. The company plans to leverage the Microsoft Power Platform to migrate all of their distribution and retail workloads to Dynamics 365 Unified Operations.
The customer uses Dynamics 365 Sales. Dynamics 365 Customer Service and Dynamics 365 Field Service.
Retail store information -
Adventure Works Cycle has one legal entity, four warehouses, and six field service technicians.
Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.
The Adventure Works Cycles retail location performs bicycle inspections and performance tune-ups.
Technicians use paper forms to document the bicycle inspection performed before a tune-up and any additional work performed on the bicycle.
Adventure Works Cycles uses a Power Apps app for local bike fairs to attract new customers.
A canvas app is being developed to capture customer information when customers check in at the retail location. The app has the following features:
- Customer selects yes or no if they are on the mailing list.
- Customer selects the amount of times they have visited the store.
- Customer selects the type of service needed.
- The search result returns all last name records that match the search term.

Technology -
A plug-in for Dynamics 365 Sales automatically calculated the total billed time from all activities on a particular customer account, including sales representative visits, phone calls, email correspondence, and repair time compared with hours spent.
A shipping API displays shipping rates and tracking information on sales orders. The contract allows for 3,000 calls per month.
Ecommerce orders are processed in batch daily by using a manual import of sales orders in Dynamics 365 Finance.
Microsoft Teams is used for all collaboration.
All testing and problem diagnostics are performed in a copy of the production environment.
Customer satisfaction surveys are recorded with Microsoft Forms Pro. Survey replies from customers are sent to a generic mailbox.
Requirements -

Automation -
A text message must be automatically sent to a customer to confirm an appointment and to notify when a technician is en route that includes their location.
Ecommerce sales orders must be integrated into Dynamics 365 Finance and then exported to Azure every night.
A text alert must be sent to employees scheduled to assist in the repair area of the retail store if the number of repair check-ins exceeds eight.
Submitted customer surveys must generate an email to the correct department. Approval and follow-up must occur within a week.
Reporting -
The warehouse manager's dashboard must contain warehouse counting variance information.
A warehouse manager needs to quickly view warehouse KPIs by using a mobile device.
Power BI must be used for reporting across the organization.
User experience -
Warehouse counting must be performed by using a mobile app that scans barcodes on boxes.
All customer repairs must be tracked in the system no matter where they occur.
Qualified leads must be collected from local bike fairs.
Issues -
Internal -
User1 reports receives an intermittent plug-in error when viewing the total bill customer time.
User2 reports that Azure consumption for API calls has increased significantly to 100 calls per minute in the last month.
User2 reports that sales orders have increased.
User5 receives the error message: 'Endpoint unavailable' during a test of the technician dispatch ISV solution.
The parts department manager who is the approver for the department is currently on sabbatical.
External -
CustomerB reports that the check-in app returned only one search result for their last name, which is not the correct name.
Nine customers arrive in the repair area of the retail store, but no texts were sent to scheduled employees.
Customers report that the response time from the information email listed on the Adventure Works Cycles website is greater than five days.
CustomerC requested additional information from the parts department through the customer survey and has not received a response one week later. Question You need to reduce response time for the information email on the website.
What should you create?

A. a flow that creates a SharePoint item for each email response

B. a flow that creates a notification in Microsoft Teams

C. a Power Apps app that displays the number of email received in a dashboard

D. a logic app that moves all emails received to Azure Blob storage

Answer: B

Explanation:
Scenario:
✑ Customers report that the response time from the information email listed on the Adventure Works Cycles website is greater than five days.
✑ Microsoft Teams is used for all collaboration.
Microsoft teams support email notifications.

Reference:
https://support.microsoft.com/en-us/office/manage-notifications-in-teams-1cc31834-5fe5-412b-8edb-43fecc78413d

Question: 434 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study. At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Background -

Bellows Sports is the region's newest, largest, and most complete sports complex. The company features baseball and soccer fields and two full-size hockey rinks. The complex provides coaching, recreational leagues, a pro shop, and state-of-the art customer and player amenities.

The company is organized into the following divisions:

Baseball

Hockey

Soccer

Bellows Sports runs tournaments several times per year. Each tournament runs six weeks.

Current environment -

Bellows Sports tracks players and events in Microsoft Excel workbooks and uses email to communicate with players, partners, and prospective customers. The company uses a proprietary cloud-based accounting system.

The company relies on referrals from athletes for new business. Bellows uses a third-party marketing company to gather feedback and referrals from athletes. The third-party marketing company uploads a Microsoft Excel file containing lists of potential customers and players to the FTP site that Bellows Sports maintains.

Requirements -

Tournaments -

Customer information is stored in the Accounts entity. Each tournament record must list the associated sales representative as the tournament owner. When team members create tournament records they must enter the start date for a tournament. The end date of the tournament must be automatically calculated.

Registration form -

You must create a form to allow players to register for tournaments. The registration form must meet the following requirements:

Division	Requirement
Baseball	Capture the age and weight of the player. The height field must not display.
Hockey	Capture the age, height, and weight of the player.
Soccer	Capture the age of the player. The height and weight fields must not display.

Each division has tournaments that take place in specific locations. Users must be able to select the division for a tournament location.

Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.

The form must include a custom button that sends an email confirmation to the player after the player registers. The button must not be visible until after the form is saved.

Security -

The company identifies the following job roles:

Role	Tasks
Sales representative	These users will enter data into Dynamics 365 Customer Service.
Intern	These users will create Power Apps apps, and connectors, and create Power Automate flows.
Manager	These users will add users, assign security roles, and manage data storage.

You must grant users the minimum permissions required to perform their job tasks.

Data automation -

Customer name must be added to Dynamics 365 Finance automatically after it is entered.

You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.

- You must implement mechanisms to handle all code-related errors.

When a customer record is updated, the system must look up the account number for the customer in the accounting system.

Referrals must be imported into the system as soon as they are available.
Issues -
Apps -
The captions for the New and Save buttons do not render properly on the form.
Interns can create apps but cannot interact with their own data.
Portal -
The query for all registered users must return the data categorized by division. Queries must return only the Name and Sport fields. Queries return all fields. The query is as follows:

```
GET [Organization URI]/api/data/v9.1/accounts?
&$orderby=Name, sport
&$filter=sport ne null
```

Solution checker issues -
You run solution checker and observe Plug-in or workflow activity errors in the following code sets:

Set	Code	Error message
Code set 1	CS101 var columns = new ColumnSet(); CS102 columns.AllColumns = true; CS103 var query = new QueryExpression("account"); CS104 query.ColumnSet = columns; CS105 var results = service.RetrieveMultiple(query);	il-specify-column
Code Set 2	CS201 WebRequest request = WebRequest.Create ("https://www.bellows.com/api/stuff"); CS202 HttpWebResponse response = new HttpWebResponse(); CS203 CS204 response = request.GetResponse(); CS205 response.Close();	il-turn-off-keepalive

Code -
The following code runs when the registration form loads. You must implement a mechanism to handle errors that occur in the code:
UpdateRecord.js (Line numbers are included for reference only.)

```
UR01
UR02 var data = {
      "name" : "Updated Account ",
      "creditonhold": true,
      "description" : "This is an account update",
      "revenue" : 10,000,
      "Division" : 2
      }
UR03 Xrm.WebApi.updateRecord("account", "5531d753-95af-e711-a94e-000d3a11e605", data).then(
      function success(result) {
      console.log("Account updated");
      . . .perform operations on record update
      },
UR04
```

Question HOTSPOT -
You need to analyze and identify the issues that solution checker identifies.
What is the missing or bad code? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Issue	Action
Code set 1	Modify code at line CS102 to select only required columns Change the code at line CS104 to query.ColumnSet = AllColumns Replace the code at line CS101 with the following code: AllColumns = new ColumnSet();
Code set 2	Add the following code at line CS203: request.KeepAlive = false; Add the following code at line CS203: request.KeepAlive = true; Add the following code at line CS203: response.KeepAliveEnabled = true; Add the following code at line CS203: response.KeepAliveEnabled = false;

Answer:

Answer Area

Issue	Action
Code set 1	Modify code at line CS102 to select only required columns Change the code at line CS104 to query.ColumnSet = AllColumns Replace the code at line CS101 with the following code: AllColumns = new ColumnSet();
Code set 2	Add the following code at line CS203: request.KeepAlive = false; Add the following code at line CS203: request.KeepAlive = true; Add the following code at line CS203: response.KeepAliveEnabled = true; Add the following code at line CS203: response.KeepAliveEnabled = false;

Explanation:
Box 1: Modify code at line CS102 to select only required columns
Reduce the number of columns that are retrieved.
Scenario: Error Message: il-specify-column

Symptoms -
Retrieving all columns can cause:
- Performance issues due to the amount of data being retrieved
- Unintended plug-in/process execution

Guidance -
For optimal performance, you should only select the minimum amount of data needed by your application when querying Microsoft Dataverse data.

ColumnSet Parameter -
When you use the IOrganizationService.Retrieve method set the columnSet parameter to a ColumnSet instance with specified columns. When you use
QueryExpression set the ColumnSet property with the required attributes.
Box 2: Add the following code at line CS203: request.KeepAlive =false;
Scenario: Error message: Il-turn-off-keepalive

Symptoms -
If a plug-in makes external web requests and is trying to use KeepAlive on a closed connection, the plug-in will ultimately fail to execute the web request. If the plug-in is registered:
Synchronously, users may experience:
- Unresponsive model-driven apps

✑ Slow client interactions
✑ The browser stops responding
Asynchronously, plug-in executions may take an extended period of time before failing.

Guidance -
In HTTP 1.1, all connections are considered persistent (KeepAlive is true) unless declared otherwise. Due to the fact that plug-ins run in isolation, the Sandbox service translates into them being short-lived executions that generally would not benefit from KeepAlive. To avoid problems with connecting to external services we recommend disabling KeepAlive within plug-ins. This is done by setting KeepAlive to false.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/best-practices/business-logic/set-keepalive-false-interacting-external-hosts-plugin https://docs.microsoft.com/en-us/powerapps/developer/data-platform/best-practices/work-with-metadata/retrieve-specific-columns-entity-via-query-apis

Question: 435 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment -
Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
Pharmacies submit order requests through email.
All information at customer locations is handwritten by customer representatives.
Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
Some accounts are referrals from other pharmacies.
Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
A field named Priority_Trigger must be created to trigger the Priority field.
A field named Facility type field must be added in order to select whether a customer is a retail pharmacy,

wholesale pharmacy, research facility, or hospital.
Users -
UserA must be able to create and publish Power Apps apps.
UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
UserC must be able to create apps connected to the systems and update the security roles and entities.
Pharmacy representatives must only be able to run the apps and access their own records.
Access to the accounting Power Apps app must be restricted to accounting team members.
End users must have minimum access to the required systems.
Only supervisors must be able to view phone numbers in the Accounts form.
Developers must be able to create new apps for all users.
Sales users must only have access to their own records.
Reporting -
Pharmacy orders must be displayed in four graphs as follows:
Annual revenue over $100,000
Annual revenues under $100,000
Research facilities
Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -
Ensure that notifications are sent to the sales team when a lead is added by using Slack.
Ensure that leads have a review stage added to the sales process.
Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
Fields for the doctor's name and phone number must be displayed in the customer record.
The doctor entered on the customer's record must be validated against doctors that exist in the system.
The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.
The solution must be error free so that when it is installed in other environments it does not cause issues.
Mobile app -
A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits. Question
You need to ensure that users can create the required charts.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Create a quick view form to show the Accounts entity.

B. Configure filter fields in the Annual revenue field.

C. Add the Facility field to the account form.

D. Delete the Annual revenue field from the account form.

E. Create a view with annual revenue sorted lowest value to highest value.

Answer: BC

Explanation:

Pharmacy orders must be displayed in four graphs as follows:

- Annual revenue over $100,000
- Annual revenues under $100,000
- Research facilities
- Hospitals

The graphs must be interactive, and users must be able to drill down on any dimension.

Question: 436 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Contoso Pharmaceuticals manufactures and sells drugs to retail and wholesale pharmacies, hospitals, and research facilities.
The company plans to implement Dynamics 365 Sales and Dynamics 365 Finance.
Current environment -
Contoso maintains a Microsoft Excel workbook that lists all drugs they supply.
Pharmacies submit order requests through email.
All information at customer locations is handwritten by customer representatives.
Contoso uses Cerner, which is a medical industry application that uses a proprietary database.
Some accounts are referrals from other pharmacies.
Every pharmacy has its own Dynamics 365 Sales instance.
Requirements -
General -
You must create a model-driven app to meet Contoso's needs. You must minimize the use of custom code and custom connectors.
Accounts -
Ensure that the names of the pharmacies are synced between the accounting and the customer management systems.
Account numbers should be entered automatically into the pharmaceutical system that is in a Cerner database and kept in sync.
When the account is entered into the system, extra fields must appear if the referral customer box is selected. If the box is not selected, the extra fields must not appear.
A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.
A field named Priority_Trigger must be created to trigger the Priority field.
A field named Facility type field must be added in order to select whether a customer is a retail pharmacy, wholesale pharmacy, research facility, or hospital.
Users -
UserA must be able to create and publish Power Apps apps.
UserB must be the owner of all the systems and be able to provide permissions and create all new environments.
UserC must be able to create apps connected to the systems and update the security roles and entities.
Pharmacy representatives must only be able to run the apps and access their own records.
Access to the accounting Power Apps app must be restricted to accounting team members.
End users must have minimum access to the required systems.
Only supervisors must be able to view phone numbers in the Accounts form.
Developers must be able to create new apps for all users.
Sales users must only have access to their own records.
Reporting -
Pharmacy orders must be displayed in four graphs as follows:
Annual revenue over $100,000
Annual revenues under $100,000
Research facilities
Hospitals
The graphs must be interactive, and users must be able to drill down on any dimension.
Customizations -
Ensure that notifications are sent to the sales team when a lead is added by using Slack.
Ensure that leads have a review stage added to the sales process.
Doctors must be manually added to a custom entity named Doctor if the doctor is not listed.
Refill dates for customer prescriptions should be automatically determined and a notification should be sent to the customer.
Fields for the doctor's name and phone number must be displayed in the customer record.
The doctor entered on the customer's record must be validated against doctors that exist in the system.
The new solution will be sold to other pharmacies for use. The application must not allow changes to be made.
The solution must be error free so that when it is installed in other environments it does not cause issues.

Mobile app -
A custom mobile app must be created to allow salespeople to add or search by pharmacy name.
Pharmacy records must be uniquely identified by pharmacy name, address, contact name, and phone number.
When a pharmacy is added by using the mobile app, the phone number must be validated to be all digits. Question
You need to configure the trigger for the priority field in the Account entity.
Which expression should you use?

A. DIFFINWEEKS(now,1)
B. SUBTRACTDAYS(10, Now())
C. ADDWEEKS(1, CreatedOn)
D. DIFFINDAYS(Createdon, now())
E. ADDDAYS(10, CreatedOn)

Answer: C

Explanation:

A trigger must be created that changes the Priority field to 1 in the Account record 10 days after an Account record is created.

Note:

Date.AddWeeks returns the date, datetime, or datetimezone result from adding numberOfWeeks weeks to the datetime value dateTime.

CreatedOn gets the value to store in the history table indicating when this entry was created.

Reference:

https://docs.microsoft.com/en-us/powerquery-m/date-addweeks

https://docs.microsoft.com/en-us/dotnet/api/system.data.entity.migrations.model.inserthistoryoperation.createdon?view=entity-framework-4.3.1

Question: 437 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Current environment -
Adventure Works Cycles wants to replace their paper-based bicycle manufacturing business with an efficient paperless solution. The company has one manufacturing plant in Seattle that produces bicycle parts, assembles bicycles, and distributes finished bicycles to the Pacific Northwest.

Adventure Works Cycles has a retail location that performs bicycle repair and warranty repair work. The company has six maintenance vans that repair bicycles at various events and residences.
Adventure Works Cycles recently deployed Dynamics 365 Finance and Dynamics 365 Manufacturing in a Microsoft-hosted environment for financials and manufacturing. The company plans to leverage the Microsoft Power Platform to migrate all of their distribution and retail workloads to Dynamics 365 Unified Operations.
The customer uses Dynamics 365 Sales. Dynamics 365 Customer Service and Dynamics 365 Field Service.
Retail store information -
Adventure Works Cycle has one legal entity, four warehouses, and six field service technicians.
Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.
The Adventure Works Cycles retail location performs bicycle inspections and performance tune-ups.
- Technicians use paper forms to document the bicycle inspection performed before a tune-up and any additional work performed on the bicycle.

Adventure Works Cycles uses a Power Apps app for local bike fairs to attract new customers.
A canvas app is being developed to capture customer information when customers check in at the retail location. The app has the following features:
- Customer selects yes or no if they are on the mailing list.
- Customer selects the amount of times they have visited the store.
- Customer selects the type of service needed.
- The search result returns all last name records that match the search term.

Technology -
A plug-in for Dynamics 365 Sales automatically calculated the total billed time from all activities on a particular customer account, including sales representative visits, phone calls, email correspondence, and repair time compared with hours spent.
A shipping API displays shipping rates and tracking information on sales orders. The contract allows for 3,000 calls per month.
Ecommerce orders are processed in batch daily by using a manual import of sales orders in Dynamics 365 Finance.
Microsoft Teams is used for all collaboration.
All testing and problem diagnostics are performed in a copy of the production environment.
Customer satisfaction surveys are recorded with Microsoft Forms Pro. Survey replies from customers are sent to a generic mailbox.
Requirements -
Automation -
A text message must be automatically sent to a customer to confirm an appointment and to notify when a technician is en route that includes their location.
Ecommerce sales orders must be integrated into Dynamics 365 Finance and then exported to Azure every night.
A text alert must be sent to employees scheduled to assist in the repair area of the retail store if the number of repair check-ins exceeds eight.
Submitted customer surveys must generate an email to the correct department. Approval and follow-up must occur within a week.
Reporting -
The warehouse manager's dashboard must contain warehouse counting variance information.
A warehouse manager needs to quickly view warehouse KPIs by using a mobile device.
Power BI must be used for reporting across the organization.
User experience -
Warehouse counting must be performed by using a mobile app that scans barcodes on boxes.
All customer repairs must be tracked in the system no matter where they occur.
Qualified leads must be collected from local bike fairs.
Issues -
Internal -
User1 reports receives an intermittent plug-in error when viewing the total bill customer time.
User2 reports that Azure consumption for API calls has increased significantly to 100 calls per minute in the last month.
User2 reports that sales orders have increased.
User5 receives the error message: 'Endpoint unavailable' during a test of the technician dispatch ISV solution.
The parts department manager who is the approver for the department is currently on sabbatical.
External -
CustomerB reports that the check-in app returned only one search result for their last name, which is not the correct name.
Nine customers arrive in the repair area of the retail store, but no texts were sent to scheduled employees.
Customers report that the response time from the information email listed on the Adventure Works Cycles website is greater than five days.
CustomerC requested additional information from the parts department through the customer survey and has not received a response one week later. Question You need to resolve CustomerB's issues with the check-in application.

Which two options can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Change LookUp to Filter
B. Change Filter to LookUp
C. Change Search to LookUp
D. Change LookUp to Search

Answer: AD

Explanation:

CustomerB reports that the check-in app returned only one search result for their last name, which is not the correct name.

A: The Filter function finds records in a table that satisfy a formula. Use Filter to find a set of records that match one or more criteria and to discard those that don't.

D: The Search function finds records in a table that contain a string in one of their columns.

Incorrect:

Not B, not C: The LookUp function finds the first record in a table that satisfies a formula. Use LookUp to find a single record that matches one or more criteria.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-filter-lookup

Question: 438 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Current environment -
Adventure Works Cycles wants to replace their paper-based bicycle manufacturing business with an efficient paperless solution. The company has one manufacturing plant in Seattle that produces bicycle parts, assembles bicycles, and distributes finished bicycles to the Pacific Northwest.
Adventure Works Cycles has a retail location that performs bicycle repair and warranty repair work. The company has six maintenance vans that repair bicycles at various events and residences.
Adventure Works Cycles recently deployed Dynamics 365 Finance and Dynamics 365 Manufacturing in a Microsoft-hosted environment for financials and manufacturing. The company plans to leverage the Microsoft Power Platform to migrate all of their distribution and retail workloads to Dynamics 365 Unified Operations.
The customer uses Dynamics 365 Sales. Dynamics 365 Customer Service and Dynamics 365 Field Service.

Retail store information -
Adventure Works Cycle has one legal entity, four warehouses, and six field service technicians.
Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.
The Adventure Works Cycles retail location performs bicycle inspections and performance tune-ups.
Technicians use paper forms to document the bicycle inspection performed before a tune-up and any additional work performed on the bicycle.
Adventure Works Cycles uses a Power Apps app for local bike fairs to attract new customers.
A canvas app is being developed to capture customer information when customers check in at the retail location.
The app has the following features:
- Customer selects yes or no if they are on the mailing list.
- Customer selects the amount of times they have visited the store.
- Customer selects the type of service needed.
- The search result returns all last name records that match the search term.
Technology -
A plug-in for Dynamics 365 Sales automatically calculated the total billed time from all activities on a particular customer account, including sales representative visits, phone calls, email correspondence, and repair time compared with hours spent.
A shipping API displays shipping rates and tracking information on sales orders. The contract allows for 3,000 calls per month.
Ecommerce orders are processed in batch daily by using a manual import of sales orders in Dynamics 365 Finance.
Microsoft Teams is used for all collaboration.
All testing and problem diagnostics are performed in a copy of the production environment.
Customer satisfaction surveys are recorded with Microsoft Forms Pro. Survey replies from customers are sent to a generic mailbox.
Requirements -
Automation -
A text message must be automatically sent to a customer to confirm an appointment and to notify when a technician is en route that includes their location.
Ecommerce sales orders must be integrated into Dynamics 365 Finance and then exported to Azure every night.
A text alert must be sent to employees scheduled to assist in the repair area of the retail store if the number of repair check-ins exceeds eight.
Submitted customer surveys must generate an email to the correct department. Approval and follow-up must occur within a week.
Reporting -
The warehouse manager's dashboard must contain warehouse counting variance information.
A warehouse manager needs to quickly view warehouse KPIs by using a mobile device.
Power BI must be used for reporting across the organization.
User experience -
Warehouse counting must be performed by using a mobile app that scans barcodes on boxes.
All customer repairs must be tracked in the system no matter where they occur.
Qualified leads must be collected from local bike fairs.
Issues -
Internal -
User1 reports receives an intermittent plug-in error when viewing the total bill customer time.
User2 reports that Azure consumption for API calls has increased significantly to 100 calls per minute in the last month.
User2 reports that sales orders have increased.
User5 receives the error message: 'Endpoint unavailable' during a test of the technician dispatch ISV solution.
The parts department manager who is the approver for the department is currently on sabbatical.
External -
CustomerB reports that the check-in app returned only one search result for their last name, which is not the correct name.
Nine customers arrive in the repair area of the retail store, but no texts were sent to scheduled employees.
Customers report that the response time from the information email listed on the Adventure Works Cycles website is greater than five days.
CustomerC requested additional information from the parts department through the customer survey and has not received a response one week later. Question DRAG DROP -
You need to identify why employees are not receiving notification that nine customers are checked in and waiting in the repair area.
Which components should you test for each step? To answer, drag the appropriate components to the correct steps. Each component may be used once, more than once, or not at all.
You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

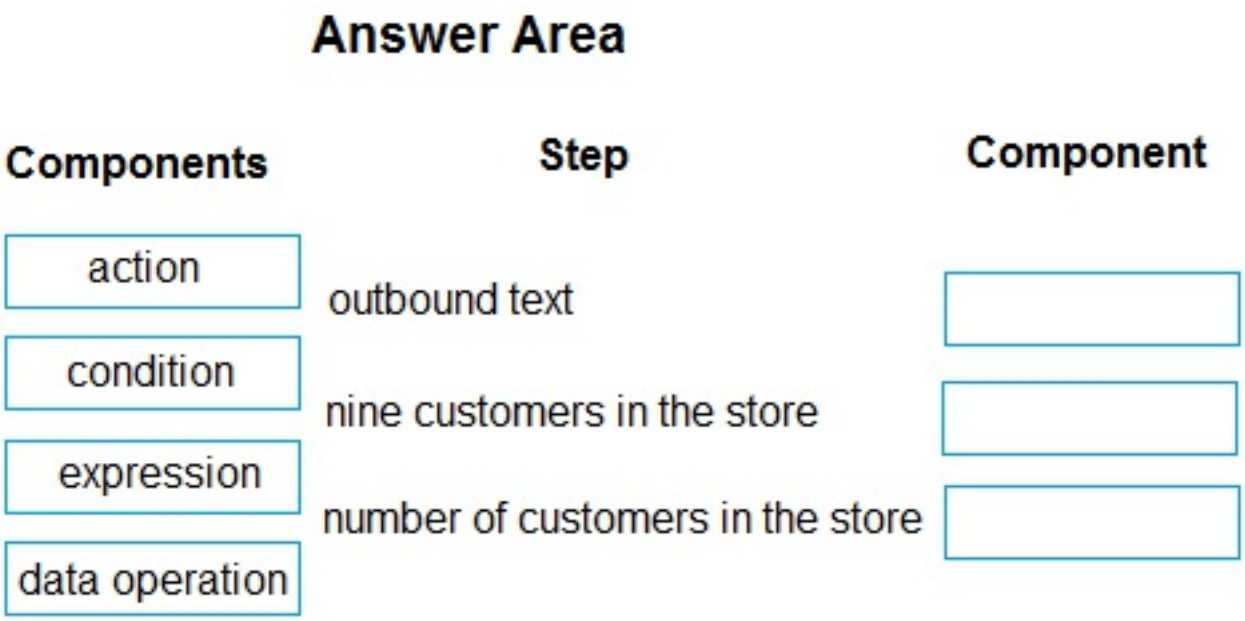

Answer:

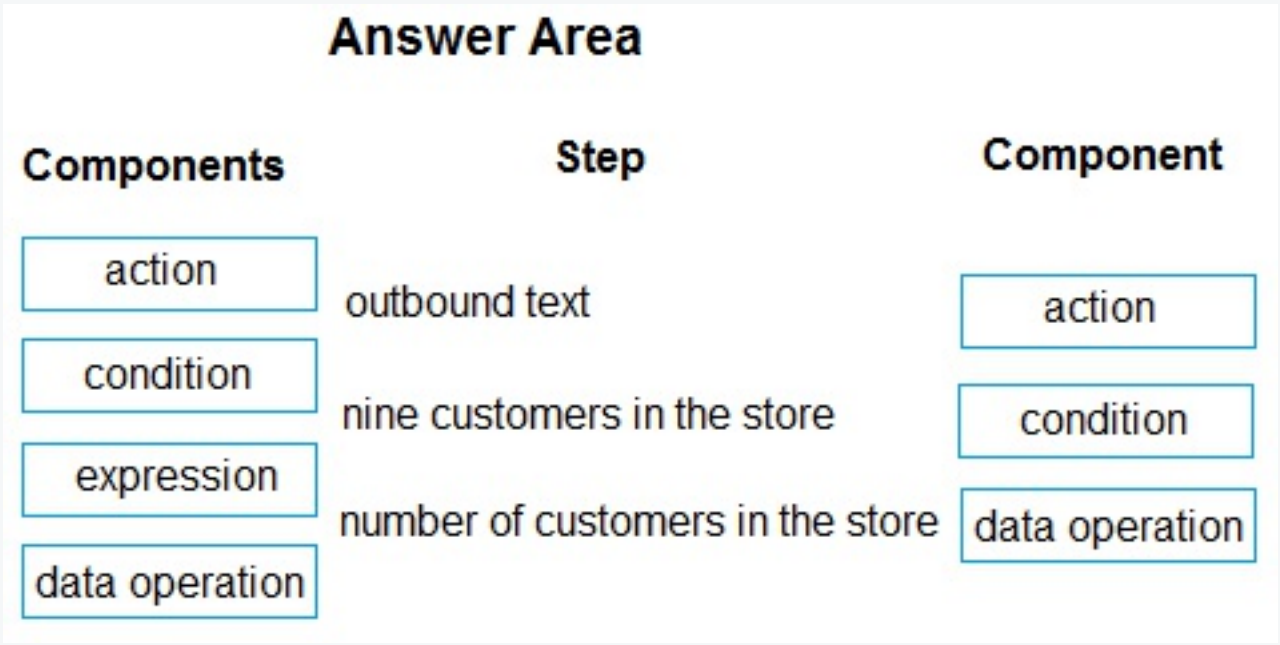

Explanation:

1. outbound text \(\rightarrow \) action

Why it is correct: An action is an operational event triggered within a flow to execute a task. Transmitting an outbound text message or SMS notification to an employee is a distinct operational command block executed downstream in the pipeline.

2. nine customers in the store \(\rightarrow \) condition

Why it is correct: A logical check evaluating whether there are exactly nine customers in the store (e.g., checking if CustomerCount is equal to 9) is a conditional branch control. It splits the workflow into "If Yes" or "If No" execution pathways.

3. number of customers in the store \(\rightarrow \) data operation

Why it is correct: Capturing, tracking, or computing a raw numeric value like the number of customers in the store involves standard cloud data manipulation. This step relies on Data Operation actions (such as Compose, Initialize Variable, or Parse JSON) to hold or shape the state data before it can be fed into actions or conditions.

Question: 439 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Current environment -
Adventure Works Cycles wants to replace their paper-based bicycle manufacturing business with an efficient paperless solution. The company has one manufacturing plant in Seattle that produces bicycle parts, assembles bicycles, and distributes finished bicycles to the Pacific Northwest.
Adventure Works Cycles has a retail location that performs bicycle repair and warranty repair work. The company has six maintenance vans that repair bicycles at various events and residences.
Adventure Works Cycles recently deployed Dynamics 365 Finance and Dynamics 365 Manufacturing in a Microsoft-hosted environment for financials and manufacturing. The company plans to leverage the Microsoft Power Platform to migrate all of their distribution and retail workloads to Dynamics 365 Unified Operations.
The customer uses Dynamics 365 Sales. Dynamics 365 Customer Service and Dynamics 365 Field Service.
Retail store information -
Adventure Works Cycle has one legal entity, four warehouses, and six field service technicians.
Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.
The Adventure Works Cycles retail location performs bicycle inspections and performance tune-ups.
- Technicians use paper forms to document the bicycle inspection performed before a tune-up and any additional work performed on the bicycle.
Adventure Works Cycles uses a Power Apps app for local bike fairs to attract new customers.
A canvas app is being developed to capture customer information when customers check in at the retail location.
The app has the following features:
- Customer selects yes or no if they are on the mailing list.
- Customer selects the amount of times they have visited the store.
- Customer selects the type of service needed.
- The search result returns all last name records that match the search term.
Technology -
A plug-in for Dynamics 365 Sales automatically calculated the total billed time from all activities on a particular customer account, including sales representative visits, phone calls, email correspondence, and repair time compared with hours spent.
A shipping API displays shipping rates and tracking information on sales orders. The contract allows for 3,000 calls per month.
Ecommerce orders are processed in batch daily by using a manual import of sales orders in Dynamics 365 Finance.
Microsoft Teams is used for all collaboration.
All testing and problem diagnostics are performed in a copy of the production environment.
Customer satisfaction surveys are recorded with Microsoft Forms Pro. Survey replies from customers are sent to a generic mailbox.

Requirements -
Automation -
A text message must be automatically sent to a customer to confirm an appointment and to notify when a technician is en route that includes their location.
Ecommerce sales orders must be integrated into Dynamics 365 Finance and then exported to Azure every night.
A text alert must be sent to employees scheduled to assist in the repair area of the retail store if the number of repair check-ins exceeds eight.
Submitted customer surveys must generate an email to the correct department. Approval and follow-up must occur within a week.
Reporting -
The warehouse manager's dashboard must contain warehouse counting variance information.
A warehouse manager needs to quickly view warehouse KPIs by using a mobile device.
Power BI must be used for reporting across the organization.
User experience -
Warehouse counting must be performed by using a mobile app that scans barcodes on boxes.
All customer repairs must be tracked in the system no matter where they occur.
Qualified leads must be collected from local bike fairs.
Issues -
Internal -
User1 reports receives an intermittent plug-in error when viewing the total bill customer time.
User2 reports that Azure consumption for API calls has increased significantly to 100 calls per minute in the last month.
User2 reports that sales orders have increased.
User5 receives the error message: 'Endpoint unavailable' during a test of the technician dispatch ISV solution.
The parts department manager who is the approver for the department is currently on sabbatical.
External -
CustomerB reports that the check-in app returned only one search result for their last name, which is not the correct name.
Nine customers arrive in the repair area of the retail store, but no texts were sent to scheduled employees.
Customers report that the response time from the information email listed on the Adventure Works Cycles website is greater than five days.
CustomerC requested additional information from the parts department through the customer survey and has not received a response one week later. Question You need to improve the efficiency of counting warehouse inventory. What should you create?

A. a model-driven app that allows the user to key in inventory counts

B. a Power BI dashboard that shows the inventory counting variances

C. a flow that updates the warehouse counts as the worker performs the count

D. a canvas app that scans barcodes to allow a warehouse worker to select inventory counts

Answer: D

Explanation:

Scenario: Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.

Barcode scanner control for canvas apps: Scans barcodes, QR codes, and data-matrix codes on an Android or iOS device.

Description -

The control opens a native scanner on an Android or iOS device. The scanner automatically detects a barcode, a QR code, or a data-matrix code when in view.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/controls/control-new-barcode-scanner

Question: 440 CertyIQ

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Current environment -
Adventure Works Cycles wants to replace their paper-based bicycle manufacturing business with an efficient paperless solution. The company has one manufacturing plant in Seattle that produces bicycle parts, assembles bicycles, and distributes finished bicycles to the Pacific Northwest.
Adventure Works Cycles has a retail location that performs bicycle repair and warranty repair work. The company has six maintenance vans that repair bicycles at various events and residences.
Adventure Works Cycles recently deployed Dynamics 365 Finance and Dynamics 365 Manufacturing in a Microsoft-hosted environment for financials and manufacturing. The company plans to leverage the Microsoft Power Platform to migrate all of their distribution and retail workloads to Dynamics 365 Unified Operations.
The customer uses Dynamics 365 Sales. Dynamics 365 Customer Service and Dynamics 365 Field Service.
Retail store information -
Adventure Works Cycle has one legal entity, four warehouses, and six field service technicians.
Warehouse counting is performed manually by using a counting journal. All warehouse boxes and items are barcoded.
The Adventure Works Cycles retail location performs bicycle inspections and performance tune-ups.
Technicians use paper forms to document the bicycle inspection performed before a tune-up and any additional work performed on the bicycle.
Adventure Works Cycles uses a Power Apps app for local bike fairs to attract new customers.
A canvas app is being developed to capture customer information when customers check in at the retail location. The app has the following features:
- Customer selects yes or no if they are on the mailing list.
- Customer selects the amount of times they have visited the store.
- Customer selects the type of service needed.
- The search result returns all last name records that match the search term.

Technology -
A plug-in for Dynamics 365 Sales automatically calculated the total billed time from all activities on a particular customer account, including sales representative visits, phone calls, email correspondence, and repair time compared with hours spent.
A shipping API displays shipping rates and tracking information on sales orders. The contract allows for 3,000 calls per month.
Ecommerce orders are processed in batch daily by using a manual import of sales orders in Dynamics 365 Finance.
Microsoft Teams is used for all collaboration.
All testing and problem diagnostics are performed in a copy of the production environment.
Customer satisfaction surveys are recorded with Microsoft Forms Pro. Survey replies from customers are sent to a generic mailbox.
Requirements -
Automation -
A text message must be automatically sent to a customer to confirm an appointment and to notify when a technician is en route that includes their location.
Ecommerce sales orders must be integrated into Dynamics 365 Finance and then exported to Azure every night.
A text alert must be sent to employees scheduled to assist in the repair area of the retail store if the number of repair check-ins exceeds eight.
Submitted customer surveys must generate an email to the correct department. Approval and follow-up must occur within a week.
Reporting -

The warehouse manager's dashboard must contain warehouse counting variance information.
A warehouse manager needs to quickly view warehouse KPIs by using a mobile device.
Power BI must be used for reporting across the organization.
User experience -
Warehouse counting must be performed by using a mobile app that scans barcodes on boxes.
All customer repairs must be tracked in the system no matter where they occur.
Qualified leads must be collected from local bike fairs.
Issues -
Internal -
User1 reports receives an intermittent plug-in error when viewing the total bill customer time.
User2 reports that Azure consumption for API calls has increased significantly to 100 calls per minute in the last month.
User2 reports that sales orders have increased.
User5 receives the error message: 'Endpoint unavailable' during a test of the technician dispatch ISV solution.
The parts department manager who is the approver for the department is currently on sabbatical.
External -
CustomerB reports that the check-in app returned only one search result for their last name, which is not the correct name.
Nine customers arrive in the repair area of the retail store, but no texts were sent to scheduled employees.
Customers report that the response time from the information email listed on the Adventure Works Cycles website is greater than five days.
CustomerC requested additional information from the parts department through the customer survey and has not received a response one week later. Question HOTSPOT -
You need to select visualization components.
What should you use? To answer, select the appropriate options from the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Component
Mailing list opt-in/opt-out	Flip switch Linear gauge Radial knob Linear slider
Number of store visits	Linear gauge Flip switch Pen control Input mask
Purpose of visit	Linear gauge Flip switch Radial knob Option set

Answer:

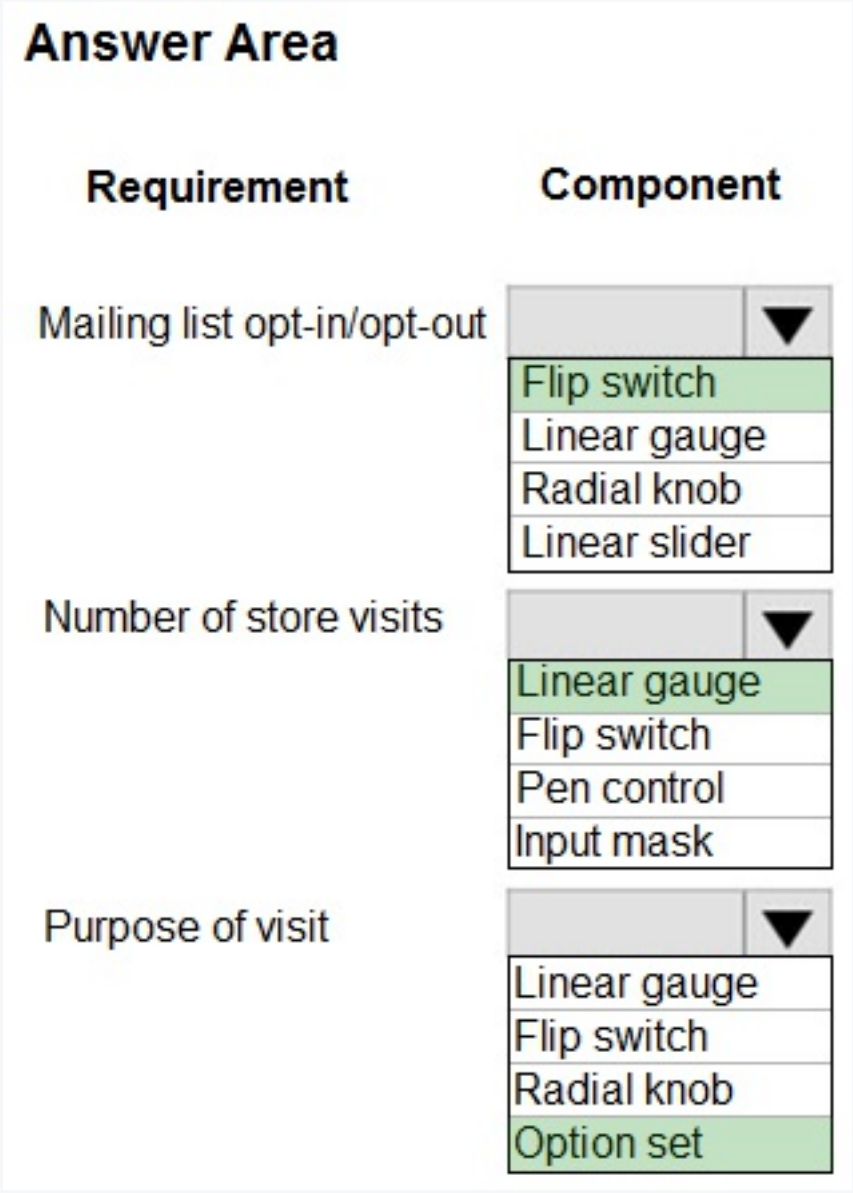

Explanation:

Scenario: Customer satisfaction surveys are recorded with Microsoft Forms Pro.

Box 1: Flip switch -

The flip switch is like an on/off switch, providing a choice between two values.

Box 2: Linear gauge -

The linear gauge lets your users input numerical values by dragging a slider instead of typing in the exact quantity. The slider provides whole number input and display only. Use this control for any numerical and money columns.

Box 3: Option set -

The choice control presents a set of options for your users to choose from when entering data.

You can customize forms (main, quick create, and quick view) and email templates by adding multi-select columns that are called Choices. When you add a choices column, you can specify multiple values that will be available for users to select. When users fill out the form they can select one, multiple, or all the values displayed in a drop-down list.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/model-driven-apps/additional-controls-for-dynamics-365-for-phones-and-tablets

Thank you

Thank you for being so interested in the premium exam material.
I'm glad to hear that you found it informative and helpful.

If you have any feedback or thoughts on the bumps, I would love to hear them.
Your insights can help me improve our writing and better understand our readers.

Best of Luck

You have worked hard to get to this point, and you are well-prepared for the exam
Keep your head up, stay positive, and go show that exam what you're made of!

Feedback

More Papers

Future is Secured

100% Pass Guarantee

24/7 Customer Support

Mail us - certyiqofficial@gmail.com

Free Updates

Lifetime Free Updates!

Total: **440 Questions**

Link: https://certyiq.com/papers/microsoft/pl-400