Question: 167 CertyIQ

An organization uses Dynamics 365 Sales. The organization has accounting and customer service departments.
You must restrict users in customer service from being able to change the value of the balance field on the Contact records. The accounting team must be the only team able to edit this field.
You need to create the appropriate solution without any customizations.
What should you do first?

A. Enable field security for the balance field and grant the customer service team read permissions.
B. Create a customer service form and role and make the balance field read-only.
C. Create a customer service form and role and a business rule that enables the balance field.
D. Create an accounting form and role and a business rule that enables the balance field.


Answer: A

Explanation:


Enable field security for the balance field and grant the customer service team read permissions.

Question: 168 CertyIQ

DRAG DROP
-
A company plans to deploy an Azure Function that connects to Dataverse on a defined schedule to bulk-update Account data.
Corporate policy discourages password-based authentication if other viable options exist.
You need to implement the function app.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

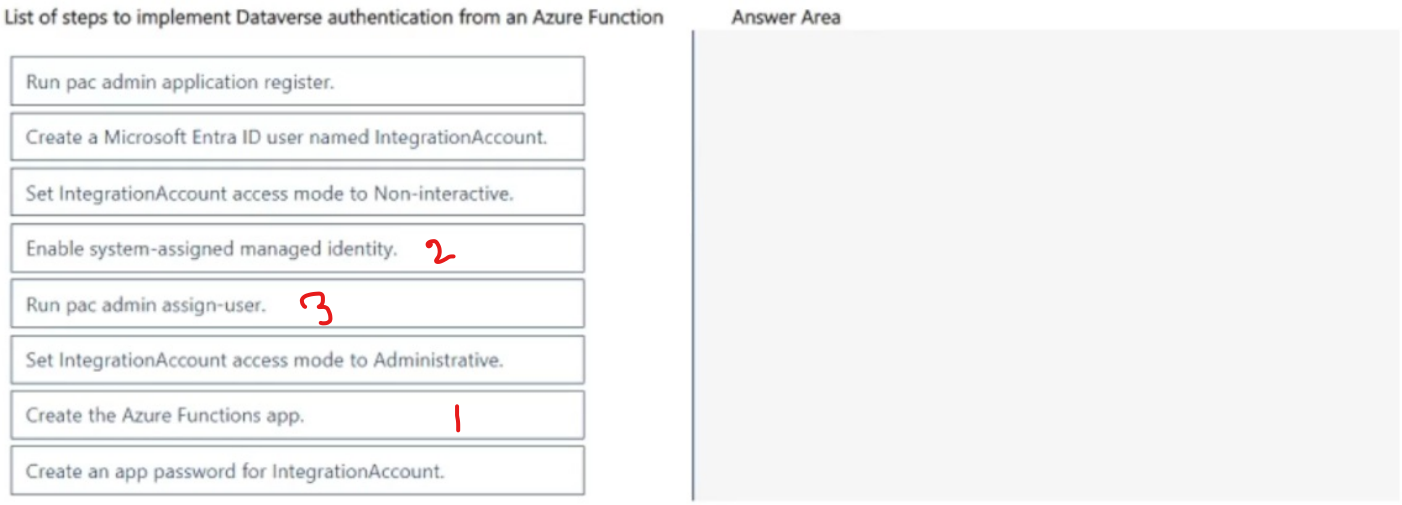

Answer:

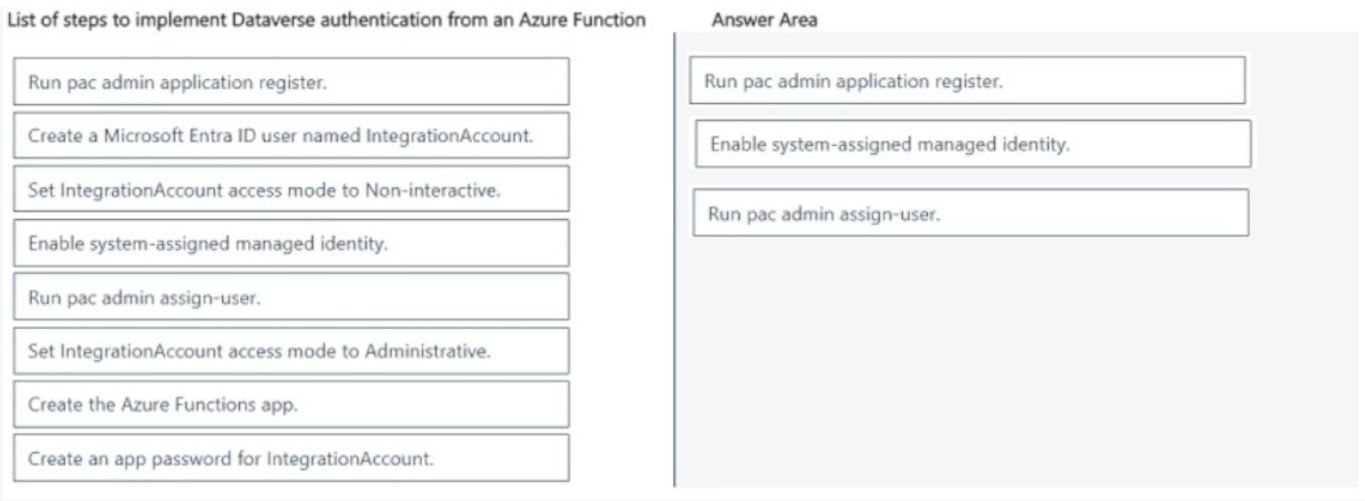

Explanation:

Run pac admin application register.

Enable system-assigned managed identity.

(This registers the newly created Function App as a native Service Principal object inside Microsoft Entra ID, automatically managing its credentials).

Run pac admin assign-user.

(Using the Power Platform CLI (*pac admin*), you link the managed identity's Application ID to a Dataverse **Application User record** and assign the specific security roles required to read or write data).

Question: 169

CertyIQ

A company uses a plug-in within Dataverse to perform complex calculations of data in near real time.
The calculations often run longer than five minutes, which causes the plug-in to time out.
You need to recommend an appropriate replacement component.
What should you recommend?

A. Azure Event Hub
B. Azure Data Factory
C. Azure Functions
D. Azure Databricks

Answer: C

Explanation:

Justification

Azure Functions (C) – Correct choice

Serverless compute that can execute long-running tasks (up to 10minutes on the Consumption plan, or unlimited with Premium/App Service plan).
Automatically scales, integrates with Dataverse triggers, and avoids the 5-minute plug-in timeout.
Supports C#, JavaScript, Python, etc., allowing the same complex calculation logic to be reused with minimal code changes.

Azure Event Hub (A) – Not suitable

Designed for high-throughput event ingestion and streaming, not for executing custom business logic.
Does not provide a runtime environment for calculations; it only transports data.

Azure Data Factory (B) – Not suitable

Primarily an orchestration service for data movement and transformation pipelines (ETL).
While it can run data flows, it is over-engineered for simple plug-in replacement and lacks direct, low-latency invocation from Dataverse.


Azure Databricks (D) – Not suitable

A managed Spark cluster geared toward big-data analytics and machine-learning workloads.
Introduces heavy infrastructure overhead and longer provisioning times, making it impractical for near-real-time, short-lived calculations that previously ran in a plug-in.


Conclusion: Azure Functions best replaces the timed-out plug-in by offering a lightweight, scalable, and near-real-time execution environment that fits the existing calculation logic and avoids the 5-minute timeout constraint.

Question: 170 CertyIQ

DRAG DROP
-
You create a model-driven app form.
During testing of the app, a user indicates a column that was expected to be editable is read-only.
You need to use Monitor to troubleshoot the issue.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

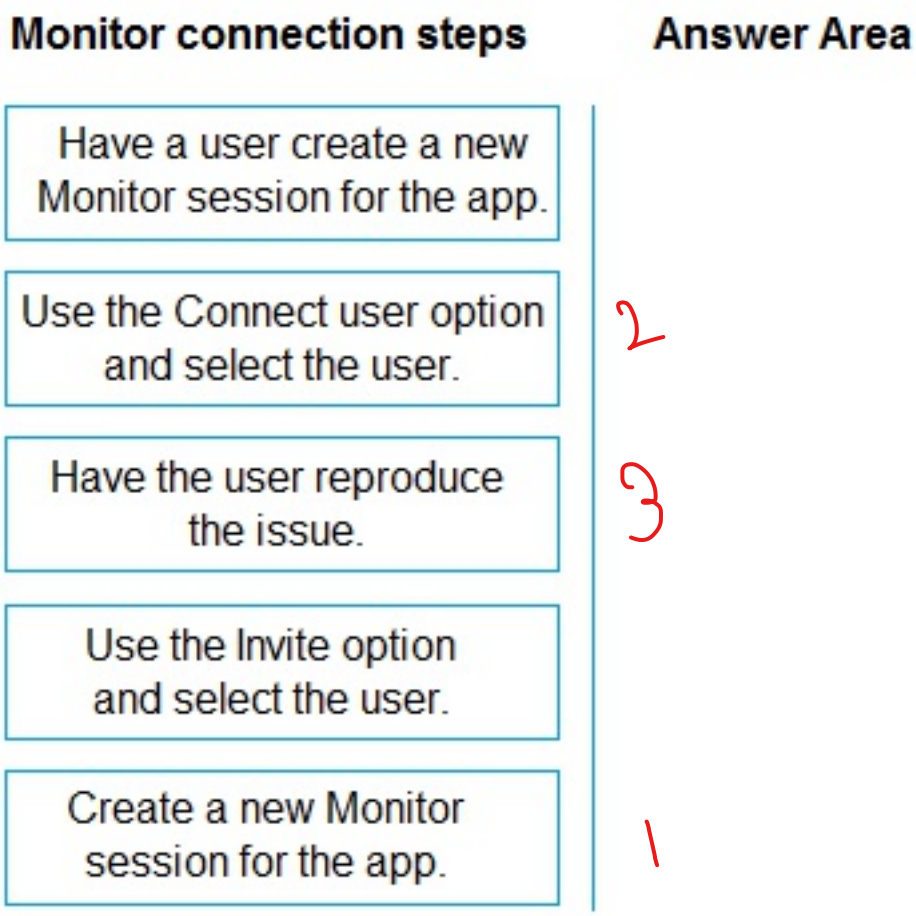

Answer:

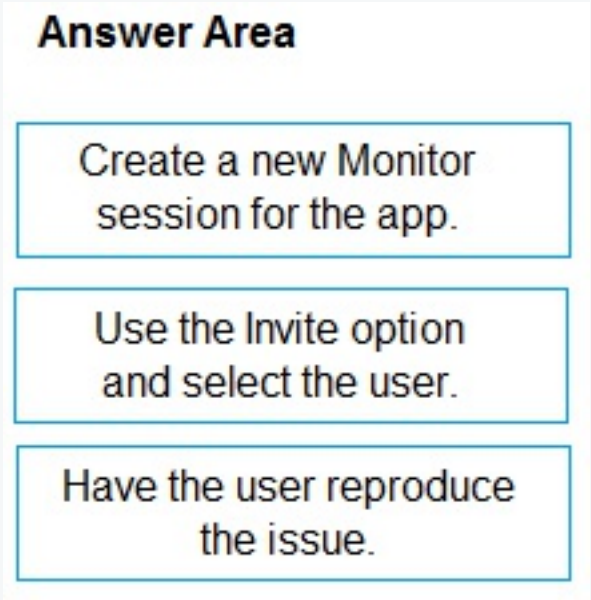

Explanation:

Step 1: Create a new Monitor session for the app.

Why: To initiate collaborative debugging, an administrator or developer must first launch the Power Apps Monitor tool from the Power Apps portal for the specific Canvas or Model-Driven application experiencing errors. This provisions a live web-based monitoring stream session.

Step 2: Use the Invite option and select the user.

Why: Once the monitoring dashboard is active, clicking the **Invite** button on the command bar allows you to search for and select a specific user within your organization's tenant directory. This generates a specialized, secure tracking link tied directly to your active debugging terminal.

Step 3: Have the user reproduce the issue.

Why: The invited user opens the application via the generated diagnostic session link. As they navigate the interface and trigger errors, their real-time client-side performance operations, network HTTP requests, and expression warnings stream directly back to your monitor dashboard for instant review.

Question: 171 CertyIQ

HOTSPOT
-
A form in a model-driven app contains a custom command button with several rules that determine the button's visibility and JavaScript registered on the OnLoad and OnSave events.
You must address two issues with the form:
•The command button is hidden but must be visible.
•An unexpected behavior occurs when users save the form. You must determine whether it is caused by the JavaScript code.
You need to troubleshoot the issues by using URL parameters.
Which parameters should you append to the form URL? To answer, select the appropriate options in the answer area

NOTE: Each correct selection is worth one point.

Answer Area

Issue	URL parameter
Command button visibility	&nvbar=on &ribbondebug=true &flags=DisableFormCommandbar=true
Unexpected form save behavior	&extraqs=name=debug &flags=DisableFormHandlers=ture & flags=DisableFormCommandbar=true

Answer:

Answer Area

Issue	URL parameter
Command button visibility	&nvbar=on &ribbondebug=true &flags=DisableFormCommandbar=true
Unexpected form save behavior	&extraqs=name=debug &flags=DisableFormHandlers=ture & flags=DisableFormCommandbar=true

Explanation:

1. Command button visibility: &ribbondebug=true

Why it is correct: Appending &ribbondebug=true to your model-driven app's URL forces the environment into a dedicated ribbon diagnostic mode. This enables the **Command Checker** utility tool, allowing a developer to visually inspect exactly why a button on the command bar is hidden or disabled (by analyzing its specific evaluation rules and display definitions).

2. Unexpected form save behavior: &flags=DisableFormHandlers=ture

Why it is correct: When a form throws errors or behaves unexpectedly during a save operation, it is typically caused by a malfunctioning client-side script. Using the parameter &flags=DisableFormHandlers=true temporarily bypasses and **disables all script handlers linked to form events** (including onLoad, onSave, and onChange). This allows you to test the raw out-of-the-box form behavior and isolate whether the issue stems from your custom code.

Question: 172 CertyIQ

You are writing C# code to create an alternate key in a table for two columns: Order ID and Order Date. The table has thousands of records.
You use the CreateEntityKey message to create the key. When you retrieve EntityKeyMetadata.EntityKeyIndexStatus, it returns a value of Failed.
You need to resolve the issue with the index creation.
What should you do first?

A. Use the ReactivateEntityKey action.
B. Publish customizations.
C. Use the DeleteEntityKeyRequest message.
D. Delete duplicate combination values in Order ID and Order Date.

Answer: A

Explanation:

Justification

Correct option –A. Use the ReactivateEntityKey action
The CreateEntityKey message fails with EntityKeyIndexStatus.Failed when the underlying index cannot be created because duplicate values already exist in the key columns.
ReactivateEntityKey forces the platform to re-evaluate the key definition, clears the failed status, and allows the system to enforce the alternate key after any duplicate rows have been resolved (or after a successful publish).
This is the first step recommended by the Power Apps/ Power Automate documentation: reactivate the key to reset its state before attempting any further remediation.
Why the other options are not appropriate as the first step
B. Publish customizations – Publishing merely makes pending changes visible to the environment; it does not resolve a failed key-creation status caused by duplicate data.
C. DeleteEntityKeyRequest – Deleting the key would remove the definition entirely, requiring you to recreate it later; it does not address the underlying duplicate-value condition that caused the failure.
D. Delete duplicate combination values in Order ID and Order Date – While removing duplicates is necessary for a successful key creation, it is an operational data-cleanup step, not the initial action the platform expects when the key's status is "Failed." The proper first step is to reactivate the key so the system can re-evaluate the definition after cleanup.

Conclusion

The immediate remediation for a failed EntityKeyIndexStatus is to invoke the **ReactivateEntityKey** action, which resets the key's state and prepares the system for subsequent validation or publication. This aligns with the platform's prescribed workflow for handling alternate key creation errors.

Question: 173 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear on the review screen.
You have two tables, account and contact, with a parent-child relationship. Records in the account table can be created in the UI or from an external system integrated with Dataverse by using an Azure Function.
When a user creates a record in the account table, a default record in the contact table must be created automatically.
You need to implement a process to create the contact records.
Solution: Create a custom API bound to the account table that uses a plug-in. Use the Organization service to create the contact record.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:

Justification

The requirement is to automatically generate a defaultContact record each time anAccount is created.
The standard, supported way to achieve this in Dataverse is to attach a **plug-in (or business rule) to theCreate message of theAccount entity** and, within that plug-in, call **IOrganizationService.Create** to insert the Contact. This guarantees the logic runs on every account creation, regardless of how the record is added (UI, SDK, integration).
Describing a “custom API bound to the account table” introduces an unnecessary abstraction layer. Custom APIs are intended for external callers, not for internal event-driven logic, and they do not automatically fire on the entity’s **Create** message. Adding an API therefore adds configuration overhead and does not ensure the contact is created reliably.
While using the **Organization service** inside a plug-in is technically correct, the solution as phrased does not meet the goal because it does not specify that the plug-in is triggered on the **Create** message; it merely mentions a “custom API bound to the account table,” which is not a valid pattern for this scenario.
Consequently, the proposed approach does **not** satisfy the requirement, making the correct answer **B – No**.

References

Register an assembly plug-in: https://learn.microsoft.com/en-us/power-apps/developer/plug-in-framework/register-an-assembly-plugin
Create records using IOrganizationService: https://learn.microsoft.com/en-us/power-apps/developer/data-platform/org-service/create-delete-update-retrieve

Question: 174 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear on the review screen.
You have two tables, account and contact, with a parent-child relationship. Records in the account table can be created in the UI or from an external system integrated with Dataverse by using an Azure Function.

When a user creates a record in the account table, a default record in the contact table must be created automatically.
You need to implement a process to create the contact records.
Solution: Create a plug-in that runs when the account record is created. Use the Organization service to create the contact record.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:

Answer: B – No, the proposed plug-in solution does not fully meet the goal.

Why "No" is the correct choice The requirement is to automatically create a default contact **every time** an account is created, regardless of whether the account is entered through the Power Apps UI **or** through an external system that uses an Azure Function.
A plug-in registered on the **Account→Create** message will fire **only when the plug-in is deployed to the Dataverse sandbox and the create operation passes through the standard event pipeline**.
When an account is provisioned by an Azure Function that uses a **separate connection string or a different service principal**, the plug-in registration may not be executed (the function often bypasses the plug

Question: 175 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear on the review screen.
You have two tables, account and contact, with a parent-child relationship. Records in the account table can be created in the UI or from an external system integrated with Dataverse by using an Azure Function.
When a user creates a record in the account table, a default record in the contact table must be created automatically.
You need to implement a process to create the contact records.
Solution: Create a JavaScript function that runs when the account record form is saved. Use the Web API in the JavaScript function to create the contact record.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:

The suggested approach uses client-side JavaScript that fires only when a user saves the form.
It will not execute when an account is inserted by an Azure Function or any other automated integration, so the contact would never be created in those scenarios.
To ensure a contact is created for **every** account record — whether entered through the UI or via an external system — a server-side mechanism is required.
Recommended alternatives are a Power Automate cloud flow, a plug-in, or a business rule attached to the **Account** entity's **Create** message; these run in the backend, participate in the same transaction, and are

triggered regardless of the creation source.
Consequently, the proposed solution does **not** meet the goal, making the correct answer **No**.

References

Create a flow that runs when a record is created: https://learn.microsoft.com/en-us/power-automate/create-flowsDataverse
Use plug-ins to respond to entity events: https://learn.microsoft.com/en-us/power-apps/developer/data-platform/plugin-framework

Question: 176 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear on the review screen.
You have two tables, account and contact, with a parent-child relationship. Records in the account table can be created in the UI or from an external system integrated with Dataverse by using an Azure Function.
When a user creates a record in the account table, a default record in the contact table must be created automatically.
You need to implement a process to create the contact records.
Solution: Create a cloud flow that runs when the account record is created. Use the Dataverse connector to create the contact record.
Does the solution meet the goal?

A. Yes
B. No

Answer: A

Explanation:

Justification

The requirement is to automatically create a related **contact** record each time an **account** record is inserted, without manual intervention.
A **cloud flow** built with PowerAutomate can be configured to trigger on the **Dataverse–When a row is added** event for the **Account** entity.
Using the **Dataverse connector** inside the flow, the flow can directly **create a new Contact** record, populating any required fields (e.g., linking the Contact to the newly created Account).
This approach is **server-less**, requires only low-code configuration, and fully leverages native Dataverse capabilities, making it the recommended pattern for this scenario.
Option **B (No)** would only be selected if the proposed solution failed to trigger on account creation, could not create a contact, or violated governance constraints. Since the described flow satisfies all those criteria, the correct answer is **A – Yes**.

References

Power Automate: Create a row in Dataverse
Power Automate triggers: When a row is added (Dataverse)

Question: 177 CertyIQ

A model-driven app form has JavaScript that runs during the OnLoad event. The event retrieves an account record and changes visibility to a form column based on one of the record columns. The following portion of code retrieves the account record:
Xrm.WebApi.retrieveRecord('account', accountId)_
Users report that the form loads slowly.
You need to improve the performance of the code that retrieves the account and changes visibility.
What should you do?

A. Use a synchronous XMLHttpRequest instead.
B. Add the code to change visibility to the success callback.
C. Enable the Async OnLoad app setting.
D. Set the options parameter to return only the column required.
E. Store the returned data in a global variable.

Answer: C

Explanation:

Technical justification

The form's OnLoad script currently uses Xrm.WebApi.retrieveRecord without any configuration to limit the payload or to run asynchronously.
Enabling the **Async OnLoad app setting** tells the platform to execute the OnLoad script in an asynchronous context, allowing the UI to render first and then fetch the account record in the background. This eliminates the blocking call that is causing the perceived slowness.
The asynchronous pattern also lets you place the visibility-change logic in the success callback, ensuring it runs only after the data is actually retrieved, but the key performance gain comes from the async execution mode itself.
Why the other options are inferiorA – Synchronous XMLHttpRequest – Would block the UI thread, making the form appear even slower and violating best-practice performance guidelines.
B – Add the code to the success callback – While this is a good practice, it does not address the root cause (synchronous execution) and therefore does not improve load time on its own.
D – Return only the required column – Reducing the attribute list can shave a few milliseconds, but the dominant delay is the synchronous call; without async execution the UI still waits for the round-trip.
E – Store the returned data in a global variable – Caching data does not reduce the initial network latency; it only helps subsequent calls, not the first load.

Conclusion – Enabling the Async OnLoad app setting is the most direct way to improve performance because it removes the blocking nature of the OnLoad script, allowing the UI to become interactive sooner while the record is fetched in the background.

References

Model-driven apps – Form scripts and events (Async execution)
Xrm.WebApi.retrieveRecord – Retrieve only needed attributes

Question: 178 CertyIQ

You have a Microsoft Dataverse entity and a model-driven app. The model-driven app integrates with an external system.
You plan to run business logic each time the model-driven app creates a record. Running business logic must not negatively affect model-driven app users.
You need to implement the business logic.
What should you use?

A. Synchronous plug-in registered in the PreOperation stage

B. Synchronous workflow

C. Asynchronous plug-in registered in the PostOperation stage

Answer: C

Explanation:
The asynchronous service executes long-running operations independent of the main Microsoft Dataverse core operation. This results in improved overall system performance and improved scalability.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/asynchronous-service

Question: 179 CertyIQ

HOTSPOT -
A company is preparing to go live with their Dynamics 365Sales solution, but first they need to migrate data from a legacy system. The company is migrating accounts in batches of 1,000.
When the data is saved to Dynamics 365 Sales, the IDs for the new accounts must be output to a log file.
You have the following code:

```
1. ExecuteMultipleRequest request = new ExecuteMultipleRequest()
2. {
3.   Settings = new ExecuteMultipleSettings()
4.   {
5.     ContinueOnError = true,
6.     ReturnResponses = false
7.   },
8.   Requests = new OrganizationRequestCollection()
9.  };
10. GetAccountData(request.Requests);
11. ExecuteMultipleResponse responseWithResults = (ExecuteMultipleResponse)
crmSvc.Execute(request);
12. foreach (var responseItem in responseWithResults.Responses)
13. {
14.  . . .
15. }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
Hot Area:

Answer Area

Statement	Yes	No
The developer is able to get access to the newly-created accounts IDs.	○	✗
If an error occurs, the developer can get access to the request that caused the fault.	✗	○
If there are errors in the requests, the request will raise an exception at the first error and stop processing.	○	✗
If there are ten errors in the 1,000 CreateRequest requests, ten responses will be returned from the platform.	✗	○

Answer:

Answer Area

Statement	Yes	No
The developer is able to get access to the newly-created accounts IDs.	○	●
If an error occurs, the developer can get access to the request that caused the fault.	●	○
If there are errors in the requests, the request will raise an exception at the first error and stop processing.	○	●
If there are ten errors in the 1,000 CreateRequest requests, ten responses will be returned from the platform.	●	○

Explanation:
Box 1: No -

Box 2: Yes -
ContinueOnError: When true, continue processing the next request in the collection even if a fault has been returned from processing the current request in the collection. When false, do not continue processing the next request.
ReturnResponses: When true, return responses from each message request processed. When false, do not return responses.
When false, the Responses collection will not be empty if errors are returned. If errors are returned, there will be one response item in the collection for each processed request that returned a fault and Fault will be set to the actual fault that occurred.


Box 3: No -

Box 4: Yes -
For example, in a request collection that contains six requests where the third and fifth request return faults, the following table indicates what the Responses collection would contain.
ContinueOnError=true, ReturnResponses=false: 2 response items: 2 have Fault set to a value.


Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/org-service/execute-multiple-requests

Question: 180 CertyIQ

DRAG DROP -
You are creating a business process flow for an organization's Request for Quote process.
You need to ensure that the business process flow meets the company's requirements.
Which components should you use? To answer, drag the appropriate components to the correct requirements.
Each component may be used once, more than once, or not at all. You may need to drag the split bar between panes to scroll to view content. Select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Select and Place:

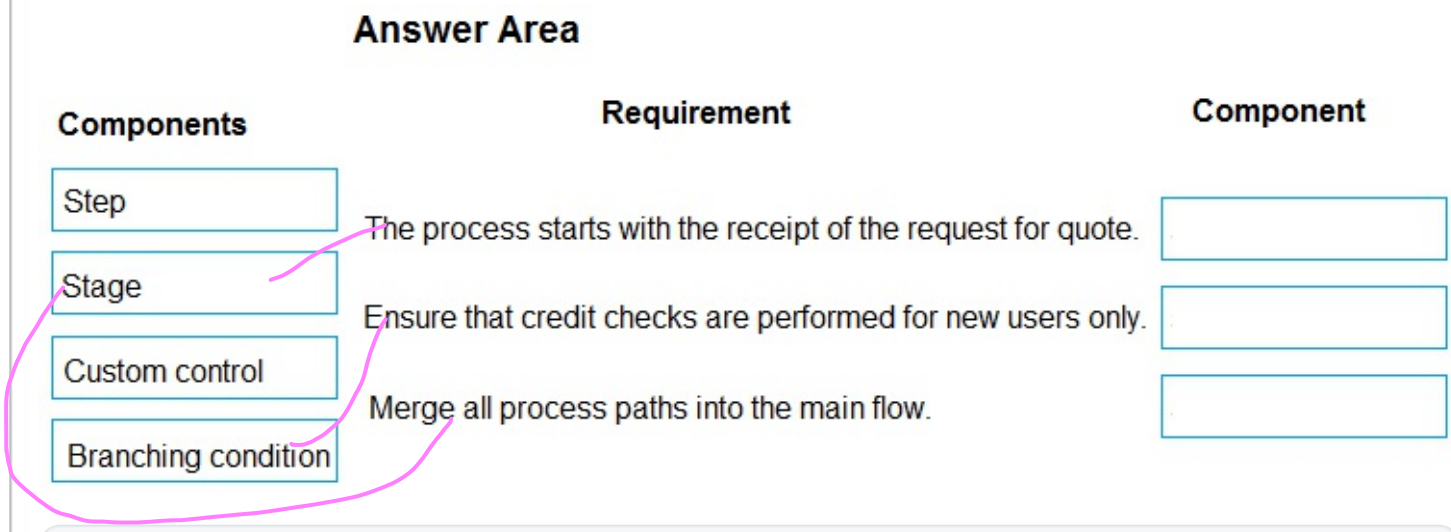

Answer:

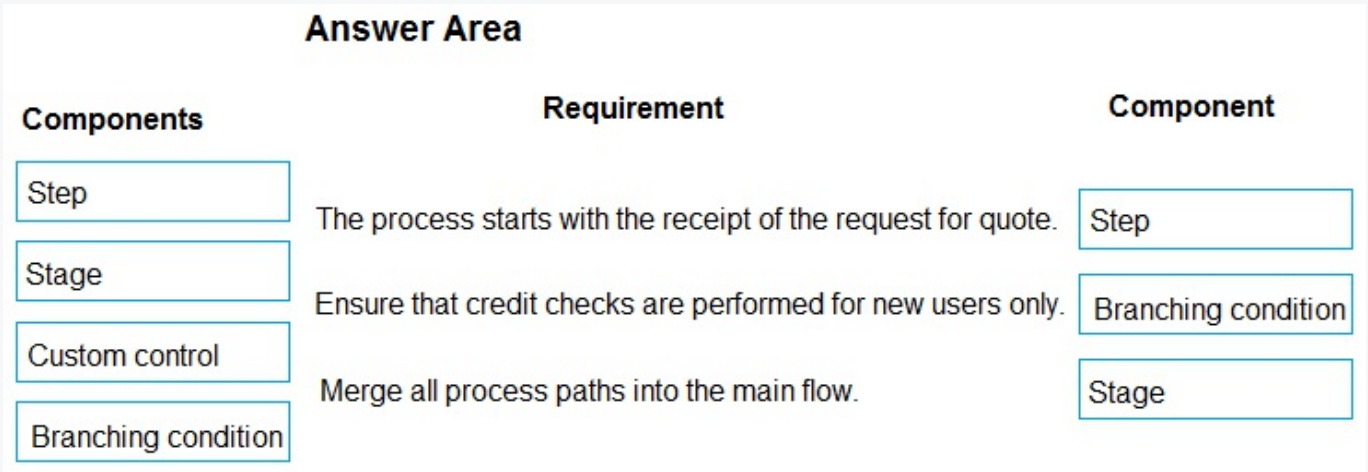

Explanation:
Box 1: Step -
Each step represents a field where data can be entered.
Stages tell you where you are in the process, while steps are action items that lead to a desired outcome.

Box 2: Branching condition -
You can enhance a business process flow with branching. If you have the create permissions on business


process flows, you'll be able create business process flow with multiple branches by using the If-Else logic.

Box 3: Stage -
Each stage contains a group of steps.
Incorrect Answers:
You can use custom controls to add rich visualizations (such as sliders, radial knobs, the LinkedIn control, and more) to business process flows steps and deliver engaging experiences to those who use your business process.

Reference:
https://docs.microsoft.com/en-us/power-automate/business-process-flows-overview
https://docs.microsoft.com/en-us/power-automate/enhance-business-process-flows-branching

Question: 181 CertyIQ

HOTSPOT -
A university manages grant applications using a model-driven app.
Users report that the message on the Grant Application screen is outdated. The screen shows the following:

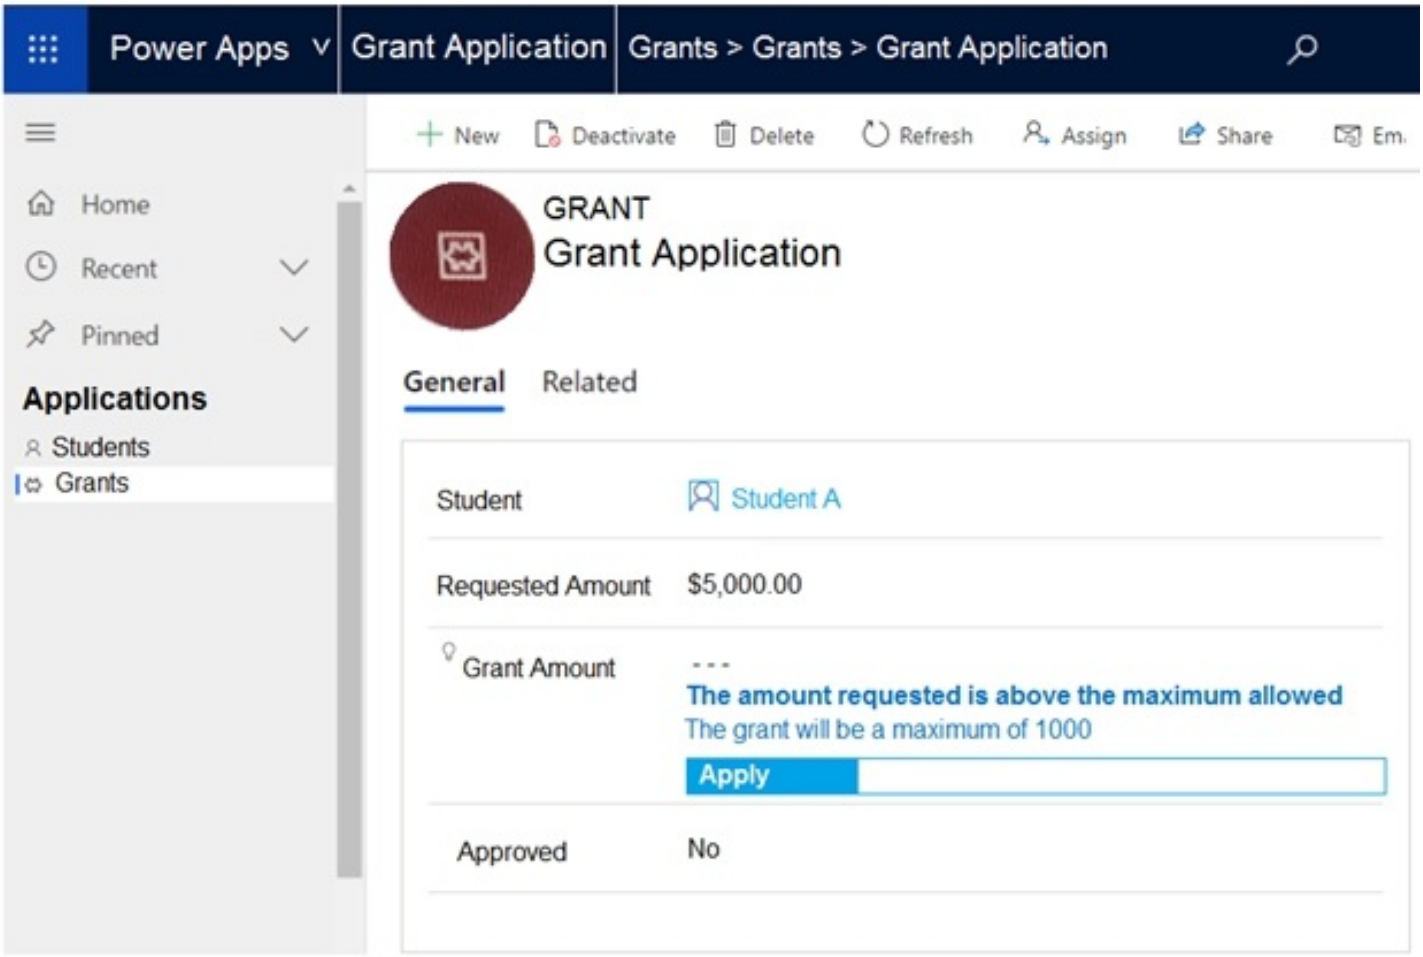

Use the drop-down menus to select the answer choice that answers each question based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area


Which Power Platform capability does the app use to display the message?

- Business rule
- Logic app
- Flow
- Plug-in

What should the app maker do to prevent the message from displaying?

- Update the field calculation.
- Update the rollup field.
- Update the automated flow.
- Update the business rule.

Answer:

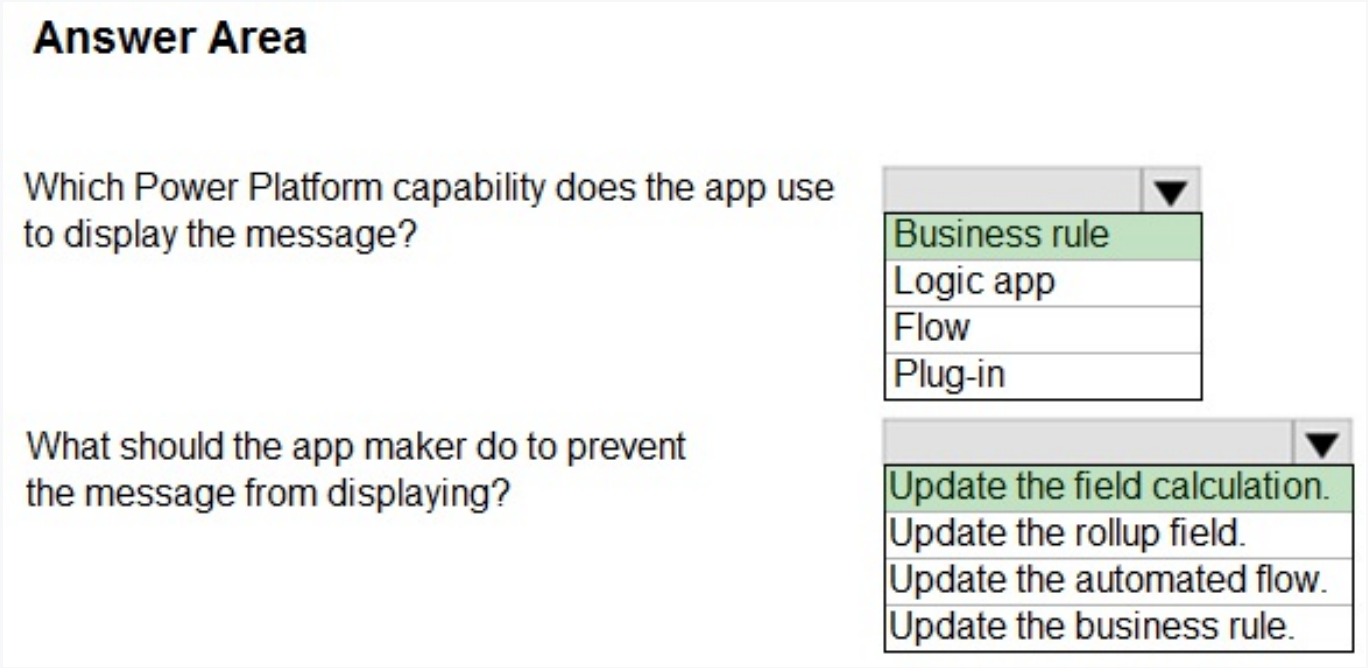

Explanation:

Business rule

update the field calculation

Reference:

https://www.loganconsulting.com/blog/how-use-power-automate-trigger-workflows-microsoft-dynamics-crm/

Question: 182 CertyIQ

A manufacturing company uses a Common Data Service (CDS) environment to manage their parts inventory across two warehouses modeled as business units and named WH1 and WH2.
Data from the two warehouses is processed separately for each part that has its inventory quantities updates. The

company must automate this process, pushing inventory updates from orders submitted to the warehouses.
You need to build the automation using Power Automate flows against the CDS database. You must achieve this goal by using the least amount of administrative effort.
Which flow or flows should you recommend?

A. Two automated flows with scope Business Unit, with triggers on Create/Update/Delete on orders.

B. Two automated flows with scope Business Unit, with triggers on Create/Update/Delete and each flow filtering updates from each business unit.

C. Two scheduled flows, each querying and updating the parts included in orders from each business unit.

D. One scheduled flow, querying the parts included in orders in both business units.

E. One automated flow, querying the orders in both business units.

F. Two scheduled flows, each querying the orders from each business unit.

G. Two automated flows with scope Organization, with triggers on Create/Update/Delete and filters on WH1 and WH2.

H. Two automated flow with scope Business Unit, with triggers on Create/Update/Delete on orders and filters on WH1 and WH2.

Answer:

H

Explanation:

With the Common Data Service connector, you can create Power Automate flows that are initiated by create and update events within Dataverse. Additionally, you can perform create, update, retrieve, and delete actions on records within Dataverse.

You can use scopes to determine if your flow runs if you create a new record, if a new record is created by a user within your business unit, or if a new record is created by any user in your organization.

Reference:

https://docs.microsoft.com/en-us/power-automate/connection-cds

Question: 183

CertyIQ

HOTSPOT -
You are training a group of makers to use Power Automate.
You have the following expressions:

Name	Expression
1	`outputs('Get_Item').statusCode`
2	`"from": "@result('MyScope')"`

You need to identify what each expression is doing.
What does each expression do? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Expression	Action
1	Return the statuscode at runtime. Return the output to the statuscode at runtime. Return the Get_Item at runtime.
2	Return MyScope as all the action items. Return all the variables from all actions from MyScope. Return all the results from all actions from MyScope.

Answer:

Answer Area

Expression	Action
1	Return the statuscode at runtime. Return the output to the statuscode at runtime. Return the Get_Item at runtime.
2	Return MyScope as all the action items. Return all the variables from all actions from MyScope. Return all the results from all actions from MyScope.

Explanation:

Box 1: Return the statuscode at runtime.

You could try the following method to get the status code.

Configure Compose action under the specified action to get the status code. outputs('ActionName')['statusCode']

Box 2: Return all the results from all actions from MyScope

The @result() expression accepts the name of a Scope as a parameter and returns a JSON array of objects that represent the results of the execution of each action within the Scope.

Reference:

https://powerusers.microsoft.com/t5/Building-Flows/How-to-determine-status-code-for-a-condition/td-p/355653 https://blogs.msmvps.com/windsor/2019/04/25/microsoft-flow-error-handling/


Question: 184 CertyIQ

HOTSPOT -
A clothing store uses Power Apps apps to interact with customers. Customer data is stored in Microsoft Dataverse. The store offers discounts for customers. You assign a group discount to all customers in a category. Applicable group discounts are added to any customer- specific discounts. Discount information is stored in the following columns:

Information type	Column
Group discount	store_groupdiscount
Personal discount	store_personaldiscount
Total discount	store_totaldiscount


If the total discount on an order exceeds 30 percent, a manager must approve the order before the order is fulfilled and delivered.
You need to create a flow that notifies managers when approvals are required.
How should you configure the flow trigger? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

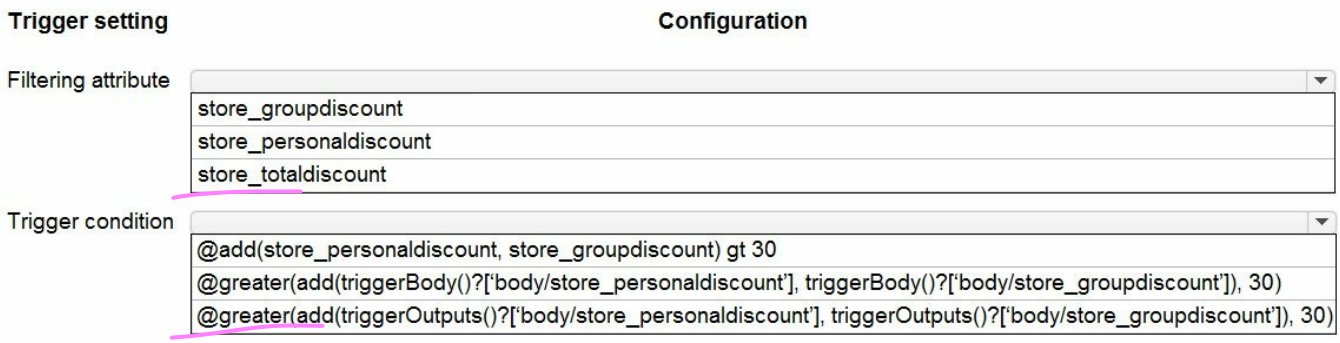

Answer:

Answer Area

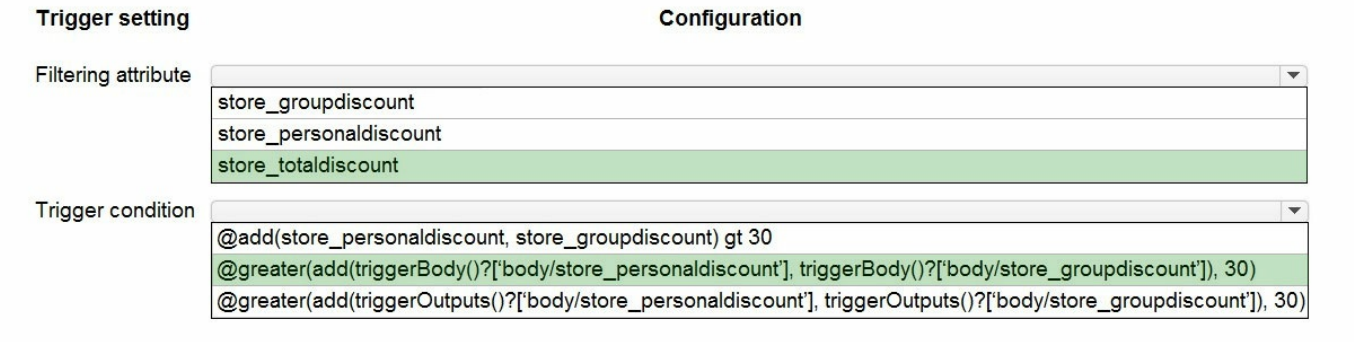

Explanation:

Box 1: store_totaldiscount -

If the total discount on an order exceeds 30 percent, a manager must approve the order before the order is fulfilled and delivered.

Box 2: @greater(add(triggerBody()..

When to use triggerBody() ? " When you want to fetch attributes from the body of the trigger.

Incorrect Answers:


When to use triggerOutputs() ? " Whenever you need to access anything from within the body as well as some info from the header as well.

Reference:


https://d365demystified.com/2020/09/06/using-triggerbody-triggeroutput-to-read-cds-trigger-metadata-attributes-in-a-flow-power-automate/

Question: 185 CertyIQ

DRAG DROP -
You are creating technical designs for several complex business processes.
You need to implement custom business logic based on the requirements.
Which implementation methods should you use? To answer, drag the appropriate implementation methods to the correct requirements. Each implementation method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

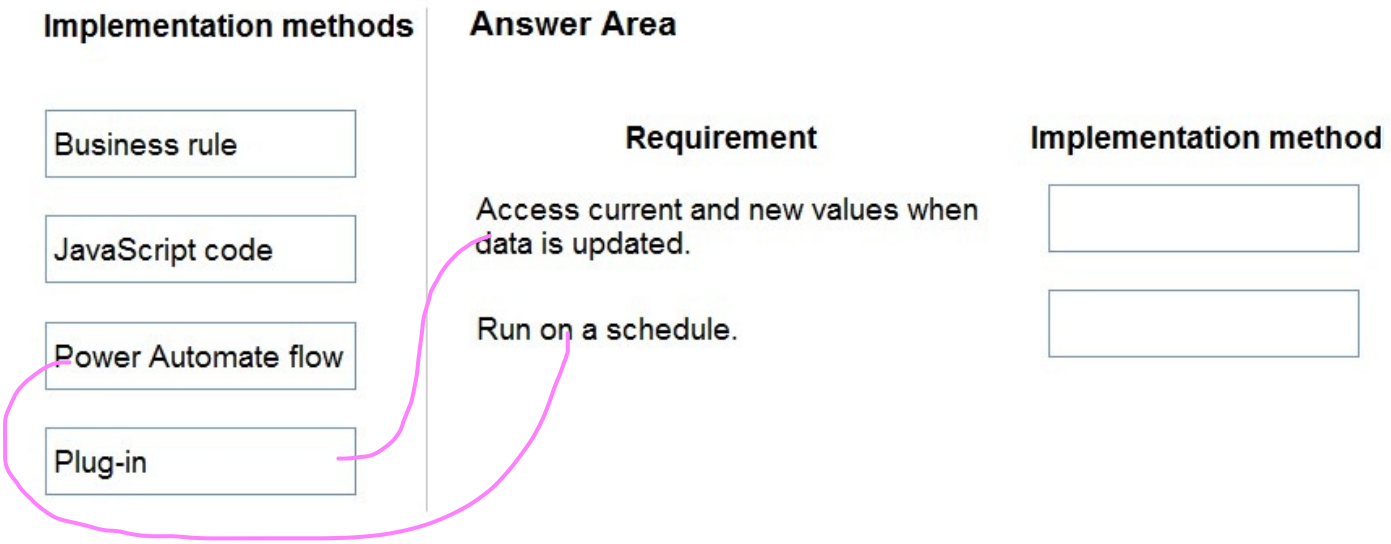

Answer:

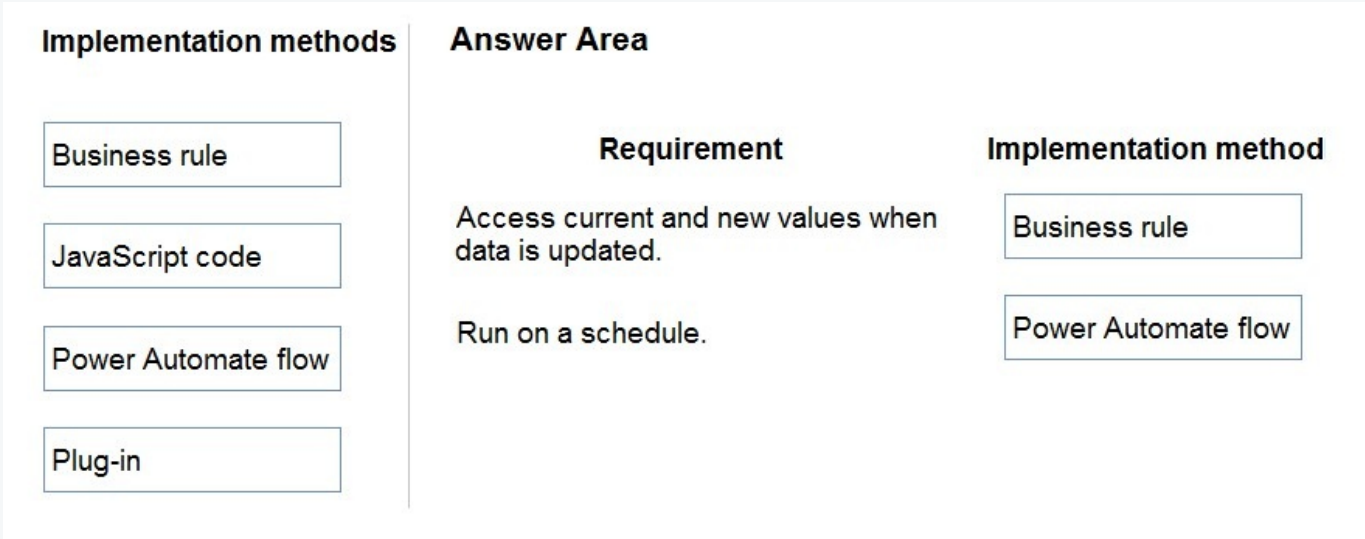

Explanation:

Box 1: Business rule -

You can create business rules and recommendations to apply logic and validations without writing code or creating plug-ins. Business rules provide a simple interface to implement and maintain fast-changing and commonly used rules.

By combining conditions and actions, you can do any of the following with business rules:

- Set column values
- Clear column values
- Set column requirement levels
- Show or hide columns
- Enable or disable columns
- Validate data and show error messages
- Create business recommendations based on business intelligence.

Box 2: Power Automate flow -

You can create a cloud flow that performs one or more tasks (such as sending a report in email):

- Once a day, an hour, or a minute
- On a date that you specify
- After a number of days, hours, or minutes that you specify

Reference:

https://docs.microsoft.com/en-us/power-automate/run-scheduled-tasks

Question: 186

CertyIQ

You create a Power Automate flow that retrieves data from a proprietary database.
You need to ensure that the flow works for other users.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Share a view with users.
B. Share the custom connector with users.
C. Share the flow with users.
D. Share the environment by giving permissions to the users.

Answer: BC

Explanation:
Share the flow and the custom connector with users.
B: Share a custom connector in your organization.
If you have a custom connector, you might want to enable other people to use it. People within your organization can use the custom connector just like they use other Microsoft-managed connectors.
C: Also share the flow.

Reference:
https://docs.microsoft.com/en-us/connectors/custom-connectors/share

Question: 187 CertyIQ

An organization implements Dynamics 365 Sales.
You need to trigger a business rule when the main form in saved.
What should you do?

A. Write a business rule to trigger on a change of ModifiedOn field.
B. Set the scope of the business rule to one specific form where business rule triggers.
C. Set the scope of the business rule to All Forms.
D. Set the scope of the business rule to Entity.

Answer: D

Explanation:
Set scope of business rule to "Entity" instead of "All Form". This will trigger it on server side.

Reference:
https://docs.microsoft.com/en-us/previous-versions/dynamicscrm-2016/developers-guide/dn481574(v=crm.8)

Question: 188 CertyIQ

A company implements Dynamics 365 Sales.
An email notification must be sent automatically to the sales manager when a business process completes.
You need to ensure that emails are sent.
What should you create on the process completed trigger?

A. a workflow
B. an action step
C. a data step

Answer: A

Explanation:
When you include a workflow that you want to trigger on Stage Exit of a stage in your business process flow, and that stage is the last stage in the flow, the designer gives the impression that the workflow will be triggered when that stage is completed.

Reference:
https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/customize/business-process-flows-overview

Question: 189 CertyIQ

You create a Power Virtual Agents chatbot in an environment named Environment1. A colleague creates a Power Automate flow in the default solution in the default environment.
The chatbot in Environment1 does not recognize the flow in the default environment.

You need to ensure the chatbot can access the flow.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Add the Power Automate flow to a solution in Environment1.
B. Send a copy of the Power Automate flow from the default environment.
C. Add the Power Automate flow to a solution in the default environment.
D. Export the solution from the default environment and import the solution into Environment1.
E. Share the Power Automate flow from the default environment.

Answer:

AE

Explanation:

E: The flow needs to be shared as it was created by another person.

A: To be available to your bots, flows must be stored in a solution in Power Automate. If you do not want to use the Default Solution for this purpose, you can move your flows to another solution.

Incorrect Answers:

C: The flow is already in the default solution in the default environment.

D: You move the flow, not export and import the solution.

Reference:

https://docs.microsoft.com/en-us/power-virtual-agents/environments-first-run-experience

Question: 190 CertyIQ

A customer wants to design a complex business process flow that includes six custom entities and four stages for each entity. One of the stages will have 15 steps.
You need to explain the flaw in this design to the customer.
What is the flaw in this design?

A. The maximum number of custom entities has been exceeded.
B. The maximum number of steps for a stage has been exceeded.
C. The maximum number of stages for an entity has been exceeded.
D. The minimum number of stages for an entity has not been met.
E. The minimum number of steps for a stage has not been met.

Answer:

A

Explanation:

Maximum number of processes, stages, and steps:

To ensure acceptable performance and the usability of the user interface, there are some limitations you need to be aware of when you plan to use business process flows:

✑ Multi-entity processes can contain no more than five entities.

✑ There can be no more than 10 activated business process flow processes per entity.


✑ Each process can contain no more than 30 stages.

Reference:


https://docs.microsoft.com/en-us/power-automate/business-process-flows-overview

Question: 191 CertyIQ

DRAG DROP -
An organization has a Dynamics 365 Sales environment. In the development environment, you create a business rule named BusinessRule1 on the Account entity. You deploy BusinessRule1 to production as part of a managed solution.
You need to remove BusinessRule1 from the production environment.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

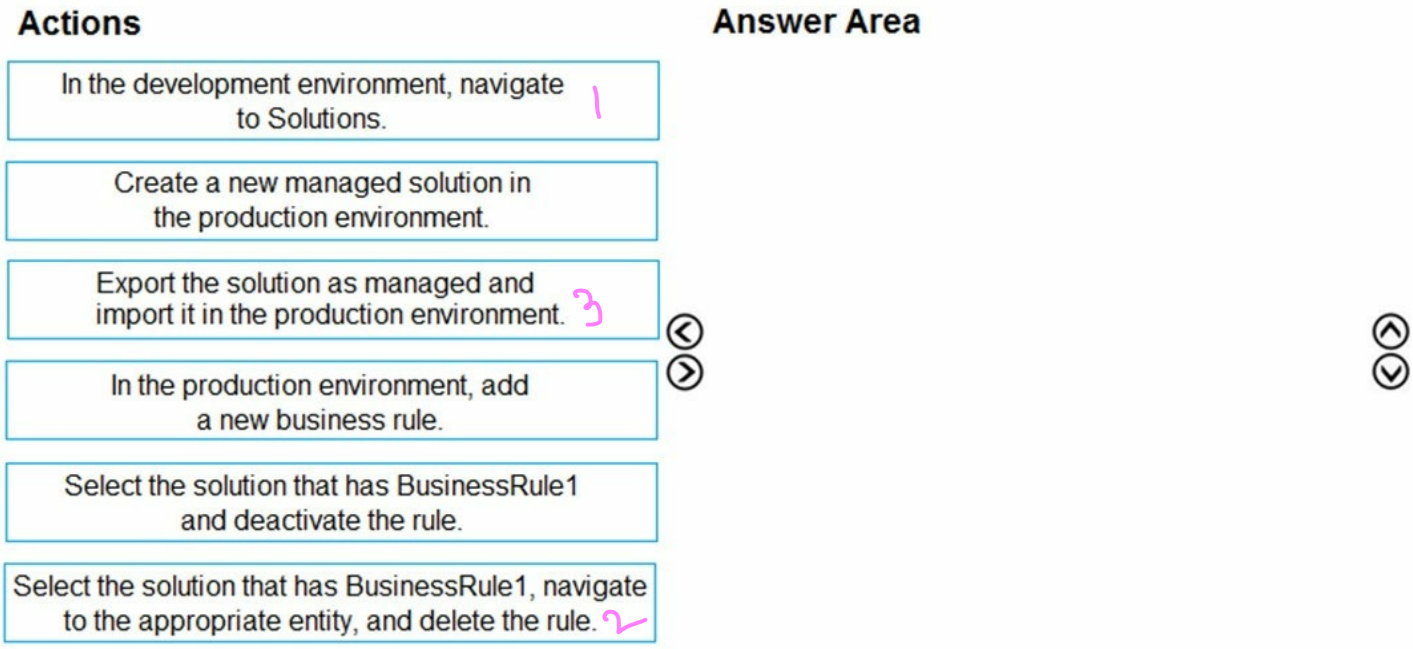

Answer:

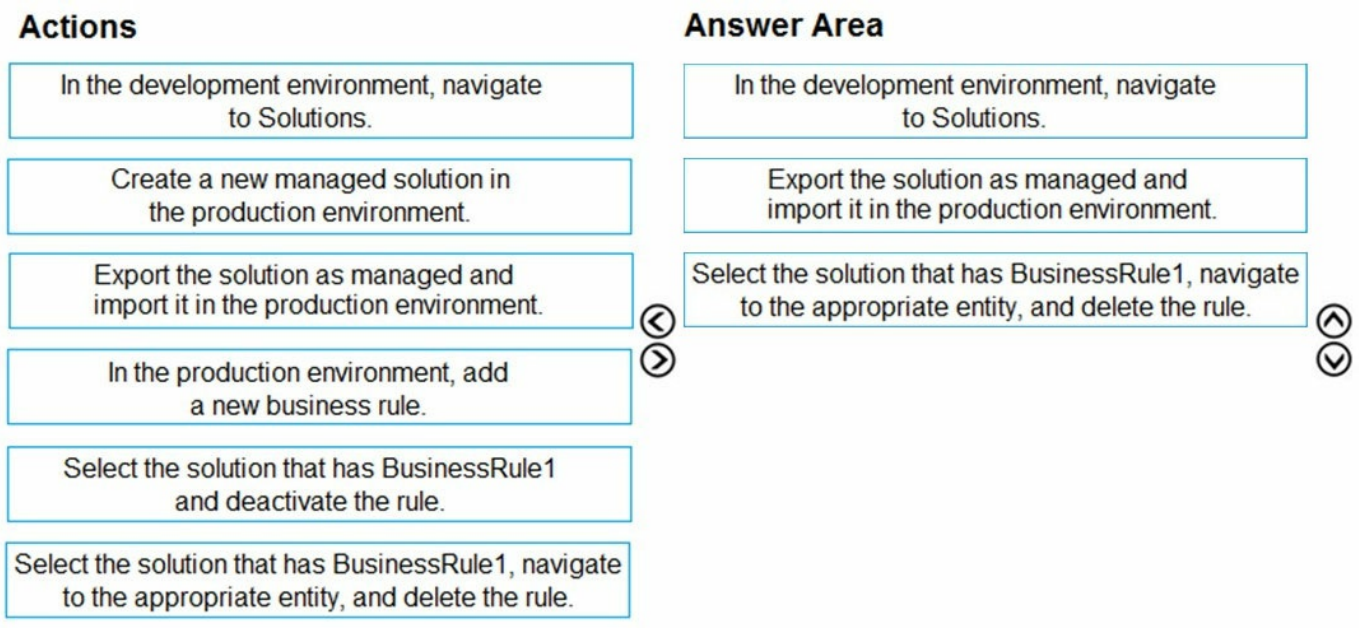

Explanation:

Step 1: In the development environment, navigate to Solutions.

The only supported way of transferring customizations from one CRM organization to another has been through Solutions.

With Solution Management came the concept of Managed and Unmanaged Solutions.

Step 2: Export the solution as managed and import it in the production environment.

Managed is a way to protect your IP (Intellectual Property) with an easy concept of install and uninstall.

Step 3: Select the solution that has BusinessRule1, navigate to the appropriate entity, and delete the rule.

Reference:

https://www.inogic.com/blog/2016/01/solution-management-with-dynamics-crm-2016/

Question: 192 CertyIQ

HOTSPOT -
You are a Power Apps app maker with administrative rights to Microsoft 365.
You create a canvas app that will be used by employees at your company. You plan to allow users to embed the app in Microsoft Teams. During testing, the following issues are reported:
- The app runs slowly when it runs in Microsoft Teams.
- Test users cannot add the personal app within Microsoft Teams.

You need to resolve the issues.
What should you do? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Issue	Resolution
The app runs slowly when it runs in Microsoft Teams.	Change settings in app to preload app Use a Teams integration object
Test users cannot add the personal app within Microsoft Teams.	Download the custom app Change permission for the custom app in Teams Publish the customer app Change custom app setup policy in Tems

Answer:

Answer Area

Issue	Resolution
The app runs slowly when it runs in Microsoft Teams.	Change settings in app to preload app Use a Teams integration object
Test users cannot add the personal app within Microsoft Teams.	Download the custom app Change permission for the custom app in Teams Publish the customer app Change custom app setup policy in Tems

Explanation:

Box 1: Change settings in app to preload app


You can optionally preload your app within Teams to increase performance.

Box 2: Change the permission for the custom app in Teams

As an admin, you can use app permission policies to control what apps are available to Microsoft Teams users in your organization. You can allow or block all apps or specific apps published by Microsoft, third-parties, and your organization. When you block an app, users who have the policy are unable to install it from the Teams app store.

You manage app permission policies in the Microsoft Teams admin center. You can use the global (Org-wide default) policy or create and assign custom policies.

Users in your organization will automatically get the global policy unless you create and assign a custom policy. After you edit or assign a policy, it can take a few hours for changes to take effect.

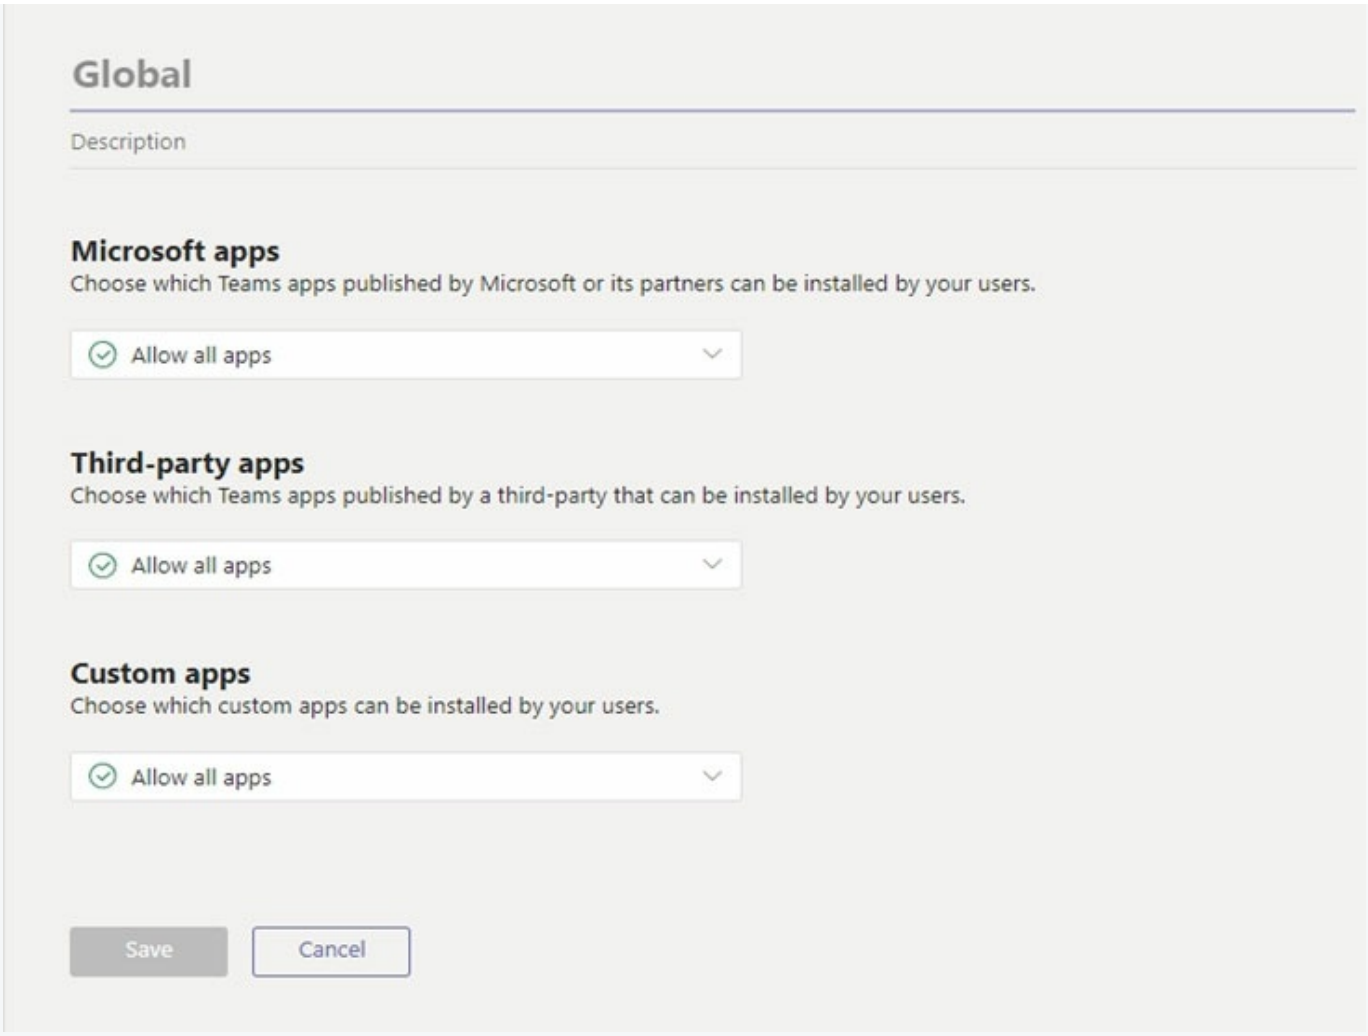


Reference:
https://docs.microsoft.com/en-us/powerapps/teams/embed-teams-app https://docs.microsoft.com/en-us/microsoftteams/teams-app-permission-policies


Question: 193

CertyIQ

DRAG DROP -
You are developing a Power Platform solution.
You must add a custom control slider to a specific step in a business process flow.
You need to add the custom control.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

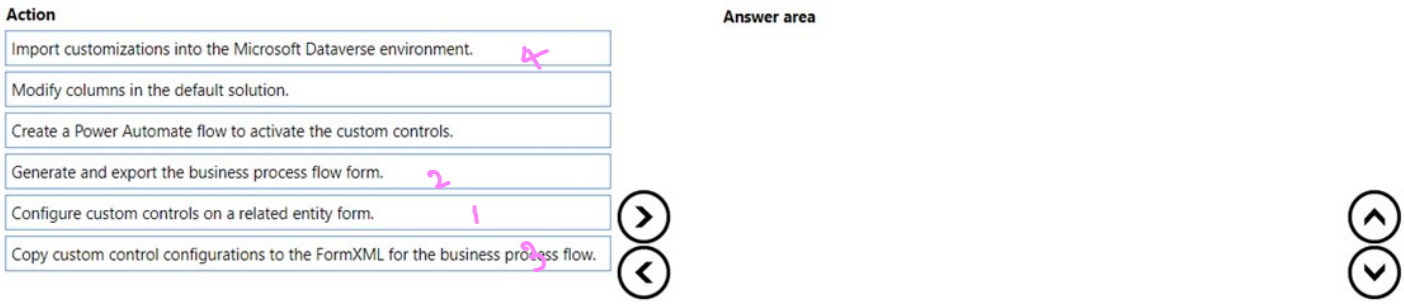

Answer:

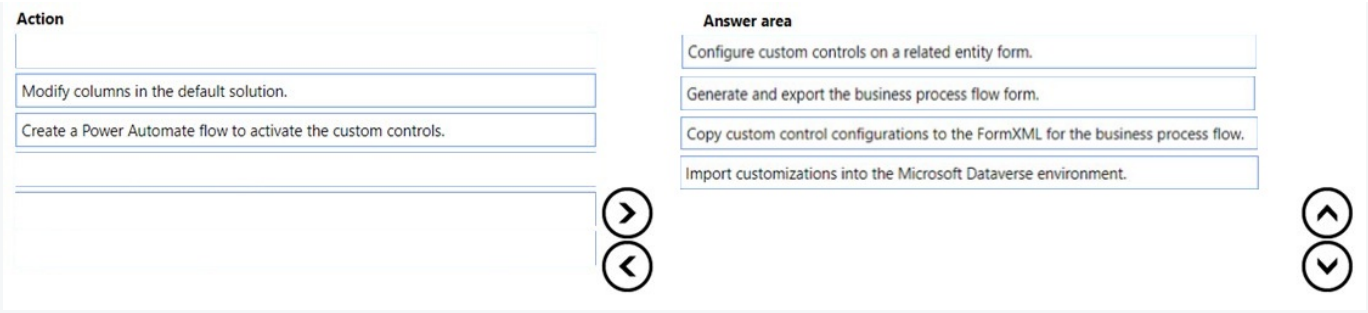

Explanation:

Here are the steps you must follow to add custom controls to a business process flow:

Step 1: Configure custom controls on a related entity.

Step 2: Generate and exporting the business process flow form.

Step 3: Copy custom control configurations to the FormXML for the business process flow.

Step 4: Import customizations into the Microsoft Dataverse environment.

Note:

1. Configure custom controls on a related table form.

2. Generate and exporting the business process flow form.

3. Copy custom control configurations to the business process flow form from the related table form.

4. Import the customizations back into Microsoft Dataverse.

Reference:

https://docs.microsoft.com/en-us/power-automate/custom-controls-business-process-flows

Question: 194 CertyIQ

HOTSPOT -
A company is creating a new system based on Dynamics 365 Sales.
The company has the following requirements for their claim process:
- Approval process must be the same for all claim applications.
- Claim applications must go through approvers at each stage.
- Fields must be shown or hidden, based on the requirements in the approval process.

You need to design the data model for the claim process using out-of-the-box components whenever possible.
Which features should you implement? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Feature
Claim applications must go through the same approval process.	Workflow / Business process flow / Plug-ins / Custom workflow
Claim applications be routed to approvers at each stage.	Power Automate flow / Business process flow / Actions
Claim applications must show or hide fields based on the values.	Business rules / JavaScript

Answer:

Answer Area

Requirement	Feature
Claim applications must go through the same approval process.	Workflow / Business process flow / Plug-ins / Custom workflow
Claim applications be routed to approvers at each stage.	Power Automate flow / Business process flow / Actions
Claim applications must show or hide fields based on the values.	Business rules / JavaScript

Explanation:

Box 1: Workflow -

You configure the approval processes in a workflow.

Box 2: Business process flow -

By integrating your approvals feature with Power Automate, you can implement features such as these:

✑ Automatically generate and send request-for-approval emails to approvers.

✑ Include active approve and reject buttons in request-for-approval emails.

✑ Easy customization of the approval steps, using a framework that most administrators will be able to understand and adjust for themselves.

Box 3: JavaScript -

In Dynamics 365, you can hide and show fields using JavaScript. This is useful if you have business logic that determines if fields are displayed or not to the user.


Reference:

https://docs.microsoft.com/en-us/dynamics365/fin-ops-core/fin-ops/organization-administration/configure-approval-process-workflow

Question: 195 CertyIQ


HOTSPOT -
You are creating a Microsoft Power Automate flow.
The flow must prompt a user for some input and populate a field in an app based on the user's input.
You need to add an expression that returns User1 if the input from the user is High. Otherwise, the expression must return User2.
How should you complete the expression? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

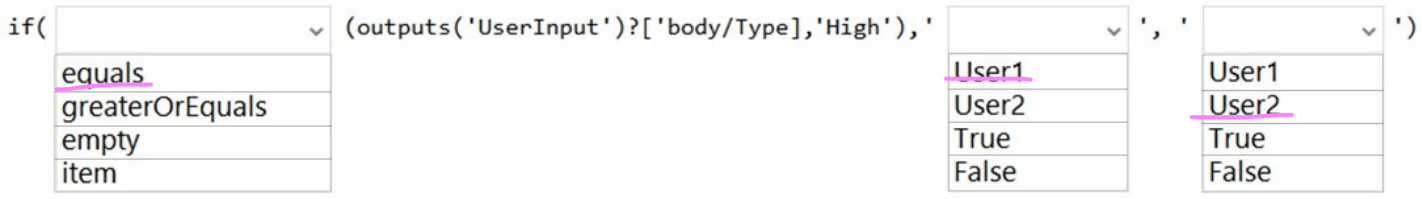

Answer:

Answer Area

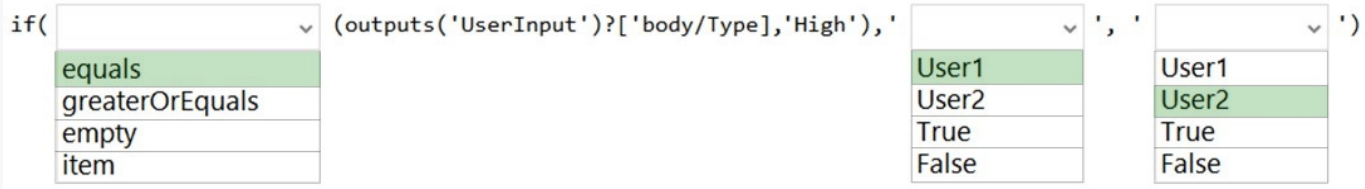

Explanation:
Box 1: equals -

Power automate if Funtion -
The Power Automate if Function is a fundamental function, which checks the expression or value, and returns true or false.
For example: If (equals(2,3),'yes', 'no'), so this expression return no.

Box 2: User1 -

Box 3: User2 -

Reference:
https://www.enjoysharepoint.com/power-automate-if/

Question: 196 CertyIQ

You create a form in a model-driven app that uses data from the Lead table in a Microsoft Dataverse instance. You add a business rule to the Lead table. The business rule displays an error if the email address is null. You set the scope for the business rule to All Forms.
You configure a Power Apps portal by using the same Microsoft Dataverse instance. You create a web page by using the Lead form.
You need to ensure the same logic is applied on the Power Apps portal page.
What are two possible ways to achieve the goal? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Deactivate the business rule. Change the scope for the rule to Table and then reactivate the rule.

B. Replace the business rule logic with a Microsoft Power Automate cloud flow by using the Dataverse When a row is added, modified or deleted trigger.

C. Extend the webFormClientValidate JavaScript function to replace the business rule logic. Edit the code in Power Apps Studio. Add the function in a <script> block.

D. Create a JavaScript web resource and replace the business rule with a JavaScript function. Add an OnSave event handler to the Lead form.

Answer:

AD

Explanation:

PowerApps Portal or CRM Portal don't support Business Rule that apply on the Forms.

A: Business rules defined for a table apply to both canvas apps and model-driven apps if the table is used in the app.

D: PostSave event occurs after the OnSave event is complete. This event is used to support or execute custom logic using web resources to perform after Save actions when the save event is successful or failed due to server errors.

Reference:

https://docs.microsoft.com/en-us/power-apps/maker/data-platform/data-platform-create-business-rule
https://powerusers.microsoft.com/t5/Power-Apps-Portals/Business-rules-in-a-PowerApps-Portal/td-p/404588

Question: 197 CertyIQ

A company uses Microsoft Dataverse rollup fields to calculate insurance exposure and risk profiles for customers. Users report that the system does not update values for the rollup fields when new insurance policies are written.
You need to recalculate the value of the rollup fields immediately after a policy is created.
What should you do?

A. Create new fields on the customer entity for insurance exposure and risk. Write a workflow process that is triggered when a new policy record is created to calculate the sum of values from policy records.

B. Update the Mass Calculate Rollup Field job to trigger when a new policy record is created.

C. Create a plug-in that uses the update method for the rollup fields. Configure a step on the Create event for

the policy entity for this plug-in.

D. Create a plug-in that uses the CalculateRollupFieldRequest method for the rollup field. Configure a step on the Create event for the policy entity for this plug-in.

Answer: D

Explanation:

D. Create a plug-in that uses the CalculateRollupFieldRequest method for the rollup field. Configure a step on the Create event for the policy entity for this plug-in.

Option A is not correct because it would require additional fields and workflows which would make the solution complex.

Option B is not correct because Mass Calculate Rollup Field job runs periodically and it wouldn't update immediately after the policy is created.

Option C is not correct because the update method is used to update the values of an existing record and it wouldn't recalculate the value of the rollup field.

Question: 198 CertyIQ

An organization implements Dynamics 365 Supply Chain Management.
You need to create a Microsoft Flow that runs daily.
What are two possible ways to achieve this goal? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Create the flow and set the flow frequency to daily and the interval to 1.
B. Create the flow and set the flow frequency to daily and the interval to 24.
C. Create the flow and set the flow frequency to hourly and the interval to 1.
D. Create the flow and set the flow frequency to hourly and the interval to 24.

Answer: AD

Explanation:

A. Create the flow and set the flow frequency to daily and the interval to 1.

D. Create the flow and set the flow frequency to hourly and the interval to 24.

Question: 199 CertyIQ

You develop a model-driven app to manage customer information. You have the system administrator security role on all environments.
You create a business process flow that is associated with the Contact table. You grant users Create, Read, and Write permissions on the business process flow.
Users report that the new business process flow does not appear when the users create new contact records. You verify that you can view the business process flow when you sign into the app and create a new contact record.
You need to resolve the issue.
What should you do?

A. Grant users the Run Flows privilege.
B. In the app designer, ensure that the business process flow is added to the app.

C. Grant users the Organization Read permission on the Process table.

D. Open the business process flow and associate the flow with the user security roles by using the Edit security button on the command bar.

Answer: D

Explanation:

Open the business process flow and associate the flow with the user security roles by using the Edit security button on the command bar.

Question: 200

CertyIQ

A company uses Microsoft Dataverse rollup fields to calculate insurance exposure and risk profiles for customers. Users report that the system does not update values for the rollup fields when new insurance policies are written. You need to recalculate the value of the rollup fields immediately after a policy is created.
What should you do?

A. Create new fields on the customer entity for insurance exposure and risk. Write a workflow process that is triggered when a new policy record is created to calculate the sum of values from policy records.

B. Create new calculated fields on the customer entity for insurance exposure and risk. Configure the formula to calculate the sum of values from policy records.

C. Change the frequency of the Calculate Rollup Field recurring job from every hour to every five minutes.

D. Create new fields on the customer entity for insurance exposure and risk. Write a plug-in that is triggered whenever a new policy is created.

Answer:

D

Explanation:

D. Create new fields on the customer entity for insurance exposure and risk. Write a plug-in that is triggered whenever a new policy is created.

Why This Is the Correct Choice

This question belongs to a classic Microsoft Power Platform PL-400 exam scenario where aggregate calculations (like summing insurance exposure and risk across multiple policies) must be displayed on a parent record **instantly in real time** when a child record changes.

Real-Time Execution Requirement: While native **Rollup fields** (Option B) are low-code and built for summing child values, they calculate asynchronously on a recurring background schedule. By default, they recalculate every 12 hours (though they can be adjusted down to 1 hour). If a business process mandates immediate, real-time updates the second a policy record is created, a **synchronous server-side plug-in** is the only way to intercept the database transaction and update the parent record instantly.
Why Option C is a distractor: The Calculate Rollup Field mass calculation recurring job **cannot** be scheduled via the user interface or standard settings to run every five minutes (the maximum platform limit for recurring background system jobs is every hour). Trying to push a rollup field to update every five minutes will cause severe performance degradation on the platform database.

Why Other Options Are Incorrect

A is incorrect: Workflow processes (Power Automate cloud flows or classic asynchronous workflows) execute after the primary transaction completes, which does not guarantee immediate, synchronous interface updates.
B is incorrect: As explained, calculated fields are computed when a record is loaded or saved, but they cannot perform complex aggregations (like summing arrays of child records) across 1:N tabular relationships natively without using rollup mechanics.

Question: 201 CertyIQ

You create a cloud flow to process a list of records using a loop.
You need to determine when to initialize a variable that is used to process the records.
When should you initialize the variable?

A. after the loop
B. after the first use of the variable inside the loop
C. before the loop
D. before the first use of the variable inside the loop

Answer: C

Explanation:

before the loop is a correct answer.

Question: 202 CertyIQ

You are configuring a Microsoft Power Virtual Agents chatbot to use the authenticate option for Microsoft Teams only.
You need to select the variables that will return information about the logged in user.
Which two variables should you use?
Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. AuthToken
B. UserDisplayName
C. UserID
D. IsLoggedIn

Answer: BC

Explanation:

B. UserDisplayName

C. UserID

Question: 203 CertyIQ

DRAG DROP
-
You are creating a model-driven app
You are using the Opportunities table to estimate the opportunity. The requirements for the app include:
• An email must be sent to the sales team if the opportunity is over $50,000.
• Users must be able to enter sponsors when creating a record if the opportunity is over one million dollars.
You must minimize the lines of code required.
You need to implement the app.
Which tools should you use?
To answer, drag the appropriate tools to the correct requirements. Each tool may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.



Answer:



Explanation:


Power Automate cloud flow

Business rules

Question: 204 CertyIQ


HOTSPOT
-
You are developing a model-driven app by using Microsoft Power Platform.
The app must perform the following functions:
•Automatically receive updates from a purchase order system.
•Only add new purchase orders.
You need to implement the app.
Which components should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

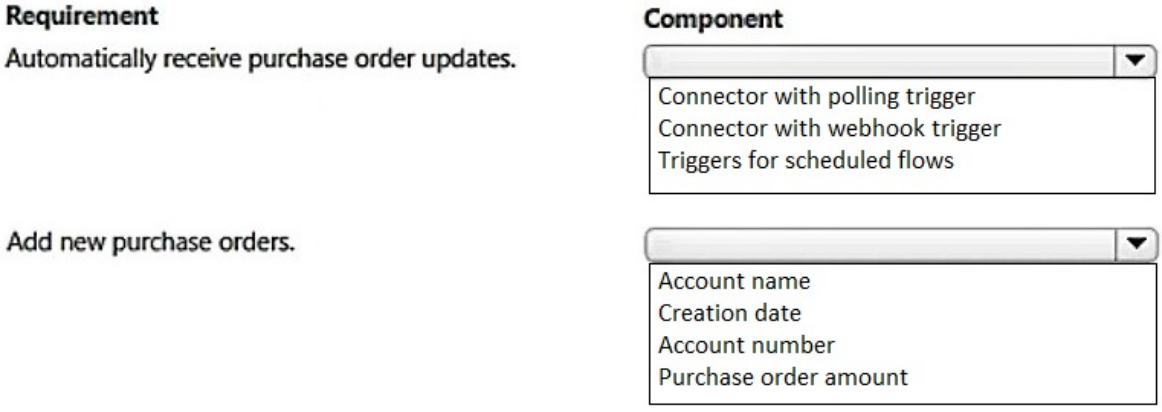

Answer:

Answer Area

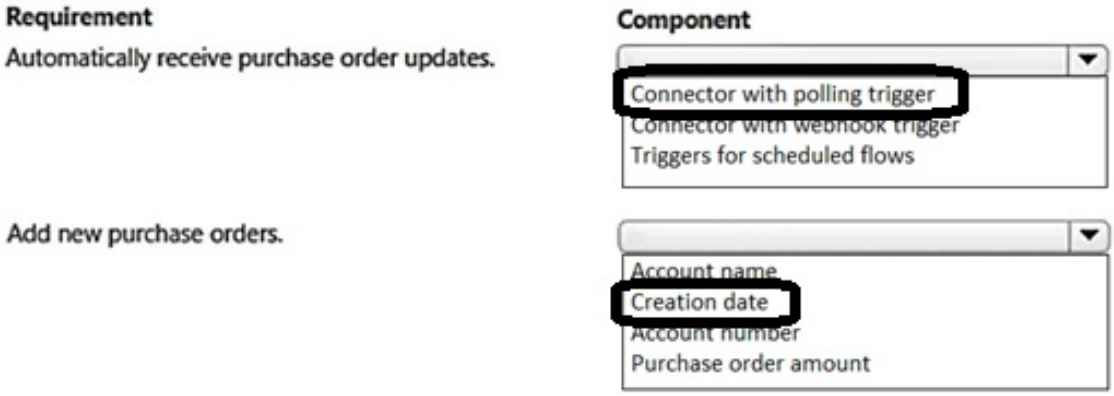

Explanation:

1. Polling Trigger

A polling trigger is basically an event that periodically makes a call to your service to look for new data. Polling triggers differ from webhooks in that a polling trigger initiates an event to determine if new data is available, whereas webhooks respond to a push of new data from the service.

https://learn.microsoft.com/en-us/connectors/custom-connectors/create-polling-trigger

2.creation date

Question: 205 CertyIQ

A company uses Microsoft Dataverse rollup fields to calculate insurance exposure and risk profiles for customers. Users report that the system does not update values for the rollup fields when new insurance policies are written. You need to recalculate the value of the rollup fields immediately after a policy is created.
What should you do?

A.Create new calculated fields on the customer entity for insurance exposure and risk. Configure the formula to calculate the sum of values from policy records.

B.Create a plug-in that uses the update method for the rollup field. Configure a step on the Create event for the policy entity for this plug-in.

C.Create new fields on the customer entity for insurance exposure and risk. Write a plug-in that is triggered

whenever a new policy is created.

D.Create new fields on the customer entity for insurance exposure and risk. Write a workflow process that is triggered when a new policy record is created to calculate the sum of values from policy records.

Answer: C

Explanation:

C. Create new fields on the customer entity for insurance exposure and risk. Write a plug-in that is triggered whenever a new policy is created.

Why This Is the Correct Choice

This question is a direct variation of the previous problem, highlighting the exact same architectural constraint in Microsoft Dataverse: **real-time child record aggregation.**

Real-time processing requirement: When a business process dictates that parent summaries (like a customer's total insurance exposure and risk) must reflect new child data (a new policy record) **immediately**, out-of-the-box **Rollup fields** cannot be used because they update asynchronously on a background timer (typically every hour or 12 hours).
The Plug-in Solution: To circumvent this latency, you must write a custom **synchronous plug-in** registered on the Create message of the child (policy) entity. When a new policy is added, the plug-in instantly triggers, queries the associated policies, sums the totals, and updates the parent (customer) record within the same database transaction.

Why Option B Is Incorrect

B is incorrect: You **cannot** manually invoke or force the internal Update platform event on a system-managed **Rollup field** using custom code this way. Rollup fields are strictly read-only within the Dataverse entity schema definition and are updated exclusively by the platform's asynchronous scheduling engine.

Question: 206

CertyIQ


HOTSPOT
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its

customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment
-
Environment
-
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data
-
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API
-
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements
-
Custom connector
-
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process
-
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues
-
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to configure a Dataverse trigger and action in a Power Automate flow so researchers can update account records with data from the Web API even if they do not have edit privileges on the record.
What should you configure for each trigger and action requirement? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Requirement	Configuration
When a row is added, modified, or deleted trigger with Change Type.	Added Modified Added or Modified
Update a row connection type.	API key User account Service principal

Answer:

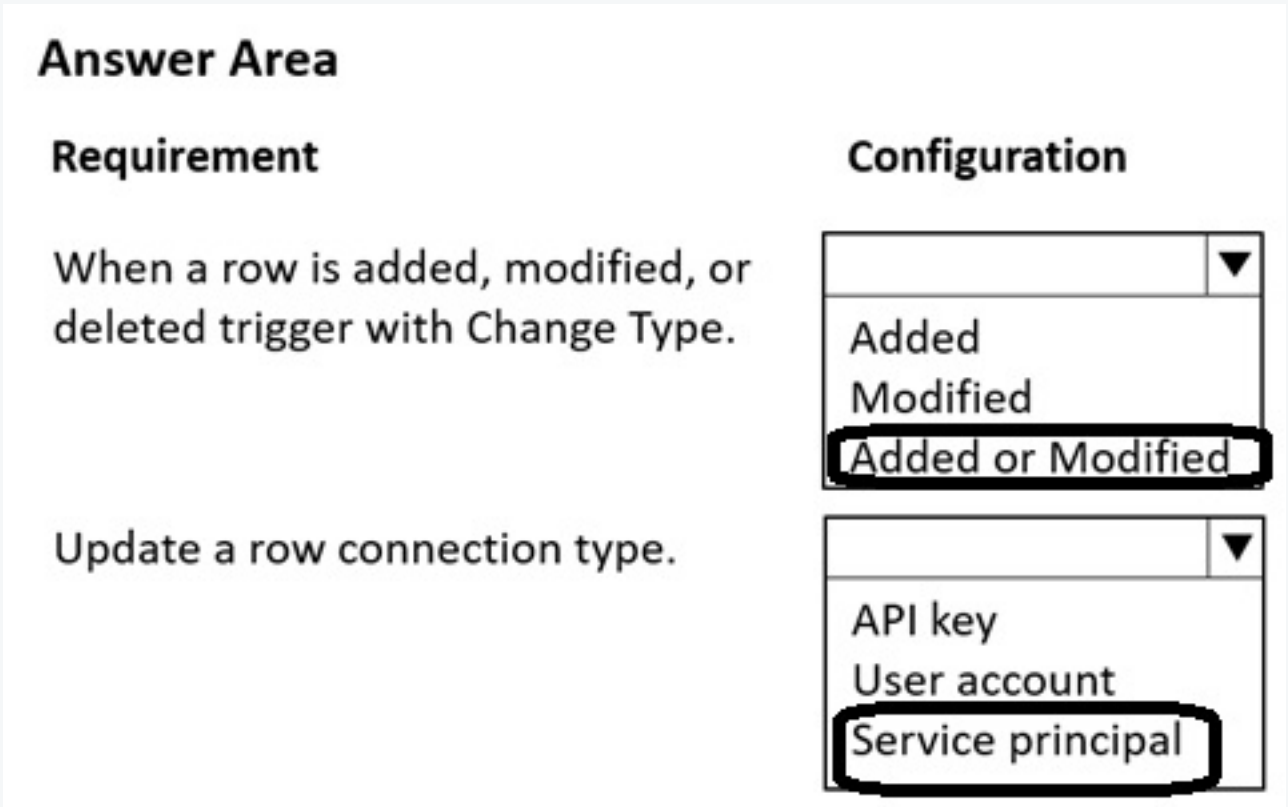

Question: 207

CertyIQ

A company uses Microsoft Dataverse rollup fields to calculate insurance exposure and risk profiles for customers. Users report that the system does not update values for the rollup fields when new insurance policies are written. You need to recalculate the value of the rollup fields immediately after a policy is created.
What should you do?

A.Change the frequency of the Calculate Rollup Field recurring job from every hour to every five minutes.

B.Create new fields on the customer entity for insurance exposure and risk. Write a workflow process that is triggered when a new policy record is created to calculate the sum of values from policy records.

C.Create new fields on the customer entity for insurance exposure and risk. Write a plug-in that is triggered whenever a new policy record is created.

D.Update the Mass Calculate Rollup Field job to trigger when a new policy record is created.

Answer: C


Explanation:

Create new fields on the customer entity for insurance exposure and risk. Write a plug-in that is triggered whenever a new policy record is created.


Question: 208

CertyIQ

DRAG DROP
-
You manage a Microsoft Power Automate cloud flow that uses a List rows action to query data from the Accounts table. The Accounts table contains more than 15,000 rows.
You must develop automation that meets the following requirements:
•Manage a large number of records.
•Return information from related contact records.
You need to configure the cloud flow to return the information.
Which properties should you configure? To answer, move the appropriate properties to the correct requirements. You may use each property once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

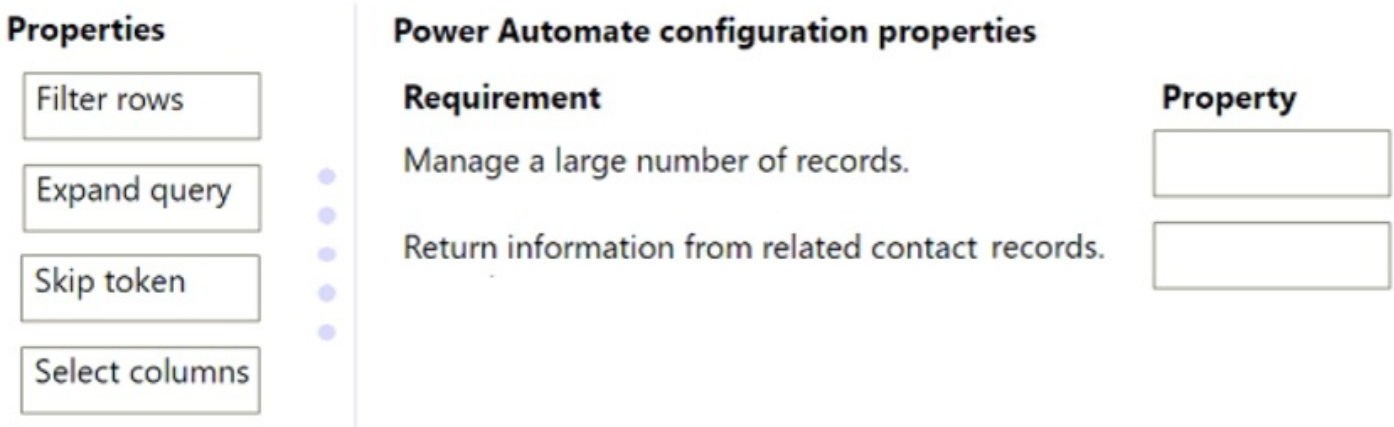

Answer:

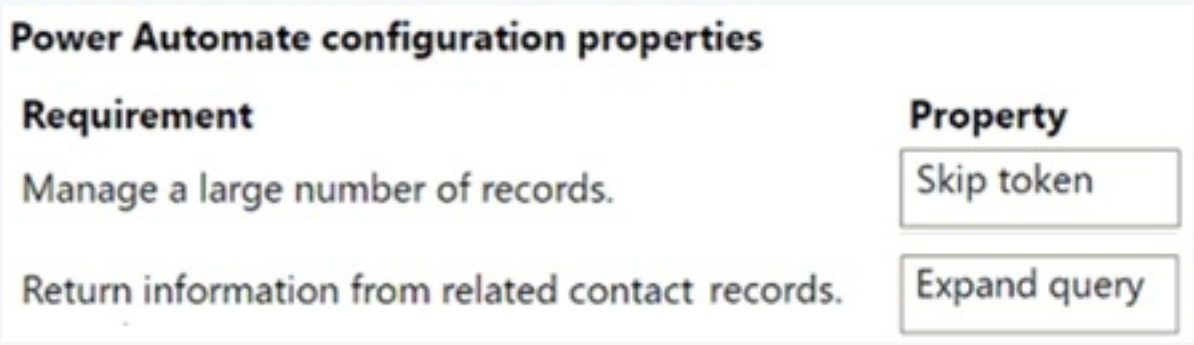

Explanation:

A. Skip token.

"Loading large data can be slow. Services often rely on pagination to load the data incrementally to improve the response times and the user experience.

B. Expand query.

Reference:


"https://learn.microsoft.com/en-us/odata/webapi/skiptoken-for-server-side-paging

https://learn.microsoft.com/en-us/aspnet/web-api/overview/odata-support-in-aspnet-web-api/using-select-expand-and-value#using-expand.


Question: 209 CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment
-
Environment
-
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data
-
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API
-

•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements
-
Custom connector
-
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process
-
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues
-
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to implement a reusable solution to encapsulate the parameterized Dataverse queries.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

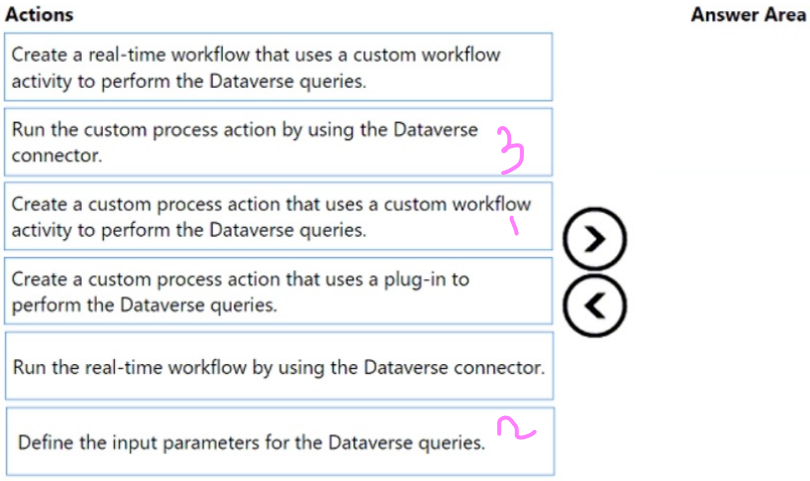

Answer:

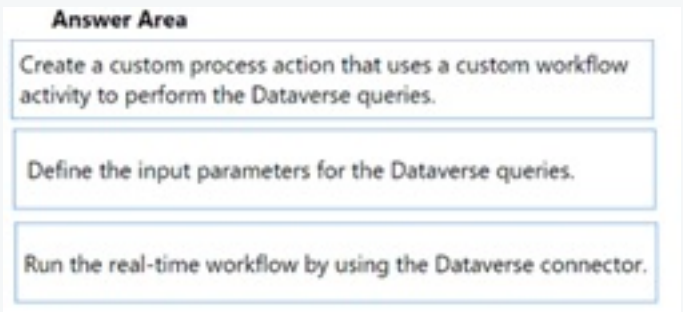

Explanation:

Create a custom process action that uses a custom workflow.


Define the Input parameters for the Dataverse queries.

Run the real time workflow by using the dataverse connector.


Question: 210 CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment
-
Get Energy Fit Program
-
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment
-
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair:
oAuthentication: 2C8D41431415E429C7FC7A74D8315

•The company uses Microsoft Azure for hosting multiple applications.
Requirements
-
Overview
-
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements
-
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application
-
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII.
oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters.
oRecords the details of the home improvements installed for the customer.
oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed.
oSend an approval to a senior manager to review and approve in Microsoft Teams.
oUpload the information to the API endpoint.
oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team.
oMust record the status on the funding application.
Suitability Assessment Tool
-
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting
-
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues
-
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to build the automation for the Planning Hub application.
Which connector should you use? To answer, move the appropriate connectors to the correct requirements. You may use each connector once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

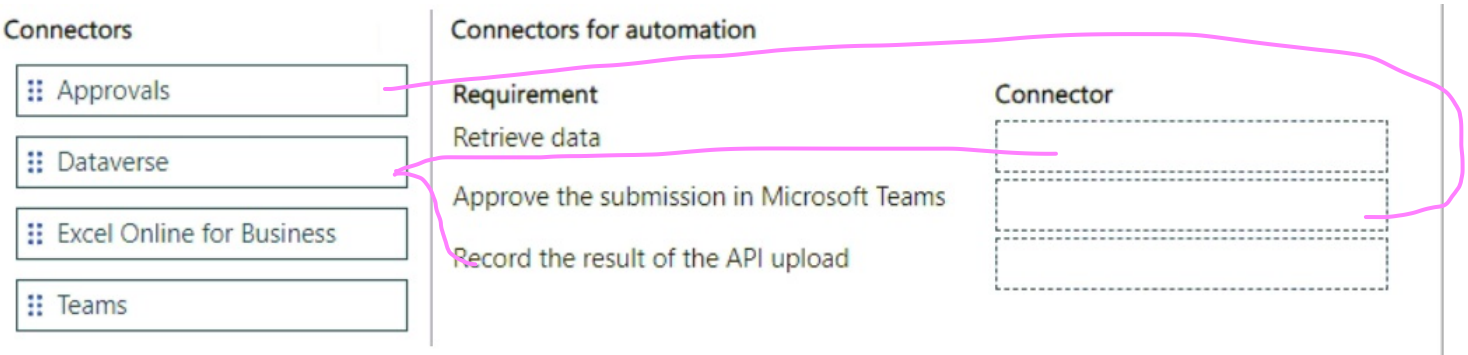

Answer:

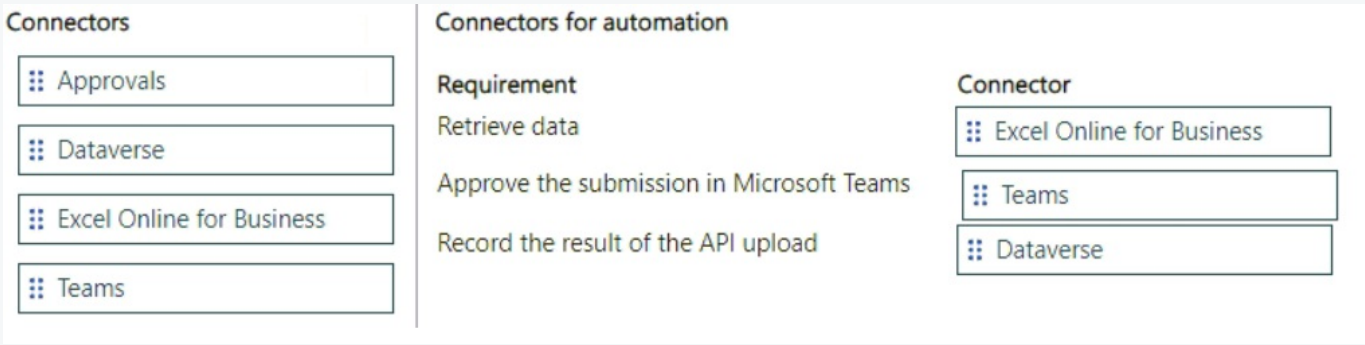

Explanation:

Retrieve Data : **Excel Online for Business.**

Excel is commonly used as a data source for storing and retrieving structured information.

In Power Automate, this connector allows you to pull data from an Excel file stored in OneDrive or SharePoint.

Approve the Submission in Microsoft Teams : **Teams.**

Microsoft Teams is used for collaboration and approvals.

This connector facilitates automated approval workflows within Teams, where users can approve or reject submissions.

Record the Result of the API Upload :**Dataverse.**

Dataverse is a cloud-based data storage service in Microsoft Power Platform.

It is used for securely storing structured data, making it ideal for logging API results.

Question: 211

CertyIQ

DRAG DROP
-
You are testing the deployment of a model-driven app. Microsoft Entra ID groups are used exclusively to manage environment- and team-level permissions.
Users encounter several access-related issues that prevent them from testing the app.
You need to select the component to use to resolve each issue by using the principle of least privilege.
What should you assign to resolve each issue? To answer, move the appropriate resolutions to the correct issues. You may use each resolution once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

Resolutions

- Microsoft Power Platform
- Security role
- Microsoft Entra ID group
- Team

List of security-related issues that require resolution

Issue	Resolution
Unable to access a single environment.	
Unable to update Account rows.	
Unable to access rows owned by the human resources team.	
Unable to create a sandbox environment.	

Answer:

Issue	Resolution
Unable to access a single environment.	Microsoft Entra ID group
Unable to update Account rows.	Security role
Unable to access rows owned by the human resources team.	Team
Unable to create a sandbox environment.	Microsoft Power Platform

Question: 212 CertyIQ

You are creating an asynchronous automation that targets an external API.
The automation must retrieve a stored API key to connect with the API. The API key must be rotated regularly by business users, without the need for dedicated tooling. No connector is available for the external API.
You need to implement the automation.
What should you use?

A.Unsecure config
B.Secure config
C.Connection references
D.Environment variables

Answer: D

Explanation:

D. Environment variables.

Why This Is the Correct Choice

This question belongs to a classic Microsoft Power Platform PL-400 case study scenario regarding Application Lifecycle Management (ALM) for automated integration workflows (such as Power Automate cloud flows or canvas apps).

Decoupling Configurations Across Environments: The business requirement states that you need to store configuration settings, parameter values, or target system URLs that vary between your **Development**, **Test**, and **Production** environments without hardcoding them into the automation workflow assets.
By using **Environment variables**, you store these key-value pairs as distinct metadata rows within Dataverse.

When your solution package transitions through your deployment pipeline, the automation references the variable placeholder name, allowing you to supply environment-specific parameters seamlessly during the import process without modifying the underlying flow or application logic.

Why Other Options Are Incorrect

A & B are incorrect: Unsecure and Secure configurations are settings explicitly tied to the parameters of C# custom server-side **plug-in steps** managed via the Plug-in Registration Tool. They are not used for general low-code automations like Power Automate or Canvas Apps.
C is incorrect: Connection references are strictly designed to store references to external endpoint connection templates (like a connection to SharePoint, Dataverse, or SQL Server) to manage user credentials/authentication tokens across environments, rather than general configuration data parameters or values.

Question: 213 CertyIQ

You must move an API key between environments by using a solution. You must use an environment variable with a data type of Secret.
You need to create the environment variable.
What must you create first?

A.Application user
B.Certificate
C.Azure Key Vault
D.Client secret

Answer: C

Explanation:

When creating an environment variable to store API key, we use Data type "Secret" which requires an Azure Key Vault. So Azure Key Vault is correct answer.

Question: 214 CertyIQ

A client requires that the system send an email from a button on their customer contact form.
You need to call the action from JavaScript.
Which two functions achieve this result? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Xrm.WebApi.online.executeMultiple()
B. Xrm.WebApi.online.updateRecord()
C. Xrm.WebApi.online.createRecord()
D. Xrm.WebApi.online.execute()

Answer: AD

Explanation:

Xrm.WebApi.online.executeMultiple executes a collection of action, function, or CRUD operations.
Xrm.WebApi.online.execute executes a single action, function, or CRUD operation.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/xrm-webapi/online/executemultiple https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/xrm-webapi/online/execute

Question: 215 CertyIQ

A company has two development instances, two test instances, two staging instances, and one production instance.
The test team reports connection issues with the test and staging instances.
You need to identify which of the instances the testing team currently has access.
Which two URLs can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. https://globaldisco.crm.dynamics.com/api/discovery/v9.1/instances
B. https://myorg.api.crm.dynamics.com/api/data/v9.1/
C. https://dev.crm.dynamics.com/api/discovery/v9.1/instances
D. https://disco.crm.dynamics.com/api/discovery/v9.1/
E. https://dev.crm.dynamics.com/api/discovery/v9.1/instances(UniqueName='myorg')

Answer:

CE

Explanation:

Organization information is stored in the Instance entity of the Discovery service. To see the kind of information contained in that entity, send an HTTP GET request to the service for one of your instances.

GET https://dev. servername /api/discovery/v9.0/Instances(UniqueName='myorg')

Example: Get the details of a specific instance. If you leave out the GUID, all instances that the authenticated user has access to are returned.

GET https://dev. servername /api/discovery/v9.0/Instances(<guid>)

Reference:

https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/webapi/discover-url-organization-web-api

Question: 216 CertyIQ

You are a Dynamics 365 developer working on a model-driven app.
You add a button to an entity form and to the view for the entity that calls a JavaScript function. When you click the button, it results in an error.
You determine that the JavaScript function is calling another JavaScript function in a different web resource.
You need to resolve the error.
What should you do?

A. In the JavaScript web resource, add the missing web resource as a dependency.

B. Add &ribbondebug=true to the app URL and run the Command Checker tool.

C. From the Ribbon Workbench, add the missing JavaScript web resource as a CustomRule in EnableRules.

Answer: A

Explanation:
Web resource dependencies -
You can define dependencies between other web resources. The primary purpose of this feature is to allow association of String (RESX) web resources with the
JavaScript web resources that will use them. This is also the way that web resources required by HTML web resources for use offline can be configured to also be available offline.
Within a solution you can define dependencies within solution components. Up until Mode-driven Apps the main purpose of these dependencies was to prevent the deletion of a solution component when another solution component depended on it. With Model-driven apps the behavior for JavaScript web resources is enhanced so that any other web resource listed as a dependency to the JavaScript web resource will be loaded along with the JavaScript web resource.
Incorrect:
Not B: &ribbondebug=true is used for debugging.
Not C: When configuring ribbon elements, you can define specific rules to control when the ribbon elements are enabled.
Custom Rule uses the <CustomRule> element. Use this kind of rule to call a function in a Script (JScript) web resource that returns a Promise (Unified Interface) or boolean (Unified Interface and web client).

Reference:
https://docs.microsoft.com/en-us/power-apps/developer/model-driven-apps/web-resource-dependencies
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/define-ribbon-enable-rules

Question: 217 CertyIQ

A multinational company requires that all phone numbers be standardized as country code + area code + phone number.
The application design team decides that a custom Power Apps component framework (PCF) control should be used to prompt users for an area code and to correctly format the phone number.
You need to get the list of valid area codes when a contact record is opened and before the user enters a new phone number.
In which function should you call webAPI.retrieveMultipleRecords?

A. updateView

B. notifyOutputChanged

C. getOutputs

Answer: A

Explanation:
The updateView method will be called when any value in the property bag has changed. This includes field values, data-sets, global values such as container height and width, offline status, component metadata values such as label, visible, etc.
Note: webAPI.retrieveMultipleRecords retrieves a collection of entity records.
Incorrect Answers:
notifyOutputChanged is a callback method to alert the framework that the control has new outputs ready to be retrieved asynchronously. getOutputs is called by the framework prior to a component receiving the new data. Returns an object based on nomenclature defined in manifest, expecting objects[s] for the property

marked as bound.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/component-framework/reference/control/updateview https://www.inogic.com/blog/2021/01/what-is-popupservice-in-powerapps-component-framework/

Question: 218 CertyIQ

HOTSPOT -
You are examining code written by another developer that is not functioning correctly. There are no other JavaScript or business rules in use on the form.
This code is properly registered to the OnChange event of the telephone1 field on an account entity form. The main operation is to update the primary contact's phone number when the account phone number changes. The primary contact field is a lookup. (Line numbers are included for reference only.)

```
01 function UpdatePrimaryContact(executionContext) {
02  var formContext = executionContext.getFormContext();
03  var formType = formContext.ui.getFormType();
04  if (formType !== 2) {
05   return;
06  }
07  var data =
08  {
09   "telephone1": formContext.getAttribute("telephone1").getValue()
10  }
11  var primaryContact = formContext.getAttribute("primarycontactid").getValue();
12  Xrm.WebApi.updateRecord("contact", primaryContact[0].id, data).then(
13   function success() {
14    ...
15    Xrm.Navigation.openAlertDialog({ text: "Updated" });
16   },
17   function fail() {
18    Xrm.Navigation.openErrorDialog({ message: "Error" });
19   }
20  );
21  Xrm.Navigation.openAlertDialog({ text: "Done" });
22 }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
Updating the primary contact record will only happen when the form is in update mode.	○	○
If the primary contact field on the account does not have a value, the error dialog on line 18 is displayed.	○	○
The alert dialog on line 21 will always be shown after the update completes and the alert dialog on line 15 is shown.	○	○

Answer:

Answer Area

Statements	Yes	No
Updating the primary contact record will only happen when the form is in update mode.	○	○
If the primary contact field on the account does not have a value, the error dialog on line 18 is displayed.	○	○
The alert dialog on line 21 will always be shown after the update completes and the alert dialog on line 15 is shown.	○	○

Explanation:

Box 1: Yes -

getFormTyp gets the form type for the record.

Form type 2 is Update.

Note: Syntax: formContext.ui.getFormType();

Return Value -

Type: Number -

Description: Form type. Returns one of the following values

RETURN VALUE -

Value Form type -

0 Undefined

1 Create

2 Update

3 Read Only

4 Disabled

6 Bulk Edit

Box 2: Yes -

Xrm.WebApi.updateRecord Return Value: On success, returns a promise object containing the values specified earlier in the description of the successCallback parameter.

Note:

Syntax: Xrm.WebApi.updateRecord(entityLogicalName, id, data).then(successCallback, errorCallback);

Where errorCallback: A function to call when the operation fails. An object with the following properties will be passed: errorCode: Number. The error code. message: String. An error message describing the issue.

Box 3: No -

It will displayed even if the update fails.

Reference:


https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/formcontext-ui/getformtype https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/xrm-webapi/updaterecord

Question: 219 CertyIQ


HOTSPOT -
You have the following JavaScript function: (Line numbers are included for reference only.)

```
01 function displayIconTooltip(rowData, userLCID)
02 {
03 var imgName = "";
04 var tooltip = "Relationship Health";
05 var str = JSON.parse(rowData);
06 var prevrev = str.new_previousyearannualrevenue_Value;
07 var rev = str.revenue_Value;
08 var health = parseFloat(rev) - parseFloat(prevrev);
09 if (health > 0)
10    imgName = "new_good";
11 else if (health == 0)
12    imgName = "new_warm";
13 else
14    imgName = "new_bad";
15 var resultarray = [imgName, tooltip];
16 return resultarray;
17 }
```

The Annual Revenue view column is configured to call the function as shown in the Column Properties exhibit. (Click the Change Column Properties tab.)

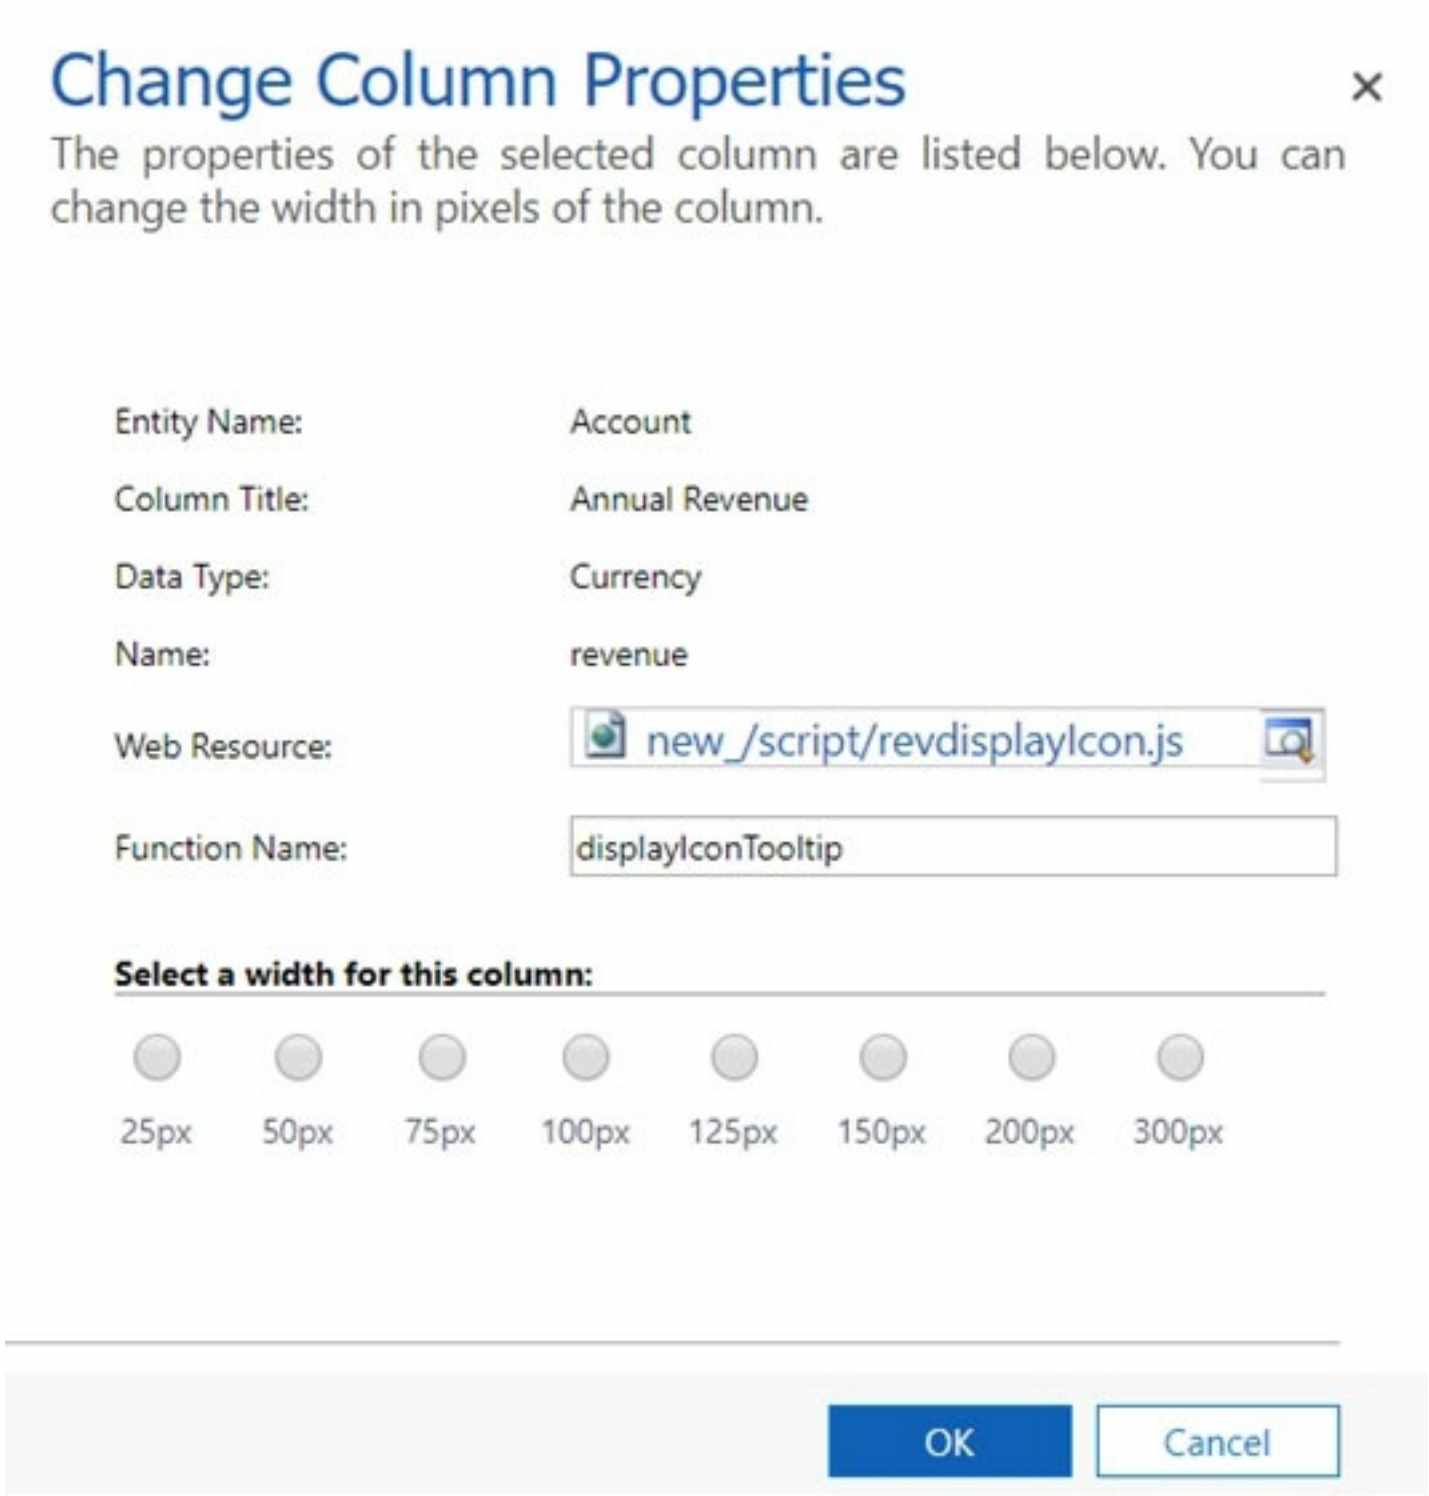

Users report that the icons that appear in the Active Accounts view are incorrect, as shown in the Active Accounts View exhibit. (Click the Active Accounts View tab.)

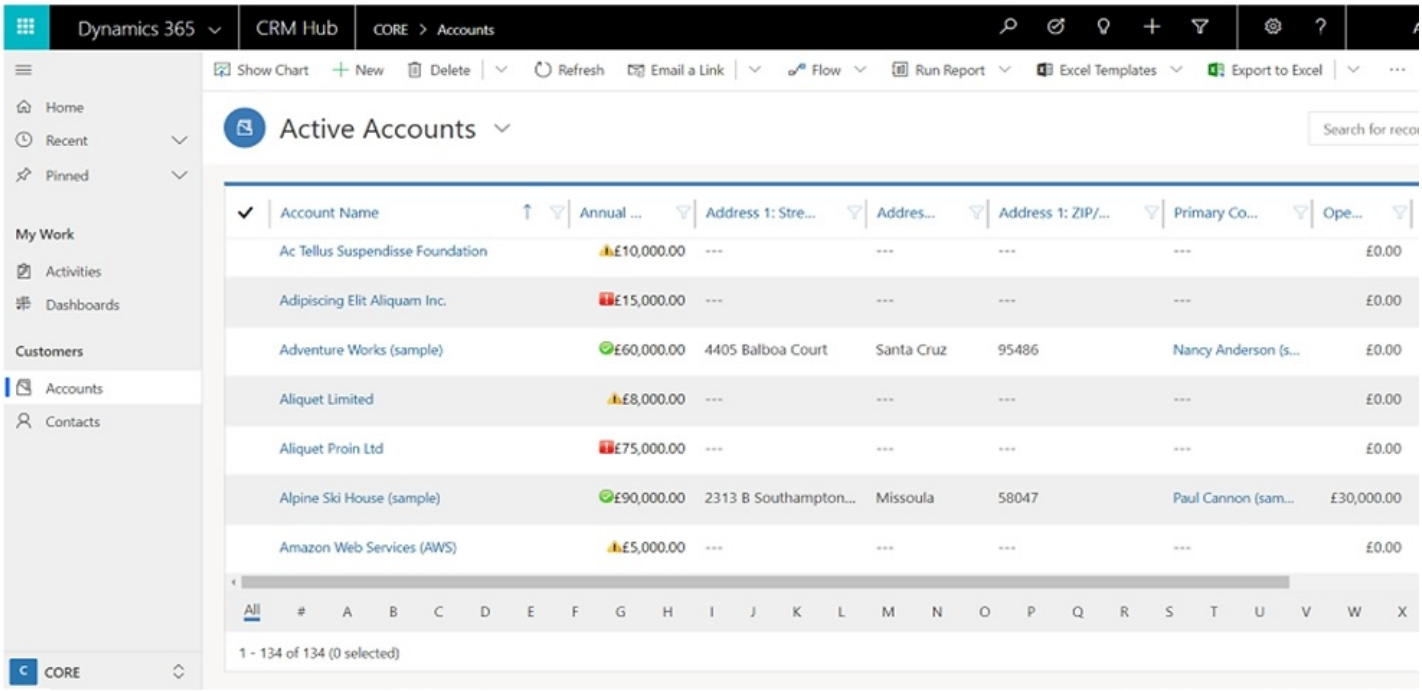

You need to determine why the incorrect icons are being displayed.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
Hot Area:

Answer Area

Statements	Yes	No
If the Previous Year Annual Revenue column is in the Active Accounts view but has a null value, the selected imgName is set to **new_good** for Accounts that have an Annual Revenue greater then **0**.	○	○
If the Previous Year Annual Revenue column is included in the Active Accounts view, an exception is raised and an error is displayed.	○	○
The userLCID can be used to gain access to users' Language settings in personal options and change the tooltip to their chosen language.	○	○

Answer:

Answer Area

Statements	Yes	No
If the Previous Year Annual Revenue column is in the Active Accounts view but has a null value, the selected imgName is set to **new_good** for Accounts that have an Annual Revenue greater then **0**.	○	○
If the Previous Year Annual Revenue column is included in the Active Accounts view, an exception is raised and an error is displayed.	○	○
The userLCID can be used to gain access to users' Language settings in personal options and change the tooltip to their chosen language.	○	○

Explanation:
Box 1: No -
parseFloat will return 'NaN' if it's not a number (null and undefined are NaNs).

Box 2: No -

Box 3: Yes -
Session.userLCID is the Locale ID for the ASP application.

Reference:
https://support.microsoft.com/en-us/help/229690/how-to-set-the-asp-locale-id-per-the-browser-s-language-settings

Question: 220 CertyIQ

HOTSPOT -
You develop the following JavaScript code for a web resource that will be used in a model-driven app.

```
function CheckAccountRating(executionContext) {
    var formContext = executionContext.getFormContext();
    var baseUrl = Xrm.Utility.getGlobalContext();
    var id = formContext.data.entity.getId();
    var url = baseUrl + "/api/data/v9.1/accounts(" + id + ")?$select=accountratingcode"

    var req = new XMLHttpRequest();
    req.open("GET", url, false);
    req.setRequestHeader("OData-MaxVersion", "4.0");
    req.setRequestHeader("OData-Version", "4.0");
    req.setRequestHeader("Accept", "application/json");
    req.setRequestHeader("Content-Type", "application/json; charset=utf-8");
    req.onreadystatechange = function () {
        if (this.readyState === 4) {
            req.onreadystatechange = null;
            if (this.status === 200) {
                var result = JSON.parse(this.response);
                if (result["accountratingcode"] == 4) {
                    alert("Test");
                }
            }
        }
    };
    req.send();
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

	Yes	No
The code raises the following exception: Interact with HTTP and HTTPS resources asynchronously (web-use-async.).	○	○
The code raises the following exception: Use strict equality operators (web-use-strict-equality-operators).	○	○
The code raises the following exception: Avoid including debug script in non-development environments (web-remove-debug-script).	○	○

Answer:

Answer Area

	Yes	No
The code raises the following exception: Interact with HTTP and HTTPS resources asynchronously (web-use-async.).	○	○
The code raises the following exception: Use strict equality operators (web-use-strict-equality-operators).	○	○
The code raises the following exception: Avoid including debug script in non-development environments (web-remove-debug-script).	○	○

Explanation:

Box 1: Yes -

Problem patterns: Web-use-async -

There are multiple ways to interact with the server or request resources. Common approaches that allow for synchronous communications include the following

(These scenarios should be avoided.):

✑ Usage of the XMLHttpRequest object passing in false for the value of the async parameter for the open function call var requestXhr = new XMLHttpRequest();

// Explicitly setting the async parameter to false or supplying a variable with a value of false will force this as a synchronous call. requestXhr.open('GET', '/test/test.txt', false);

Box 2: Yes -

strict equality compare is missing in line 18

Box 3: No -

No debugger statement in the code, so web-remove-debug-script (avoid including debug script in non-development environments) does not apply.

Reference:

https://docs.microsoft.com/sr-cyrl-rs/powerapps/developer/model-driven-apps/best-practices/business-logic/interact-http-https-resources-asynchronously https://developer.mozilla.org/en-US/docs/Web/JavaScript/Reference/Operators/Strict_equality

Question: 221 CertyIQ

A company is creating a Power Apps portal to collaborate with vendors.
You need to implement custom functionality in the portal by using JavaScript code.
Which two portal entities can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Web pages
B. Web resources
C. Webforms
D. Entity lists

Answer: CD

Explanation:

C. Webforms and **D. Entity lists**.

Why These Are the Correct Choices

In Microsoft Power Apps portals (Power Pages), you can inject custom client-side JavaScript code directly inside configuration records using the dedicated **Custom JavaScript** field provided on specific layout tables:

C. Webforms (Advanced Forms): Although the overarching container is the Webform, individual **Web Form Steps** contain a native **Custom JavaScript** field. This lets developers execute jQuery or JavaScript functions to

validate input fields, hide/show sections dynamically, or perform custom calculations as a user advances through a multi-step portal form wizard.
D. Entity lists (Lists): The **Entity List** configuration record contains a **Custom JavaScript** text block located under its Options tab. This field allows you to write custom scripts to alter the grid layout, modify row styling dynamically, or bind custom click event handlers directly to the resulting tabular records displayed on the portal interface.

Why Other Options Are Incorrect

A is incorrect: While **Web pages** can have JavaScript added via custom Web Templates or copy fields using HTML script tags, they do not possess a standalone, separate dedicated operational configuration column specifically named for custom JS scripts like Web Form steps or Entity Lists do out-of-the-box.
B is incorrect: Web resources are used to store custom scripts, CSS, and images for internal Dataverse model-driven apps, rather than handling the localized front-end portal rendering engine.

Question: 222 CertyIQ

HOTSPOT -
You need to develop a set of Web API's for a company.
What should you implement? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Requirement	Operation
Implement operations that do not have side effects and may support further composition	Functions / Actions / Entities
Implement operations that allow side effects, such as data modification	Functions / Actions / Entities
Implement keyless named structured types that consist of a set of properties	Complex types / Entity types / Enumeration types

Answer:

Answer Area

Requirement	Operation
Implement operations that do not have side effects and may support further composition	Functions
Implement operations that allow side effects, such as data modification	Actions
Implement keyless named structured types that consist of a set of properties	Complex types

Explanation:
Box 1: Functions -
most functions and services that are stateless and do not have side effects.

Box 2: Actions -
Actions can have side effects.

Box 3: Complex types -

Complex types -
Complex types are keyless named structured types consisting of a set of properties. These are value types whose instances cannot be referenced outside of their containing entity. Complex types are commonly used as property values in an entity or as parameters to operations.
Incorrect:
* An entity type is a named structured type with a key. It defines the named properties and relationships of a table.
* Enumeration types are named primitive types whose values are named constants with underlying integer values.
Type definitions are named primitive types with fixed facet values such as maximum length or precision. Type definitions can be used in place of primitive typed properties, for example, within property definition

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/webapi/use-web-api-actions
https://docs.microsoft.com/en-us/odata/concepts/data-model#complex-types

Question: 223 CertyIQ

You are developing an app that uses Common Data Service.
You must integrate Common Data Service with a new web application. You must allow the new web application to display data from Common Data Service.
You build a single-page web application using the Web API.

You need to authenticate your app using OAuth.
What should you use?

A. Windows Communication Foundation (WCF)
B. Cross-Origin Resource Sharing (CORS)
C. Microsoft Authentication Library (MSAL)
D. Kerberos authentication

Answer: C

Explanation:

OAuth requires an identity provider for authentication. For Dataverse, the identity provider is Azure Active Directory (AAD). To authenticate with AAD using a Microsoft work or school account, use the Azure Active Directory Authentication Libraries (ADAL) or Microsoft Authentication Library (MSAL).

Question: 224 CertyIQ

HOTSPOT -
A company has a model-driven app.
A custom button on a form calls a JavaScript function that validates form data fields and creates a web basket.
The JavaScript function then displays a message to the user.
Users are located in the United States, which uses ISO Code 1033, and France, which uses ISO Code 1036.
Users in France report that the message displays in English.
You need to modify the RibbonDiffXml file to ensure that messages appear in the user's language.
How should you complete the CommandDefinition node? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:


Answer Area

```
<CommandDefinitions>
 <CommandDefiniion Id= "GenerateBasket.Command">
    <Actions>
      <JavaScriptFunction FunctionName=" generatebasket"
Library="$webresource:mb_/scripts/basket.js">
     <  [ ▼ ]  Value="  [ ▼ ]  " />
        </JavaScriptFunction>
       </Actions>
    </CommandDefinition>
 </CommandDefinitions>
```

CrmParameter	1033
IntParameter	1036
StringParameter	OrgLcid
	UserLcid

Answer:

Answer Area

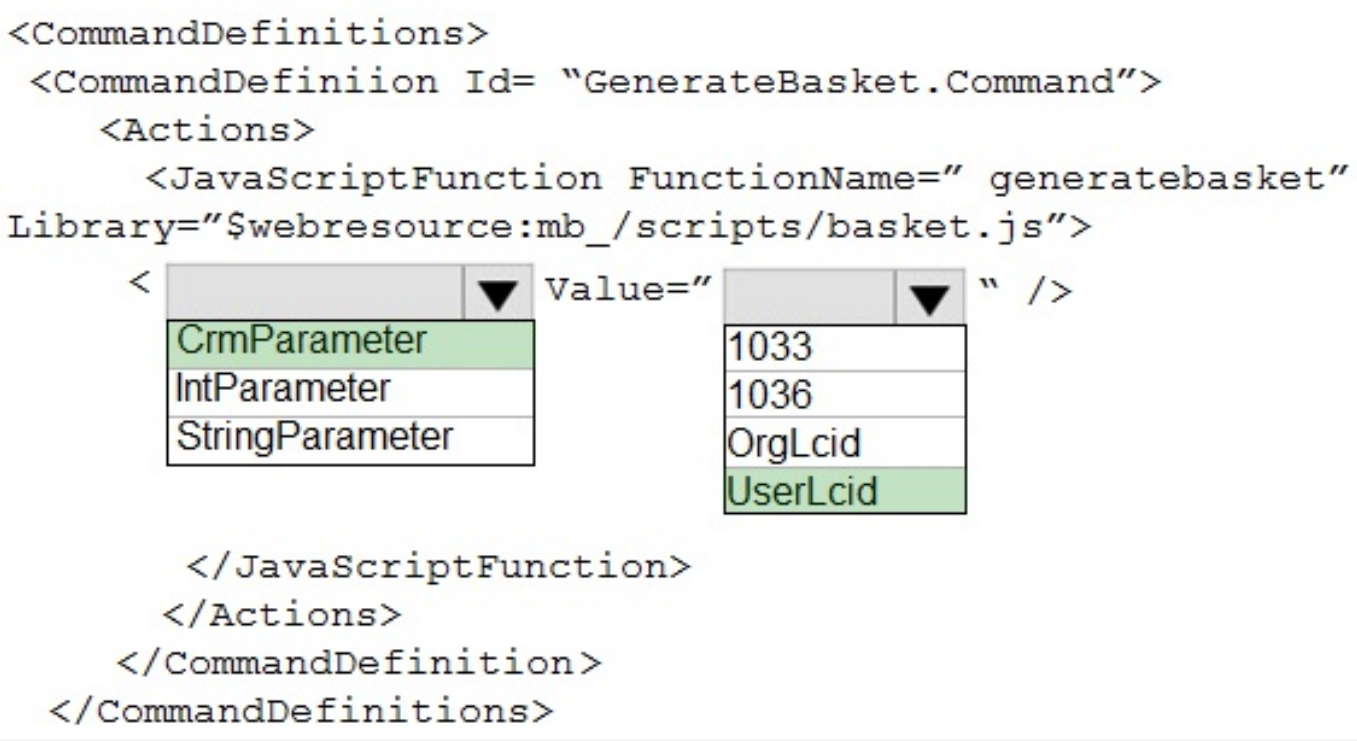

Explanation:

Box 1: CrmParameter -

In addition to data values, you can retrieve client context information by using <CrmParameter>. You can use the following options as the value for the

CrmParameter element: OrgName, OrgLcid, and UserLcid.

Box 2: UserLcid -

userLCID is the language code of the current user.

Note: A locale is a set of user preference information related to the user's language. The locale determines how dates, times, currencies, and numbers are formatted, how items are alphabetically sorted, and how strings are compared. The locale identifier (LCID) is a 32-bit value that uniquely defines a locale.

Reference:

https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/customize-dev/pass-dynamics-365-data-page-parameter-ribbon- actions

Question: 225 CertyIQ

HOTSPOT -

A company has a model-driven app that captures applications from prospective students.

You are asked to create a new re-usable custom component using the Power Apps component framework (PCF).

The custom component must allow entry of a date of birth and validate that the applicant is not a minor.

You create the class AdultDatePicker in the TypeScript file Index.ts and the style sheet DatePicker.css.

You need to define the component to be available only for relevant fields and its properties when used in a form.

How should you complete the manifest? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
<?xml version= "1.0" encoding= "utf-8"?>
<manifest>
    <control namespace= "delegate" constructor= [ ▼ ]
                                                  Index.ts
                                                  DatePicker.css
                                                  AdultDatePicker
 version= "1.0.0" display-name-key= "Date Picker" description-key= "Date of Birth
Date Picker that validates if a minor" control-type= "standard">
     <property name= "value" display-name-key= "Value" description-key= "Value" of-
type= [ ▼ ]  usage= [ ▼ ]
       Enum                 bound
       DateandTime,DateandTime   input
       DateandTime.DateOnly
required= "true" />
     <resources>
          <code path= "Index.ts" order= "1"/>
              <css path= "css/DatePicker.css" order= "1" />
          </resources>
        </control>
     </manifest>
```

Answer:

Answer Area

```
<?xml version= "1.0" encoding= "utf-8"?>
<manifest>
    <control namespace= "delegate" constructor= [ ▼ ]
                                                  Index.ts
                                                  DatePicker.css
                                                  AdultDatePicker
 version= "1.0.0" display-name-key= "Date Picker" description-key= "Date of Birth
Date Picker that validates if a minor" control-type= "standard">
     <property name= "value" display-name-key= "Value" description-key= "Value" of-
type= [ ▼ ]  usage= [ ▼ ]
       Enum                 bound
       DateandTime,DateandTime   input
       DateandTime.DateOnly
required= "true" />
     <resources>
          <code path= "Index.ts" order= "1"/>
              <css path= "css/DatePicker.css" order= "1" />
          </resources>
        </control>
     </manifest>
```

Explanation:

Box 1: AdultDatePicker -
Constructor: Constructor of the code component.

Box 2: DateandTime.DateOnly -
Date Only - No Time zone conversion.
The time portion of the value is always 12:00AM.
The date portion of the value is stored and retrieved as specified in the UI and Web services.


Box 3: bound -
usage: Has two properties, bound and input. Bound properties are bound only to the value of the field. Input properties are either bound to a field or allow a static value.

Reference:


https://docs.microsoft.com/en-us/powerapps/developer/component-framework/manifest-schema-reference/manifest https://docs.microsoft.com/en-us/powerapps/developer/component-framework/implementing-controls-using-typescript https://docs.microsoft.com/en-us/power-apps/maker/data-platform/behavior-format-date-time-field

Question: 226 CertyIQ

DRAG DROP -
An organization has a Dynamics 365 Sales environment.
You need to create a Power Apps component.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

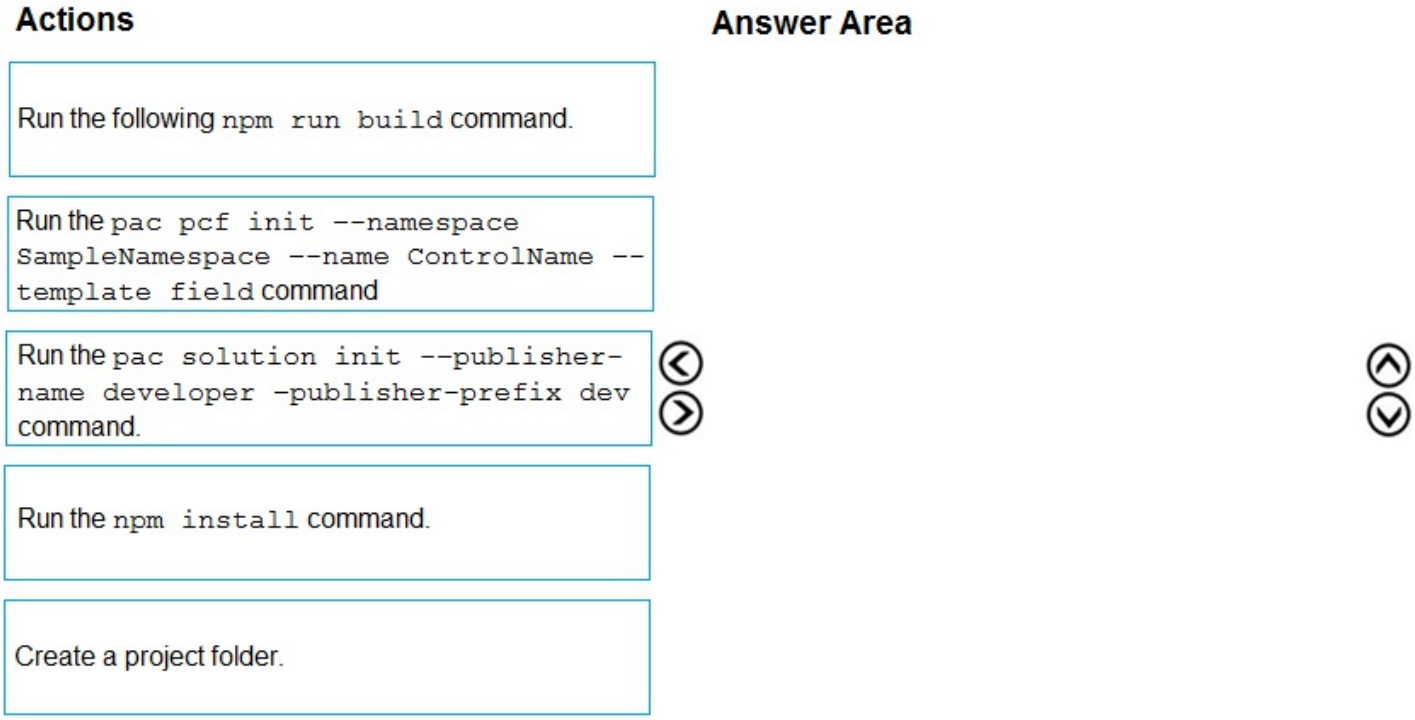

Answer:

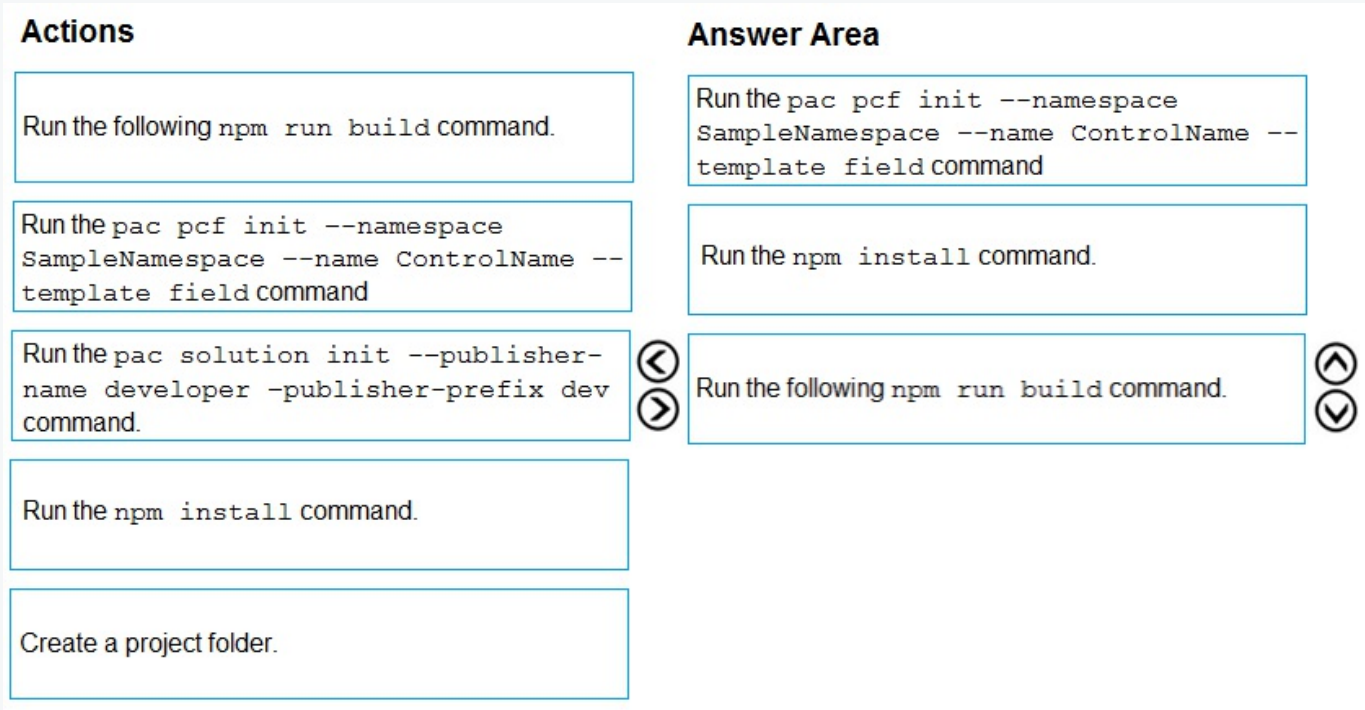

Explanation:

Step 1: Run pac pcf init "namespace ..

This is the first command which creates basic folder structure of PCF control project.

Run the following command to create the control. The format of the control is: pac pcf init "namespace <specify your namespace here> "name <put component name here> "template <component type>

Step 2: Run the npm install command

Install Dependencies -

Once 'init' sets up the basic folder, as a next step install all the PCF control dependencies using 'npm install' command.

Example:

```
C:\source\PCF\HelloWorld>npm install
npm WARN deprecated opn@6.0.0: The package has been renamed to `open`
npm WARN pcf-project@1.0.0 No repository field.
npm WARN pcf-project@1.0.0 No license field.
npm WARN optional SKIPPING OPTIONAL DEPENDENCY: fsevents@1.2.9 (node_modules\fsevents):
npm WARN notsup SKIPPING OPTIONAL DEPENDENCY: Unsupported platform for fsevents@1.2.9: wanted {"os":"darwin","arch":"any
"} (current: {"os":"win32","arch":"x64"})

added 653 packages from 497 contributors and audited 10328 packages in 19.295s
found 0 vulnerabilities
```

Now at this point, there is nothing we have actually created. However, the solution created contains sample PCF control code.

Step 3: Run the following np run build command

Build PCF Component.

Once you implement the PCF component, build the code for any syntax errors.

Syntax:

npm run build

```
> pcf-scripts build

[17:54:6] [build]  Initializing...
[17:54:6] [build]  Validating manifest...
[17:54:6] [build]  Validating control...
[17:54:6] [build]  Generating manifest types...
[17:54:6] [build]  Compiling and bundling control...
[Webpack stats]:
Hash: 7836f673449072fa8d61
Version: webpack 4.28.4
Time: 1153ms
Built at: 10/02/2019 5:54:08 PM
    Asset      Size  Chunks             Chunk Names
bundle.js  6.34 KiB    main  [emitted]  main
Entrypoint main = bundle.js
[./HelloWorld/index.ts] 2.34 KiB {main} [built]
[17:54:8] [build]  Generating build outputs...
[17:54:8] [build]  Succeeded
```

Reference:

https://rajeevpentyala.com/2020/03/21/power-apps-component-framework-pcf-demystify/
https://carldesouza.com/creating-a-custom-component-using-the-powerapps-component-framework/

Question: 227 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are developing a model-driven app for a company.
When you create a new Account record, you must automatically display a form to collect data that is needed to create a Contact record. The form must switch to the appropriate form layout based on the contact type.
You open the Contact form by using JavaScript. You pass the contact type information to the form by using the Xrm.Navigation.openForm function. An OnLoad event handler in the Contact form processes the data and shows only the appropriate sections of the form for the given contact type.
You need to configure the receiving form to accept the data parameter.
Solution: In the form editor, add an event handler for the data parameter.
Does the solution meet the goal?

A. Yes
B. No

Answer:

A

Explanation:

The solution meets the goal. Here's why:

The scenario requires passing data from one form (Account) to another (Contact) when opening the Contact form using JavaScript. The Xrm.Navigation.openForm function in Power Apps is specifically designed for this purpose. This function enables passing parameters to the target form.

To receive the data parameter passed via Xrm.Navigation.openForm, the target form (Contact form) needs to be configured to handle this incoming data. Adding an event handler to the Contact form's OnLoad event is the correct approach. Within this event handler, you can access the passed data and use it to modify the form's behavior, such as showing or hiding specific sections based on the contact type. This aligns precisely with the requirement of adapting the form layout based on the contact type. The data parameter is how you will receive the contact type from the initial form.

By adding the event handler to the "data" parameter in the Contact form editor, you're effectively enabling the form to receive and process the contact type information passed from the Account form. This ensures that the appropriate form sections are displayed based on the provided data.

Therefore, adding an event handler for the data parameter is the necessary step to receive and process data passed using Xrm.Navigation.openForm, making the solution correct.

Relevant links for further research:

Xrm.Navigation.openForm
Form Event Handlers in Power Apps

Question: 228 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are developing a model-driven app for a company.
When you create a new Account record, you must automatically display a form to collect data that is needed to create a Contact record. The form must switch to the appropriate form layout based on the contact type.
You open the Contact form by using JavaScript. You pass the contact type information to the form by using the Xrm.Navigation.openForm function. An OnLoad event handler in the Contact form processes the data and shows only the appropriate sections of the form for the given contact type.
You need to configure the receiving form to accept the data parameter.
Solution: In the form editor, add a web resource that sets formContext.data.attributes.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:
By default, model-driven apps allows a specified set of query string parameters to be passed to a form. You use these parameters to set default values when you create a new record in the application. Each parameter must use a standard naming convention that includes a reference to the column logical name.
There are two ways to specify which query string parameters will be accepted by the form:
✑ Edit form properties
✑ Edit form XML

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/configure-form-accept-custom-querystring-parameters

Question: 229 CertyIQ

You are creating a model-driven app.
A JavaScript function must be manually initiated by the user from within an entity form.
You need to add a button to the form to run the JavaScript.
What should you do?

A. Use the Ribbon Workbench.
B. Edit the SiteMap.
C. Edit the XML for the form.
D. Edit ISV.Config.
E. Export the ribbon definitions.

Answer: A

Explanation:
How to add JavaScript to existing button in Ribbon WorkBench.
Open Ribbon workbench and Right click on Assign button from Account form and click on Customize Button.
Add Enable rule and call Javascript function.

Note: An Entity Form is a way to show a form in your Dynamics 365 Portal to allow your users to enter data. You can use the Ribbon workbench for Dynamics 365 to add a custom button on entity form in Account with JavaScript action.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/customize-commands-ribbon
https://docs.microsoft.com/en-us/dynamics365/customer-service/configure-link-to-conversation-model-driven-app-form

Question: 230 CertyIQ

HOTSPOT -
You need to complete a Power Apps component framework (PCF) control.
How should you define the order in the manifest? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

```
<resources>
<code path="scripts/HelloWorldControlWave.js" order="1" />
<code path="scripts/HelloWorldControlRandom.js" order="2" />
<css path="style/HelloWorldControl.css" order="  " />
<html path="HelloWorldControlWaveRandom.htm" order="  " />
</resources>
```

(1 / 2 / 3)

(1 / 2 / 3)

Answer:

Answer Area

```
<resources>
<code path="scripts/HelloWorldControlWave.js" order="1" />
<code path="scripts/HelloWorldControlRandom.js" order="2" />
<css path="style/HelloWorldControl.css" order="  " />
```

1
2
3

```
<html path="HelloWorldControlWaveRandom.htm" order="  " />
</resources>
```

1
2
3

Explanation:

Box 1: 1 -

The css order element is the order in which the CSS files should load.

Box 2: 1 -

The html order element is the order in which the HTML files should load.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/component-framework/manifest-schema-reference/css https://docs.microsoft.com/en-us/powerapps/developer/component-framework/manifest-schema-reference/html

Question: 231 CertyIQ

HOTSPOT -
You are developing a business process flow.
JavaScript must be used to implement additional business logic in the business process flow.
You need to evaluate the JavaScript code.
What is the result of running each code segment? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

JavaScript code segment	Code Result
`formContext.getControl("test_number").setVisible(false);`	Hides only the control in the body of the form Hides only the control in the business process flow Hides controls in the body of the form and the business process flow
`formContext.data.process.addOnStageChange(testFunction);`	Adds an event handler to enable a function named testFunction to run when the business process flow stage changes Adds an event handler to enable a function named testFunction to run before the business process flow stage changes Adds an event handler to enable a function named testFunction to run when the business process flow stage is selected

Answer:

Answer Area

JavaScript code segment	Code Result
`formContext.getControl("test_number").setVisible(false);`	Hides only the control in the body of the form Hides only the control in the business process flow Hides controls in the body of the form and the business process flow
`formContext.data.process.addOnStageChange(testFunction);`	Adds an event handler to enable a function named testFunction to run when the business process flow stage changes Adds an event handler to enable a function named testFunction to run before the business process flow stage changes Adds an event handler to enable a function named testFunction to run when the business process flow stage is selected

Explanation:

Box 1: Hides the control in the body of the form.

The Client API form context (formContext) provides a reference to the form or to an item on the form, such as, a quick view control or a row in an editable grid, against which the current code is executed. setVisible sets a value that indicates whether the control is visible.

Box 2: Add an event handler to enable a function named TestFunction to run when the business process flow stage changes. addOnStageChange adds a function as an event handler for the OnStageChange event so that it will be called when the business process flow stage changes.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/clientapi-form-context

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/formcontext-data-process/eventhandlers/addonstagechange

Question: 232

CertyIQ

You are creating a canvas app for a bank. Consumers will enter information into the app when they apply for a loan. The input form for the app must display fields to prompt the consumer for their first name, last name, address, and the requested loan amount.

Immediately after a consumer enters a value for the LoanAmount field, the background color for the column must change. The background color for the column must change to red if a consumer enters a value of more than $5,000 and must turn green for values less than or equal to $5,000.

You need to implement the required behavior.

Which option should you use?

A. Create a Power Automate flow.

B. Configure field properties.

C. Add a business rule to the form.

D. Add a formula to the LoanAmount field.

Answer: D


Explanation:
Conditional formatting in Power Apps can be done with formulas.

Reference:
https://powerapps.microsoft.com/en-us/blog/conditional-formatting-in-powerapps/

Question: 233 CertyIQ


HOTSPOT -
A company has a canvas app that has a screen with a gallery of contacts.
Users must be able to search the gallery by last name, email address, and country/region. They must also be able to sort by last name, followed by country/region.
You need to define the expression that meets the requirements.
How should you complete the expression? To answer, select the appropriate options from the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

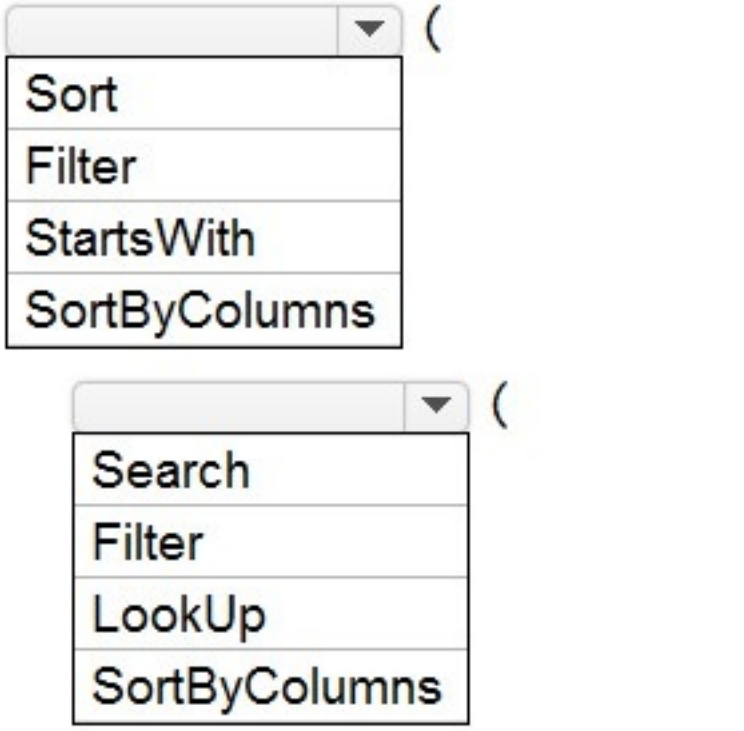

Answer:

Answer Area

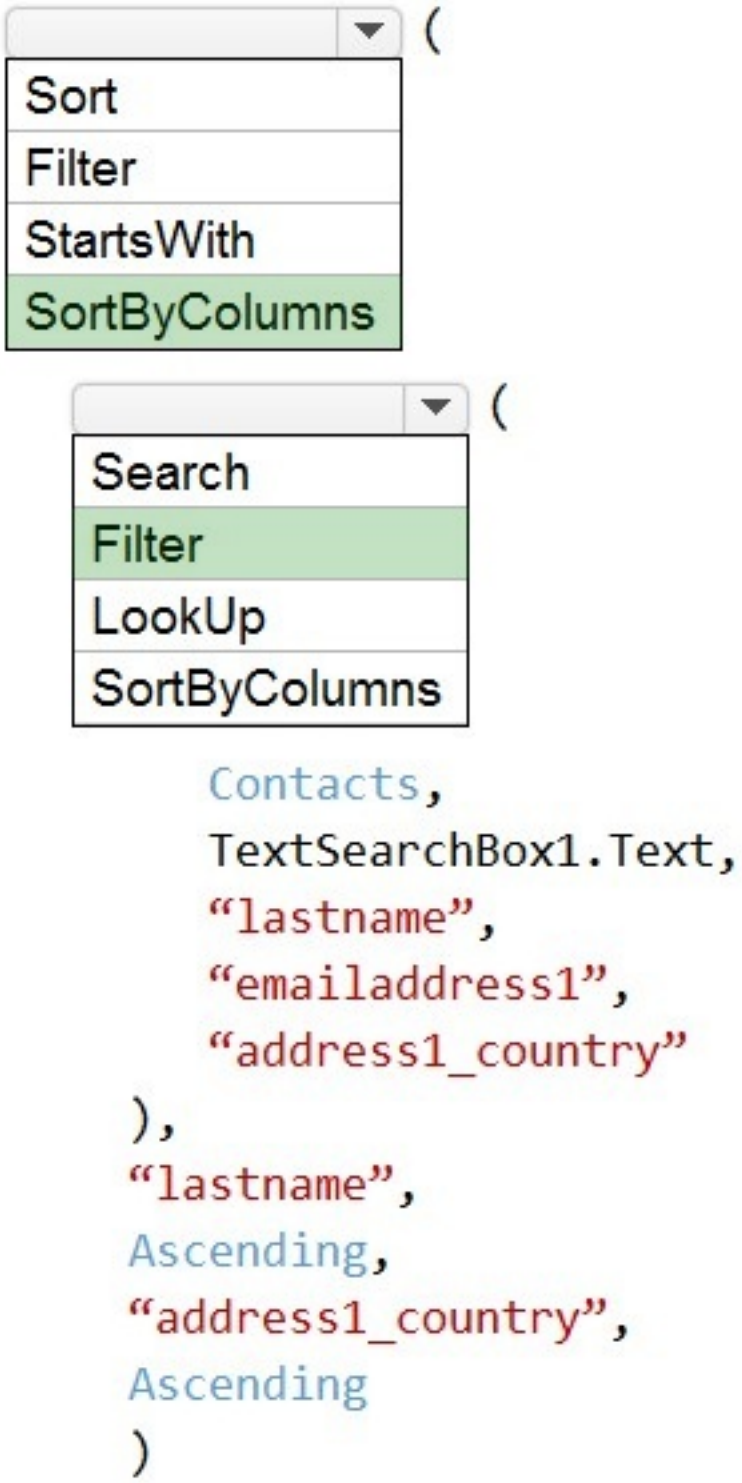

Explanation:

Box 1: SortByColums -

The SortByColumns function can be used to sort a table based on one or more columns.

The parameter list for SortByColumns provides the names of the columns to sort by and the sort direction per column. Sorting is performed in the order of the parameters (sorted first by the first column, then the second, and so on).

Box 2: Filter -

The Filter function finds records in a table that satisfy a formula. Use Filter to find a set of records that match one or more criteria and to discard those that don't.

Incorrect Answers:

✑ Lookup: The LookUp function finds the first record in a table that satisfies a formula. Use LookUp to find a single record that matches one or more criteria.

✑ Search: Search function uses a single string to match instead of a formula.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-sort

Question: 234 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are developing a model-driven app for a company.
When you create a new Account record, you must automatically display a form to collect data that is needed to create a Contact record. The form must switch to the appropriate form layout based on the contact type.
You open the Contact form by using JavaScript. You pass the contact type information to the form by using the Xrm.Navigation.openForm function. An OnLoad event handler in the Contact form processes the data and shows only the appropriate sections of the form for the given contact type.
You need to configure the receiving form to accept the data parameter.
Solution: In the form editor, add a query string parameter for the data parameter.
Does the solution meet the goal?

A. Yes
B. No

Answer:

A

Explanation:

By default, model-driven apps allows a specified set of query string parameters to be passed to a form. You use these parameters to set default values when you create a new record in the application. Each parameter must use a standard naming convention that includes a reference to the column logical name.

There are two ways to specify which query string parameters will be accepted by the form:

✑ Edit form properties

✑ Edit form XML

When you edit a form, on the Home tab in the Form group, select Form Properties. In the Form Properties dialog box, select the Parameters tab.

Use this tab to modify the names and data types that the form allows.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/configure-form-accept-custom-

querystring-parameters

Question: 235 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are developing a model-driven app for a company.
When you create a new Account record, you must automatically display a form to collect data that is needed to create a Contact record. The form must switch to the appropriate form layout based on the contact type.
You open the Contact form by using JavaScript. You pass the contact type information to the form by using the Xrm.Navigation.openForm function. An OnLoad event handler in the Contact form processes the data and shows only the appropriate sections of the form for the given contact type.
You need to configure the receiving form to accept the data parameter.
Solution: Export the solution, edit the customizations.xml, and add a querystringparameter element to the XML.
Does the solution meet the goal?

A. Yes
B. No

Answer:

A

Explanation:

Within the exported solution customizations.xml file, immediately following the footer element, you can add a <formparameters> element. In the <formparameters> element, add <querystringparameter> elements to specify which parameters will be allowed.

Note: By default, model-driven apps allows a specified set of query string parameters to be passed to a form. You use these parameters to set default values when you create a new record in the application. Each parameter must use a standard naming convention that includes a reference to the column logical name.

There are two ways to specify which query string parameters will be accepted by the form:

✑ Edit form properties

✑ Edit form XML


Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/configure-form-accept-custom-querystring-parameters


Question: 236 CertyIQ

DRAG DROP -
You are developing a new Power Apps Component Framework (PCF) control.
The control must be deployed to a development environment by using the Power Apps CLI and a new solution.
You need to deploy the PCF control.
Which four actions should you perform in sequence? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

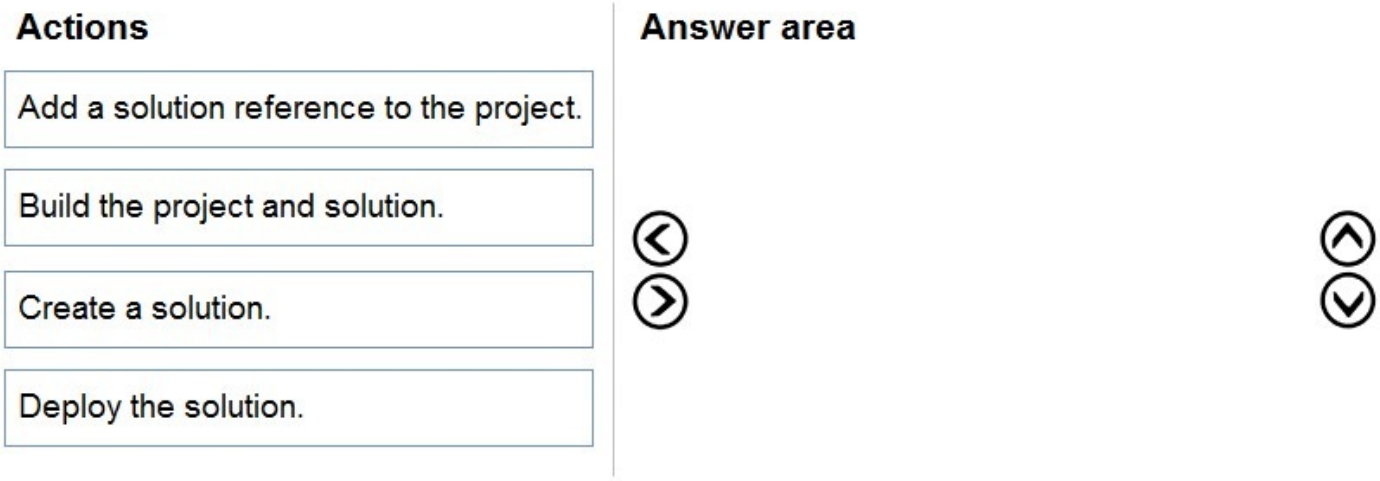

Answer:

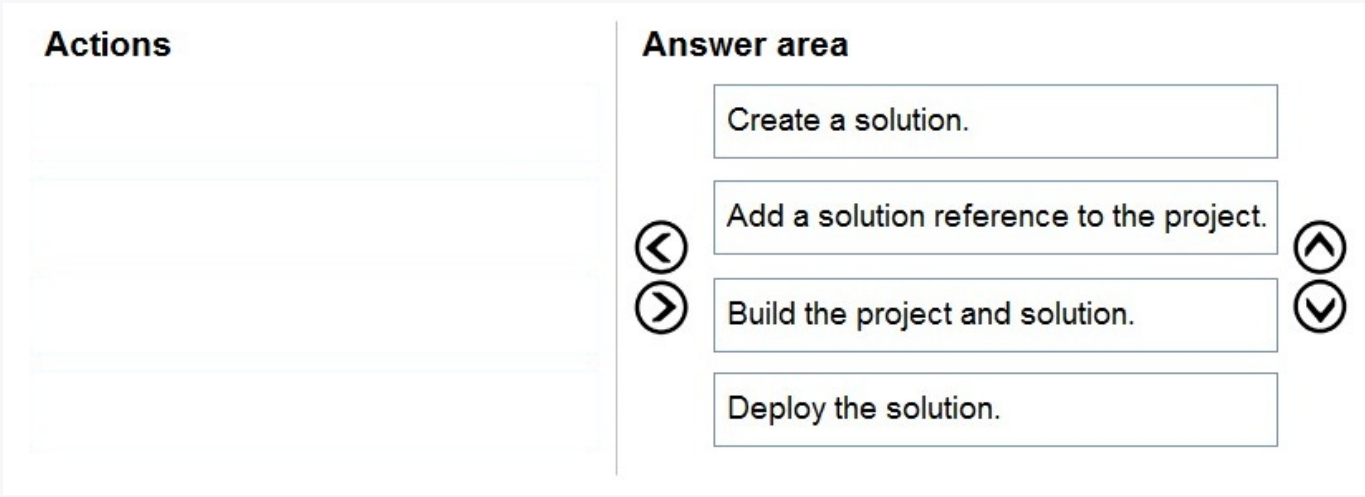

Explanation:

Step 1: Create a solution -

Create a new solutions project using the following command. The solution project is used for bundling the code component into a solution zip file that is used for importing into Dataverse. pac solution init --publisher-name developer --publisher-prefix dev

Step 2: Add a solution reference to the project

Once the new solution project is created, refer the Solutions folder to the location where the created sample component is located. You can add the reference using the command shown below. This reference informs the solution project about which code components should be added during the build. You can add references to multiple components in a single solution project. pac solution add-reference --path c:\downloads\mysamplecomponent

Step 3: Build the project and solution

To generate a zip file from the solution project, go into your solution project directory and build the project using the following command. msbuild /t:build /restore

Step 4: Deploy the solution -


Reference:

https://docs.microsoft.com/en-us/powerapps/developer/component-framework/import-custom-controls


Question: 237 CertyIQ

DRAG DROP -

You create solutions in a development environment and export the solution for testing by various departments in your organization. Power users in each department control the testing environments.
You must display department-specific wording at the beginning of any custom notifications that are displayed in testing environments.
You need to package solutions to ensure that the power users can customize the notification content.
Which three actions should you perform in sequence inside a solution? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

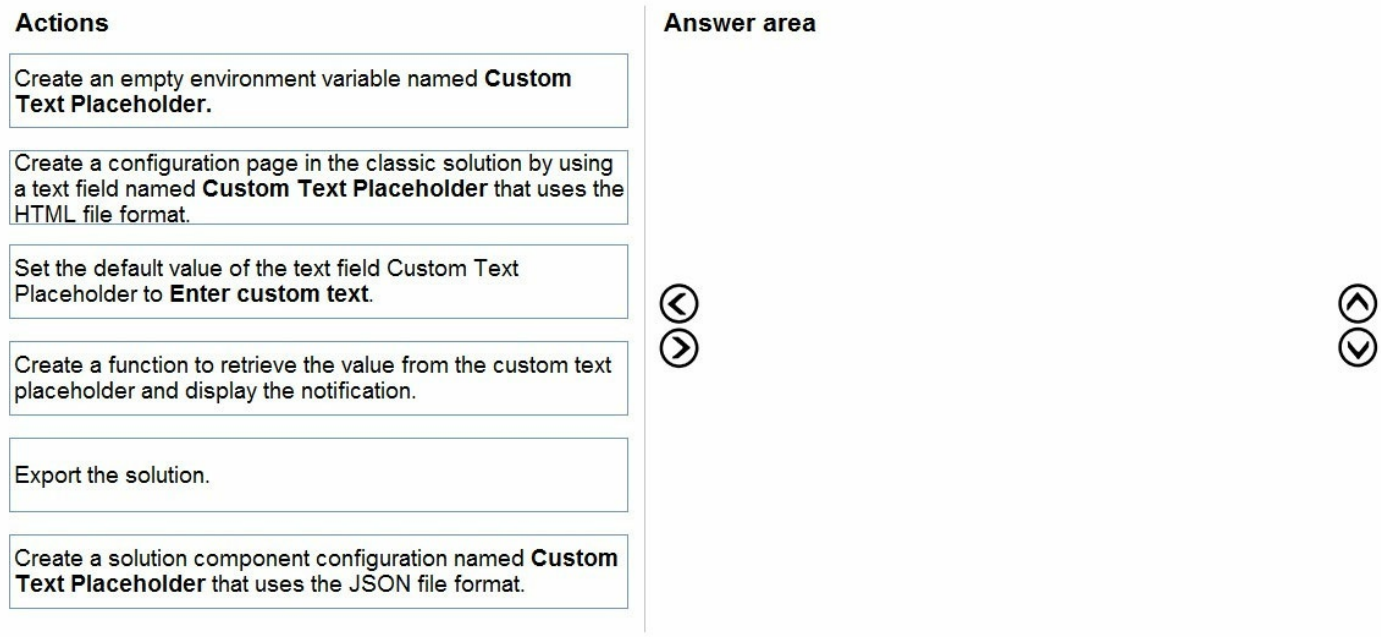

Answer:

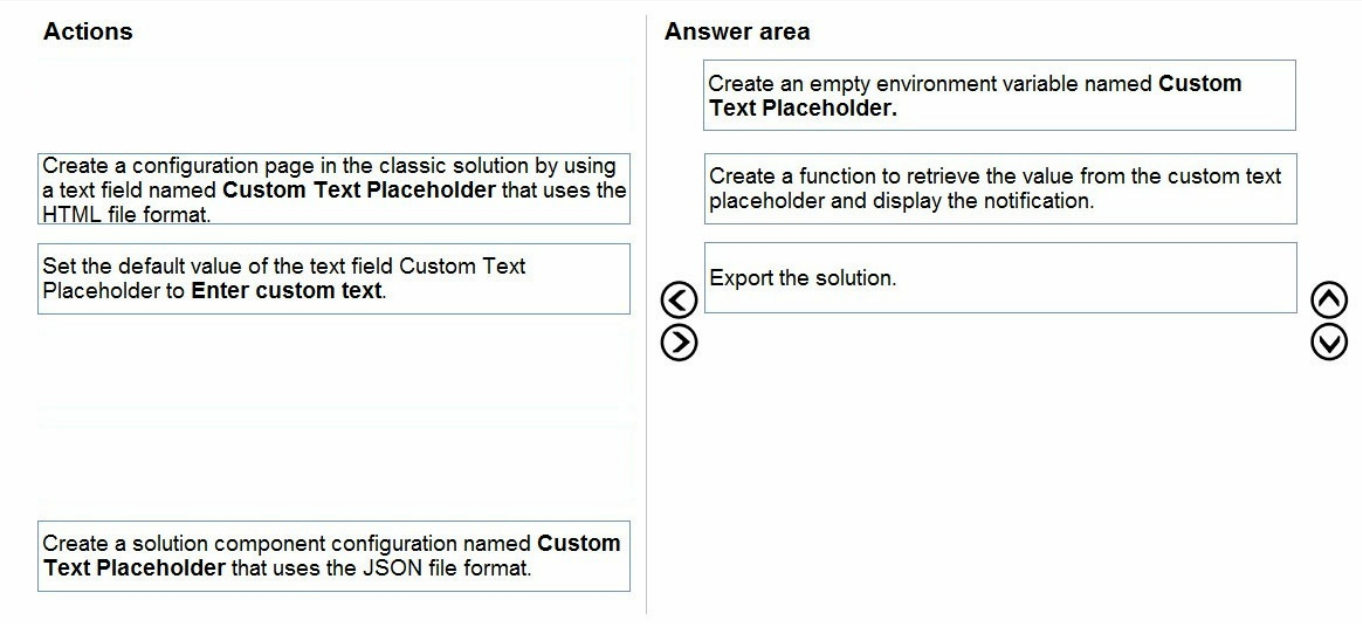

Explanation:

Step 1: Create an empty environment variable named Custom Text Placeholder.
Applications often require different configuration settings or input parameters when deployed to different environments. Environment variables store the parameter keys and values, which then serve as input to various other application objects. Separating the parameters from the consuming objects allows you to change the values within the same environment or when you migrate solutions to other environments.
Step 2: Create a function to retrieve the value from the custom text placeholder and display the notification.

Step 3: Export the solution -
You can manually export solutions. Microsoft recommends that you create an unmanaged solution to use for exporting your customizations, and then export your customizations periodically so that you have a backup in

case anything happens.

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/data-platform/environmentvariables
https://docs.microsoft.com/en-us/powerapps/maker/data-platform/export-solutions

Question: 238 CertyIQ

HOTSPOT -
You need to use the Dynamics 365 Sales Web API to retrieve metadata information.
How should you complete the Web API queries? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Metadata item	Web API query
Entity	`GET /api/data/v9.0/EntityDefinitions(` [▼] `= 'account')`
Attribute	`GET /api/data/v9.0/EntityDefinitions(` [▼] `= 'account')/Attributes(LogicalName=telephone1)`
Relationship	`GET /api/data/v9.0/RelationshipDefinitions(` [▼] `= 'Account_Tasks')`
Global Option Set	`GET /api/data/v9.0/GlobalOptionSetDefinitions(` [▼] `= 'metric_goaltype')`

- Entity: Name / EntityName / LogicalName / SchemaName
- Attribute: Name / LogicalName / SchemaName / AttributeName
- Relationship: Name / LogicalName / SchemaName / RelationshipName
- Global Option Set: Name / LogicalName / SchemaName / AttributeName

Answer:

Answer Area

Metadata item	Web API query
Entity	`GET /api/data/v9.0/EntityDefinitions(` [Name / EntityName / **LogicalName** / SchemaName] `= 'account')`
Attribute	`GET /api/data/v9.0/EntityDefinitions(` [Name / **LogicalName** / SchemaName / AttributeName] `= 'account')/Attributes(LogicalName=telephone1)`
Relationship	`GET /api/data/v9.0/RelationshipDefinitions(` [Name / LogicalName / **SchemaName** / RelationshipName] `= 'Account_Tasks')`
Global Option Set	`GET /api/data/v9.0/GlobalOptionSetDefinitions(` [**Name** / LogicalName / SchemaName / AttributeName] `= 'metric_goaltype')`

Explanation:
Entity: LogicalName -
Querying the EntityMetadata entity type:
GET [Organization URI]/api/data/v9.0/EntityDefinitions(LogicalName='account')

Attribute: LogicalName -
Retrieving attributes:
GET [Organization URI]/api/data/v9.0/EntityDefinitions(LogicalName='account')/Attributes(

Relationship: SchemaName -
Querying relationship metadata:
Entity relationships can also be queried using the RelationshipDefinitions entity set. You can use a query like the following to get the SchemaName property for every relationship.
GET [Organization URI]/api/data/v9.0/RelationshipDefinitions?$select=SchemaName

Global Option Set: Name -
Querying Global OptionSets:
GET /api/data/v9.0/GlobalOptionSetDefinitions(Name='metric_goaltype')
Note: Retrieving items by name is generally easier because you probably already have some reference to the metadata item name in your code. The following table lists the alternate key properties for retrieving

metadata items by name.

Metadata item	Alternate Key	Example
Entity	LogicalName	`GET /api/data/v9.0/EntityDefinitions(LogicalName='account')`
Attribute	LogicalName	`GET /api/data/v9.0/EntityDefinitions(LogicalName='account')/Attributes(LogicalName='emailaddress1')`
Relationship	SchemaName	`GET /api/data/v9.0/RelationshipDefinitions(SchemaName='Account_Tasks')`
Global Option Set	Name	`GET /api/data/v9.0/GlobalOptionSetDefinitions(Name='metric_goaltype')`

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/webapi/query-metadata-web-api

Question: 239 CertyIQ

You are creating a custom connector in Power Apps to connect to a third-party application.
The definition in the connector must be set so that it is not visible to the end user.
You need to select the appropriate visibility parameter.
Which parameter should you use?

A. important
B. none
C. internal
D. advanced

Answer: C

Explanation:

Leave the Visibility property set to none. This property for operations and parameters in a logic app or flow has the following options:

- none: displayed normally in the logic app or flow
- advanced: hidden under an additional menu
- internal: hidden from the user
- important: always shown to the user first

Reference:

https://docs.microsoft.com/en-us/connectors/custom-connectors/define-blank

Question: 240 CertyIQ

HOTSPOT -
A model-driven app has the following JavaScript code. The code is attached to the OnChange event of the Phone (telephone1) field on the Account entity.

```
var telephone = formContext.getAttribute("telephone1").getValue();
if (!telephone) {
     return;
}
var contact = formContext.getAttribute("primarycontactid").getValue();
var data = { "telephone1": telephone }
Xrm.WebApi.updateRecord("contact", contact[0].id, data).then(
     function () {
          Xrm.Navigation.openAlertDialog("Updated");
     },
     function () {
          var errorOptions = { "message": "Not Updated" };
          Xrm.Navigation.openAlertDialog(errorOptions);
     }
)
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

	Yes	No
When the code runs and the Primary contact (primarycontactid) field is populated, the Contact record's Phone (telephone1) field is updated to match the Account.	○	○
When the code runs and the Primary contact (primarycontactid) field is not populated, the following error message displays: `Not Updated`	○	○
When the code runs and the value in Phone (telephone1) is removed, the Contact record's Phone (telephone1) field is updated to null.	○	○

Answer:

Answer Area

	Yes	No
When the code runs and the Primary contact (primarycontactid) field is populated, the Contact record's Phone (telephone1) field is updated to match the Account.	○	○
When the code runs and the Primary contact (primarycontactid) field is not populated, the following error message displays: `Not Updated`	○	○
When the code runs and the value in Phone (telephone1) is removed, the Contact record's Phone (telephone1) field is updated to null.	○	○

Explanation:

Box 1: Yes -

Xrm.WebApi.updateRecord updates a table record.

Syntax:

Xrm.WebApi.updateRecord(entityLogicalName, id, data).then(successCallback, errorCallback);

Box 2: Yes -

Box 3: No -


No action would be taken.

Reference:


https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/xrm-webapi/updaterecord

Question: 241 CertyIQ


HOTSPOT -
A JavaScript function on a Contact form alerts users to what they need to type, as shown in the JavaScript Code exhibit. (Click the JavaScript Code tab.)

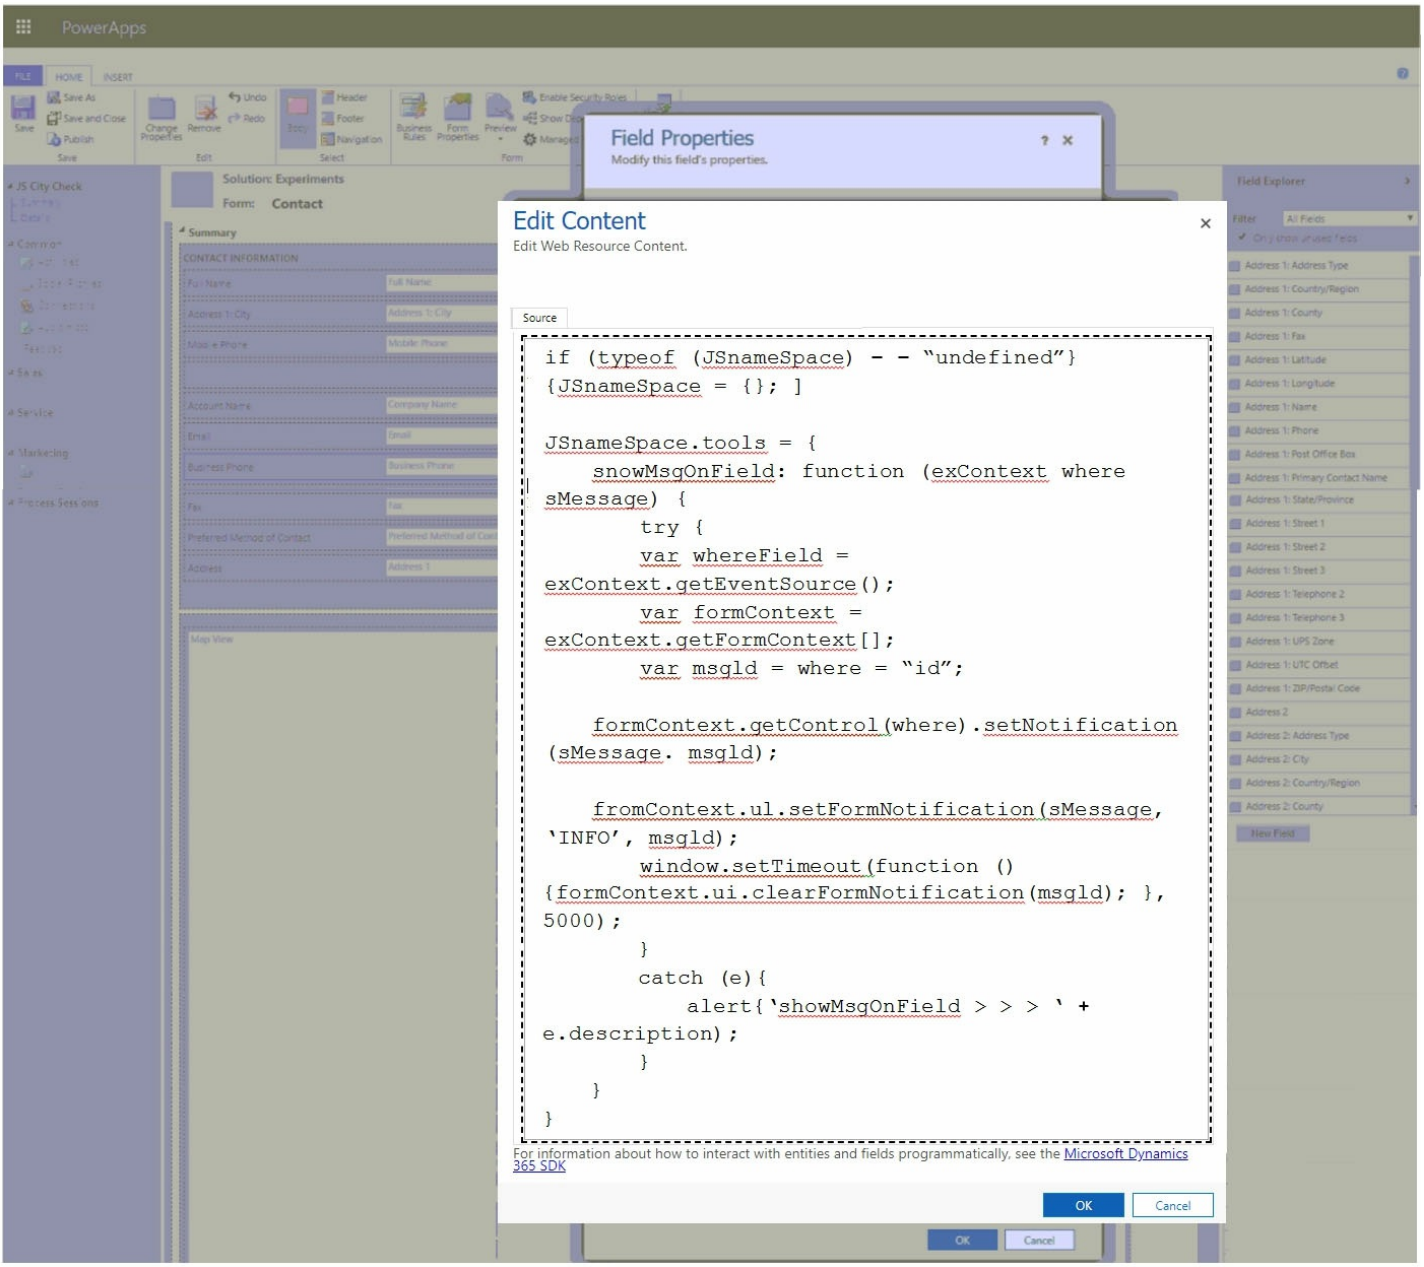

The Business Phone field has the OnChange event handler defined as shown in the Event Handler exhibit. (Click the Event Handler tab.)

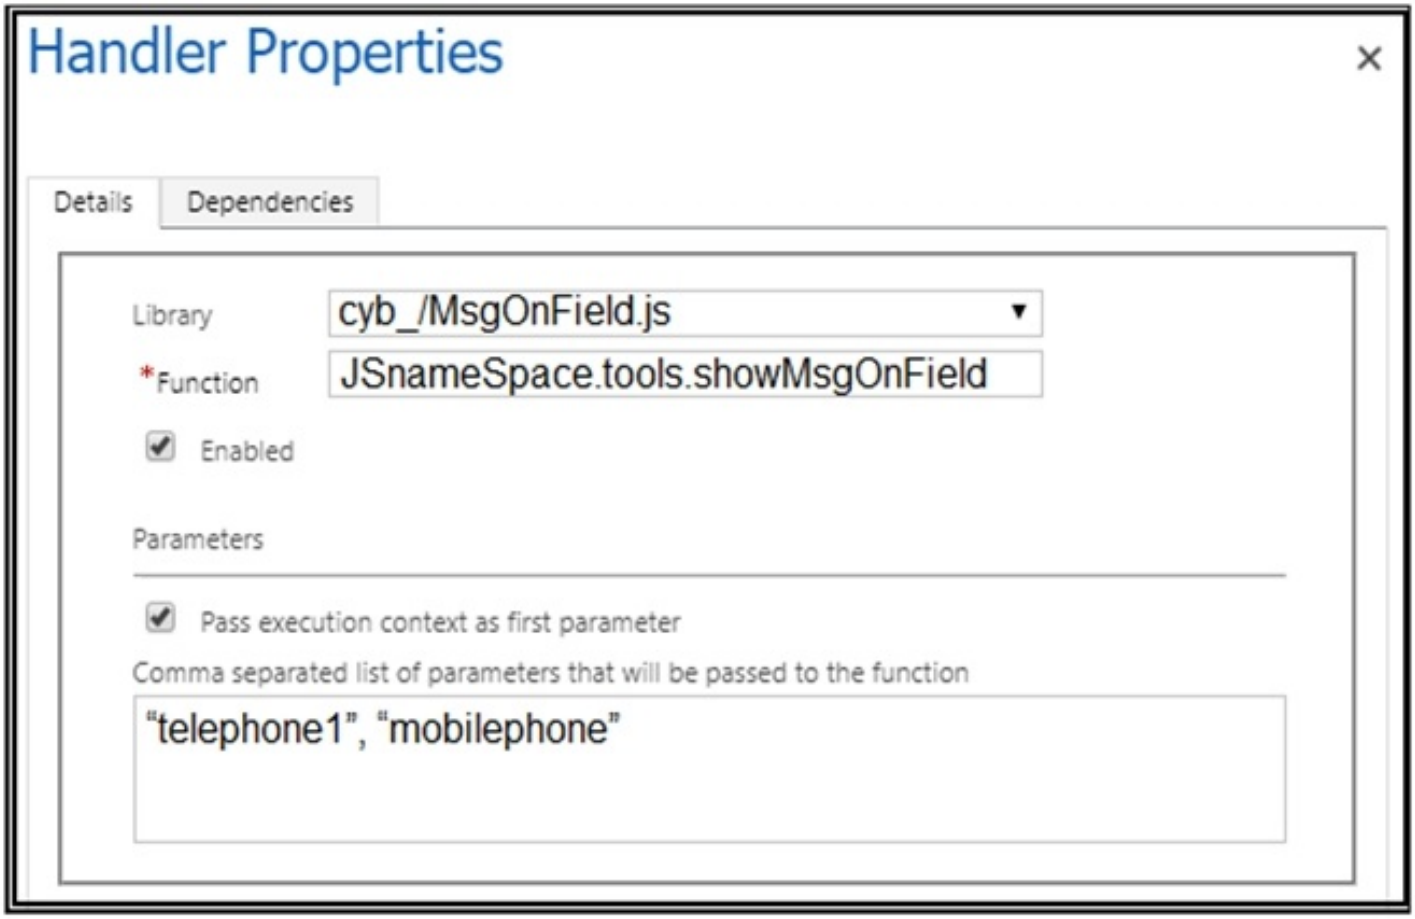

Users report that there is incorrect wording on the Contact page, as shown in the Contact exhibit. (Click the Contact tab.)

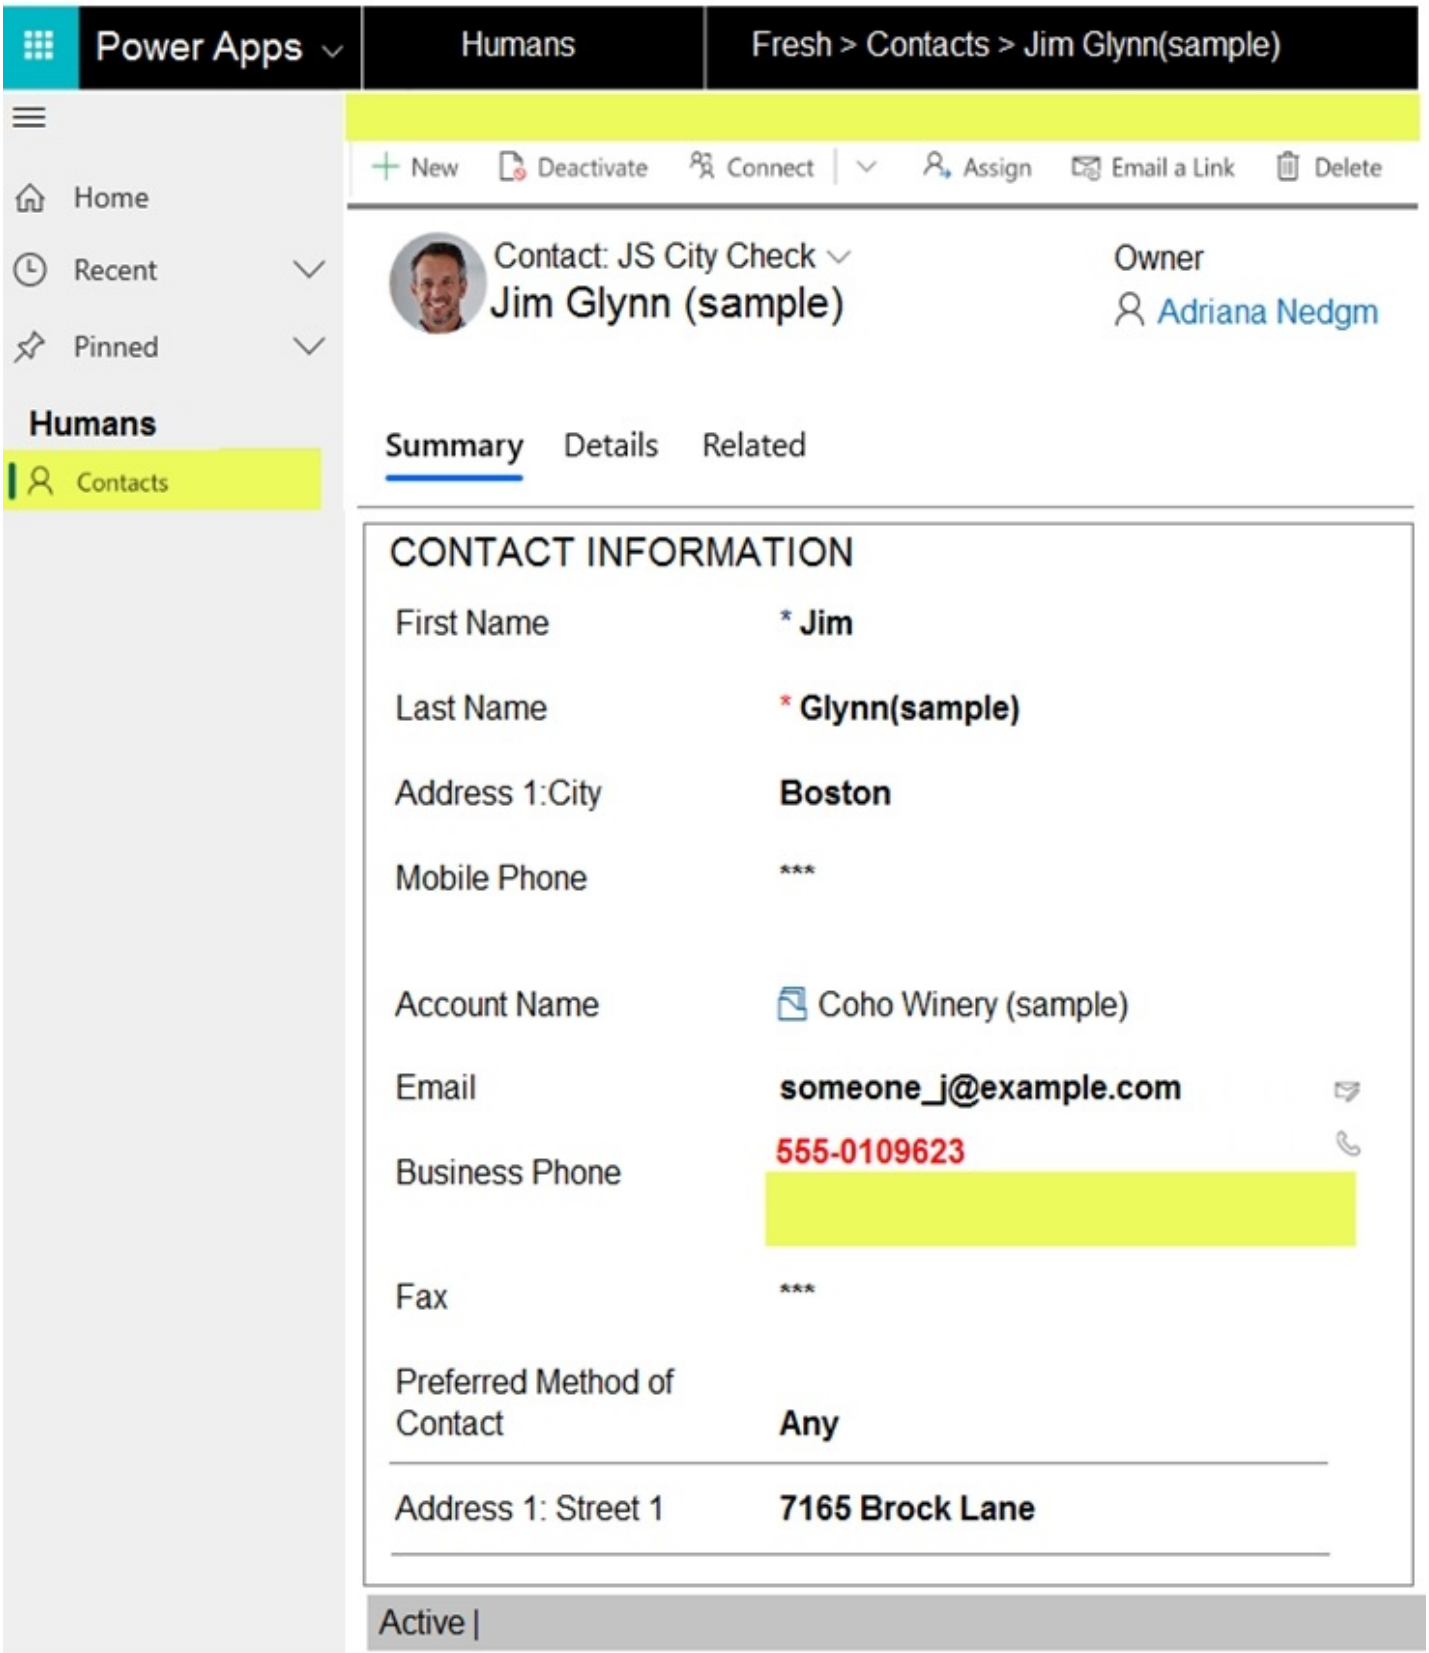

You need to determine what happens when a user modifies the business phone of a contact record.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statement	Yes	No
The message "telephone1" shows in the Business Phone notification area.	○	○
The message "mobilephone" shows in the Business Phone notification area.	○	○
The message "telephone1" shows in the form notification area.	○	○
The message "mobilephone" show in the form notification area.	○	○

Answer:

Answer Area

Statement	Yes	No
The message "telephone1" shows in the Business Phone notification area.	○	○
The message "mobilephone" shows in the Business Phone notification area.	○	○
The message "telephone1" shows in the form notification area.	○	○
The message "mobilephone" show in the form notification area.	○	○

Explanation:

Box 1: Yes -

setNotification displays an error message for the control to indicate that data isn't valid. When this method is used, a red "X" icon appears next to the control. On

Dynamics 365 mobile clients, tapping on the icon will display the message.

Syntax: formContext.getControl(arg).setNotification(message,uniqueId);

Box 2: No -

Box 3: Yes -

setFormNotification displays form level notifications. You can display any number of notifications and they will be displayed until they are removed using clearFormNotification.

Syntax: formContext.ui.setFormNotification(message, level, uniqueId);

Box 4: No -

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/formcontext-ui/setformnotification https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/controls/setnotification

Question: 242 CertyIQ

You are developing a Power Apps app to manage records in the Account table in Microsoft Dataverse.
You must configure a Web API request to retrieve changes from the table.
You need to configure the preference header for the API request.
What should you include in the request header?

A. odata.context
B. odata.deltaLink
C. odata.track-changes
D. odata.nextLink

Answer:

B

Explanation:

The @odata.deltaLink Uri returned from the below example can be used to fetch changes in tables. In this example a new account was created and an existing account deleted. The delta link returned from the previous request fetches these changes, as shown in the example below.

"@odata.context":"[Organization URI]/api/data/v9.0/$metadata#accounts(name,accountnumber,telephone1,fax)",

"@odata.deltaLink": "[Organization URI]/api/data/v9.0/accounts?$select=name,accountnumber,telephone1,fax&$deltatoken=919042%2108%2f22%2f2017%

2008%3a10%3a44",

"value":[

"@odata.etag":"W/\"915244\"",

"name":"Monte Orton",

"accountnumber":null,

"telephone1":"555000",

"fax":"10101",

"accountid":"60c4e274-0d87-e711-80e5-00155db19e6d"

]

Reference:

https://docs.microsoft.com/en-us/power-apps/developer/data-platform/use-change-tracking-synchronize-data-external-systems

Question: 243 CertyIQ

You are creating a Power Apps Component Framework (PCF) component.
You add the following markup to the component manifest. (Line numbers are included for reference only.)

```
01  <?xml version="1.0" encoding="utf-8"?>
02  <manifest>
03
04    <property name="Text1" display-name-key="Text1" description-key="Text1" of-type="SingleLine.Text" usage="bound" required="true" />
05    <resources>
06      <code path="index.ts" order="1" />
07    </resources>
08    <feature-usage>
09      <uses-feature name="WebAPI" required="true" />
10    </feature-usage>
11    </control>
12  </manifest>
```

You need to complete the component manifest.
Which XML markup segment should you insert at line 03?

A. <control DisplayNameKey="PowerContoso" constructor="CtlProducts" version="0.0.10" display-name-key="CtlProducts" description-key="CtlProducts" control-type="standard">

B. <control namespace="PowerContoso" constructor="CtlProducts" version="0.0.10" display-name-key="CtlProducts" description-key="CtlProducts" control- type="standard">

C. <control code="PowerContoso" constructor="CtlProducts" version="0.0.10" display-name-key="CtlProducts" description-key="CtlProducts" control- type="standard">

D. <control name="PowerContoso" constructor="CtlProducts" version="0.0.10" display-name-key="CtlProducts" description-key="CtlProducts" control- type="standard">

E. <control _value="PowerContoso" constructor="CtlProducts" version="0.0.10" display-name-key="CtlProducts" description-key="CtlProducts" control- type="standard">

Answer: B

Explanation:
The control element defines the component's namespace, version and display information.
Example:
<?xml version="1.0" encoding="utf-8" ?>
<manifest>
<control namespace="MyNameSpace" constructor="JSHelloWorldControl" version="1.0.0" display-name-key="JS_HelloWorldControl_Display_Key" description- key="JS_HelloWorldControl_Desc_Key" control-type="standard">
<property name="myFirstProperty" display-name-key="myFirstProperty_Display_Key" description-key="myFirstProperty_Desc_Key" of-type="SingleLine.Text" usage="bound" required="true" />
<resources>
<code path="JS_HelloWorldControl.js" order="1" />
<css path="css/JS_HelloWorldControl.css" order="1" />
</resources>
</control>
</manifest>

Reference:

https://docs.microsoft.com/en-us/power-apps/developer/component-framework/manifest-schema-reference/manifest

Question: 244 CertyIQ

You are creating a model-driven app. You create JavaScript code to display a message when a record is saved.
You need to configure the associated JavaScript web resource name when adding the event handler to the form.
Which field should you use?

A. Event Type
B. Component
C. Function
D. Library

Answer:

C

Explanation:

In the context of adding an event handler to a form, the field you would use to configure the associated JavaScript web resource name is "Function". The "Library" field would typically be used to specify a JavaScript library that the web resource depends on, such as jQuery. While the web resource would be added to the form as a library.

Question: 245 CertyIQ


HOTSPOT
-
The planning department for municipal government wants to survey the land in town and define new property lines. You define a data model for the surveys.
Surveyors and other department employees need a phone app to capture survey data.
You need to define a Power Apps component framework (PCF) component to be used across multiple functional areas.
How should you complete the PCF control manifest? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

```
<manifest>
  <control namespace="surveyCapture" constructor="Survey" …>
    <property name="propertyRollNo" of-type-group="SingleLine.Text" usage="bound" required="true" />
    <property name="latitude" of-type-group="[Decimal / Whole.None / Floating point]" usage="input" required="true" />
      . . .
    <feature-usage>
      <uses-feature name="Device.getCurrentPosition" required="true" />
      <uses-feature name="[Client / Utility / Web API]" required="true" />
    </feature-usage>
    <resources>
      . . .
    </resources>
  </control>
</manifest>
```

Answer:

Answer Area

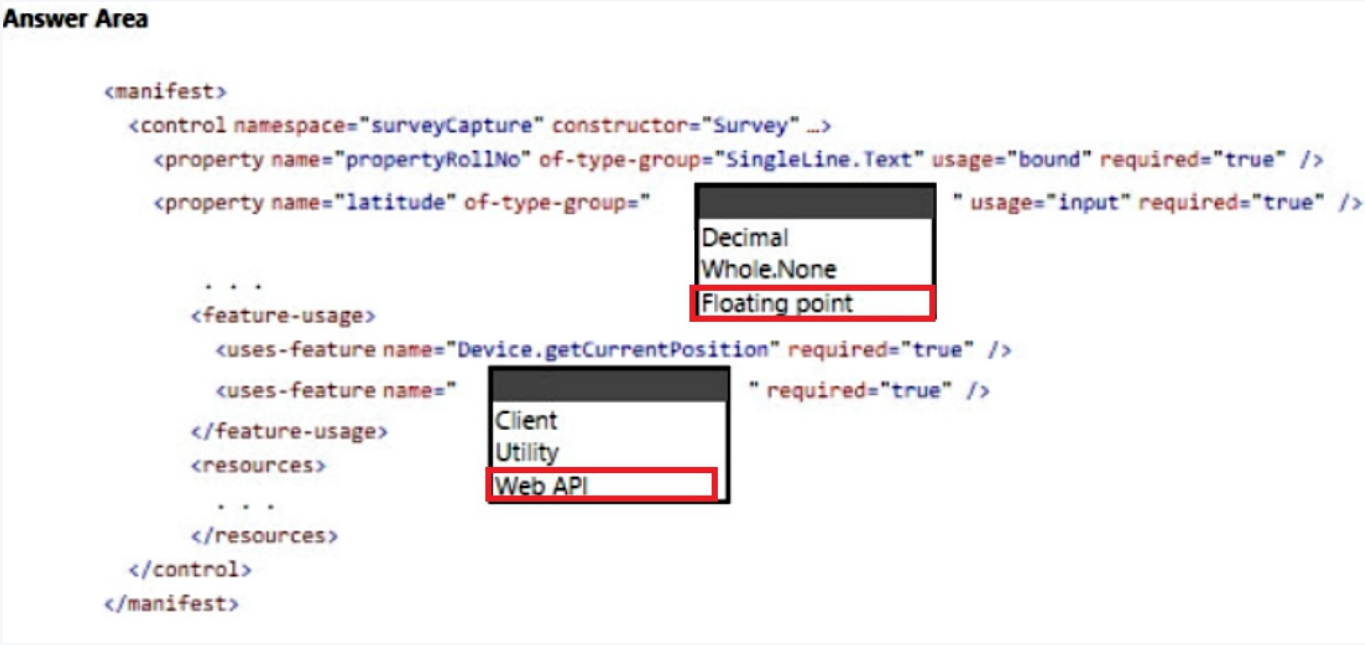

Explanation:

. latitude of-type-group \(\rightarrow \) Floating point (Correction)

Why the highlighted "Decimal" is incorrect: Latitude and longitude coordinates require high numerical precision to pinpoint exact geographic locations. In Microsoft Dataverse, a **Decimal** data type defaults to 2 decimal places unless explicitly modified with custom precision attributes. For geospatial mapping or capturing GPS values, you must bind the property to a **Floating point** type-group to avoid truncation errors.

<uses-feature name="..."> \(\rightarrow \) Web API (Correct)

Why this is correct: The component needs to perform Create, Read, Update, or Delete (CRUD) transactions directly against Dataverse tables (such as saving the captured survey responses). In the Power Apps Component Framework (PCF) feature-usage schema, explicitly declaring the **Web API** (or WebAPI) capability tells the hosting sandbox engine to expose the authorization tokens and client methods (context.webAPI) needed to interact with the environment data endpoints securely.

Question: 246 CertyIQ

DRAG DROP
-
You are developing an inventory tracking component for a warehouse. You plan to use the component with a Power Apps app.
Truck drivers will use tablet devices to confirm their cargo manifest. Warehouse employees will use their phones to pick and fulfill orders. The phone-based version must run in a Power Apps runtime container.
You need to create a single Power Apps component that can be used on both tablet devices and phones.
How should you complete the code segment? To answer, drag the appropriate code segments to the correct locations. Each code segment may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

Code Segments

- getValue
- getTitle
- getFormFactor
- getClient

Answer Area

```
var gTablet1 = 2;
var gPhone1 = 3;
var gTablet2 = "Web";
var gPhone2 = "Mobile";
if (context.client.          () == "Mobile") {
    if (context.client.          () == gPhone1) {
      . . .
    }
    else if . . . {
      . . .
    }
}
```

Answer:

Answer Area

```
var gTablet1 = 2;
var gPhone1 = 3;
var gTablet2 = "Web";
var gPhone2 = "Mobile";
if (context.client. getClient () == "Mobile") {
    if (context.client. getFormFactor () == gPhone1) {
      . . .
    }
    else if . . . {
      . . .
    }
}
```

Explanation:

getclient

get Form Factor

Question: 247

CertyIQ

A company is creating a Power Apps portal to collaborate with vendors.
You need to implement custom functionality in the portal by using JavaScript code.

Which two portal entities can you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A. Web pages
B. Web resources
C. Web roles
D. Entity lists

Answer:

AD

Explanation:

A. Web pages: The Web Page entity includes a dedicated field to add custom script logic that triggers when that specific page load completes. This is ideal for altering page UI elements, adding custom validation rules, or pulling external data via client-side scripts.
D. Entity lists (Lists): The Entity List configuration includes a **Custom JavaScript** section located under its Options tab. This field allows you to write custom jQuery/JavaScript code to modify the behavior of the tabular grid (e.g., dynamically altering column formatting, adding click handlers, or changing row colors).

Why Other Options Are Incorrect

B is incorrect: While model-driven Power Apps use **Web resources** for custom scripts, Power Apps Portals use portal-specific tables and entities (like Web Templates or the page/list configuration records themselves) to handle injected custom JavaScript logic natively.
C is incorrect: Web roles are strictly used for security, access control, and defining permissions; they do not handle code or visual styling behavior.

Question: 248 CertyIQ

HOTSPOT
-
You have the following code registered on the OnChange event of the parentcustomerid column on a contact table form. The parentcustomerid field is a lookup which can be an account or a contact record.
Line numbering is provided for information only.

```
01  function UpdateTelephone1(executionContext) {
02      var formContext = executionContext.getFormContext();
03
04      var parent = formContext.getAttribute('parentcustomerid').getValue()
05      if (parent[0] !== null) {
06          Xrm.WebApi.online.retrieveRecord(parent[0].name, parent[0].id, "?$select=telephone1").then(
07              function success(result) {
08                  var telephone1 = result["telephone1"];
09                  formContext.getAttribute("telephone1").setValue(telephone1);
10              },
11              function (error) {
12                  Xrm.Navigation.openErrorDialog({ message: error.message });
13              }
14          );
15      }
16      else {
17          formContext.getAttribute("telephone1").setValue(null);
18      }
19  }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statement	Yes	No
Would the value of the telephone1 column on the contact form be null if the parentcustomerid column is null?	○	○
Would the code return a parentcustomerid record if it is an account or a contact?	○	○
Would the value of the telephone1 column be null if the value of the telephone1 column from the parentcustomerid record is null?	○	○

Answer:

Answer Area

Statement	Yes	No
Would the value of the telephone1 column on the contact form be null if the parentcustomerid column is null?	○	○
Would the code return a parentcustomerid record if it is an account or a contact?	○	○
Would the value of the telephone1 column be null if the value of the telephone1 column from the parentcustomerid record is null?	○	○

Explanation:

Box 1: No. Error message is displayed in line 05. Cannot read properties of null (reading '0')Box 2: No. Error

message is displayed. The entity "Trey Research" cannot be found. Specify a valid query, and try again. Code should be parent[0].entityTypeBox 3: No. Because the parent record can not be retrieved because of parent[0].name.

Question: 249

CertyIQ

HOTSPOT
-
You are creating an app for a school.
You need to implement client-side logic that uses the Microsoft Dataverse web API to evaluate the class type associated with a class record. The code must hide the School Schedule tab if no value is entered for Class Type.
How should you complete the code? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

```
function handleClassTypeSettings (executionContext) {
  var formContext = executionContext.getFormContext();
  var classType = formContext.getAttribute("contoso_classtype").
  if (classType ===
    formContext.ui.tabs.get("SchoolScheduleTab").
  }
}
```

- `if (classType ===` : false / empty string / null / zero
- `getAttribute("contoso_classtype").` : getVisible() / getValue() / getObject() / getName()
- `formContext.ui.tabs.get("SchoolScheduleTab").` : setVisible(false) / setVisible(true) / setDisabled(false) / setDisabled(true)

Answer:

Answer Area

```
function handleClassTypeSettings (executionContext) {
  var formContext = executionContext.getFormContext();
  var classType = formContext.getAttribute("contoso_classtype").
  if (classType ===
    formContext.ui.tabs.get("SchoolScheduleTab").
  }
}
```

- `if (classType ===` : false / empty string / **null** / zero
- `getAttribute("contoso_classtype").` : getVisible() / **getValue()** / getObject() / getName()
- `formContext.ui.tabs.get("SchoolScheduleTab").` : **setVisible(false)** / setVisible(true) / setDisabled(false) / setDisabled(true)

Question: 250


CertyIQ

HOTSPOT
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the

scenario that is described in the case study. Each question is independent of the other questions in this case study. At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a


Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate's local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to configure elements in the manifest for the PCF control used to display local time.
Which values should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

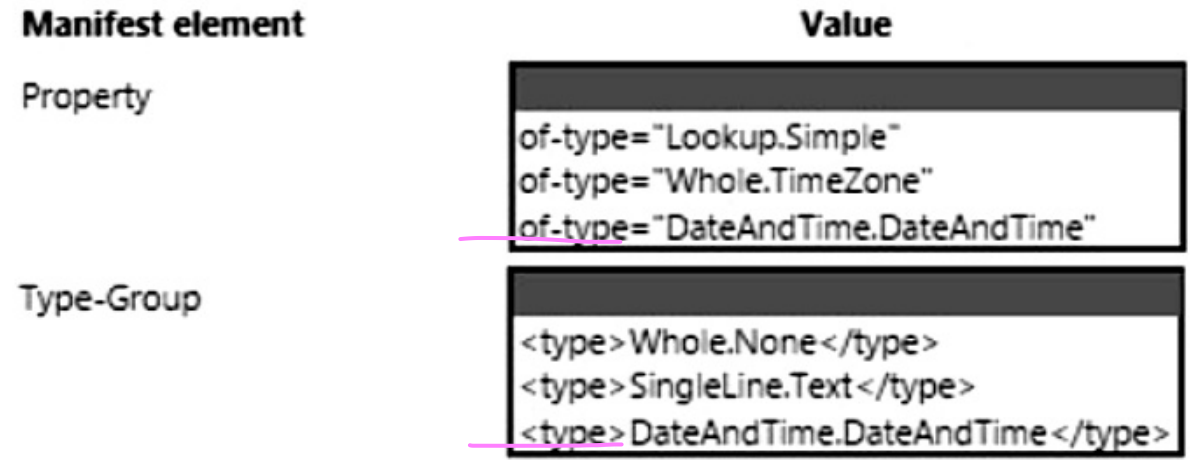

Answer:

Answer Area

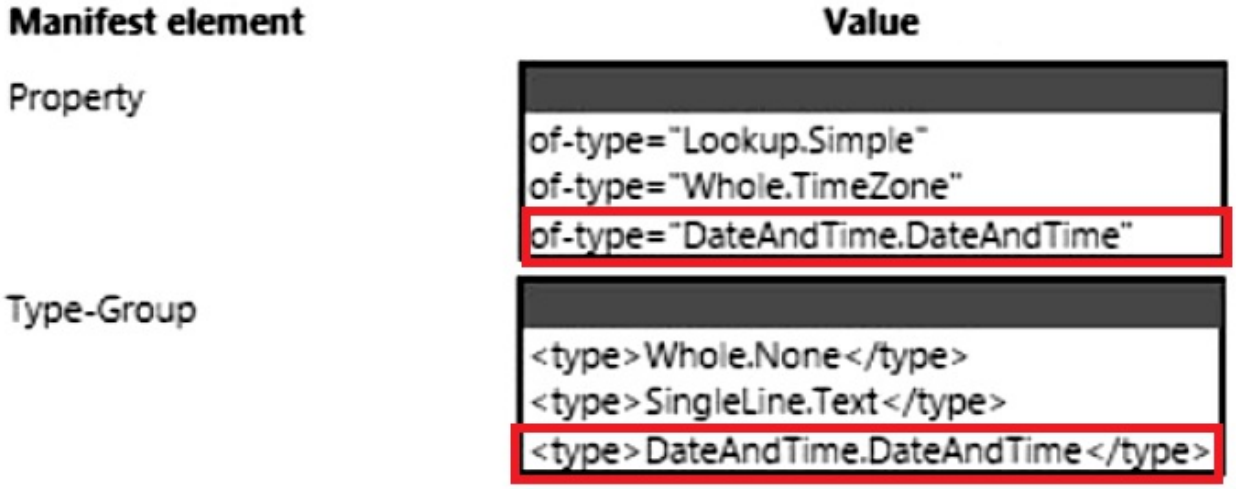

Explanation:

1. Property \(\rightarrow \) of-type="DateAndTime.DateAndTime"

Explanation: The <property> element defines the input parameters or data fields that the PCF control expects from the host application (Canvas or Model-driven app). When a property is strictly bound to a single specific data type, the of-type attribute is used.
Specifying **DateAndTime.DateAndTime** ensures that this field will exclusively accept and bind to standard Dataverse date-and-time fields.

2. Type-Group \(\rightarrow \) <type>DateAndTime.DateAndTime</type>

Explanation: A <type-group> element is used when you want a single property to be compatible with multiple different data types (for example, allowing a control to bind to both a text field and a whole number).
Within a type group definition, individual allowed data types are declared using child <type> tags. Including **<type>DateAndTime.DateAndTime</type>** within a custom group enables the component to safely recognize and evaluate date/time values under that grouping contract.

Question: 251 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment -
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter

- Recruiter identifier
- Recruiter name

Applications -

There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.

Interviews -

Each interview is performed by an employee and is related to a single application.

The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.

Requirements. Interview Scheduling

The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.

• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.

You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.

Requirements. Historical Information Tracking

You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.

• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.

Requirements. Historical Information Scoring

The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.

• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.

Requirements. Design Guidelines -

The following design guidelines must be followed:

• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.

Issues -

• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.

You need to resolve the issue with the new command button.
What should you do?

A.Pass ExecutionContext to the function in the action definition.

B.Pass the value SelectedControl to the function in the action definition.

C.Select the Pass execution context as first parameter option on the event registration form.

D.Pass the value PrimaryControl to the function in the action definition.

Answer: D

Explanation:

D. Pass the value PrimaryControl to the function in the action definition.

Why This Is the Correct Choice

The problem statement describes a **command button** (ribbon button) that is failing because the execution/form context parameter inside the custom JavaScript function evaluates to null.

Command Bar vs. Form Event Parameters: Unlike standard form events (such as OnLoad or OnSave), which use a simple checkbox to "Pass execution context as first parameter" (Option C), command bar buttons do not use that configuration interface.
The PrimaryControl Parameter: When setting up a JavaScript action for a ribbon or command bar button (using tools like the Ribbon Workbench or the Power Apps Command Designer), you must explicitly supply a **CRM Parameter** and set its value to **PrimaryControl**. This passes the active form's context into the JavaScript handler, resolving the null parameter issue.

Question: 252


CertyIQ

HOTSPOT
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-

The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring


The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to implement ribbon display rules to control availability for the scoring command button.
Which rule types should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

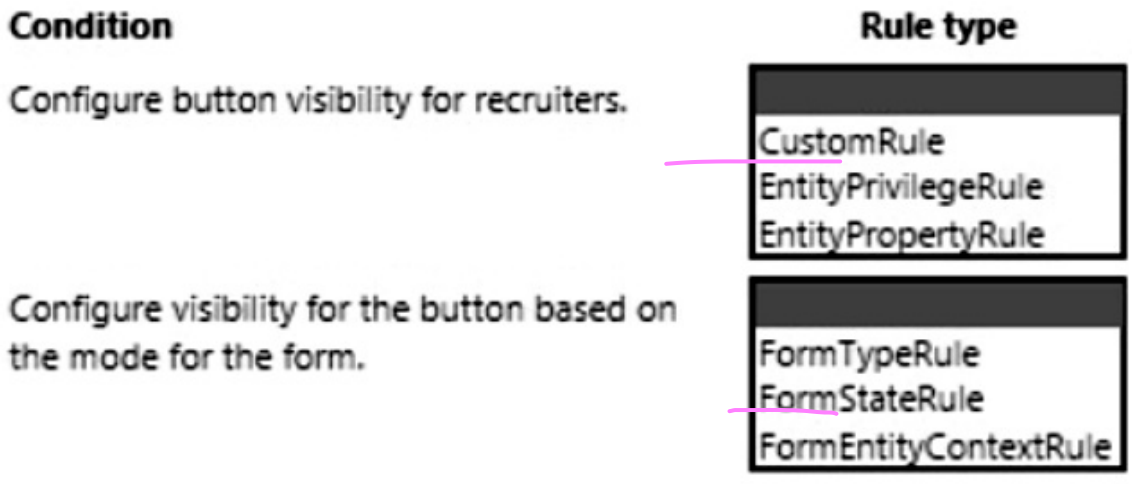

Answer:

Answer Area

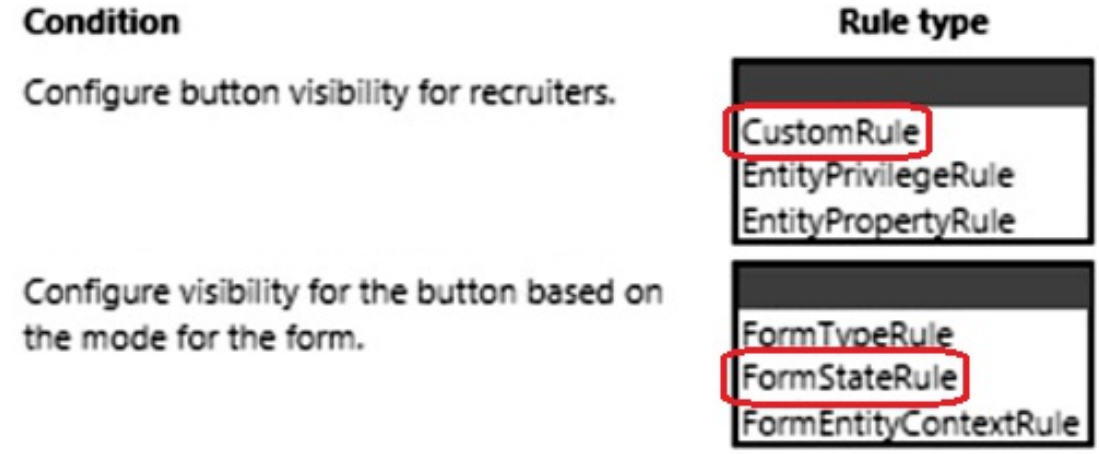

Explanation:

Condition / RequirementCorrect Rule TypeTechnical Justification**Configure button visibility for recruitersCustomRule**Dataverse ribbon rules do not contain a built-in rule type to natively check a user's specific **Security Role** name. You must use a **CustomRule** to invoke a JavaScript function that uses the Client API (Xrm.Utility.getGlobalContext().userSettings.roles) to evaluate if the current user possesses the "Recruiter" role.**Configure visibility for the button based on the mode for the formFormStateRule**The **FormStateRule** is explicitly built to toggle command button visibility dynamically based on the current transactional state or mode of the form (e.g., **Create**, **Existing**, **ReadOnly**, or **Disabled**).

Why the Other Options Are Incorrect

EntityPrivilegeRule: Checks standard table-level CRUD permissions (like Read, Write, or Append) for the current user, rather than specific named security roles.
EntityPropertyRule: Evaluates metadata definitions or boolean traits of the entity table itself rather than the active user's environment role context.
FormTypeRule: Determines visibility based on the functional style classification of the active form window (e.g., Main form, Quick Create, Dashboard, or Mobile) rather than the data record's lifecycle mode (new vs. existing record).
FormEntityContextRule: Filters button visibility based on whether the command layout is being loaded within a specific subgrid context or table frame relation, not the form entry mode.

Question: 253 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore

the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.

Background -

Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.

Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.

Current Environment -

The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.

Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.

The recruiting team manages all information by using a model-driven application.

The company has the following Microsoft Dataverse tables and columns:

• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name

Applications -

There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.

Interviews -

Each interview is performed by an employee and is related to a single application.

The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.

Requirements. Interview Scheduling

The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.

• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.

You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.

Requirements. Historical Information Tracking

You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.

• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines -
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues -
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to configure the PCF control to display team members for interview scheduling.
Which two inputs should you use? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A.identifier for the hiring manager

B.time-zone offset for the job candidate

C.identifier for the job posting

D.time-zone offset for the hiring manager

E.identifier for the job candidate

Answer: AB

Explanation:

1. **Finding the team members:** "You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager."

To query and pull the correct sub-list of employees from Dataverse, the control requires the unique record GUID/ID representing the **hiring manager (Option A)**.

1. **Sorting the list by location proximity:** "You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first."

To successfully perform the sorting mathematics/logic on the front-end control, the PCF component must know where the applicant is located. Therefore, it requires the dynamic **time-zone offset for the job candidate (Option B)** as an input property wrapper.

Why the Other Options Are Incorrect

C & E are incorrect: The requirement states that the control needs to find who reports to the hiring manager and compare their locations against the applicant's time zone. The job posting record ID or candidate GUID alone won't provide the direct reporting relationship or location coordinates needed for sorting.
D is incorrect: The time-zone information of the hiring manager is irrelevant for sorting the grid, as the requirement specifically asks to calculate proximity relative to the **candidate's** zone.

Question: 254 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-

[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to configure the row filter on the Dataverse trigger.
Which filter should you use?

A.not contains(new_dataid, '')

B.new_dataid eq null

C.DataId ne null

D.new_dataid ne null

Answer: D

Explanation:

• [DATAID] is the new_ data id column in the Account table.

Question: 255 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to ensure data returned from the Web API corresponds to the correct environment.
What should you use?

A.system settings

B.plug-in secure configurations

C.records in a new configuration table

D.environment variables

Answer: D


Explanation:

Correct answer is D:environment variables.


Question: 256 CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment
-
Environment
-
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data
-
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API
-
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements
-
Custom connector
-

•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process
-
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues
-
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to configure the custom connector to incorporate the environment name and DataId in the Web API URL.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

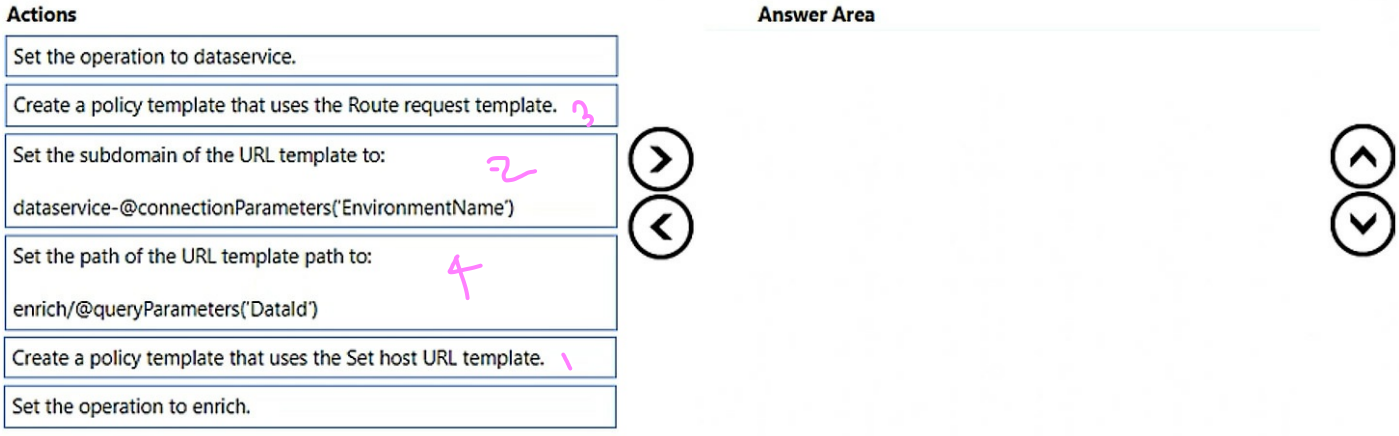

Answer:

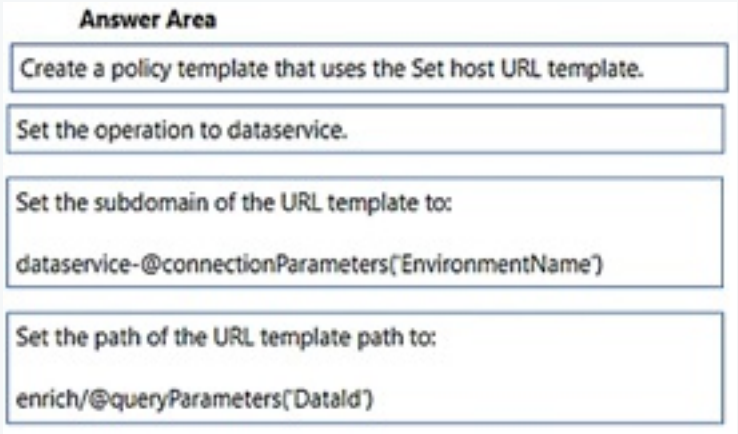

Explanation:

1. **Create a policy template that uses the Set host URL template \(\rightarrow \) Correct**

Justification: To dynamically alter the endpoint target URL host or subdomains at runtime based on environmental configuration parameter sets, you must select the **Set host URL** policy type.

1. **Set the operation to enrich \(\rightarrow \) Correction Needed**

Justification: There is a mismatch in the image selections. The path in the final box targets the /enrich endpoint: enrich/@queryParameters('DataId'). Therefore, the **Operation** scope parameter field inside the policy header must be mapped to match **enrich** rather than dataservice so the policy executes exclusively against the proper API action handler.

1. **Set the subdomain of the URL template to: dataservice-@connectionParameters('EnvironmentName') \(\rightarrow \) Correct**

Justification: This correctly leverages a dynamic expression value (@connectionParameters) injected into the sub-domain prefix structure string to resolve environment variants cleanly during execution pipeline parsing.

1. **Set the path of the URL template path to: enrich/@queryParameters('DataId') \(\rightarrow \) Correct**

Justification: This string successfully utilizes query string token variables via @queryParameters parameters to map individual transactional tracking values seamlessly into the absolute path mapping structure.

Question: 257 CertyIQ

HOTSPOT
-
You are configuring two command buttons on a form.
The form must display the buttons only if conditions meet a pre-defined criteria.
You need to create rules for the form.
Which rule types should you use?
To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Condition	Rule type
Website link to the current form	PageRule / ValueRule / EntityRule
Sum of two form fields	ValueRule / CustomRule / SelectionCountRule

Answer:

Answer Area

Condition	Rule type
Website link to the current form	PageRule / ValueRule / EntityRule
Sum of two form fields	ValueRule / CustomRule / SelectionCountRule

Explanation:

Page rule

Custom rule

Reference:

https://d365demystified.com/2021/01/08/ribbon-button-visibility-based-on-a-field-value-in-dynamics-365-ribbon-workbench/ at least not value rule

Question: 258 CertyIQ

A company is testing a Microsoft Dataverse plug-in in an environment. The plug-in works in post-operation mode and performs the update of the Account entity.
During testing, a user observes that the plug-in unintentionally triggers a synchronous third-party ISV plug-in.
You need to modify the system design to avoid unwanted triggering of the third-party plug-in.
What should you do?

A.Disable the existing third-party plug-in by using the Plug-in Registration Tool.

B.Use UpdateRequest with the BypassCustomPluginExecution parameter and Execute method of the Organization service.

C.Update the code of the third-party ISV plug-in to ignore updates caused by the new plug-in.

D.Update the code of the new plug-in to use InputParameters of Plugin Execution Context.

Answer: B

Explanation:

Use the Bypass Custom Plugin Execution optional parameter to bypass custom synchronous logic.The alternative to using this optional parameter is to locate and disable the custom plug-ins that contain the synchronous business logic. But disabling plug-ins means that the logic is disabled for all users.

https://learn.microsoft.com/en-us/power-apps/developer/data-platform/bypass-custom-business-logic?tabs=sdk

Question: 259 CertyIQ

You are developing a model-driven app using JavaScript.
You need to configure the app to display a dialog box when a form is opened or when a grid on a form is sorted.
What should you use?

A.Grid OnSave

B.Grid OnRecordSelect

C.Grid OnChange

D.Subgrid OnLoad

Answer: D

Explanation:

Correct answer is D:Subgrid On Load.

Reference:

https://learn.microsoft.com/en-us/power-apps/developer/model-driven-apps/clientapi/reference/events/subgrid-onload

Question: 260 CertyIQ

A company performs an update to an existing column-bound Power Apps Component Framework (PCF) code component.
You test the changes to the code component in the development environment. You then import the component to the production environment as a part of a managed solution. You observe that the changes to the component are not reflected in the production environment.
You need to ensure that the changes are effective in the production environment.
What should you do?

A.Import the PCF code component to the production environment directly from Visual Studio Code by using the pac pcf push instruction.

B.Publish the form that uses the PCF code component in the production environment.

C.Increment the PCF control version property in the manifest.xml file, and then reimport the solution from development to the production environment.

D.Publish the PCF code component in the production environment.

Answer: C

Explanation:

C. Update the PCF control version property in the manifest.xml file and then reimport the solution.The solution on the production environment is managed and pushing a component directly on production is not a good practice.

Question: 261 CertyIQ

HOTSPOT

-

You develop the following code as part of an OnSave event handler in a form.

```
01  executionContext.getEventArgs().preventDefault();
02
03  var isOnHold = false;
04  Xrm.WebApi.retrieveRecord("account", id, "?$select=creditonhold").then(
05      function (result) {
06          isOnHold = result["creditonhold"];
07      }
08  );
09
10  if (isOnHold) {
11      Xrm.Navigation.openConfirmDialog({ text: 'Credit Hold - Save OK?' }).then(
12          function (success) {
13              if (success.confirmed) {
14                  formContext.data.save();
15              }
16          });
17  }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statement	Yes	No
The code cancels the normal save operation of the form.	○	○
A confirmation dialog box is displayed if the creditonhold value is true.	○	○
The record will save if the creditonhold value is false.	○	○

Answer:

Answer Area

Statement	Yes	No
The code cancels the normal save operation of the form.	●	○
A confirmation dialog box is displayed if the creditonhold value is true.	●	○
The record will save if the creditonhold value is false.	○	●

Explanation:

Yes

Yes

No

Question: 262 CertyIQ

You create a custom API. You define the API as a function.

The custom API does not appear in the response received from https://[yourorg].api.crm.dynamics.com/api/data/v9.2/$metadata and returns an error when called.
You need to identify why the custom API is not working.
What should you do?

A.Add a response property to the custom API.

B.Add a request property to the custom API.

C.Set the Enabled for Workflow option of the customer API to True.

D.Set the is Private property of the custom API to False.

Answer: D

Explanation:

"If you aren't willing to support other developers using your custom API, you should set the custom API Is Private (IsPrivate) property to true before you ship the managed solution containing your custom API.The Is Private property blocks the custom API from appearing within the $metadata service document and prevent Dataverse code generation tools from creating classes to use the messages for your custom API."

https://learn.microsoft.com/en-us/power-apps/developer/data-platform/custom-api

Question: 263 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.

•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to implement visual hints in the custom connector.
What should you do? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.In the custom connector, update the name of the policy template.

B.Extend the Open API definition of the Web API for the EnvironmentName parameter.

C.Extend the Open API definition of the Web API for the DataId parameter.

D.In the custom connector, update the description for the DataId parameter.

Answer: BD

Explanation:


B. Extending the OpenAPI definition for the EnvironmentName parameter will allow you to include a clear description of this parameter, providing guidance on its usage.D. Updating the description for the DataId parameter in the custom connector will also provide a clear explanation for this parameter, ensuring that users understand its purpose and how to use it effectively.

Question: 264


CertyIQ

HOTSPOT
-
You are composing a request to the Microsoft Dataverse Web API that updates existing account records in Dataverse and returns resulting records in the response.
You need to complete the request.
Which value should you use for each property? To answer, select the appropriate options in the Value for Property area.

NOTE: Each correct selection is worth one point.

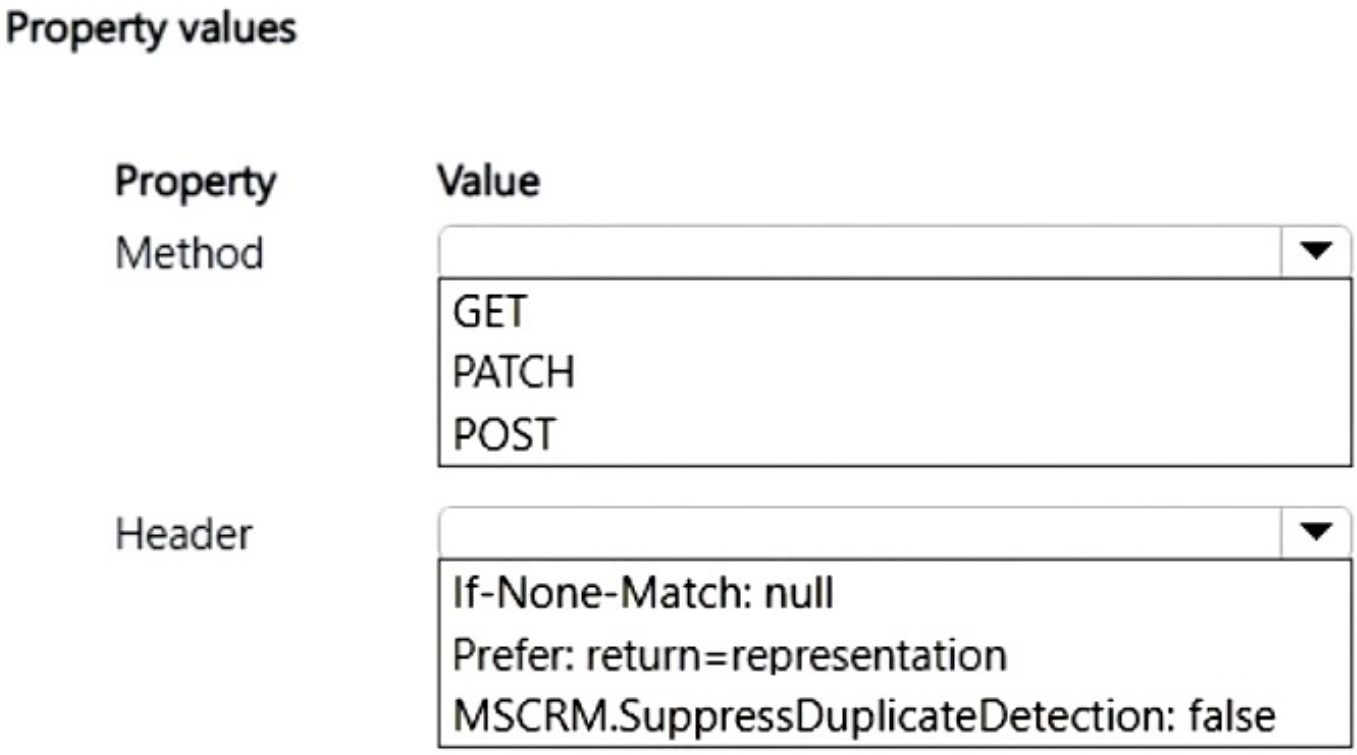

Answer:

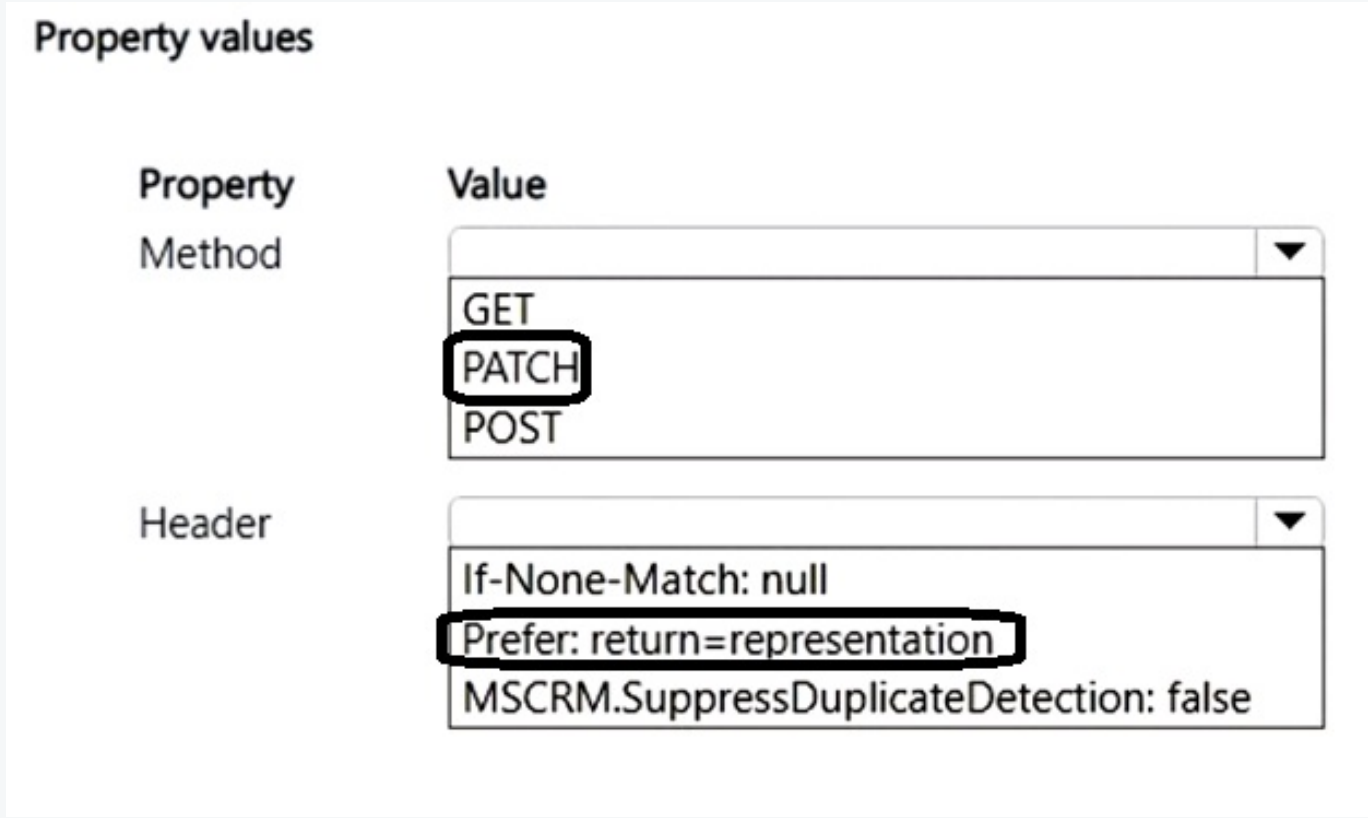


Explanation:

PATCH.


Prefer: return=representation.

Question: 265 CertyIQ

DRAG DROP
-
A company develops a model-driven app. The company sets up a custom form for the Contact table. The app contains multiple custom app pages.
You must extend the app as follows:
•Run logic when a contact is saved.
•Display data from an Azure SQL Server database.
•Apply a consistent header across multiple app pages.
•Run a Dataverse custom API when the Contact row is saved.
You need to implement the app extension by using minimal development effort.
What should you implement for each requirement? To answer, move the appropriate capabilities to the correct requirements. You may use each capability once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.

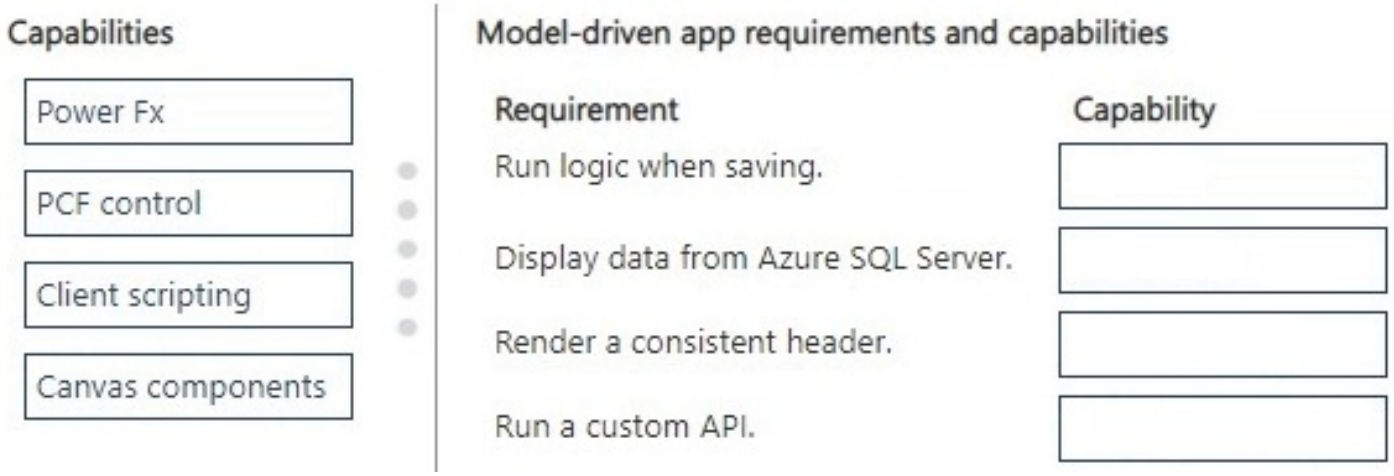

Answer:

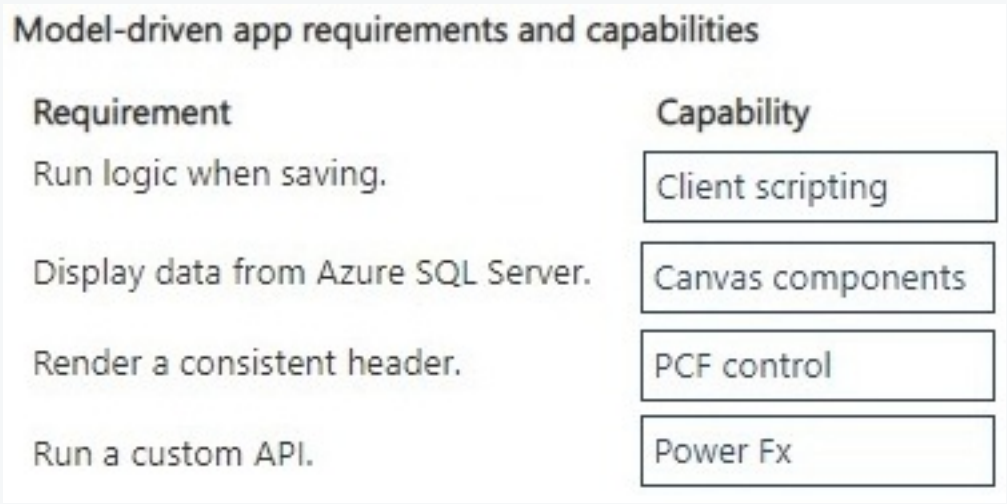

Explanation:

Client scripting(Correct in your image)To validate data or trigger dynamic calculations at the exact moment a model-driven form record is saved, you use client-side JavaScript bound to the form's OnSave event framework.

Canvas components(Requires Adjustment)Custom Canvas components allow low-code makers to build highly uniform, reusable visual artifacts (such as top navigation headers or banners) that can be embedded across multiple distinct app pages to guarantee UI layout consistency.

PCF control(Requires Adjustment)The **Power Apps Component Framework (PCF)** allows professional developers to build custom HTML/TypeScript controls that can query external APIs or databases (like an Azure SQL Server instance) and display that live data directly on a model-driven app form.

Power Fx(Correct in your image)Modern model-driven app command buttons and data rows natively support Power Fx formulas to invoke custom developer-made Dataverse actions and plug-in APIs without needing full pro-code deployments.

Question: 266 CertyIQ

You plan to create a Microsoft Power Apps Component Framework (PCF) code component for a record form in a model-driven app.
The code must be able to read the record's Id column.
You need to configure the manifest.
Which solution should you use?

A. resources
B. property
C. feature-usage
D. type-group

Answer: D

Explanation:

Technical Justification

The requirement is to configure a PCF code component on a model-driven form to read the record's primary key (Id) column, which is of data type **UniqueIdentifier (GUID)**. The critical constraint is that the PCF manifest schema (ControlManifest.Input.xml) does **not** list UniqueIdentifier or Guid as a valid native value for the property element's of-type attribute. The supported native types for input properties are limited to SingleLine.Text, Whole.Number, Decimal, Currency, TwoOptions, DateAndTime, OptionsSet, MultipleLines.Text, EntityReference, etc.

To bind a PCF property to a UniqueIdentifier column in the form designer, you must bridge this type mismatch by defining a custom **type-group** in the manifest. This type-group (e.g., named guidType) explicitly maps the unsupported UniqueIdentifier platform type to the supported PCF SingleLine.Text type. The property element then references this type-group via its of-type attribute (e.g., of-type="guidType"). Without this type-group definition, the manifest cannot correctly surface the Id column as a bindable target in the Power Apps designer, preventing the component from receiving the record Id.

Why Other Options Are Less Suitable

B. property: While a property element is required to receive the value, it is **insufficient on its own** because it cannot natively declare support for the UniqueIdentifier data type. A property defined with a standard type like SingleLine.Text will not automatically bind to a system Id column in the designer without the intermediary type-group mapping.
C. feature-usage: This node declares platform capabilities (e.g., webapi, utility, dataset, device). It does not define data bindings or property type mappings for field components.
A. resources: This node references code implementation files (TypeScript, CSS, RESX) and has no role in defining data contracts or column binding metadata.

References

1. PCF Manifest Schema Reference - type-group Element
2. PCF Property Data Types and Type Groups

Question: 267 CertyIQ

You are developing custom pages for a model-driven app.
The app must display a timer control within a menu and include a mixture of buttons and icons. If a change is made to any of these elements, then the changes must cascade out automatically to all custom pages.
You need to implement a solution.
What should you implement?

A.PCF control
B.Canvas component
C.Timer control
D.Web resource

Answer: B

Explanation:

B. Canvas component.

Why This Is the Correct Choice

This question belongs to a classic Microsoft Power Platform PL-400 case study series where a uniform UI element needs to be replicated cleanly across multiple screens or low-code applications.

Reusable Low-Code UI UI Blocks: A **canvas component** allows app developers to build modular, visual building blocks (such as a standard corporate header banner, navigation menu sidebar, or footer logo bar) completely within the low-code studio environment.
Once built, you can place this component across **dozens of different app screens** or package it in a **Component Library** for cross-application consumption. Any future design edits or updates made to the master component automatically propagate to every single instance across the system, saving significant maintenance overhead.


Why Other Options Are Incorrect

A is incorrect: While a **Power Apps Component Framework (PCF) control** is modular and highly customizable, it is an advanced pro-code solution built with TypeScript/HTML. It is designed to handle custom data visualizations or external API connections that low-code canvas capabilities cannot support natively. It is unnecessary for a standard visual layout requirement.
C is incorrect: The **Timer control** is an operational functional element used exclusively to measure passing time, count down intervals, or trigger events automatically after a delay period.
D is incorrect: Web resources (like custom JavaScript, CSS, or HTML files) are primarily used to implement custom client-side styling and script tracking behaviors within **model-driven apps** rather than low-code visual layout elements in canvas apps.

Question: 268 CertyIQ


DRAG DROP
-
Telephone numbers for a company must have their values formatted by using JavaScript on the OnChange event.

You need to create the JavaScript function.
Which three actions should you perform in sequence?
To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

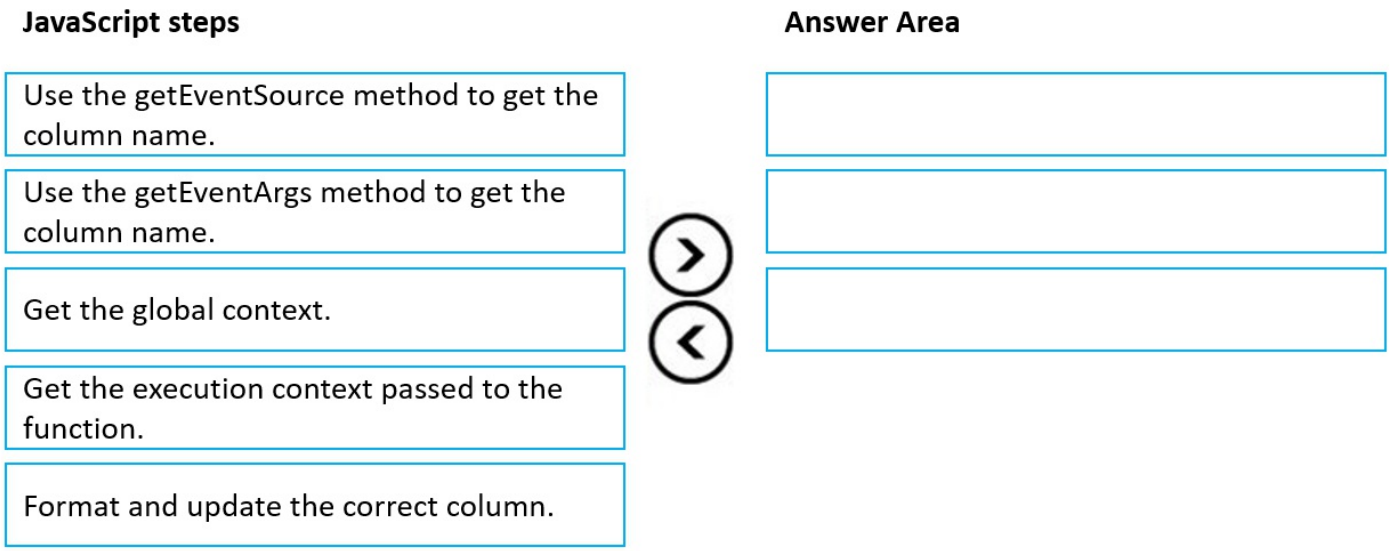

Answer:

Explanation:

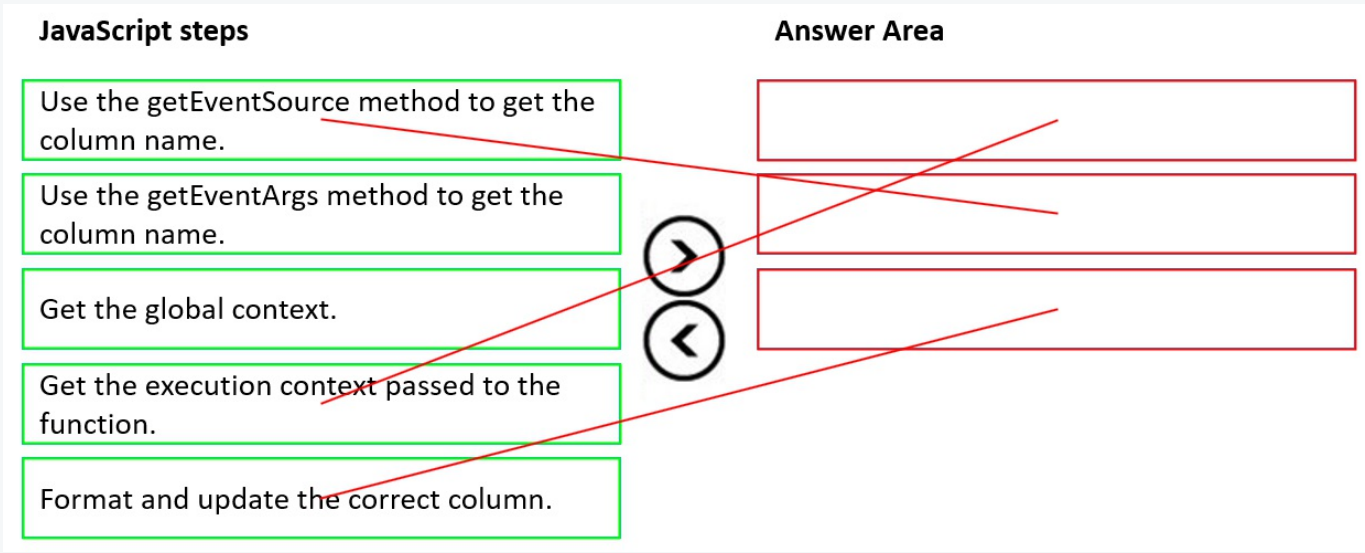

Get the execution context. The function is passed an execution context as a parameter. This context is an object that contains all the information about the event that triggered the function (e.g., a field changing, a form loading). You need this context to access the next level of information.

Use getEventArgs() to get the column name. Within the execution context, the getEventArgs() method retrieves an object that provides details about the specific event. For a field change event, this object includes the getEventSource() method, which gives you the control that triggered the event, from which you can get the column name.

Format and update the correct column. Once you have the column name and the necessary context, you can use the client-side APIs to format the data or update the column value. This is the final step in the process, as you must gather all the necessary information before attempting to modify the form.

Question: 269 CertyIQ

You develop a model-driven app in which client-side scripts are used extensively.

Users report that forms load quickly but become unresponsive.
You need to investigate the form issues before optimizing the forms.
What should you do first?

A. Use a Quick View form.
B. Add the URL parameter &ribbondebug=true.
C. Remove unused forms from the app.
D. Enable Offline mode.
E. Disable form event handlers.

Answer: B

Explanation:

Correct option: B – Add the URL parameter &ribbondebug=true.

Why it's the best first step
Enabling ribbon debugging injects additional telemetry and error-reporting into the form's client-side script execution.
It surfaces JavaScript console messages, script load failures, and performance bottlenecks that are otherwise hidden, allowing you to pinpoint the exact cause of the "unresponsive" behavior.
This approach is non-intrusive; you can reproduce the issue with the debug flag on and gather actionable diagnostics before making any code changes.
Why the other options are less appropriate at this stage
A. Use a Quick View form – Quick Views are meant for lightweight data display, not for diagnosing script responsiveness; they do not provide any debugging insight.
C. Remove unused forms from the app – While reducing form count can improve overall app performance, it does not help isolate the specific script-related problem on the affected form.
D. Enable Offline mode – Offline mode changes data caching behavior and is unrelated to client-side script execution speed or responsiveness.
E. Disable form event handlers – Disabling handlers may mask the symptom but does not reveal why the scripts are unresponsive; it also risks losing critical functionality needed for diagnosis.

Bottom line: Activating ribbon debugging (&ribbondebug=true) is the precise, low-impact technique to surface script errors and performance metrics, giving you the information needed to proceed with targeted optimizations.

Question: 270 CertyIQ

HOTSPOT
-
You are extending a model-driven app by using modern commanding in Power Fx.
When a user selects a button on the Opportunity form, the button must trigger an automation to generate a document by updating a single column in Dataverse. Users must affirm the action before it takes place and receive a message after it completes successfully.
You need to write the formula.
How should you complete the code segment? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

```
If(
    [Confirm / Notify / Print] (
        "This will proceed with generating the document. Proceed?"
    ),
    [Patch / SubmitForm / Update] (
        Opportunities,
        [ThisItem / Self.Selected.Item / ThisRecord]
        {'Trigger Document Generation?': true}
    );
    [Confirm / Notify / Print] ("Document generation has been triggered.")
)
```

Answer:

Answer Area

```
If(
    [Confirm | Notify | Print] (
        "This will proceed with generating the document. Proceed?"
    ),
    [Patch | SubmitForm | Update] (
        Opportunities,
        [ThisItem | Self.Selected.Item | ThisRecord],
        {'Trigger Document Generation?': true}
    );
    [Confirm | Notify | Print] ("Document generation has been triggered.")
)
```

Explanation:

Confirm.

User Interactivity: The Confirm function displays a native modal dialog box to the user containing custom text alongside "OK" and "Cancel" buttons.

Conditional Logic: It returns a boolean value (true if the user clicks OK, false if they click Cancel). This makes it ideal inside an If statement to block accidental clicks before running backend operations.

Patch.

Targeted Field Modification: The Patch function is used to create or modify a specific record directly in a data source (Opportunities) without requiring a standard edit form control. Here, it targets and toggles a single field: 'Trigger Document Generation?': true .


ThisItem.

Record Context: When a button or icon is located inside a Gallery or a Form, ThisItem explicitly references the exact, single row/record currently being viewed or interacted with. Patch requires this base record parameter to know which specific row to update.


Notify.

Question: 271 CertyIQ

DRAG DROP
-
You are writing code to integrate a system with Dataverse by using the Web API.
The code must perform the following operations:
•Upsert to create and update records
•Upsert only to create new records
You need to complete the requests to perform the operations.
Which headers should you use? To answer, move the appropriate headers to the correct operations. You may use each header once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.

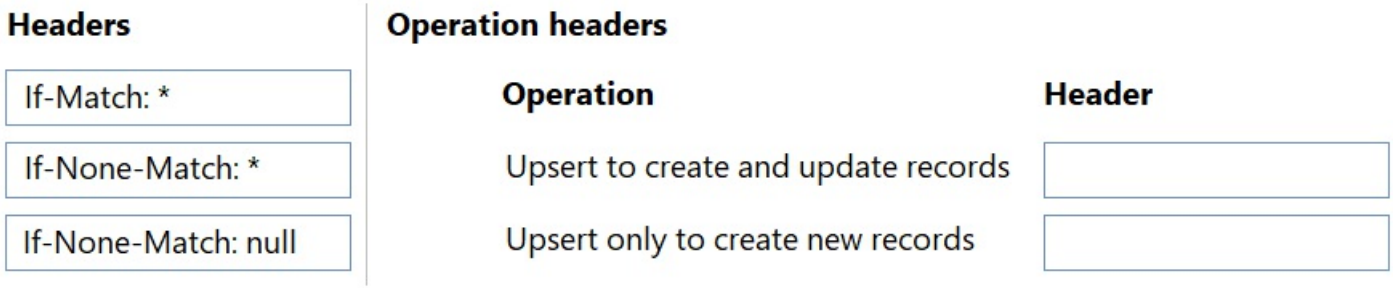

Answer:

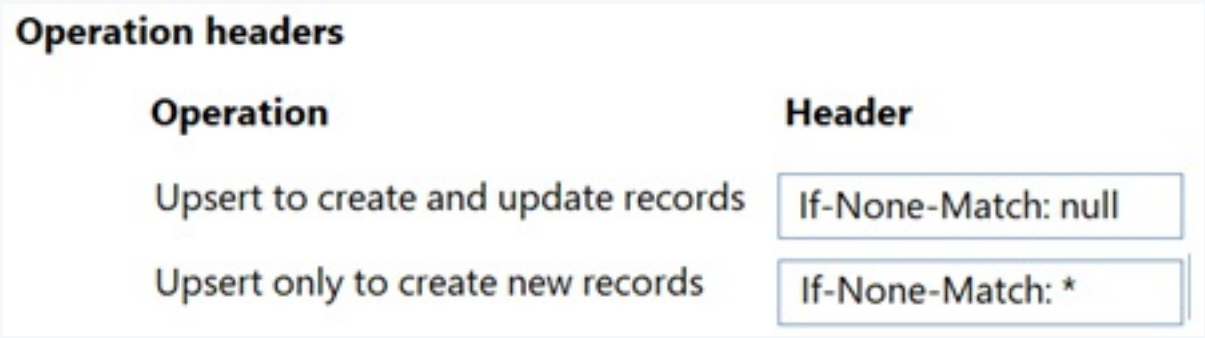

Explanation:

If-None-Match: null

In Dataverse, an HTTP PATCH request behaves as an upsert operation by default. It will automatically update the record if it already exists or create it if it doesn't. Setting If-None-Match: null ensures that no conditional restrictions are placed on the request, allowing both inserts and updates to occur smoothly.

If-None-Match:

To restrict an upsert operation so that it only creates new records and never overwrites existing data, you must apply the If-None-Match: * header. If Dataverse detects that a record with the specified ID or alternate key already exists, the precondition fails, and it blocks the update by throwing an HTTP 412 Precondition Failed error.

Question: 272 CertyIQ


You are creating an integration that uses an Azure function to create records in the Common Data Service when leads are submitted from your company website.
You create a user and grant the user the Basic User security role.
You do not have administrator access to the environment you are using or access to Azure Active Directory.
Company policy dictates that service accounts must be used for integrations, and integrations must not be granted privileges beyond what is needed.

You need to recommend actions that an administrator should perform to configure access for the Azure Function.
Which three actions should you perform? Each correct selection presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Create an application registration in Azure Active Directory.
B. Assign the system administrator security role to the application user.
C. Assign the Power Platform administrator role to the application user in Azure Active Directory.
D. Create a new security role with the minimum required permissions and assign to the application user.
E. Grant the application delegated permissions to the Dynamics CRM API in Azure Active Directory.
F. Deploy Azure B2B guest permissions to the application user.

Answer: ADE

Explanation:
A: Registering an application with Azure Active Directory, enables a user with Power Apps user account to connect to their Microsoft Dataverse environment from external client applications using OAuth authentication.
D: Use minimum permissions.
E: In the application registration process you delegate permissions to the Dynamics CRM API in Azure Active Directory.

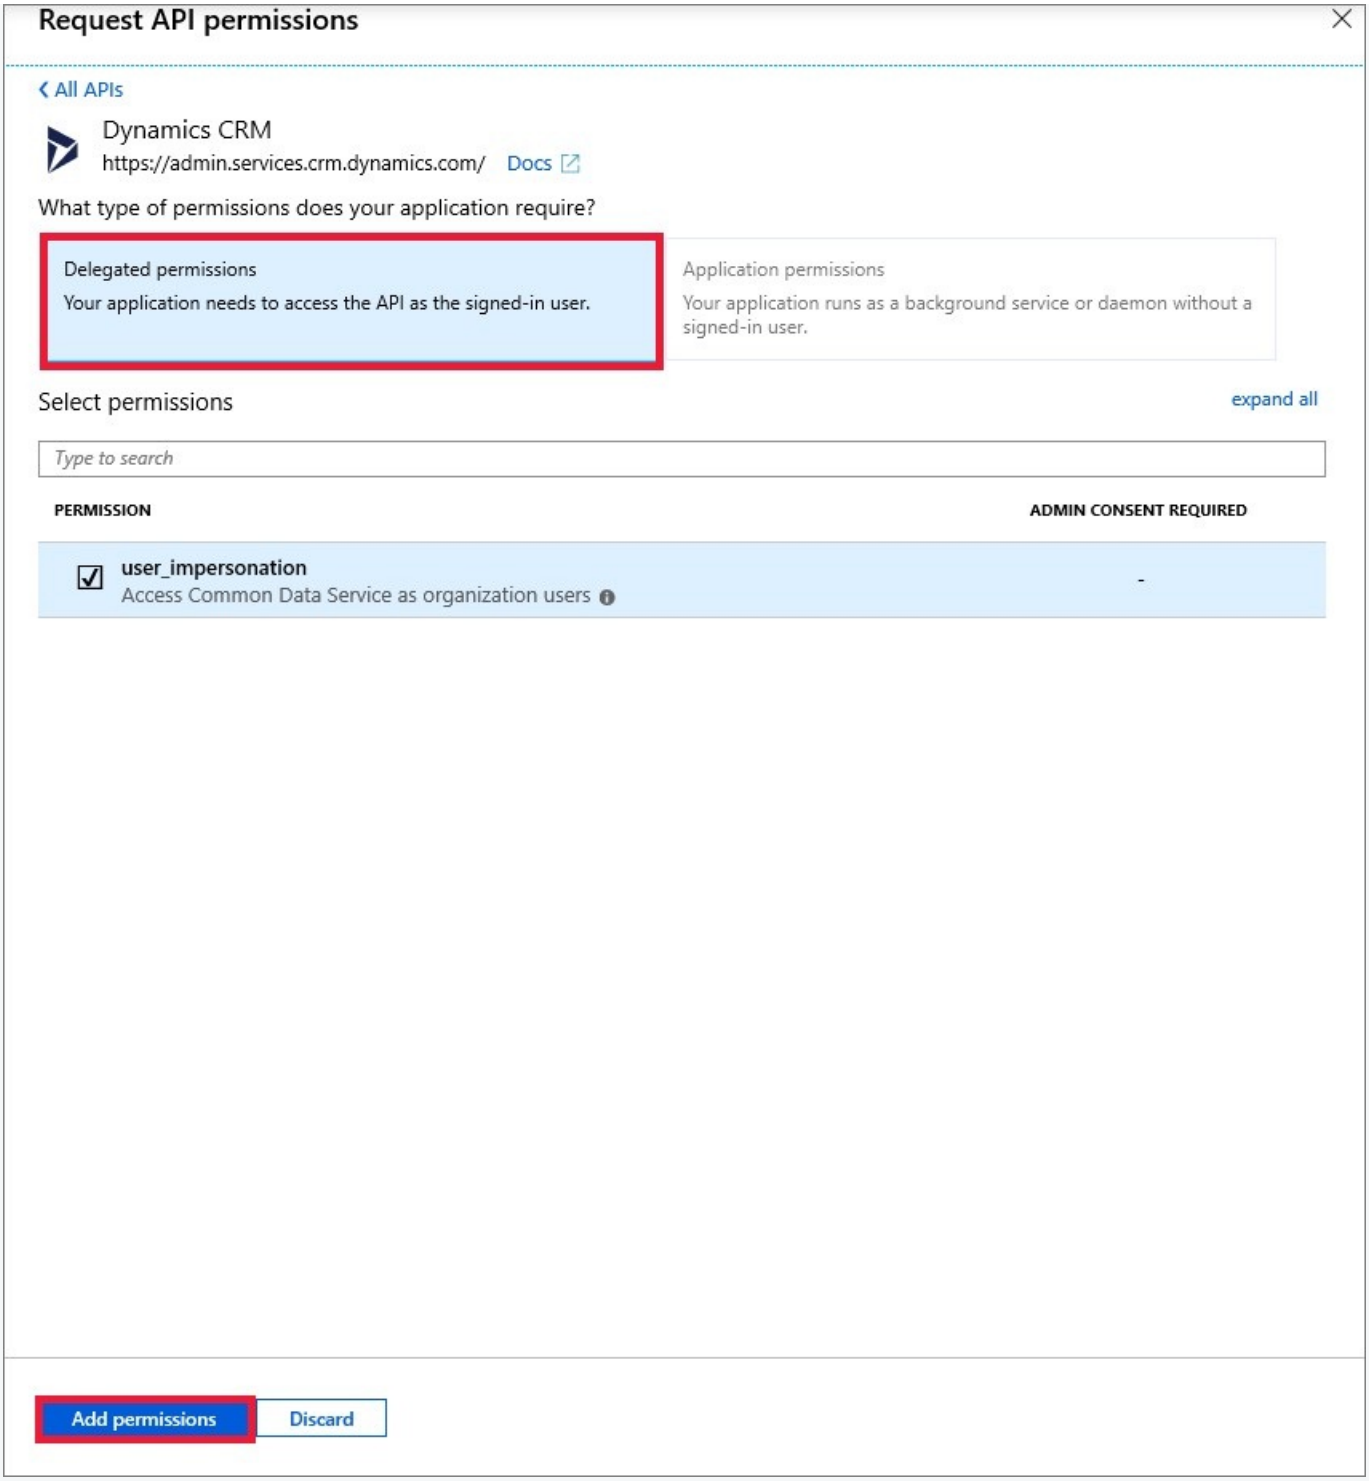


Incorrect:
Not B: The system administrator security role would give the user too much privileges.
Not C: The Power Platform administrator role would give the user too much privileges.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/walkthrough-register-app-azure-active-directory


Question: 273 CertyIQ

HOTSPOT -
You work for a multinational company that has Azure and Microsoft Dataverse environments in the United States (UTC-7) and Japan (UTC+9).
You create Azure Functions for each location to update key data.
You need to configure the functions to run at 4:00 AM on weekdays at each location.
Which schedule formats should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.
Hot Area:

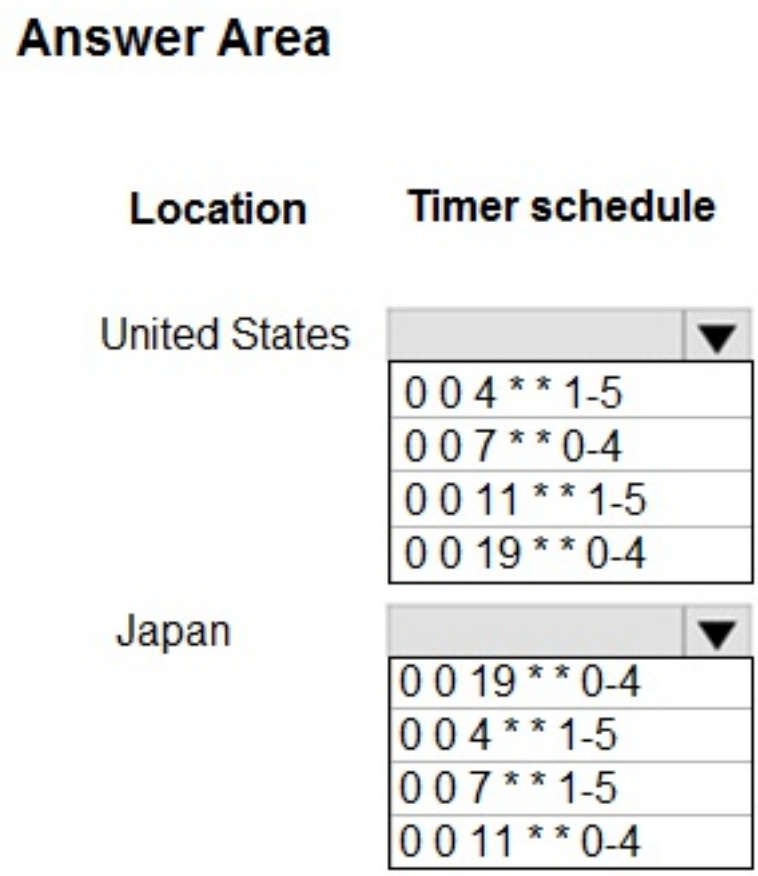

Answer:

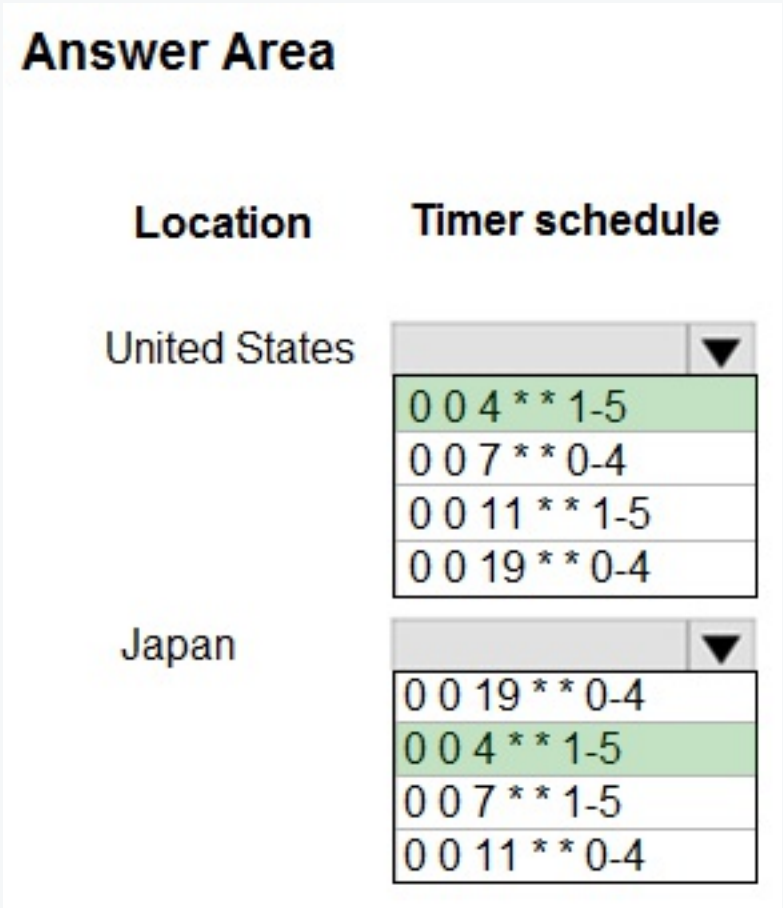

Explanation:

Box 1: 0 0 4 * * 1-5 -

Azure Functions uses the NCronTab library to interpret NCRONTAB expressions.

An NCRONTAB expression is similar to a CRON expression except that it includes an additional sixth field at the beginning to use for time precision in seconds:

second minute hour day month day-of-week

NCRONTAB time zones -

The numbers in a CRON expression refer to a time and date, not a time span. For example, a 5 in the hour field refers to 5:00 AM, not every 5 hours.

The default time zone used with the CRON expressions is Coordinated Universal Time (UTC).

To have your CRON expression based on another time zone, create an app setting for your function app named WEBSITE_TIME_ZONE.

1-5 is weekdays

Box 2: 0 0 4 * * 1-5 -


Reference:

https://docs.microsoft.com/en-us/azure/azure-functions/functions-bindings-timer


?

Question: 274 CertyIQ

DRAG DROP -
You are creating a PowerApps connector between Dynamics 365 Sales and Slack.
You must generate a Slack notification whenever a new product is added to Dynamics 365 Sales. You must not be required to sign in directly into Dynamics 365
Sales to generate notifications. You created a Power Apps connector between Dynamics 365 Sales in Slack to enable this to happen.
You need to configure the appropriate security for each scenario.
Which security components should you configure?
NOTE: Each correct selection is worth one point.
Select and Place:

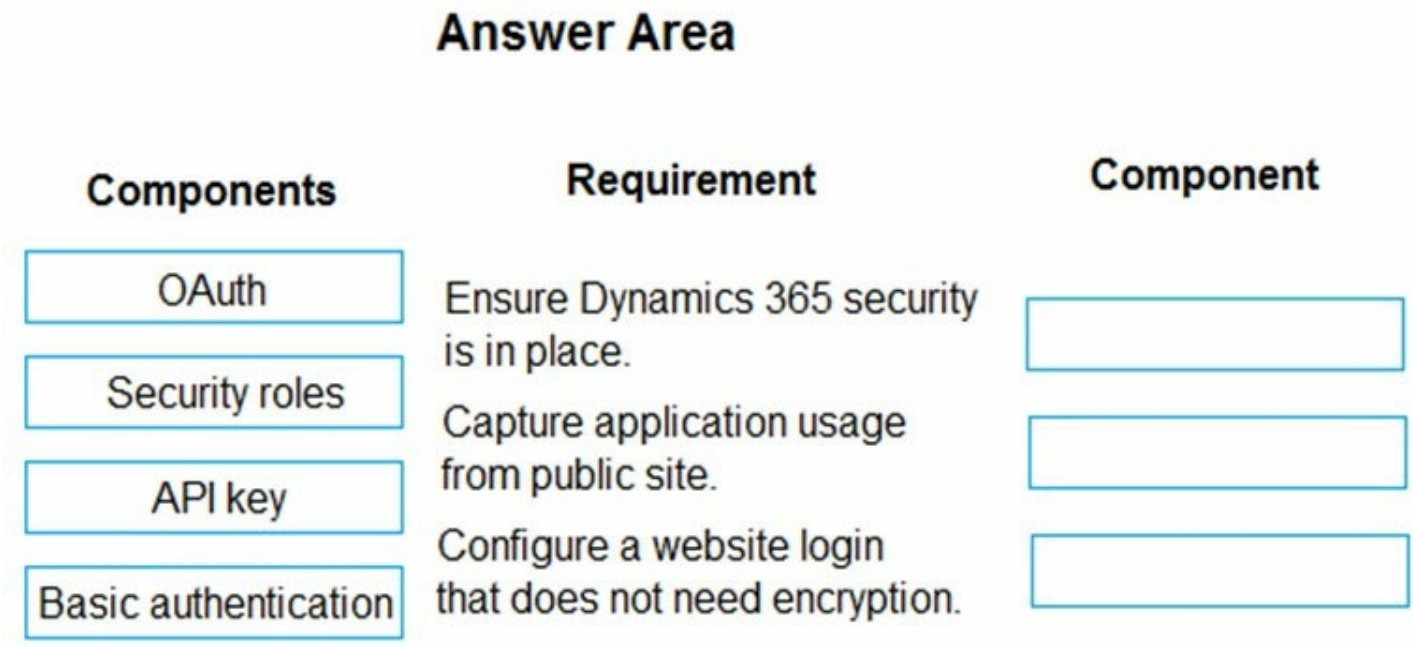

Answer:

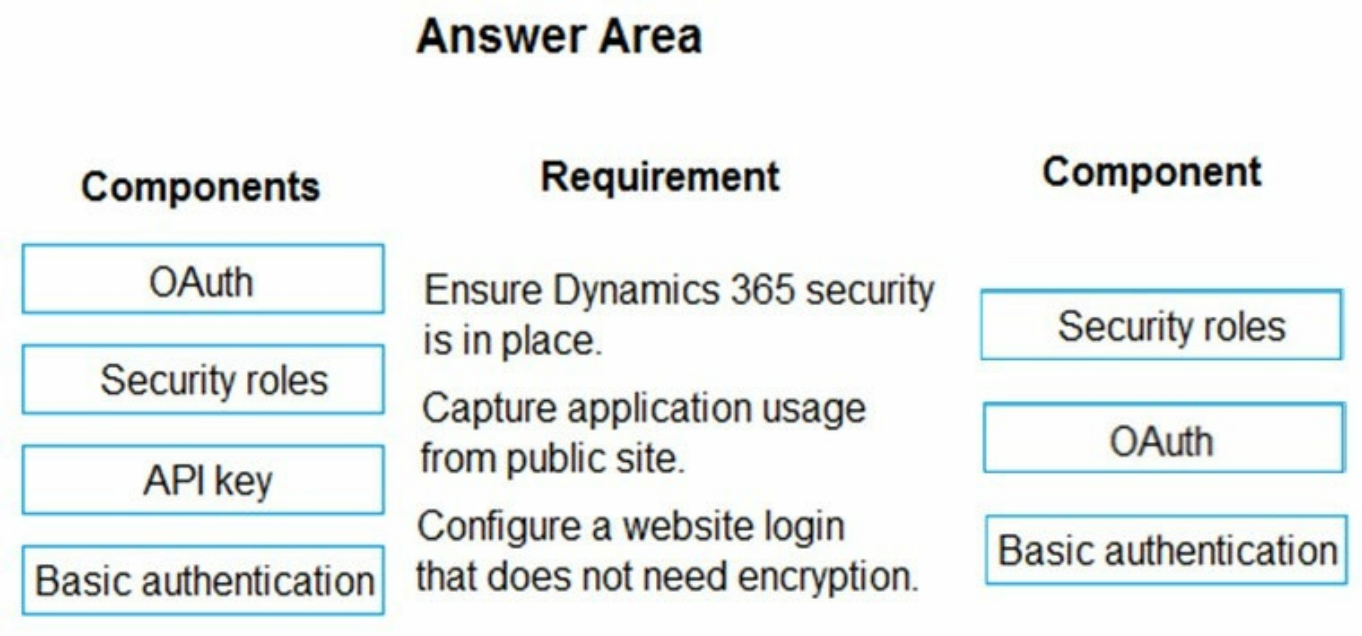

Explanation:

Box 1: Security roles -

A security role defines how different users, such as salespeople, access different types of records. To control access to data, you can modify existing security roles, create new security roles, or change which security roles are assigned to each user. Each user can have multiple security roles.

Security role privileges are cumulative: having more than one security role gives a user every privilege available in every role.

Each security role consists of record-level privileges and task-based privileges.

Box 2: OAuth -

Oauth 2.0 is the most frequently used type, which uses the Oauth 2 authentication framework to authenticate with the service. Before using this authentication type, you'll need to register your application with the service so that it can receive access tokens for the users.

For example, Register the application in Azure AD shows how to register an application with the Azure Active Directory service.

During the connection creation process, the user will be asked to enter the credentials for login to the service. These credentials will be used by the application to get an authorization token. For every request, this authorization token will be sent to your service through the Authorization header.

Box 3: Basic Authentication -

Basic Authentication is the simplest type of authentication, where the user just has to provide the username and password to create the connection.

Note: Before using any connector in Azure Logic Apps, Microsoft Power Automate, or Microsoft Power Apps, the user needs to create a connection by authenticating to the backend service.

Authentication types -

The different types of authentication that are currently supported are:

No authentication -

Basic authentication -

Api Key based authentication -


Oauth 2.0 -

Reference:


https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/admin/security-roles-privileges https://docs.microsoft.com/en-us/connectors/custom-connectors/connection-parameters

Question: 275 CertyIQ

DRAG DROP -
A developer must register a step using the Plug-in registration tool.
You need to associate the correct Event Pipeline Stage of Execution with its purpose.
Which stage should you associate with each description? To answer, drag the appropriate stages to the correct descriptions. Each stage may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

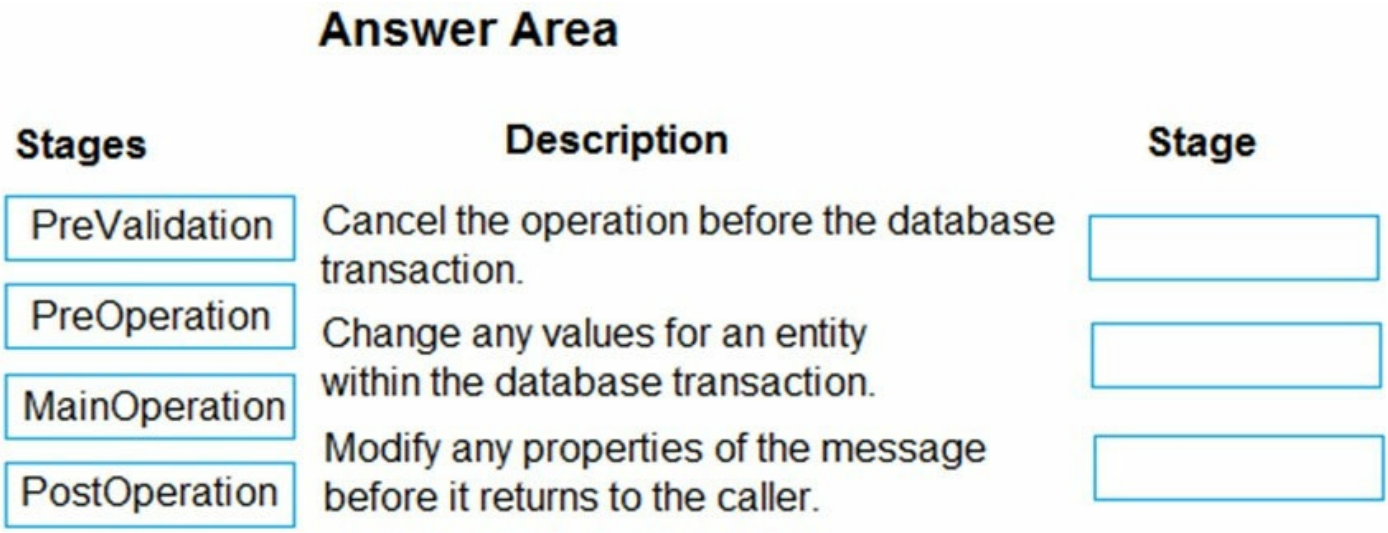

Answer:

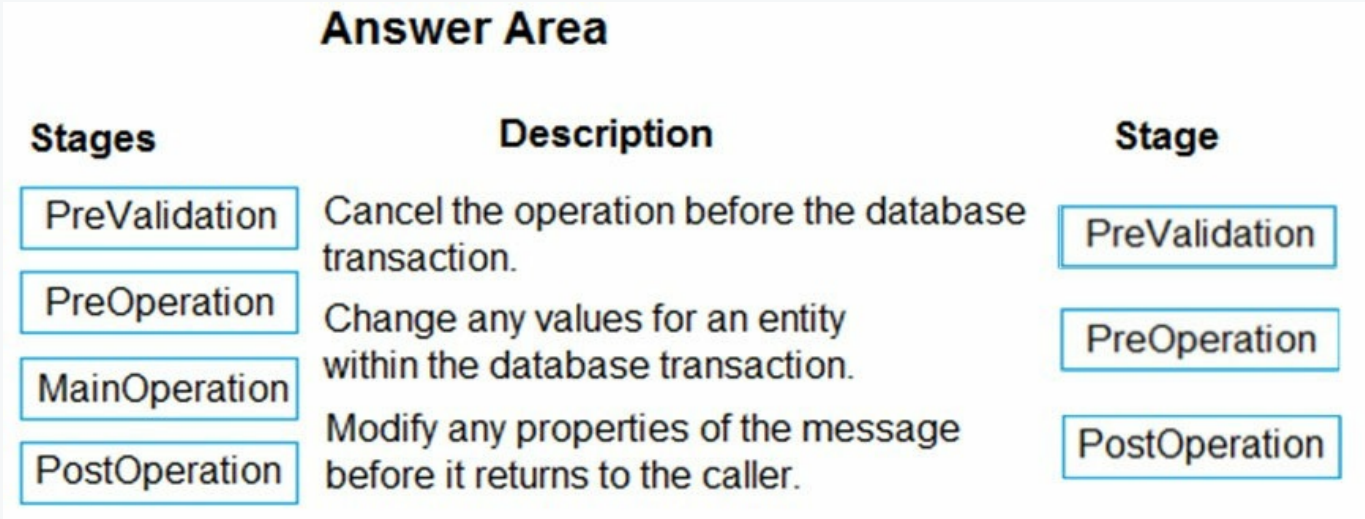

Explanation:

Box 1: PreValidation -

For the initial operation, this stage will occur before the main system operation.

This provides an opportunity to include logic to cancel the operation before the database transaction.

Box 2: PreOperation -

PreOperation occurs before the main system operation and within the database transaction.

If you want to change any values for an entity included in the message, you should do it here.

Box 3: PostOperation -

Occurs after the main system operation and within the database transaction.

Use this stage to modify any properties of the message before it is returned to the caller.

Incorrect Answers:

MainOperation: For internal use only except for Custom API and Custom virtual table data providers.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/event-framework

Question: 276 CertyIQ

HOTSPOT -
An organization has a custom Assignments entity that guides agent actions. Team leaders for each assignment group must be able to review any changes made to assignment data by their agents.
You have the following JSON segment:

```
{
 "@odata.context": "https://orgxyz.api.crm3.dynamics.com/api/data/v9.1/$metadata#xyz_assignments
 (xyz_assignmentname,xyz_secretcode)",
 "@odata.deltaLink": "https://orgxyz.api.crm3.dynamics.com/api/data/v9.1/xyz_assignments?
 $select=xyz_assignmentname,
     xyz_secretcode$deltatoken=652832%2107%2f20%2f2020%2017%3a21%3a13",
 "value": [
 {
      "@odata.etag": "W/\"652815\"",
      "xyz_assignmentname": "spy007",
      "xyz_secretcode": "abc",
      "xyz_assignmentid": "a278f39e-a7ca-ea11-a812-000d3af45c52"
     },
     {
      "@odata.etag": "W/\"652816\"",
     "xyz_assignmentname": "agent007",
     "xyz_secretcode": "123",
     "xyz_assignmentid": "1e110eac-a7ca-ea11-a812-000d3af45c52"
     }
     ...
   ]
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

	Yes	No
You can use the JSON segment to retrieve a list of changes to the assignment records referenced in the segment.	○	○
You can use the delta link to query the assignment changes from the last 30 days.	○	○
You can use the delta link with a $filter option to retrieve assignment changes from the last 30 days.	○	○
Is the delta link token valid?	○	○

Answer:

Answer Area

	Yes	No
You can use the JSON segment to retrieve a list of changes to the assignment records referenced in the segment.	●	○
You can use the delta link to query the assignment changes from the last 30 days.	○	●
You can use the delta link with a $filter option to retrieve assignment changes from the last 30 days.	○	●
Is the delta link token valid?	●	○

Explanation:

Box 1: Yes -

Delta query lets you query for additions, deletions, or updates to users, by way of a series of delta function calls. Delta query enables you discover changes to users without having to fetch the entire set of users from Microsoft Graph and compare changes.

Box 2: No -

Tracking user changes -

Tracking user changes is a round of one or more GET requests with the delta function. You make a GET request much like the way you list users, except that you include the following:

The delta function.

A state token (deltaToken or skipToken) from the previous GET delta function call.

Delta tokens are only valid for a specific period before the client application needs to run a full synchronization again. For directory objects (application, administrativeUnit, directoryObject, directoryRole, group, orgContact, oauth2permissiongrant, servicePrincipal, and user), the limit is 7 days.

Box 3: No -

There is limited support for $filter:

The only supported $filter expression is for tracking changes on a specific object: $filter=id+eq+ value .


Box 4: Yes -

Reference:
https://docs.microsoft.com/en-us/graph/api/user-delta

Question: 277 CertyIQ


HOTSPOT -
A training company implements a Common Data Service (CDS) environment. The company has created and stores information about courses in a custom entity.
A Power Automate flow must be created whether a course has been created that starts within the next seven days and must be accurate to the minute.
You need to define an expression that meets the requirements.
Which functions should you use for the expression? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

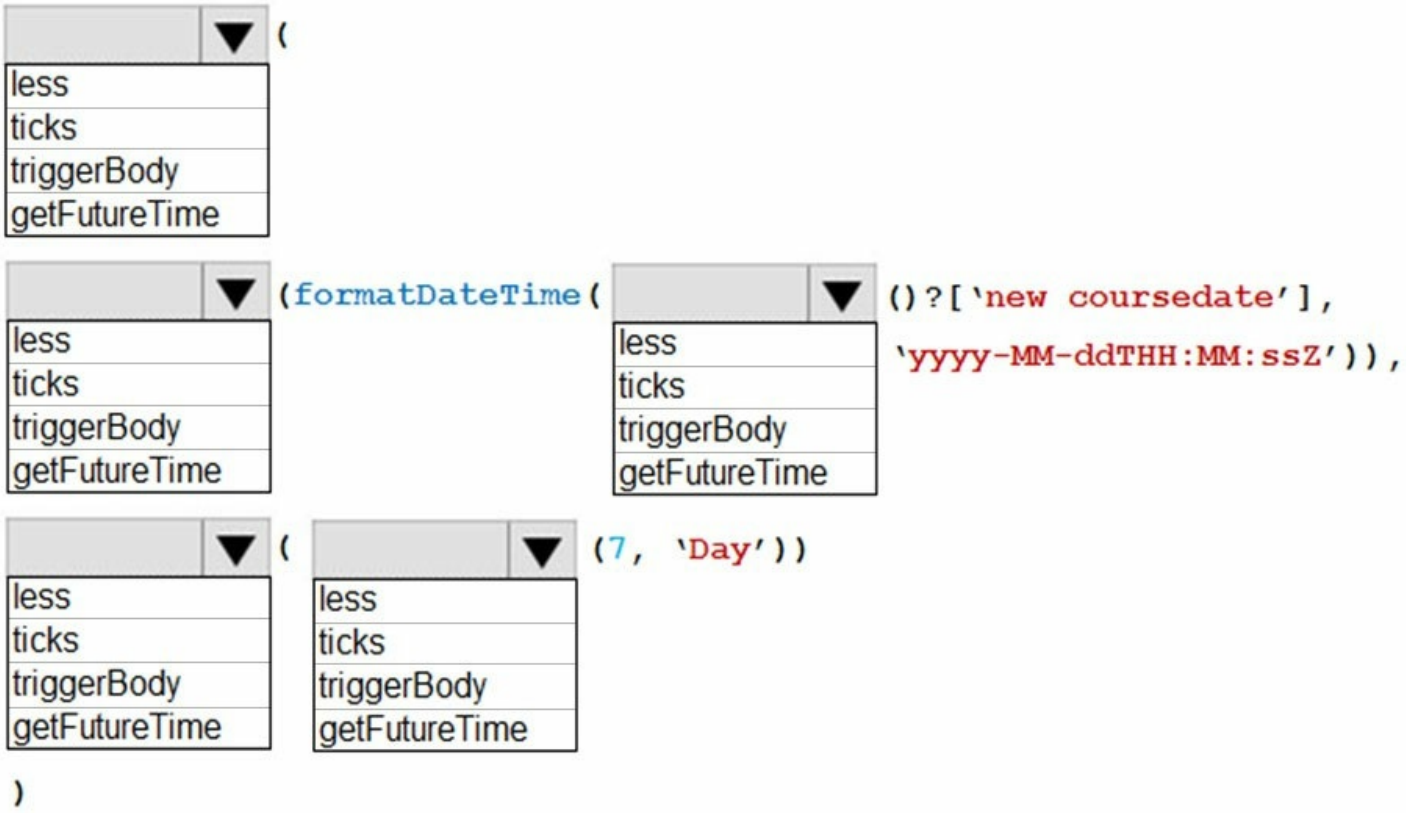

Answer:

Answer Area

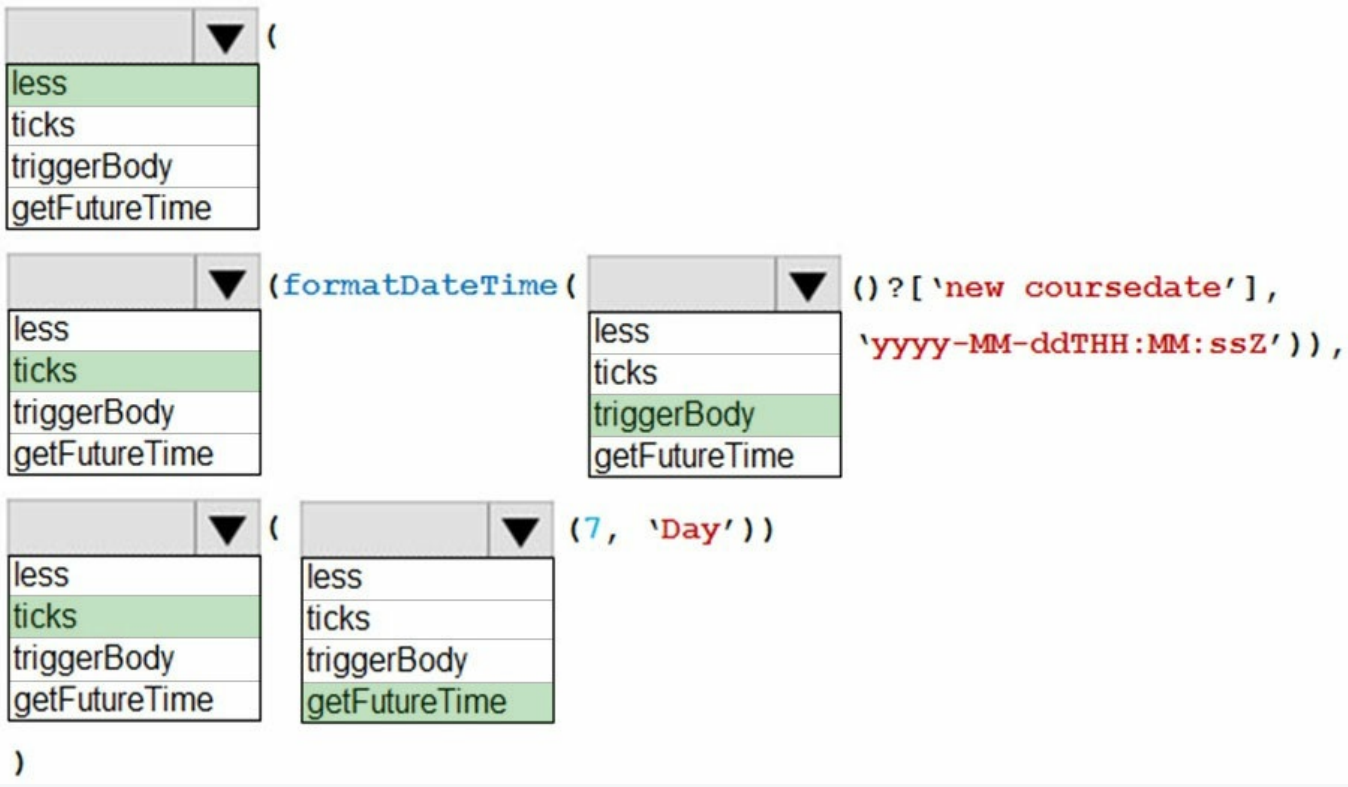

Explanation:

Box 1: less -

less checks whether the first value is less than the second value. Return true when the first value is less, or return false when the first value is more.

Box 2 : ticks -

ticks(timestamp: string) - Returns the number of ticks (100 nanoseconds interval) since 1 Jan 1601 00:00:00 UT

Syntax: ticks('<timestamp>')

Box 3: triggerBody -

triggerBody returns a trigger's body output at runtime.

Box 4: ticks -

Box 5: getFutureTime -

getFutureTime teturn the current timestamp plus the specified time units.

Syntax: getFutureTime(<interval>, <timeUnit>, <format>?)

Reference:

https://docs.microsoft.com/en-us/azure/logic-apps/workflow-definition-language-functions-reference

Question: 278 CertyIQ

DRAG DROP -


You are developing a Power Platform app for a school. The school plans to use the app to gather information about classes and students.

You must design a plug-in for the app. You must store data about students in the Contacts table and store data about classes in a custom table.


You need to select the stage in the event pipeline for each function.

Which stages should you use? To answer, drag the appropriate plug-in stages to the correct functions. Each plug-in stage may be used once, more than once, or not at all. You may need to drag the split bar between panes or

scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

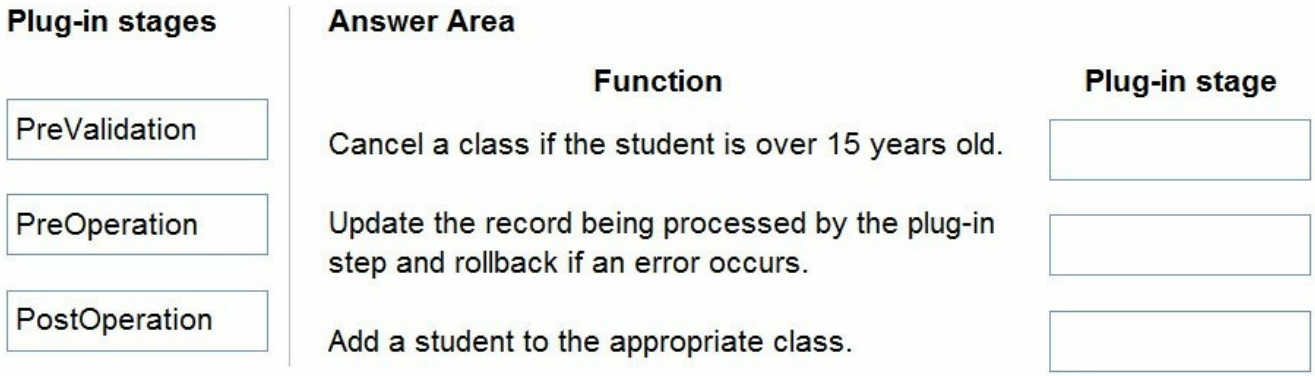

Answer:

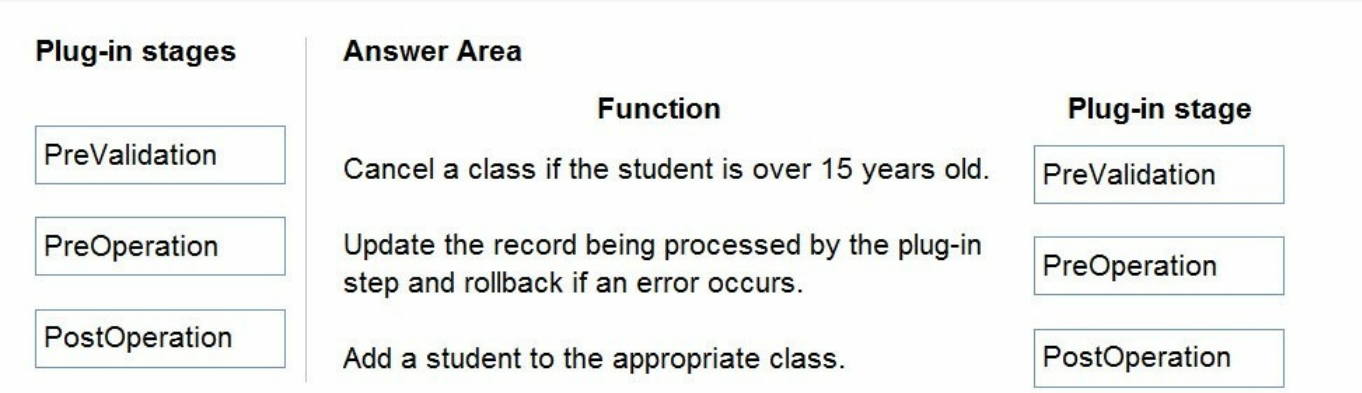

Explanation:

Box 1: PreValidation -

For the initial operation, this stage will occur before the main system operation.

This provides an opportunity to include logic to cancel the operation before the database transaction.

Box 2: PreOperation -

Occurs before the main system operation and within the database transaction.

If you want to change any values for an entity included in the message, you should do it here.

Avoid cancelling an operation here. Canceling will trigger a rollback of the transaction and have significant performance impact.

Box 3: PostOperation -

Occurs after the main system operation and within the database transaction.

Use this stage to modify any properties of the message before it is returned to the caller.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/event-framework

Question: 279 CertyIQ

The communication department for a company plans to add a publicly accessible survey page to the company's public website.
You must add the new survey page to the company's public website and capture data from the page to a Common Data Service environment.
Explicit user credentials must not be required to write survey data to Common Data Service.
You need to implement authentication.
Which authentication mechanism should you implement?

A. ADFS
B. Azure AD Conditional Access
C. OAuth 2.0
D. Client secret

Answer:

C

Explanation:

The OAuth 2.0 client credentials grant flow permits a web service (confidential client) to use its own credentials, instead of impersonating a user, to authenticate when calling another web service.

Note: OAuth is the preferred means to authenticate because it provides access to both the OData RESTful web services (Web API and OData global Discovery service) as well as to the SOAP web services (Organization service and Discovery service).

OAuth is also required to support:

✑ Azure Active Directory configurations for conditional access, such as Two-factor Authentication (2FA)

✑ Use of client secrets to enable server-to-server authentication scenarios.

✑ Cross-Origin Resource Sharing (CORS) to connect a Single-page Application (SPA)

Reference:

https://docs.microsoft.com/en-us/power-platform/admin/wp-security https://docs.microsoft.com/en-us/powerapps/developer/data-platform/authentication

Question: 280 CertyIQ

DRAG DROP -
A company uses Dynamics 365 Sales.
Sales commission must be calculated when an order is placed. You create an Azure Function to perform the calculation. The Azure Function has an HTTP trigger.
You need to configure the Plug-in Registration tool to send data to the Azure Function when an order is placed. You open the Plug-in Registration tool and connect to Dynamics 365 Sales.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

Actions

Select **Register New Web Hook.**

Select **Register New Service Endpoint.**

Register a New Step for Create of SalesOrder.

Enter a service endpoint.

Enter the endpoint URL.

Answer Area

Answer:

Actions

Select **Register New Service Endpoint.**

Enter a service endpoint.

Answer Area

Select **Register New Web Hook.**

Enter the endpoint URL.


Register a New Step for Create of SalesOrder.

Explanation:


Step 1:SelectRegister New Web Hook.

Configure Dynamics 365 Sales to Call Your Webhook in Azure Functions

1. Open the Plug-in Registration Tool and connect to your organization.
2. Select Register->Register New Web Hook

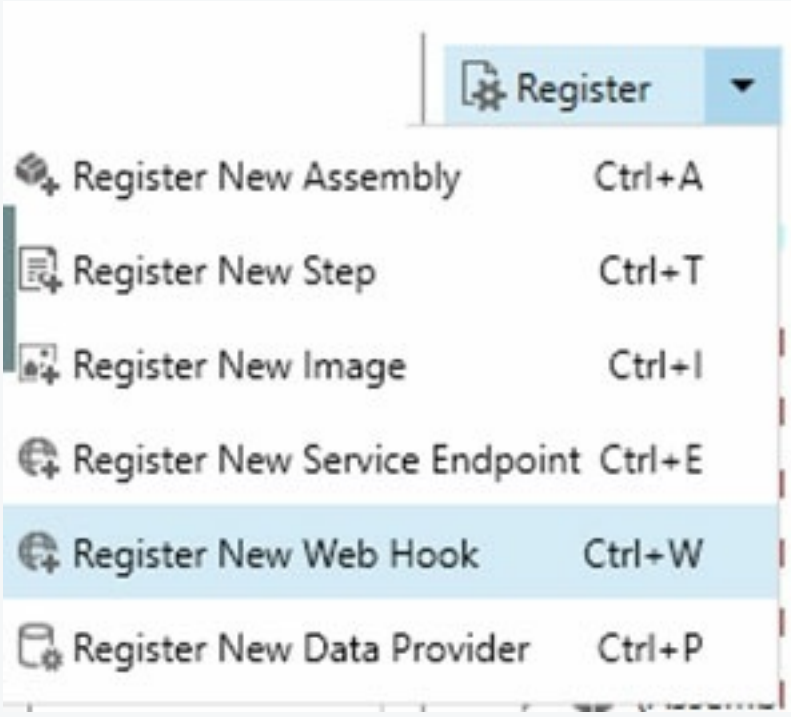

Step 2: Enter the endpoint URL -

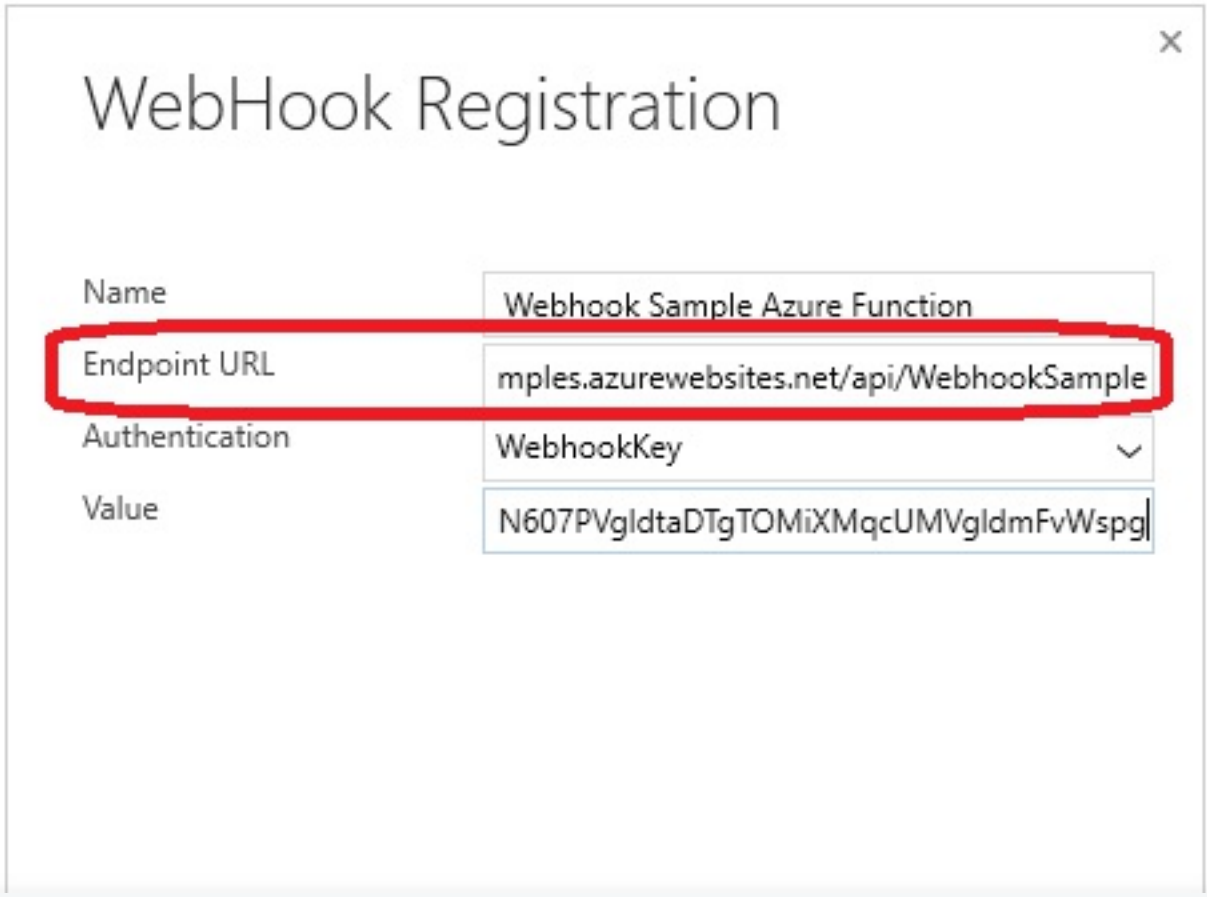

Step 3: Register a New Step for Create of SalesOrder.
Register a new webhook, and then tie that webhook to an event in Dynamics 365 Sales. Select your newly registered webhook, right-click it, and then choose
"Register New Step."
Note that the webhook here is set to execute whenever a change to an account record is detected within Dynamics 365 Sales.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/tutorial-write-plug-in

Question: 281 CertyIQ

The communication department for a company plans to add a publicly accessible survey page to the company's public website.
You must add the new survey page to the company's public website and capture data from the page to a Common Data Service environment.
Explicit user credentials must not be required to write survey data to Common Data Service.
You need to implement authentication.
Which authentication mechanism should you implement?

A. Microsoft 365
B. X.509 certificate
C. OAuth 2.0
D. Claims-based

Answer:

C

Explanation:

OAuth is the preferred means to authenticate because it provides access to both the OData RESTful web services (Web API and OData global Discovery service) as well as to the SOAP web services (Organization service and Discovery service).

OAuth is also required to support:

- Azure Active Directory configurations for conditional access, such as Two-factor Authentication (2FA)
- Use of client secrets to enable server-to-server authentication scenarios.
- Cross-Origin Resource Sharing (CORS) to connect a Single-page Application (SPA)

Incorrect Answers:

A: Using Microsoft 365 authentication does not require that your register your applications as OAuth does. You must simply provide a User Principal Name (UPN) and password for a valid user.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/authentication

Question: 282 CertyIQ

DRAG DROP -
You are a Power Platform developer.
Users report several access issues.
You need to resolve the user access issues.
What should you use? To answer, drag the appropriate security options to the correct scenarios. Each security option may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

Security options

- DLP policy
- GDPR compliance
- Conditional access
- Exfiltration blocking

Answer Area

Issues	Security option
A user is not able to sign into a Power Apps app from home.	Security option
A user is not able to use a social media connector in a flow that uses the Microsoft Teams connector.	Security option
A user is not able to forward email messages to an address in another domain.	Security option

Answer:

Security options	Answer Area	
DLP policy	**Issues**	**Security option**
GDPR compliance	A user is not able to sign into a Power Apps app from home.	Conditional access
Conditional access	A user is not able to use a social media connector in a flow that uses the Microsoft Teams connector.	DLP policy
Exfiltration blocking	A user is not able to forward email messages to an address in another domain.	Exfiltration blocking

Explanation:
Box 1: Conditional access -
You can limit access to users with block access by location to reduce unauthorized access. By using Conditional Access policies, you can apply the right access controls when needed to help keep your organization secure and stay out of your user's way when not needed. Conditional Access analyses signals such as user, device, and location to automate decisions and enforce organizational access policies for resources.

Box 2: DLP policy -
DLP policies enforce rules for which connectors can be used together by classifying connectors as either Business or Non-Business. If you put a connector in the
Business group, it can only be used with other connectors from that group in any given app or flow. Sometimes you might want to block the usage of certain connectors altogether by classifying them as Blocked.

Box 3: Exfiltration blocking -
Email exfiltration controls for connectors
Microsoft Exchange enables admins to disable email autoforwards and autoreplies to remote domains for external recipients. Exchange does this by using message-type headers, such as Auto Forward received from Outlook and Outlook on web clients.

Reference:
https://docs.microsoft.com/en-us/power-platform/admin/restrict-access-online-trusted-ip-rules
https://docs.microsoft.com/en-us/power-platform/admin/wp-data-loss-prevention
https://docs.microsoft.com/en-us/power-platform/admin/block-forwarded-email-from-power-automate

Question: 283 CertyIQ

HOTSPOT -
A company uses Dynamics 365 Sales.
You need to configure the customer lookup search for email activity in the canvas app.
How should you complete the expression? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

```
If ( [IsBlank / AsType / IsType] ( ThisItem.'Company Name' ), "",
    [IsBlank / AsType / IsType] ( ThisItem.'Company Name', [@Accounts] ),
        "Account: " & [IsBlank / AsType / IsType] ( ThisItem.'Company Name', [@Accounts] ).'Account Name',
    "Contact: " & [IsBlank / AsType / IsType] ( ThisItem.'Company Name', [@Contacts] ).'Full Name'
)
```

Answer:

Answer Area

```
If ( [IsBlank] ( ThisItem.'Company Name' ), "",
    [IsType] ( ThisItem.'Company Name', [@Accounts] ),
        "Account: " & [AsType] ( ThisItem.'Company Name', [@Accounts] ).'Account Name',
    "Contact: " & [AsType] ( ThisItem.'Company Name', [@Contacts] ).'Full Name'
)
```

Explanation:

Box 1: IsBlank -

The IsBlank function tests for a blank value or an empty string. The test includes empty strings to ease app creation since some data sources and controls use an empty string when there is no value present.

Box 2: IsType -

The IsType function tests whether a record reference refers to a specific table type.

Box 3: AsType -

The AsType function treats a record reference as a specific table type, sometimes referred to as casting. You can use the result as if it were a record of the table and again use the Record.Field notation to access all of the fields of that record. An error occurs if the reference isn't of the specific type.

Box 4: AsType -

Reference:
https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-isblank-isempty
https://docs.microsoft.com/en-us/powerapps/maker/canvas-apps/functions/function-astype-istype

Question: 284 CertyIQ

HOTSPOT -
You are designing an integration between Dataverse and an external application. The external application processes thousands of records per day.
Record processing volumes vary throughout the day. Extremely high processing volumes may occur and may exceed the Dataverse service protection API limits.
You need to implement each service protection limit that is enforced.
Which implementations should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Service Protection Limit	Implementation
Number of requests	Number per user over a sliding window of time Number per environment over a sliding window of time Number per user per 24-hour period Number per environment per 24-hour period
Combined execution time	Combined time per user over a sliding window of time Combined time per user over a fixed window of time Combined time per environment over a sliding window of time Combined time per environment over a fixed window of time
Concurrent requests	Fixed number per user Fixed number per tenant Fixed number per application Fixed number per environment

Answer:

Answer Area

Service Protection Limit	Implementation
Number of requests	Number per user over a sliding window of time Number per environment over a sliding window of time Number per user per 24-hour period Number per environment per 24-hour period
Combined execution time	Combined time per user over a sliding window of time Combined time per user over a fixed window of time Combined time per environment over a sliding window of time Combined time per environment over a fixed window of time
Concurrent requests	Fixed number per user Fixed number per tenant Fixed number per application Fixed number per environment

Explanation:

Box 1: Number per user over a sliding window of time

Service protection API limits are enforced based on three facets:

- The number of requests sent by a user.
- The combined execution time required to process requests sent by a user.
- The number of concurrent requests sent by a user.

The following table describes the default service protection API limits enforced per web server:

Measure	Description	Limit per web server
Number of requests	The cumulative number of requests made by the user.	6000 within the 5 minute sliding window
Execution time	The combined execution time of all requests made by the user.	20 minutes (1200 seconds) within the 5 minute sliding window
Number of concurrent requests	The number of concurrent requests made by the user	52

Box 2: Combined time per user over a sliding window of time

Box 3: Fixed number per user -

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/api-limits

Question: 285 CertyIQ

You are deploying a Power Apps app that uses the custom connector for ServiceNow.
The app loads very slowly for some users. You determine that all records from ServiceNow are being retrieved for every user.
The app must load only incidents that are assigned to each user.
You need to limit the number of records that the connector returns.
What should you do?

A. Apply a Lifecycle Services asset scope
B. Apply a business process flow
C. Apply the Azure APIM parameter
D. Apply a connector policy template

Answer: D

Explanation:
You can configure policy templates for custom connectors. Policies allow you to modify the behavior of a custom connector at runtime. You can use policies to perform data conversion, route requests, set parameter values, and more. You can configure policies directly in the custom connector API properties file before import, or you can do it from the maker portal in the custom connector designer by applying policy templates.
Common policy use cases are:
* Set query parameter - Use for handling default values, if necessary, but the maker doesn't configure one. For example, if an API required a top parameter for how many records to return by using a policy, you could set a default value to be used if the maker doesn't configure one.
Note: ServiceNow Action: GetRecords

Summary: List Records -
Description: Gets records of a certain ServiceNow object type like 'Incidents'
Syntax:ServiceNow.GetRecords (string tableType, [advanced][Optional]boolean sysparm_display_value, [advanced][Optional]boolean sysparm_exclude_reference_link, [advanced][Optional]string sysparm_query, [advanced][Optional]integer sysparm_limit, [advanced][Optional]integer sysparm_offset)

Reference:
https://docs.microsoft.com/en-us/learn/modules/policy-templates-custom-connectors/
https://www.carlosag.net/PowerApps/Connectors/ServiceNow

Question: 286 CertyIQ

A company is developing multiple plug-ins.
One of the plug-ins keeps failing.
You need to debug the plug-in.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Highlight the plug-in step and select Debug in the Plug-in Registration tool
B. Copy the .pdb file into the server/bin/assembly folder
C. Select Start Profiling in the Plug-in Registration tool
D. Attach the debugger to the w3wp.exe process
E. Install the plug-in profiler

Answer:


ADE

Explanation:


Starting profiling in the Plugin Registration Tool can help identify any performance bottlenecks or issues in the execution of the plugin, but it may not necessarily help in debugging a failing plugin. Debugging the plugin code and attaching a debugger to the process or using the Plugin Profiler can be more helpful for identifying and fixing errors in the code.

Question: 287 CertyIQ

DRAG DROP -
A company uses Dynamics 365 Sales.
Sales commission must be calculated when an order is placed. You create an Azure Function to perform the calculation. The Azure Function has an HTTP trigger.
You need to configure the Plug-in Registration tool to send data to the Azure Function when an order is placed. You open the Plug-in Registration tool and connect to Dynamics 365 Sales.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

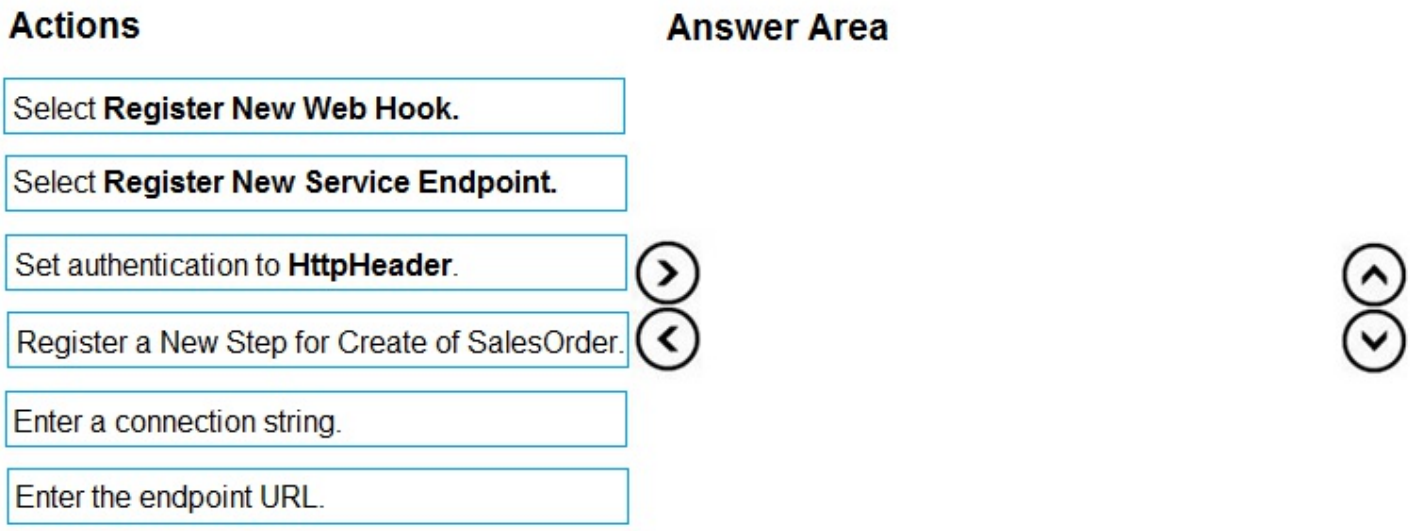

Answer:

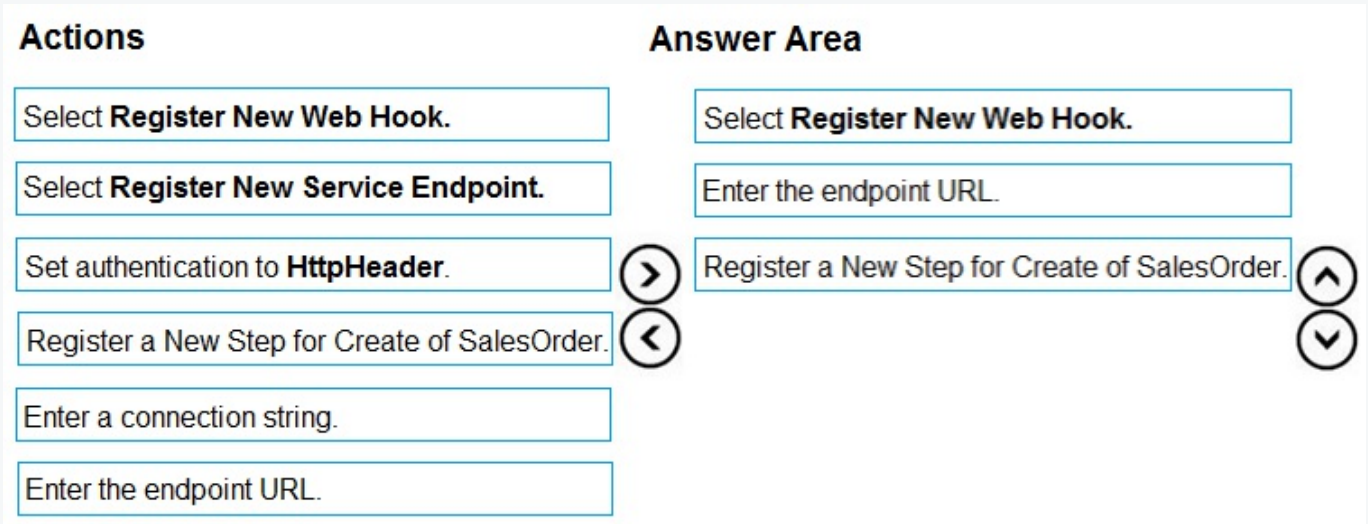


Explanation:


Step 1:SelectRegister New Web Hook.

Configure Dynamics 365 Sales to Call Your Webhook in Azure Functions

1. Open the Plug-in Registration Tool and connect to your organization.
2. Select Register->Register New Web Hook

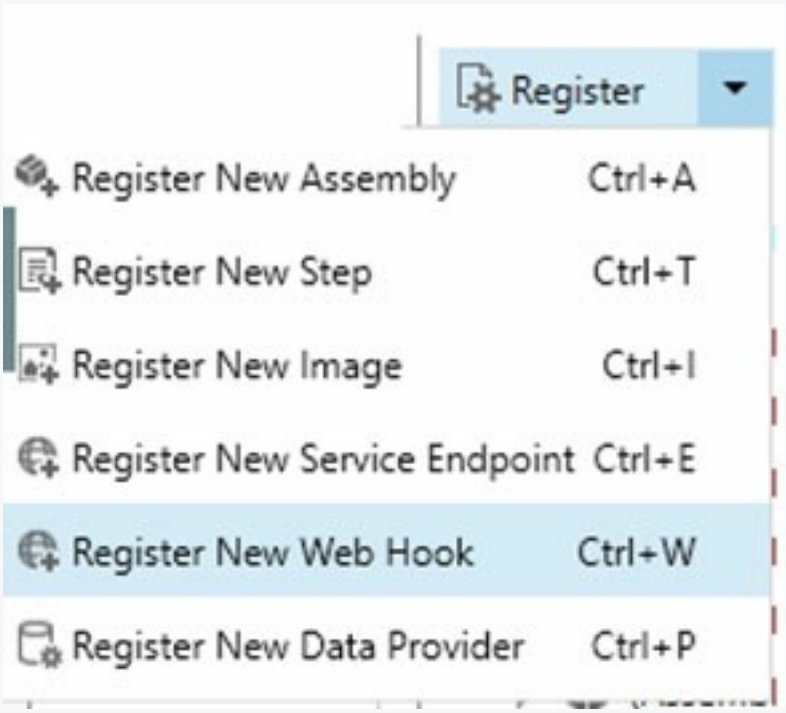

Step 2: Enter the endpoint URL -

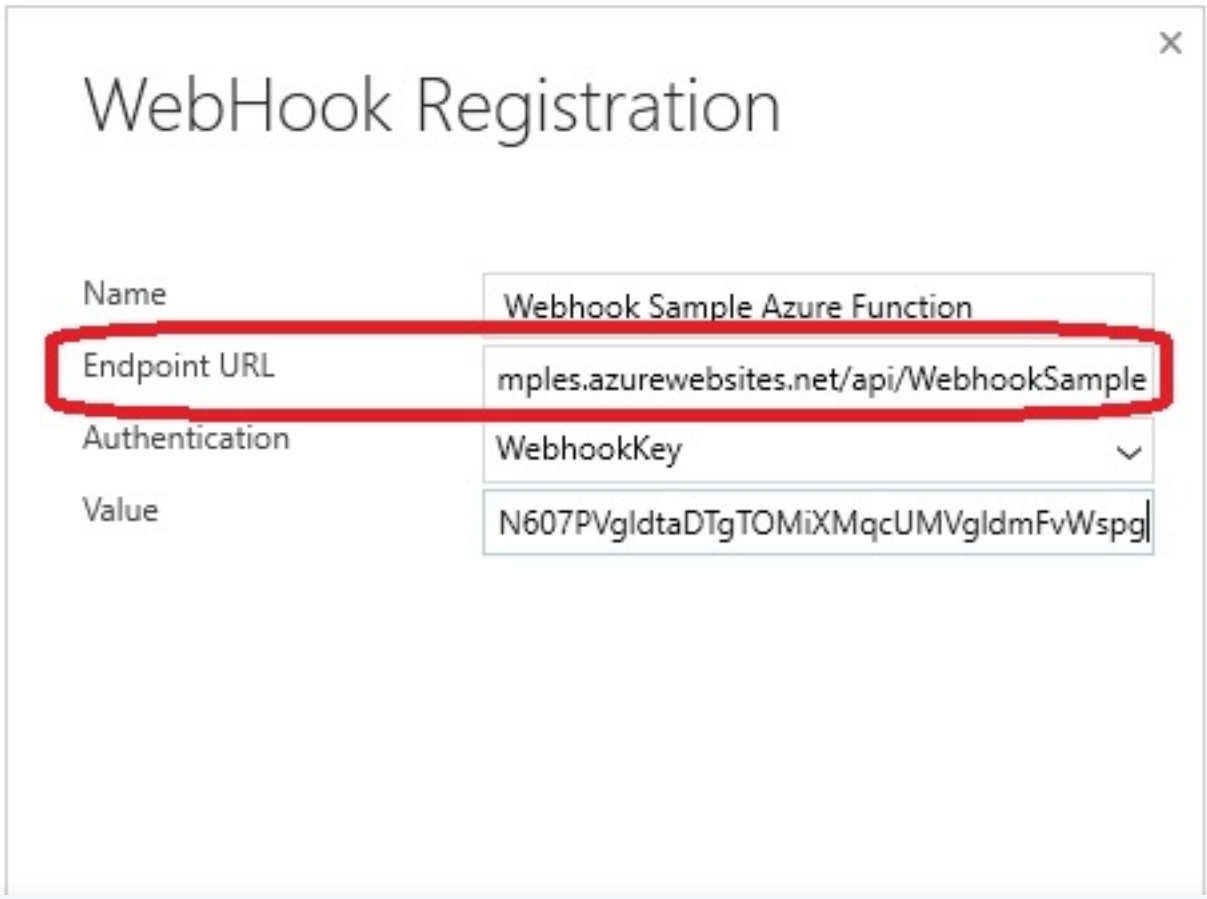

Step 3: Register a New Step for Create of SalesOrder.

Register a new webhook, and then tie that webhook to an event in Dynamics 365 Sales. Select your newly registered webhook, right-click it, and then choose

"Register New Step."

Note that the webhook here is set to execute whenever a change to an account record is detected within Dynamics 365 Sales.

Reference:
https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/tutorial-write-plug-in

Question: 288 CertyIQ

A company needs to illustrate the relationships of the entities in Dynamics 365 Sales.
You need to select the appropriate tool to show this graphic.
Which tool should you select?

A. Metadata diagram
B. Sales Insights
C. Power Automate
D. Security model

Answer: A

Explanation:
Visual representation of metadata can be useful, especially when you are trying to describe the relationship between entities in the system. You can use the
Metadata Diagram sample code provided for Dynamics 365 Customer Engagement (on-premises) to generate the entity relationship diagrams.
You can create a diagram that shows a relationship for just one entity, or a complex diagram that includes dozens of related entities, including custom and system entities.

Reference:
https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/use-metadata-generate-entity-diagrams

Question: 289 CertyIQ


HOTSPOT -
A travel agency uses Dynamics 365 Sales.
Customers are allowed to add up to three regions to their travel preferences from the website. Customer preferences must be stored in the Contact entity. An error message must display if customers enter data incorrectly. You create a plug-in.
You need to register the plug-in to meet the requirements.
Which value should you apply for each parameter? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Parameter	Value
message	create associate update
primary entity	none region contact
secondary entity	none region contact
execution mode	synchronous asynchronous

Answer:

Answer Area

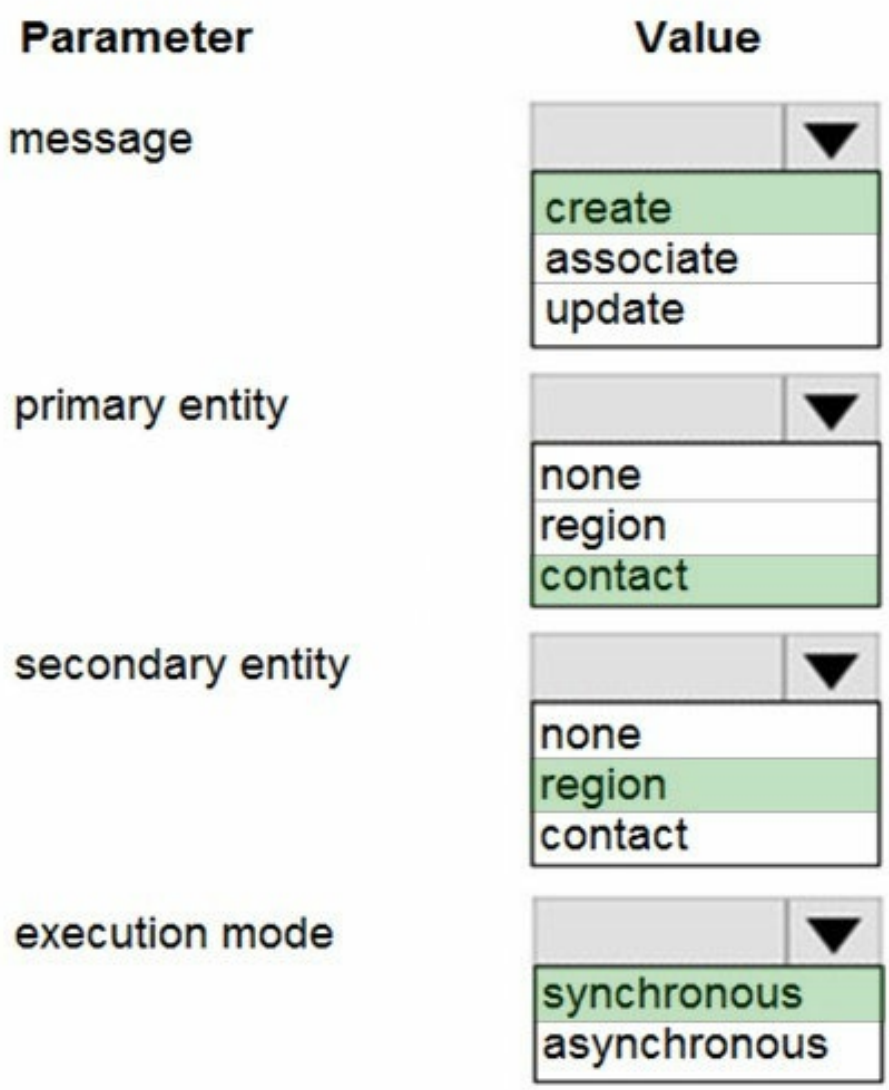

Explanation:

Box 1: create -

An error message must display if customers enter data incorrectly.

The message must be created -

Box 2: contact -

Customers are allowed to add up to three countries/regions to their travel preferences from the website. Their preferences must be stored in the Contact entity.

Box 3: region -

Customers are allowed to add up to three regions to their travel preferences from the website. Customer preferences must be stored in the Contact entity

Box 4: synchronous -

A synchronous plug-in will cause the operation to wait until the code in the plug-in completes. This has an impact on perceived performance of the system. The operations in an asynchronous plug-in are placed in a queue and are executed after the operation is completed so that the operation can complete with minimal interruption.

Reference:

https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/tutorial-write-plug-in


Question: 290 CertyIQ

A company uses a third-party shipping company to deliver products to customers.
You need to design a custom connector that retrieves the shipping fees from the shipping company API.
Which three elements should you define for the custom connector? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.


A. Authentication model
B. Address parameter
C. OpenAPI definition
D. Fee parameter
E. Fee reference

Answer: ABC

Explanation:
C: You can create a custom connector using a OpenAPI definition file or a URL to OpenAPI definition.
A: On the Security page you get to choose how to authenticate to the API.

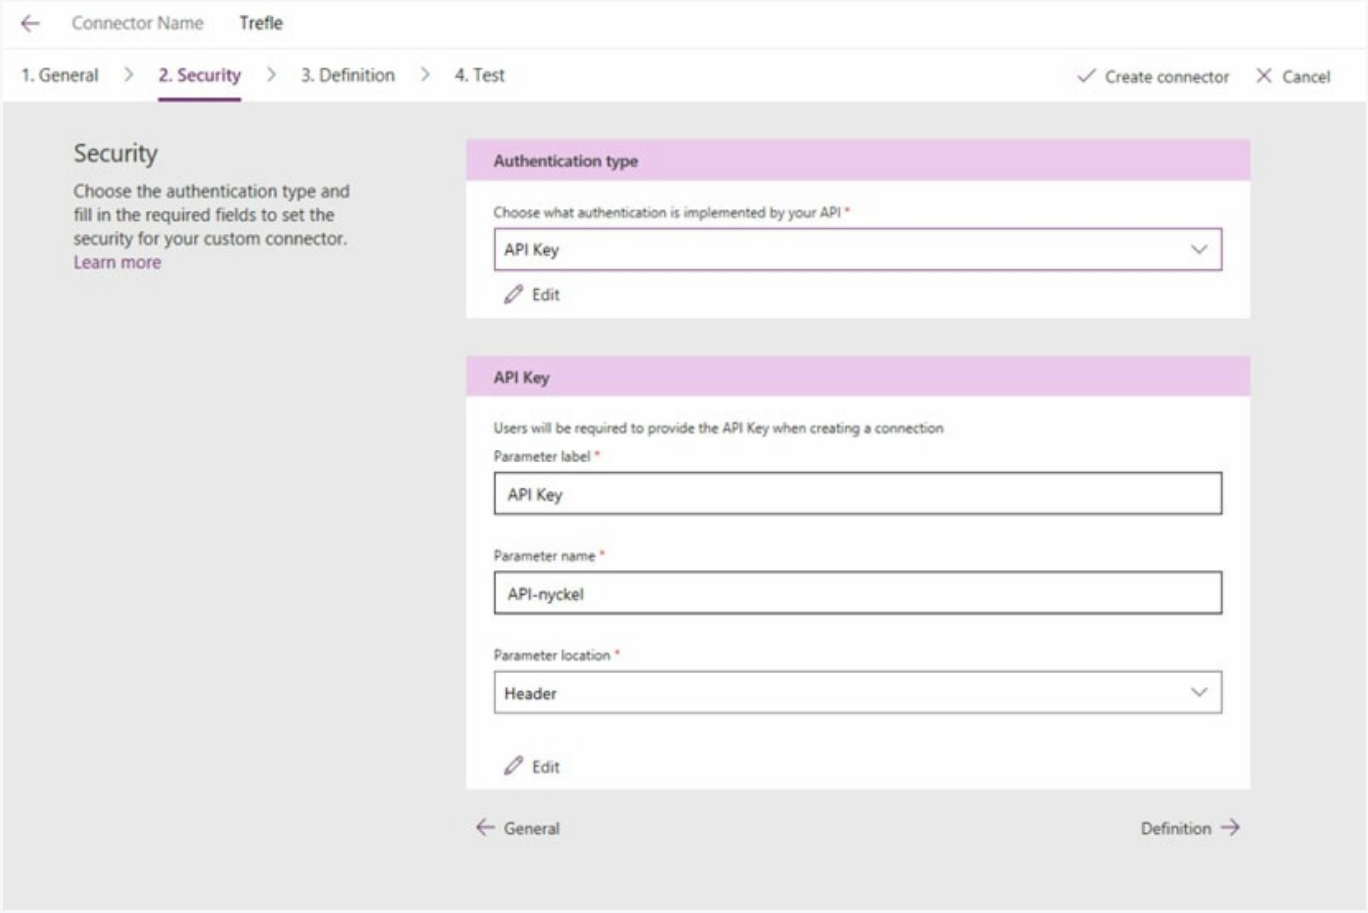

B: Address parameter.
If you were to create a Custom Connector from scratch, then you would have to study the API you have chosen and type in the URL manually here.

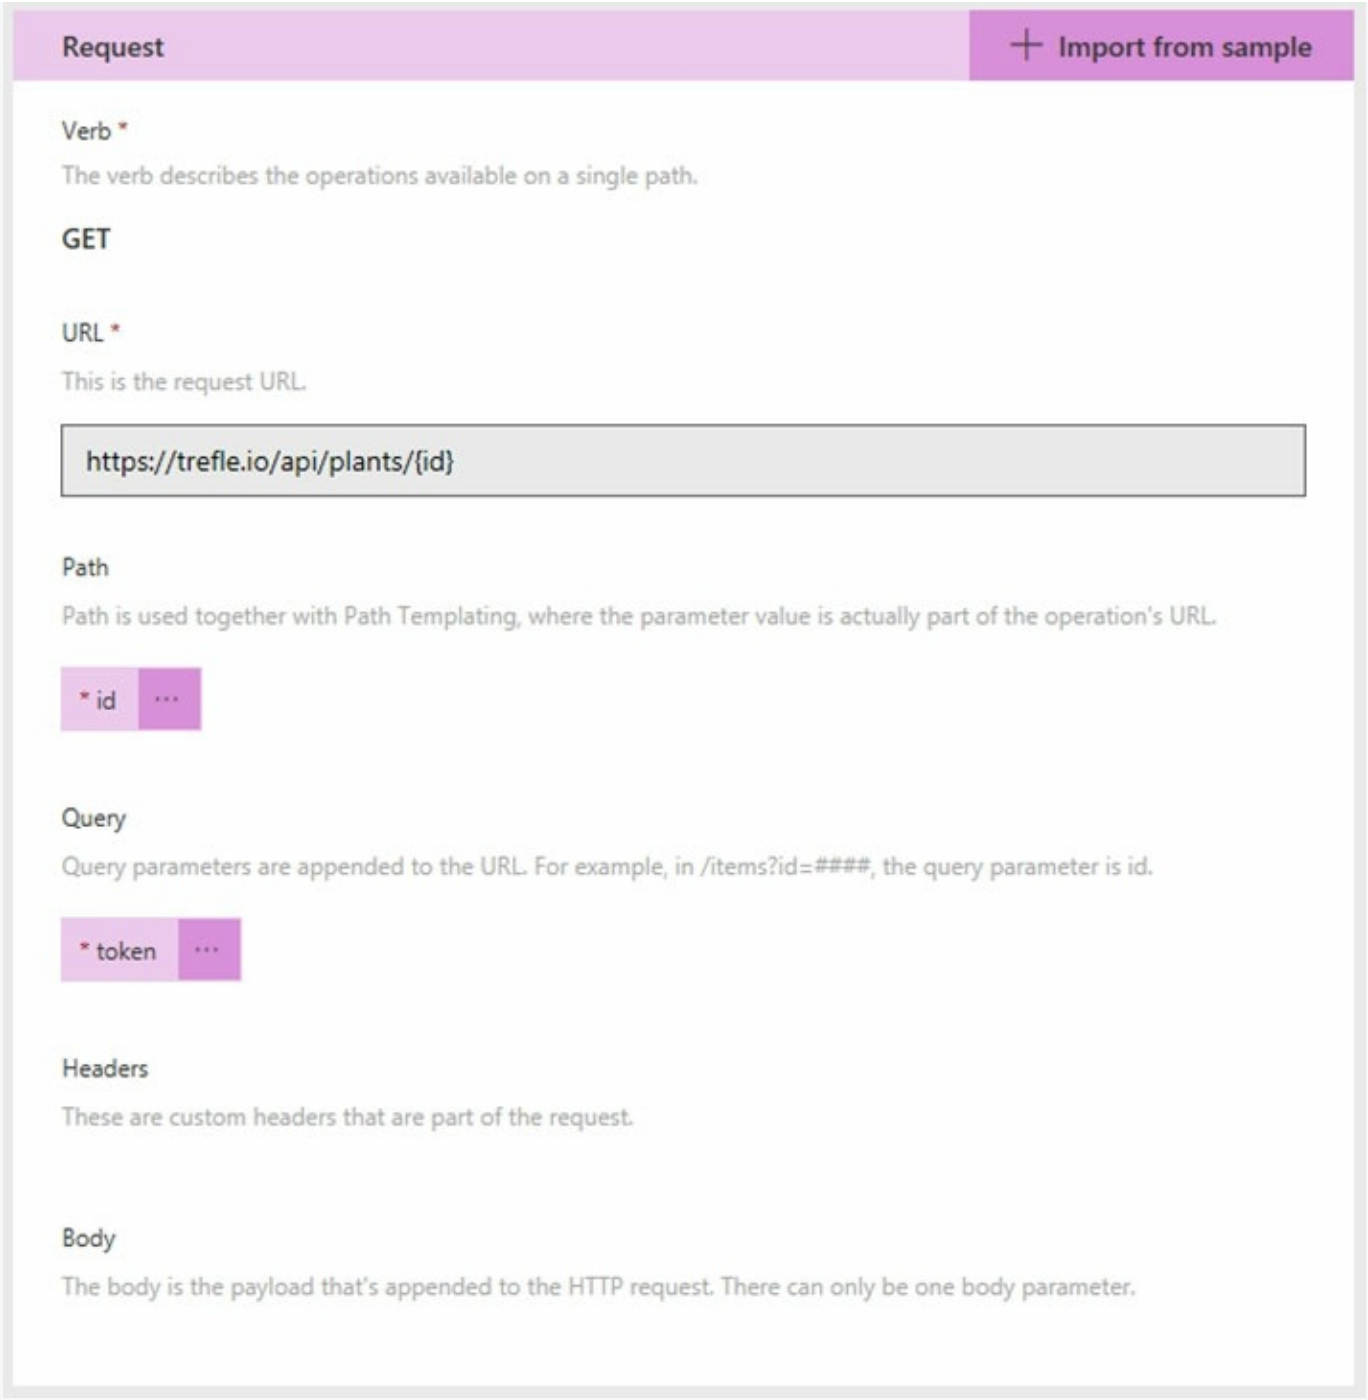

Reference:
https://carinaclaesson.com/2019/09/06/setting-up-a-custom-connector-from-an-openapi-file-and-utilizing-it-in-powerapps-and-flow/

Question: 291 CertyIQ

You are creating a Power Apps app that retrieves customer information from Azure Active Directory when you use the app to look up a customer record.
You create an Azure Function by using JSON code to retrieve the customer information.
You need to make the application work.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A. Create a Power Automate flow to import data.
B. Create a custom connector that uses the Azure Function API.
C. Copy your JSON code to the app.
D. Create a custom connector that uses the JSON code.

E. Create an API definition for the Azure Function.

Answer:

BE

Explanation:

E: Before exporting an API, you must describe the API using an OpenAPI definition.

B: This OpenAPI definition contains information about what operations are available in an API and how the request and response data for the API should be structured. PowerApps and Microsoft Flow can create custom connectors for any OpenAPI 2.0 definition.

Reference:

https://github.com/MicrosoftDocs/azure-docs/blob/master/articles/azure-functions/app-service-export-api-to-powerapps-and-flow.md

Question: 292 CertyIQ


HOTSPOT -
A manufacturing company takes online orders.
The company requires automatic validation of order changes. Requirements are as follows:
- If validation is successful, the order changes must be submitted.
- If exceptions are encountered, a message must be shown to the customer and the order changes must not be submitted.

You need to set up and deploy a plug-in that encapsulates the rules.
Which options should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Settings	Options
Execution stage	PreValidation PreOperation PostOperation
Execution mode	Asynchronous Synchronous
Image	Pre image Post image
Error message	throw new InvalidPluginExecutionException("Your error message", ex); tracingService.Trace("Your error message: {0}", ex.ToString());

Answer:

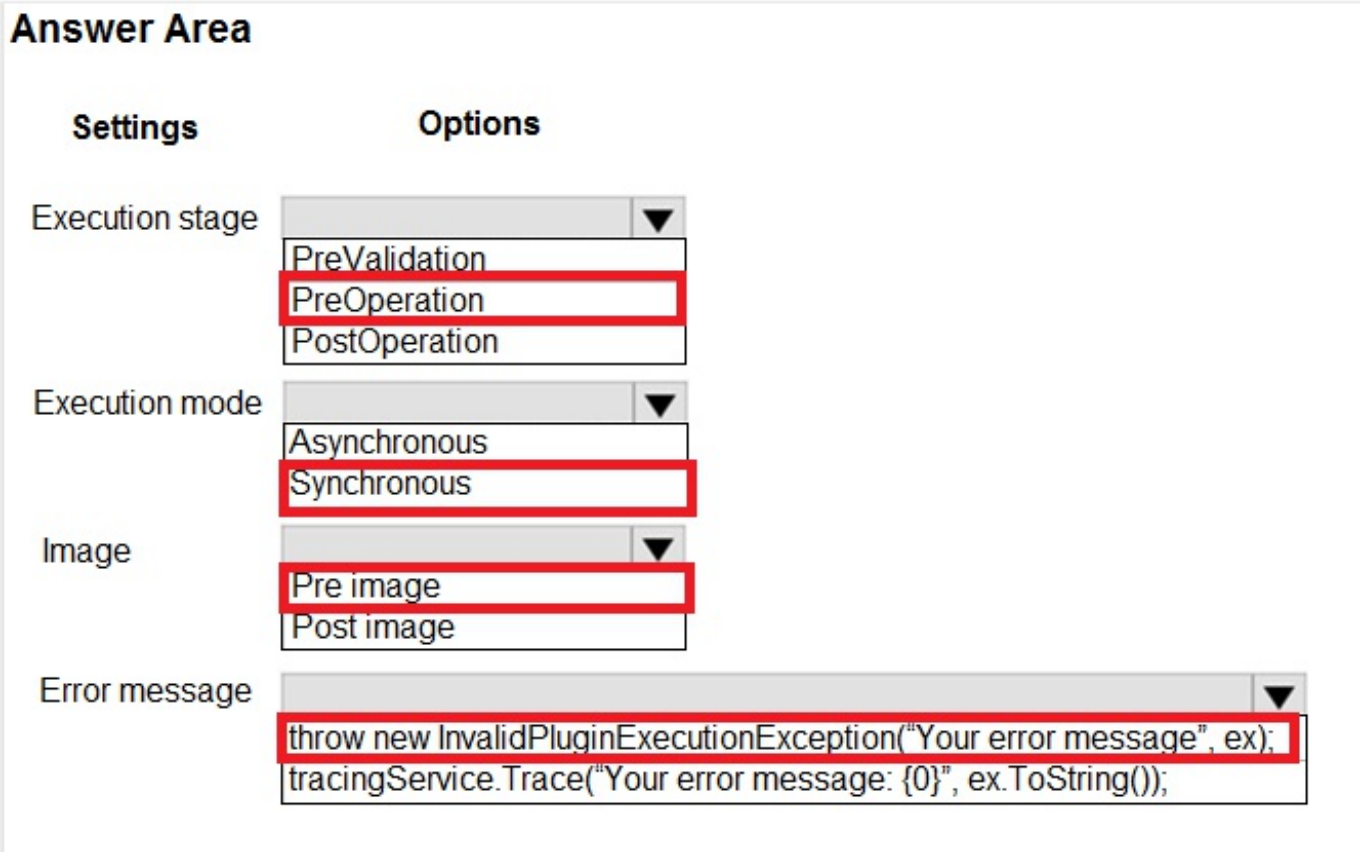

Explanation:

Box 1: Pre operation

Box 2: Synchronous -

Ideally, you should only cancel operations using synchronous plug-ins registered in the PreValidation stage.


Box 3: Pre Image -

Box 4: throw ..


When you throw an InvalidPluginExecutionException exception within a synchronous plug-in an error dialog with your message will be displayed to the user.

Question: 293 CertyIQ

DRAG DROP -
You are designing new functionality for an existing model-driven app.
A field must display multiple selections to the user, enabling the user to select a value.
You need to determine which column type can support the required scenarios.
Which column type should you use? To answer, drag the appropriate column types to the correct scenarios. Each column type may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

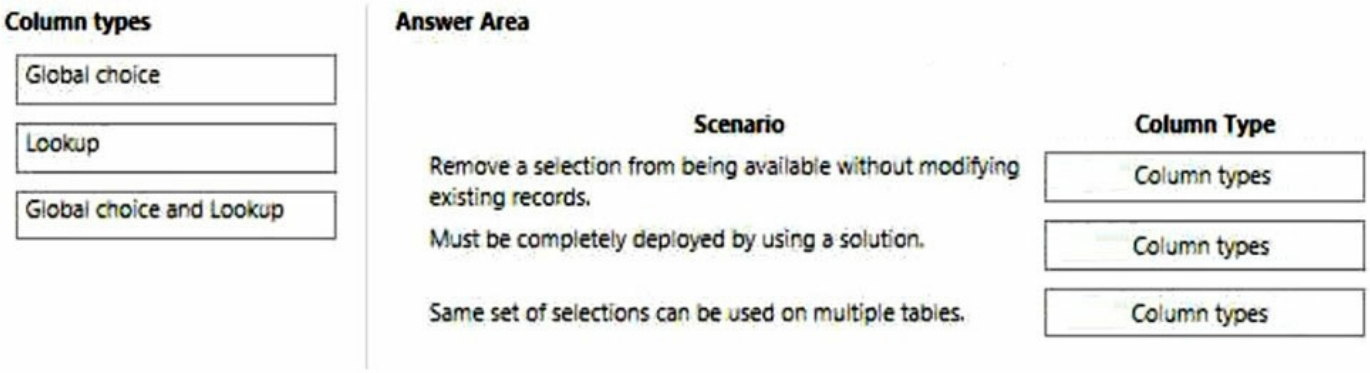

Answer:

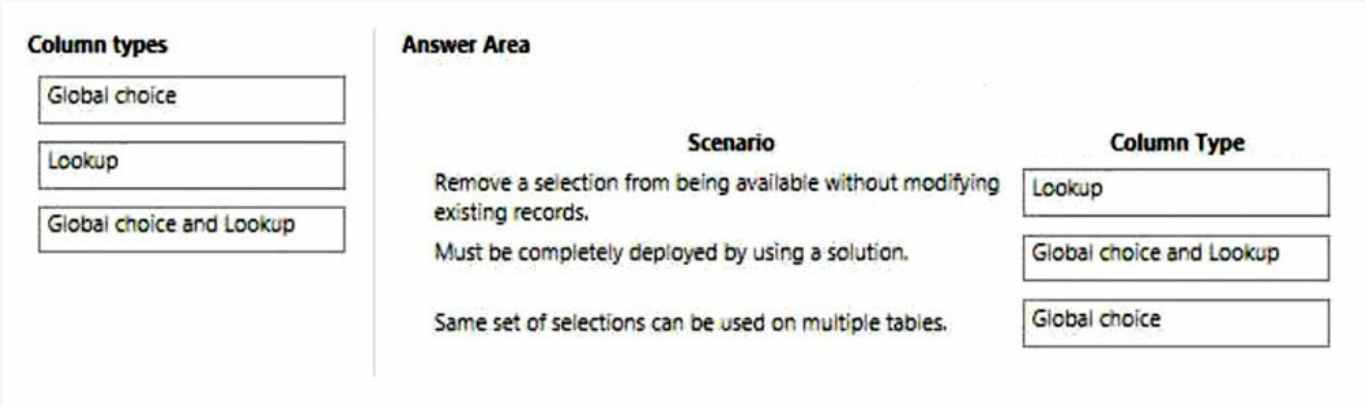

Explanation:

Box 1: Lookup -

The LookUp function finds the first record in a table that satisfies a formula. Use LookUp to find a single record that matches one or more criteria.

Besides the normal formula operators, you can use the in and exactin operators for substring matches.

[!INCLUDE [record-scope]../../includes/record-scope.md)]

Example:

Filter(IceCream, OnOrder > 0) - Returns records where OnOrder is greater than zero.

Box 2: Global choice and Lookup -

Box 3: Global choice -

A choice column provides a list of values for users to pick from. They help streamline data entry in turn ensuring clean data. There are two types - local and global.

Local choices can are local to the table and column that they are created for. They cannot be reused on other tables. For example, a list of statuses for an application may not apply anywhere else (e.g. Submitted, In Review, Approved, Rejected). On the other hand, global choices are available across all tables and columns allowing them to be reused.

Reference:

https://docs.microsoft.com/en-us/power-platform/power-fx/reference/function-filter-lookup
https://thepoweraddict.com/how-to-work-with-choice-columns-in-dataverse/

Question: 294 CertyIQ

You create a plug-in to validate data.
Users report that validation is not working as expected.
You need to debug the plug-in.
Which tool should you use?

A. Plug-in profiler
B. Power Platform Tools for Visual Studio
C. Plug-in dashboard
D. Plug-in Registration Tool

Answer: B


Explanation:

Plug-in Profiler is not the best tool to use when debugging a plug-in that is not working as expected. The Plug-in Profiler is designed to troubleshoot performance issues with a plug-in by analyzing the execution of the plug-in on a remote server. It captures a profile of an executing plug-in and allows you to re-play the execution of the plug-in using Visual Studio on your local computer. However, it does not allow you to attach a debugger to the plug-in process and step through the code in real-time, which is typically necessary when debugging a plug-in. The Power Platform Tools for Visual Studio, on the other hand, is a tool that allows you to develop, debug, and deploy customizations for Dynamics 365 and Power Platform. It allows you to attach a debugger to the plug-in process, which allows you to step through the code and see what is happening at each stage of the validation process. This makes it more suitable for debugging the plug-in when the validation is not working as expected.


Question: 295 CertyIQ

DRAG DROP -
You are creating a Web API.
The API must be able to perform the following actions:
✑ Create a column in a Microsoft Dataverse table.
Update a column for an existing row.

Which HTTP methods should you use? To answer, drag the appropriate HTTP methods to the correct requirements. Each HTTP method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.
Select and Place:

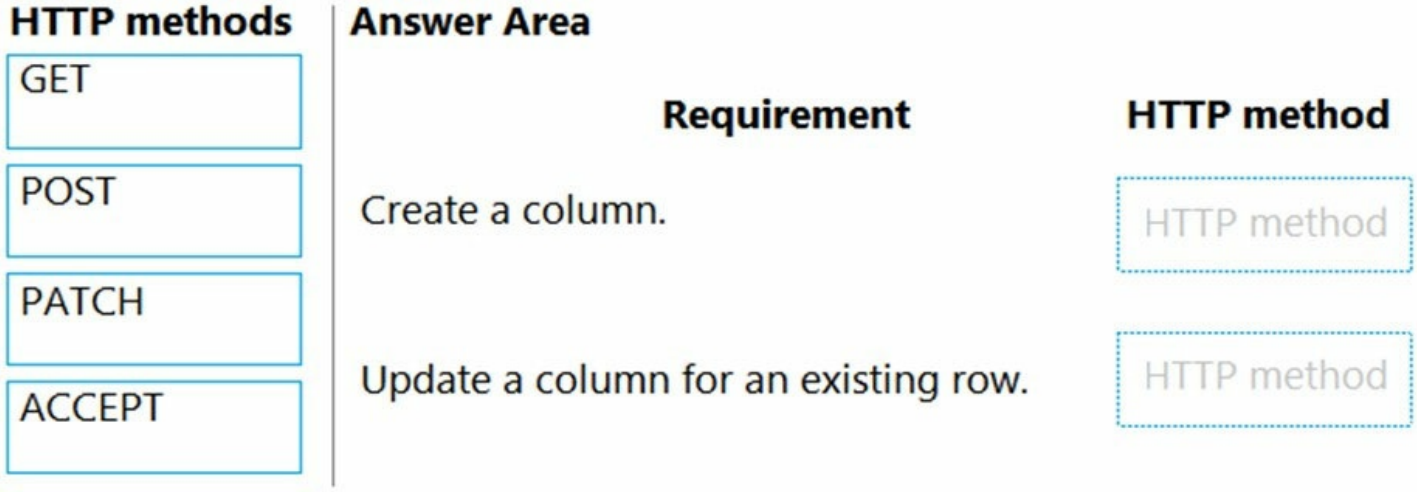

Answer:

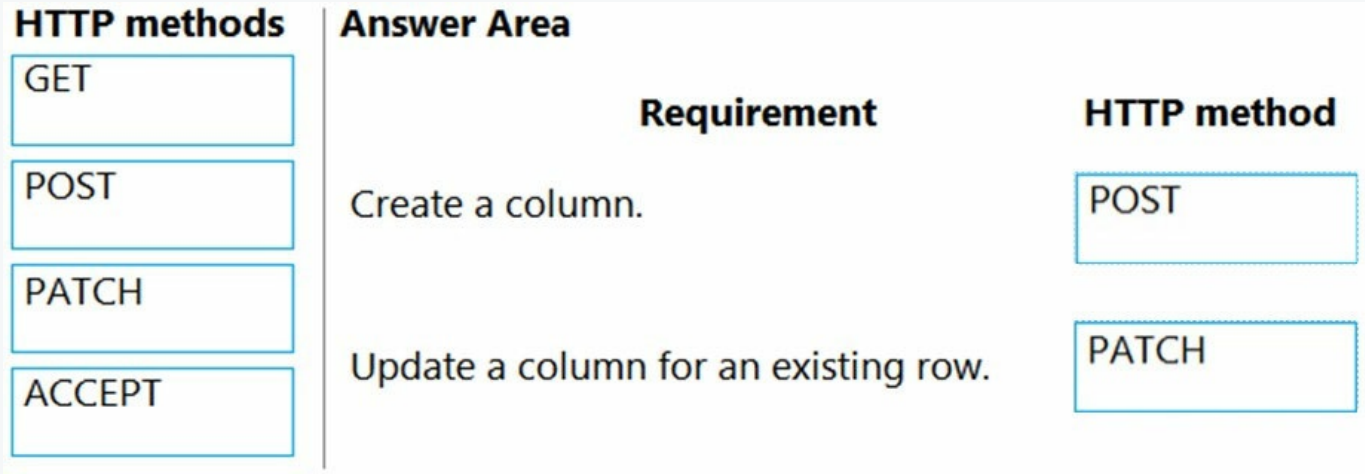

Explanation:
Box 1: POST -

Create table definitions -
To create a table definition, POST the JSON representation of the entity definition data to the EntityDefinitions entity set path. The entity must include the definition for the primary name attribute. You don't need to set values for all the properties. The items on this list except for Description are required, although setting a description is a recommended best practice.

Box 2: PATCH -

Basic update -
Update operations use the HTTP PATCH verb. Pass a JSON object containing the properties you want to update to the URI that represents the record.

Reference:
https://docs.microsoft.com/en-us/power-apps/developer/data-platform/webapi/create-update-entity-definitions-using-web-api https://docs.microsoft.com/en-us/power-apps/developer/data-platform/webapi/update-delete-entities-using-web-api

Question: 296 CertyIQ

HOTSPOT
-
You have a plug-in that performs business logic on contact records. The plug-in is registered in the post-operation stage and is executed when a field named custom_field3 is updated.
The plug-in contains the following code:

```
var cols = new ColumnSet("lastname", "custom_field1");
var contact = service.Retrieve("contact", ctx.PrimaryEntityId, cols);
var updatedValue = contact.GetAttributeValue<string>("lastname");
updatedValue += contact.GetAttributeValue<string>("custom_field1");
contact["custom_field2"] = updatedValue;
service.Update(contact);
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can improve code performance by using the following code instead of retrieving individual fields: `new ColumnSet(true)`	○	○
You can avoid retrieving the changed entity by using plug-in images.	○	○
You can avoid updating the changed entity by registering the plug-in in the pre-operation stage.	○	○

Answer:

Answer Area

Statements	Yes	No
You can improve code performance by using the following code instead of retrieving individual fields: `new ColumnSet(true)`	○	○
You can avoid retrieving the changed entity by using plug-in images.	○	○
You can avoid updating the changed entity by registering the plug-in in the pre-operation stage.	○	○

Explanation:

no

yes

yes

Question: 297

CertyIQ

DRAG DROP

-

You are creating various Power Apps apps for a company. Power Automate flows must connect securely to the following external systems:


External system	Comments
Accounts receivable	This is a proprietary database. You must access the database by using an API. The API uses the client credentials grant type.
Bing Maps	You must access the API by sending a unique identifier in the query string of requests.

You need to create custom connectors to access the external systems.


Which type of security should you use for the connectors?

To answer, drag the appropriate security types to the correct external systems. Each security type may be used

once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

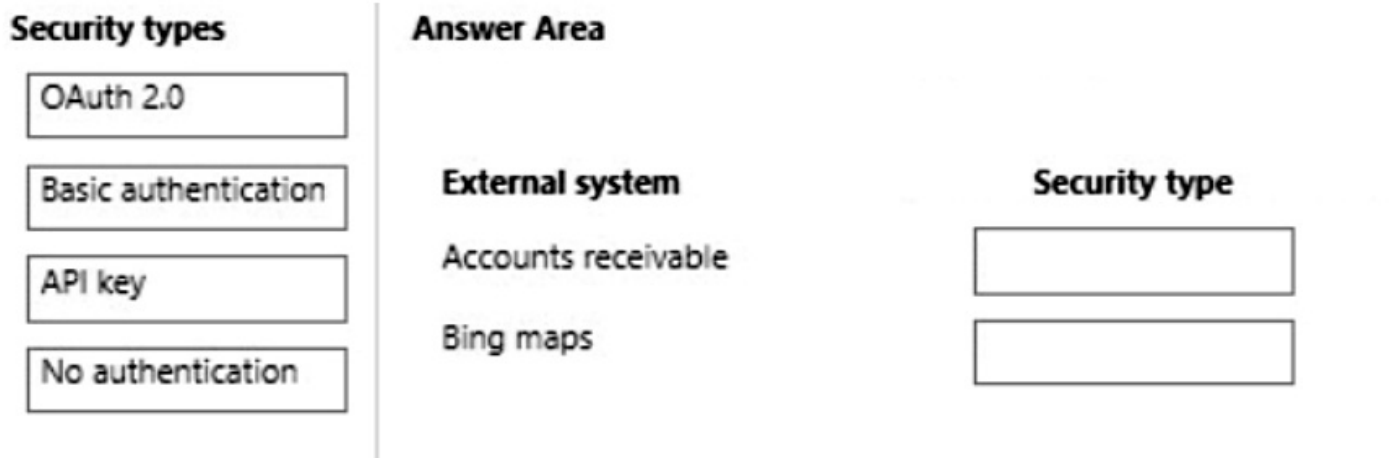

Answer:

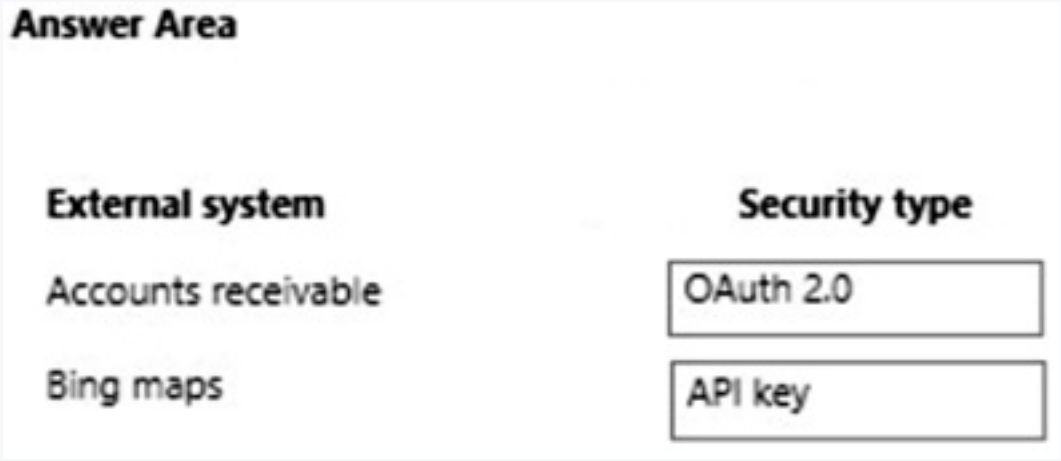

Question: 298 CertyIQ

HOTSPOT
-
You are developing a Power Platform solution that uses a plug-in. The plug-in includes the following code (line numbers are included for reference):

```
01 public class updateACCOLmt:IPIugin
02 {
03   public void Execute(IServiceprovider serViceprovider) {
04     var context = (IPluginExecutionContext)serviceProvider.GetService(typeof(IPluginExecutionContext)):
05     if (context.Stage !=20)
06       return;
07     var account = (Entity)context.InputParameters["Target"];
08     if (!account.TryGetAttributeValue("name", out string _))
09       throw new InvalidPluginExcecustionException("Account name is missing");
10     account["accountnumber"] = GenerateAccountNumber();
11   }
12   public string GenerateAccountNumber() {
13     . . .
14   return accountNumber;
15   }
16 }
```

The plug-in includes a step that is registered in the execution pipeline within the PreOperation stage for the Create message.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The GenerateAccountNumber method runs if the plug-in step registration is changed to the PostOperation stage.	○	○
Creating an account in a model-driven app while excluding a name generates the error message "Account name is missing".	○	○
The Organization service's Update method must run to update the database after setting the accountnumber value.	○	○

Answer:

Answer Area

Statements	Yes	No
The GenerateAccountNumber method runs if the plug-in step registration is changed to the PostOperation stage.	○	●
Creating an account in a model-driven app while excluding a name generates the error message "Account name is missing".	●	○
The Organization service's Update method must run to update the database after setting the accountnumber value.	○	●

Explanation:

1. The GenerateAccountNumber method runs if the plug-in step registration is changed to the PostOperation stage \(\rightarrow \) No

Technical Reason: Standard enterprise plug-in boilerplate code includes explicit guard clauses at the top of the execution block to verify the pipeline stage (e.g., if (context.Stage != 20) return; where 20 is PreOperation). If the step registration is modified to a different stage like PostOperation (Stage 40), the condition evaluates as true, causing the method to exit immediately before executing the main generation code block.

2. Creating an account in a model-driven app while excluding a name generates the error message "Account name is missing" \(\rightarrow \) Yes

Technical Reason: The custom plug-in logic contains a validation check that evaluates incoming target attributes. When a user tries to save an account record without providing a name value, the validation block intercepts the message and throws a synchronous InvalidPluginExecutionException("Account name is missing");, which displays that exact error dialog directly on the user's form.

3. The Organization service's Update method must run to update the database after setting the accountnumber value \(\rightarrow \) No

Technical Reason: When a plug-in executes in the **PreOperation (Stage 20)** stage, modifications made to the Target entity's attribute collection in the execution context are automatically carried forward into the main database transaction. Calling service.Update(account) explicitly within PreOperation is a severe architectural anti-pattern that can trigger redundant database transactions or cause an infinite loop.

Question: 299

CertyIQ

You are creating a plug-in for an app that helps government employees get a proof of vaccination card.
You must add the following information to a vaccination record before a proof of vaccination card is created:
• Vaccination type
• Date of vaccination
• Name of person administering the vaccine
You need to register the plug-in.
In which stage should you register the plug-in?

A. PreValidation
B. PostOperation
C. MainOperation
D. PreOperation

Answer: D

Explanation:

pre operation is a correct answer.

Question: 300

CertyIQ

HOTSPOT
-
You are developing a new model-driven app.
You must create a custom connector to connect the app to the Microsoft Graph API.
You need to configure the environment before creating the custom connector.
Which actions should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Scenario	Action
Enable connector to authenticate with Microsoft Azure Active Directory.	Register Application and specify permissions Open Postman and create collections Export collection Export solution
Enable Postman calls to be available for the custom connector.	Register Application and specify permissions Open Postman and create collections Export collection Export solution

Answer:

Answer Area

Scenario	Action
Enable connector to authenticate with Microsoft Azure Active Directory.	Register Application and specify permissions
Enable Postman calls to be available for the custom connector.	Open Postman and create collections

Register Application and specify permissions
Open Postman and create collections
Export collection
Export solution

Question: 301 CertyIQ

Case Study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background -
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment -
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)

- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications -
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews -
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines -
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.

• Email notifications need to be kept to a minimum.
Issues -
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to determine the cause for the issue reported by the interviewers.
What is the root cause of the issue?

A.There was an error in the event pipeline and the entire transaction was rolled back.

B.There is no plug-in registered to run when an interview record is created.

C.The plug-in used to synchronize the Person of Interest field from Contact to Interview was not triggered.

Answer: B

Explanation:

Interviewers must get an email notification when the Person of Interest field on the "interview record" is successfully updated. Nothing mentioned over a contact record.

Question: 302

CertyIQ

HOTSPOT
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.

The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting
• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information

criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-
• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You develop the following code for the plug-in that sends email notifications to recruiters.

```
var target = (Entity)context.InputParameters["Target"];
var contact = service.Retrieve(target.LogicalName, target.Id, new ColumnSet("fullname"));
var fetchXml = @"<fetch>
                  <entity name='pro_application'>
                    <attribute name='pro_recruiterassignedid' />
                    <filter type='and'>
                      <condition attribute='statecode' operator='eq' value='0' />
                      <condition attribute='pro_contactid' operator='eq' value='" + target.Id + @"' />
                    </filter>
                  </entity>
                </fetch>";
var fetchRecruiters = new FetchExpression(fetchXml);
var recruiters = service.RetrieveMultiple(fetchRecruiters);
foreach (var recruiter in recruiters.Entities)
{
  SendEmail(recruiter.Id, contact.GetAttributeValue<string>("fullname"));
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can use data from the contact's name without explicitly retrieving the value from the fullname column.	✗	○
You can use the same plug-in to send notifications to interviewers.	○	✗
Recruiters only receive a single email notification per applicant.	○	✗

Answer:

Answer Area

Statements	Yes	No
You can use data from the contact's name without explicitly retrieving the value from the fullname column.	○	●
You can use the same plug-in to send notifications to interviewers.	○	●
Recruiters only receive a single email notification per applicant.	●	○

Explanation:

1. You can use data from the contact's name without explicitly retrieving the value from the fullname column \(\rightarrow \) No

Technical Reason: In Dataverse plug-ins, the input execution context only contains the attributes that were explicitly sent in the web request or captured in a registered pre/post-image. If the plug-in targets a table with a lookup to the Contact entity, the context will only provide the contact's unique GUID and basic reference reference. To access the contact's actual **fullname** value, the plug-in code must explicitly execute a **service.Retrieve()** request to fetch the full record data from the database.

2. You can use the same plug-in to send notifications to interviewers \(\rightarrow \) No

Technical Reason: Plug-in logic should adhere to Single Responsibility design principles, but more importantly, notifications for recruiters and notifications for interviewers trigger on **completely different tables and pipeline messages** (e.g., an Application submission vs. an Interview schedule creation). Because the triggers, target data context, and messaging targets are entirely distinct, they require separate step registrations and separate plug-in classes.

3. Recruiters only receive a single email notification per applicant \(\rightarrow \) Yes

Technical Reason: This lines up directly with the specific business logic constraints stated in the recruiting


case study. The automation contains conditional checks or state flags to ensure that when a candidate applies, the recruiter notification is throttled or locked to a single instance execution per application record, preventing duplicate email alert spam.

Question: 303 CertyIQ


DRAG DROP
-
Case Study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Proseware, Inc. is an industry leading software company with several thousand employees. The company has had some trouble recruiting talented employees. Top-level candidates interview with the company but go on to work for competitors.
Feedback from candidates show that some offers were not accepted because the interview scheduling process was unpleasant. The company does not have a system to keep track of the candidates that were not selected.
Current Environment
-
The recruiting process starts when an individual applies for a position on the company website. The individual may have found the position on their own, they may have been officially referred by an employee, or in some cases were contacted directly by a hiring manager and encouraged to apply.
Recruiters schedule an interview with a hiring manager and interviews with two senior team members. Each interview results in feedback about the candidate and a recommendation whether to hire or not.
The recruiting team manages all information by using a model-driven application.
The company has the following Microsoft Dataverse tables and columns:
• JobPosting
- Hiring Manager - lookup to SystemUser
- Recruiter Assigned - lookup to SystemUser
• Contact (Job Applicant)
- Contact identifier
- First name
- Last name
- Time-Zone Offset
- Person of Interest - Yes/No (default)
• Application proapplication
- Contact identifier, Contact - lookup to Contact
- Job Posting - lookup to JobPosting
- pro_recruiterassignedid
• Interview
- Application - lookup to Application
- Job Posting - lookup to JobPosting
- Recommend - Choice (Yes (0), No (1), and null (default) are the available values)
- Person of Interest - Yes/No, No is the default value
• Referral
- Contact - lookup to Contact
- Referrer - lookup to SystemUser
- Job Posting - lookup to JobPosting

• SystemUser
- Manager - lookup to SystemUser
- Time-Zone Offset
• Recruiter
- Recruiter identifier
- Recruiter name
Applications
-
There may be multiple applications associated with each job posting. Applications are linked to an employee record if an employee referred the applicant for a position. The same individual can be an applicant for multiple job postings.
Interviews
-
Each interview is performed by an employee and is related to a single application.
The interview scheduling process may force potential candidates to accept interviews at unusual times with the senior team members due to time-zone differences.
Requirements. Interview Scheduling
The system must provide recruiters with a list of team members and their time-zone information. You must create a Microsoft Power Apps Component Framework (PCF) control for the Job Application form to display a list of senior team members who report directly to a hiring manager.
• The control must display the current time in each team member's local time.
• The control must be bound so that it minimizes the amount of code that must be written.
• You must display the list of team members and sort the list to show team members who reside in time zones closest to the applicant's time zone first.
You must develop a second PCF control that displays the time-zone name and current time on the Job Application form. You must display the data in the candidate’s local time.
Requirements. Historical Information Tracking
You must create a process to identify individuals as a person of interest that the company should consider hiring. You must assign each individual a score based on their past interactions.
• You must be able to determine the following information about a candidate:
- The number of interviews in the past two years and whether team members provided recommendations
- The number of hiring manager referrals and employee referrals in the past two years
- Whether the individual has any of the 12 designations or certifications that the company considers significant
• Only a single referral can be made per job application. The system must be able to support multiple referrals for a candidate.
• The system must track referrals even if an application is not completed.
Requirements. Historical Information Scoring
The automated process must run weekly to assess all candidates. The process must also run automatically when historical information is updated. You must be able to perform scoring by selecting a command button on the contact form.
• This new command button must only be visible to employees who belong to a security role assigned named Recruiter. The command button must not be visible to anyone unless the contact form is in Update mode.
• A person of interest is defined as having a score of 15 or more based on the following historical information criteria:
- Each interview with a recommendation adds two to the score.
- Each interview without a recommendation subtracts two from the score.
- Each employee or manager referral adds one to the score.
- Each designation or certification adds one to the score.
• All scoring elements must be recalculated when changes occur. You must assign the score to the Person of interest field.
• Values representing totals or scores must be stored in their own numeric fields.
• Plug-ins must be used to keep the Person of Interest field on active interview records associated with the Contact.
• Plug-ins registered on the update of the Person of interest field must send an email notification when the candidate named in the email is a person of interest. Recruiters must receive the message when the field is updated on the Contact record.
• Interviewers must get an email notification when the Person of Interest field on the interview record is successfully updated.
Requirements. Design Guidelines
The following design guidelines must be followed:
• Schema changes must be made using the method requiring the least amount of storage to meet the requirement.
• Out-of-the-box functionality must be used when possible.
• Any code required to calculate scores must be able to be run from a single point.
• Email notifications need to be kept to a minimum.
Issues
-

• Recruiters report that the command button to score a candidate is not working. You debug the code and observe that the context input parameter is null.
• The system does not support associating designations and certifications with candidates.
• The value for the field used by the PCF control to display local time is saved to Microsoft Dataverse each time an active application record is opened.
• Interviewers report that they do not receive email notifications when interview records are created for an existing person of interest.
You need to implement scoring.
Which methods should you use? To answer, drag the appropriate methods to the correct actions. Each method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

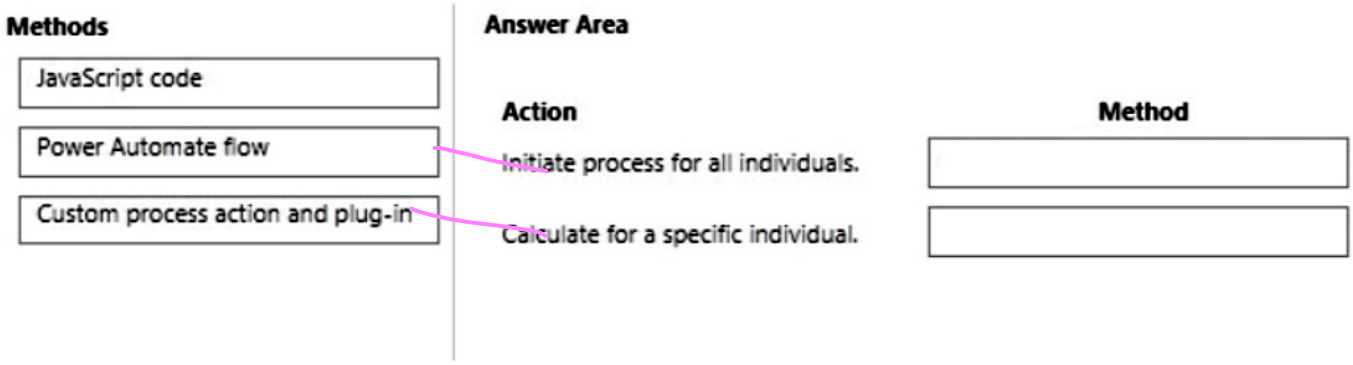

Answer:

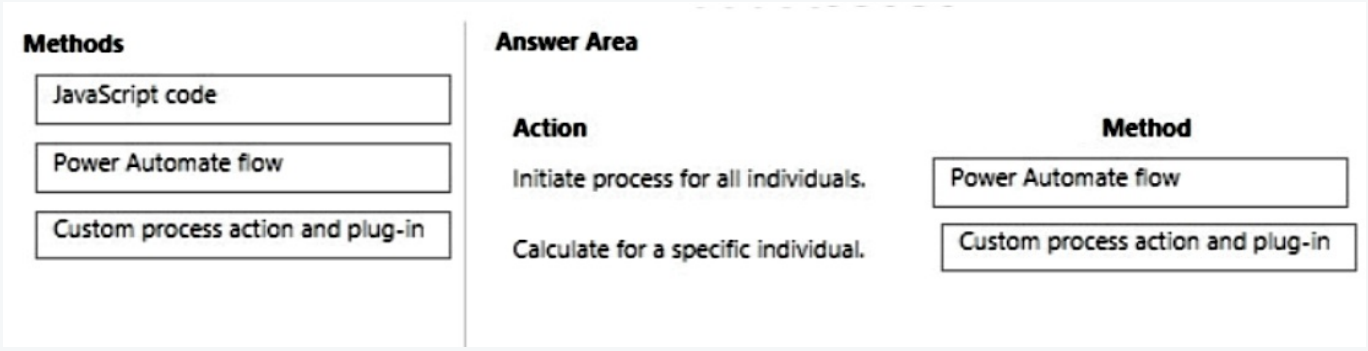

Explanation:

Power automate flow

Custom process action and plug-in

Question: 304 CertyIQ

HOTSPOT
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Background

-

Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.

Current environment

-

Environment

-

•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.

Data

-

•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.

Web API

-

•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.

Requirements

-

Custom connector

-

•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.

Process

-

•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.

Issues


-

•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.

You need to configure security for the Azure Function and custom connector.

Which security tool should you configure for each item? To answer, select the appropriate options in the answer

area.
NOTE: Each correct selection is worth one point.

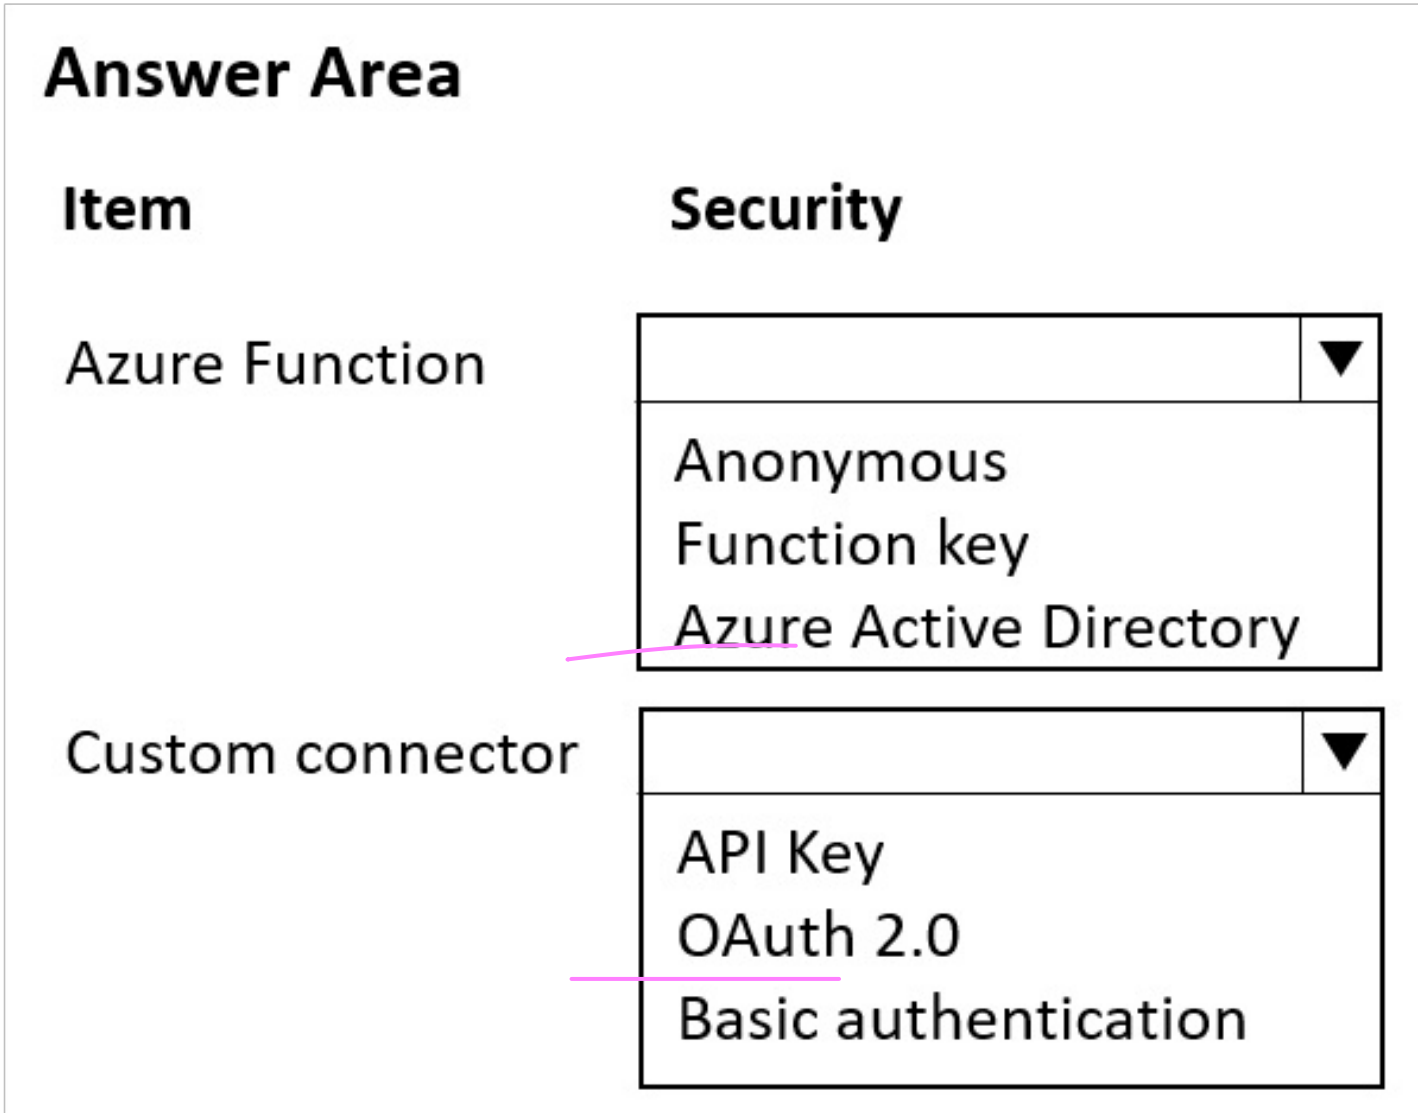

Answer:

Answer Area

Item	Security
Azure Function	Anonymous **Function key** Azure Active Directory
Custom connector	API Key **OAuth 2.0** Basic authentication

Question: 305 CertyIQ

HOTSPOT
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment

-
Environment
-
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data
-
•Researchers are responsible for creating account records.
•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API
-
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements
-
Custom connector
-
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process
-
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues
-
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to configure the Web API and create the custom connector.
Which action should you perform for each step? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Step	Action
Configure the Web API.	Import a WSDL file. Add an OpenAPI definition. Import a PostMan collection.
Create the custom connector.	Import a solution. Import an OpenAPI file. Import a PostMan collection.

Answer:

Answer Area

Step	Action
Configure the Web API.	Import a WSDL file. **Add an OpenAPI definition.** Import a PostMan collection.
Create the custom connector.	Import a solution. **Import an OpenAPI file.** Import a PostMan collection.


Explanation:

Add a open API definition.


import an open api file.

Question: 306 CertyIQ

DRAG DROP
-
You are developing a Power Apps app for a company. The app will interact with the company's enterprise resource planning (ERP) system. The app allows users to create quotes for customers. You are creating a plug-in for the app. The solution must meet the following requirements:
•Display an error message if there is no account associated with a quote and prevent changes to the quote.
•Synchronize quotes with the external ERP system.
You need configure the plug-in execution pipeline.
Which pipeline stages should you use? To answer, drag the appropriate pipeline stages to the correct requirements. Each pipeline stage may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

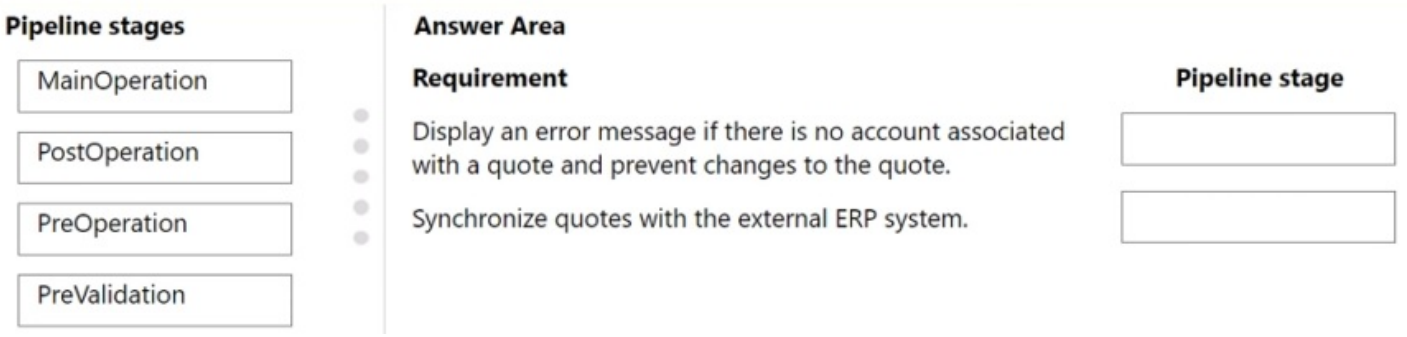

Answer:

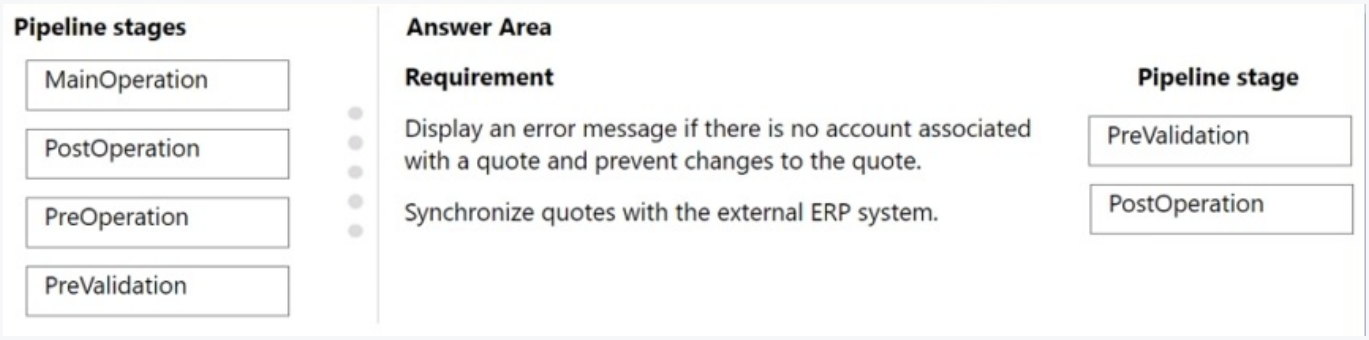

Explanation:

Pre Validation.

Post Operation.

Question: 307

CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
Northwind Traders uses Microsoft Dynamics 365 Sales to manage its sales process. To better understand its customers, Northwind Traders invests in a team of researchers who gather data from multiple sources. The company stores the data it collects in a Microsoft Azure SQL Database. The company plans to use the data to enrich account records and make the sales team more effective.
Current environment -
Environment -
•The company has three Microsoft Power Platform environments with Dynamics 365 Sales installed. The environments are named development, test, and production.
•Each environment has an application user that can be used for integrations.
•The company must use solutions to perform all customization and configuration deployment.
Data -
•Researchers are responsible for creating account records.

•Researchers have permissions on the Account table to create records, read all records, and update records they own.
•A synchronous plug-in runs when an account record is created and could reassign the record to a different user.
•Users must access data as themselves to enforce security and audit changes.
•A column named new_dataid is added to the Account table. The column uniquely identifies which data it should receive.
•Researchers have researched only the top 20 percent of account records.
Web API -
•The company creates an Azure Function to run a RESTful .NET Web API.
•Data can be retrieved by placing a GET request to the URL https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID].
•[ENVIRONMENTNAME] is the name of the Microsoft Power Platform environment that requests the data.
•[DATAID] is the new_dataid column in the Account table.
•The Web API response will return a 200 response plus data if the DataId is found. Otherwise, a 404 response is returned.
•Developers plan to create a custom connector from the Web API to make it accessible from Microsoft Power Platform.
Requirements -
Custom connector -
•The Web API definition used to create the custom connector must be generated based on a low-code technology.
•The URL used by the custom connector must incorporate the current environment name without hardcoding values.
•Errors generated by the custom connector must not cause downstream processes to fail.
•Text descriptions and field placeholder text that describe the use of the custom connector must appear for non-developers.
Process -
•All account records must be updated with data from the Web API once automatically.
•Only account records that contain a DataId should be updated by the Web API.
•Researchers must create Power Automate flows to specify data analysis priority.
•The researchers require a process that repurposes a set of identical steps of parameterized Microsoft Dataverse queries from a Power Automate flow for use in other flows that have different parameters. The researchers want to avoid recreating the steps manually each time they create a flow to save time and avoid errors.
Issues -
•A tester attempts to connect to the production instance of the Web API with a DataId that should return data. The tester receives an error stating that the remote name could not be resolved.
•A missing component causes an error to occur when importing the solution that contains the Power Automate flow to update account records in a test environment.
You need to determine the cause of the 404 error when connecting to the production instance of the Web API.
What do you identify?

A.The web service lacks data for the record.

B.An authentication error occurred.

C.The request timed-out.

D.The host name in the URL is missing a valid value.

Answer: D

Explanation:

The error message indicating that the remote name could not be resolved suggests that the host name specified in the URL (https://dataservice-[ENVIRONMENTNAME].azurewebsites.net/enrich/[DATAID]) could not be resolved to a valid IP address, indicating a DNS resolution issue or a misconfiguration in the environment name specified in the URL. Therefore, the host name in the URL might be missing a valid value.

Question: 308 CertyIQ

You manage a Microsoft Power Automate cloud flow. The cloud flow queries Microsoft Dataverse data by using the List rows action.

You need to configure the cloud flow to process 10,000 records in a single run.
What should you do? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A.Set the row count parameter to 10,000.
B.Return the first 5,000 records and use the @odata.nextLink in the response to return the remaining records.
C.Create the query by using FetchXML and set the top parameter to 10,000.
D.Turn on pagination and set the threshold to 10,000.

Answer: BD

Explanation:

Method 1 (Option D - Low-Code Automatic): Turning on **Pagination** in the action's advanced configuration settings allows Power Automate to handle page loops natively. Setting the **Threshold to 10,000** instructs the flow to fetch multiple pages automatically until it reaches the specified number, outputting them all in a single array.
Method 2 (Option B - Manual Control): If you leave pagination turned off, the initial action execution will stop at 5,000 rows but include an **@odata.nextLink URL** token in the body output. You can use a **Do until** loop container to make subsequent HTTP/Dataverse calls using that token until no more records or next links remain.

Why Other Options Are Incorrect

A is incorrect: Simply setting the **Row count** parameter to 10,000 without turning on pagination will still cap the response at the default platform limit of 5,000 records.
C is incorrect: While FetchXML allows you to query data, setting the top parameter or count attribute to 10,000 will still fail or truncate at the 5,000-row mark if pagination settings are not configured in the action configuration wrapper.

Question: 309 CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.
What should you do?

A.Assign the IOrganizationService object to a member variable.
B.Register the plug-in to run synchronously.
C.Register the plug-in step once for each web service request.
D.Set the HTTP connection KeepAlive property to false.

Answer: D

Explanation:

D. Set the HTTP connection KeepAlive property to false.

Why This Is the Correct Choice

This question belongs to a classic Microsoft Power Platform PL-400 scenario where a custom plug-in communicates with an external REST API or web service.

Preventing Socket Exhaustion & Timeouts: When a plug-in executes within the sandbox isolation environment, it is subject to a strict **2-minute execution timeout** limit. If a plug-in makes multiple calls to an external service that is running slow or unresponsive, persistent TCP connections (KeepAlive = true) can hold sockets open, causing them to pool and exhaust available connections, eventually leading to a timeout error. By explicitly setting the **KeepAlive property to false**, you force each HTTP request to close the channel immediately upon completion or failure. This ensures that resources are freed instantly, preventing connection hanging and helping the plug-in avoid hitting the 2-minute timeout limit when external services fail.

Why Other Options Are Incorrect

A is incorrect: You should **never** assign the IOrganizationService or execution context to a member variable. Dataverse plug-in classes are instantiated as stateless singletons. Storing request-specific services in global class fields will cause severe **thread-safety issues** and data corruption across concurrent executions.
B is incorrect: Registering a web-service-reliant plug-in to run **synchronously** is an anti-pattern. If the external web service delays, the synchronous execution will freeze the user interface and database transaction, directly worsening user experience and increasing timeout risk.
C is incorrect: Registering the step multiple times does not solve timeout problems and causes redundant executions, degrading platform performance.

Question: 310 CertyIQ

HOTSPOT
-
Field technicians use a canvas app to update Microsoft Dataverse data. The app is designed to work when it is not connected to the internet.
The app requires a plug-in to apply business logic after records are updated. Unhandled exceptions must not prevent records from saving or syncing.
You need to register the plug-in step to apply the business logic.
Which values should you use for each plug-in step setting? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Plug-in step settings

Setting	Value
Plug-in deployment	Managed Offline Server
Plug-in step event	OnChange PreOperation PostOperation

Answer:

Answer Area

Plug-in step settings

Setting	Value
Plug-in deployment	Managed Offline **Server**
Plug-in step event	OnChange PreOperation **PostOperation**

Explanation:

1. Plug-in deployment: Server

Why Server is correct: In modern cloud-based Microsoft Dataverse environments, custom business logic executes completely on the cloud server.
Why others are incorrect: The **Offline** deployment option is a legacy setting primarily intended for execution within the local client storage of the Outlook offline client or specialized offline mobile frameworks, which does not apply to default cloud data pipeline workflows.

2. Plug-in step event: PostOperation

Why PostOperation is correct: The server-side event execution pipeline contains specific architectural stages (PreValidation [Stage 10], PreOperation [Stage 20], and PostOperation [Stage 40]). The **PostOperation** stage is utilized when the plug-in code relies on the primary database transaction successfully completing — such as when it requires the newly generated database record GUID/ID to create related child records, or when registering an **Asynchronous** background task.
Why others are incorrect:
OnChange: This is a client-side UI event triggered via JavaScript on model-driven forms, not a server-side plug-in platform stage.
PreOperation: This runs before the database main operation executes, meaning database-generated values (like auto-numbers or record IDs) are not yet available.

Question: 311 CertyIQ

Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background -
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment -
Get Energy Fit Program -
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments.

About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment -
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair: oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements -
Overview -
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements -
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application -
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII. oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters. oRecords the details of the home improvements installed for the customer. oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed. oSend an approval to a senior manager to review and approve in Microsoft Teams. oUpload the information to the API endpoint. oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team. oMust record the status on the funding application.
Suitability Assessment Tool -
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting -
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues -
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.
•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to resolve the issue with the eligibility assessment tool.
Which two commands should you run? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A.pac solution version

B.pac solution import

C.pac pcf push

D.pac pcf version --strategy manifest

Answer: AD

Explanation:

pac solution version: This command is used to manage the version of your solution. It helps ensure that the solution is correctly versioned, which is crucial for tracking changes and ensuring compatibility.

pac pcf version --strategy manifest: This command is used to update the version of Power Apps Component Framework (PCF) controls within your solution. The --strategy manifest option ensures that the version is updated based on the manifest file, which is important for maintaining consistency and resolving version-related issues.

Question: 312

CertyIQ

DRAG DROP
-
Case study
-
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.
To start the case study
-
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.
Background
-
City Power & Light is an energy and utilities company that has offices in Europe. The company subsidizes home improvements for domestic customers, to improve energy efficiency and to meet environmental commitments. The company also distributes and generates electricity for domestic and commercial customers. The company has 2,000 employees in multiple offices and in work-from-home locations.
City Power & Light uses a team of schedulers, assessors, field engineers, and customer support agents for home improvements in a program named Get Energy Fit.
Current Environment
-
Get Energy Fit Program
-
City Power & Light uses the following to manage the Get Energy Fit program:
•The company uses a Microsoft Excel spreadsheet named Planning Hub on Microsoft SharePoint Online to store information about customer appointments, customer details, and customer eligibility in the program.
•The company records sensitive customer information that includes the document identification numbers and the customer's financial information.
•The company uses an assessor to verify customer eligibility in the program and to perform a suitability assessment. The assessor completes the suitability assessment by using a paper and clipboard at the customer property and enters the data to the Planning Hub after the assessment is completed. The assessor also uploads photographs to an on-premises document library. The assessor completes the eligibility assessment by using an

application written in React.
•Schedulers use Microsoft Outlook to schedule engineers and assessors for home improvement appointments. About 200 appointments are scheduled daily.
•Employees for the company submit funding claims on behalf of the customer by uploading evidence and compliance checks information to an application named the Claim Submission Portal.
Technical Environment
-
•Schedulers use Windows 11 desktop and laptop computers with the latest version of Microsoft Edge.
•Assessors use iOS and Android tablet devices.
•The Claim Submission Portal uses REST-based APIs for all operations and a dedicated testing environment. Authentication to the API is provided by using the following example header key and value pair:
oAuthentication: 2C8D41431415E429C7FC7A74D8315
•The company uses Microsoft Azure for hosting multiple applications.
Requirements
-
Overview
-
City Power & Light plans to implement Microsoft Power Platform to improve the customer experience and increase delivery for the Get Energy Fit program.
Business Requirements
-
•Only team leaders and senior managers should have access to read personally identifiable information (PII).
•All development changes must be tested in a separate environment.
•The company requires out-of-the-box solutions, when possible.
•Sensitive credentials, such as user passwords and API secrets, must be stored securely.
•The Claim Submission Portal must allow citizen developers to create automated solutions.
•Customer and appointment information must be accessible to all applications.
Planning Hub Application
-
The company is planning to replace the Planning Hub spreadsheet with a new application. The new application has the following requirements:
•The application must support a component design that provides rapid changes requested by the schedulers.
•The data model for the application must capture the following information:
oInformation about customers such as name, address, and other PII.
oThe data and time for an assessor's or engineer's appointment. Schedulers must be able to view all appointments without filters.
oRecords the details of the home improvements installed for the customer.
oContains all the information and evidence for submission to the Claim Submission Portal.
•After an assessor uploads the funding application and all evidence after a home improvement has been complete, the company requires that the status of the application is set to Submit and should run the following:
oRetrieve the details about the customer and the improvement installed.
oSend an approval to a senior manager to review and approve in Microsoft Teams.
oUpload the information to the API endpoint.
oIf the upload fails to complete, it should retry after a delay of 30 seconds up to three times. If an error occurs after three times, the application should send an email notification to the application support team.
oMust record the status on the funding application.
Suitability Assessment Tool
-
The company plans to implement a new application named the Suitability Assessment Tool for the assessors. The new application has the following requirements:
•Must integrate with Microsoft Power Platform.
•Assessors must be able to complete the eligibility assessment by using the Suitability Assessment Tool. The assessors must be able to upload photographs to the on-premises file share.
•Must be developed by using modular components that can be used by other applications.
•Must be optimized for use on tablet devices.
•All changes to the application must be completed in the Suitability Assessment Tool solution.
Reporting
-
The company has the following requirements for a reporting solution:
•The data source for the reporting solution must support incremental refreshes.
•The solution must report accurate data if an error occurs.
Issues
-
•A recent audit identified that all users can access the PII in the Planning Hub spreadsheet.
•After a developer deploys a change to the production environment, a user reports information is loaded incorrectly to the test system when processing a funding application.


•After deploying a change to the new eligibility assessment tool in the development environment, you observe that the changes do not appear in the development environment.
•After removing a column from the Planning Hub application and deploying the changes to the production environment, you observe that the column is still present.
•You deploy the customizations for the data model. Users report that the email address of the user who created the appointment is missing and that searches on the description information do not return any results.
You need to configure a custom connector for the claim submission portal API.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Options

- Certify the connector.
- Enable basic authentication.
- Share the connector. 3
- Enable API key authentication. 2
- Import an OpenAPI definition.
- Create a connector by using the wizard. 1
- Enable OAuth 2.0 authentication.
- Import a Postman collection.

Custom connector configuration steps

Answer:

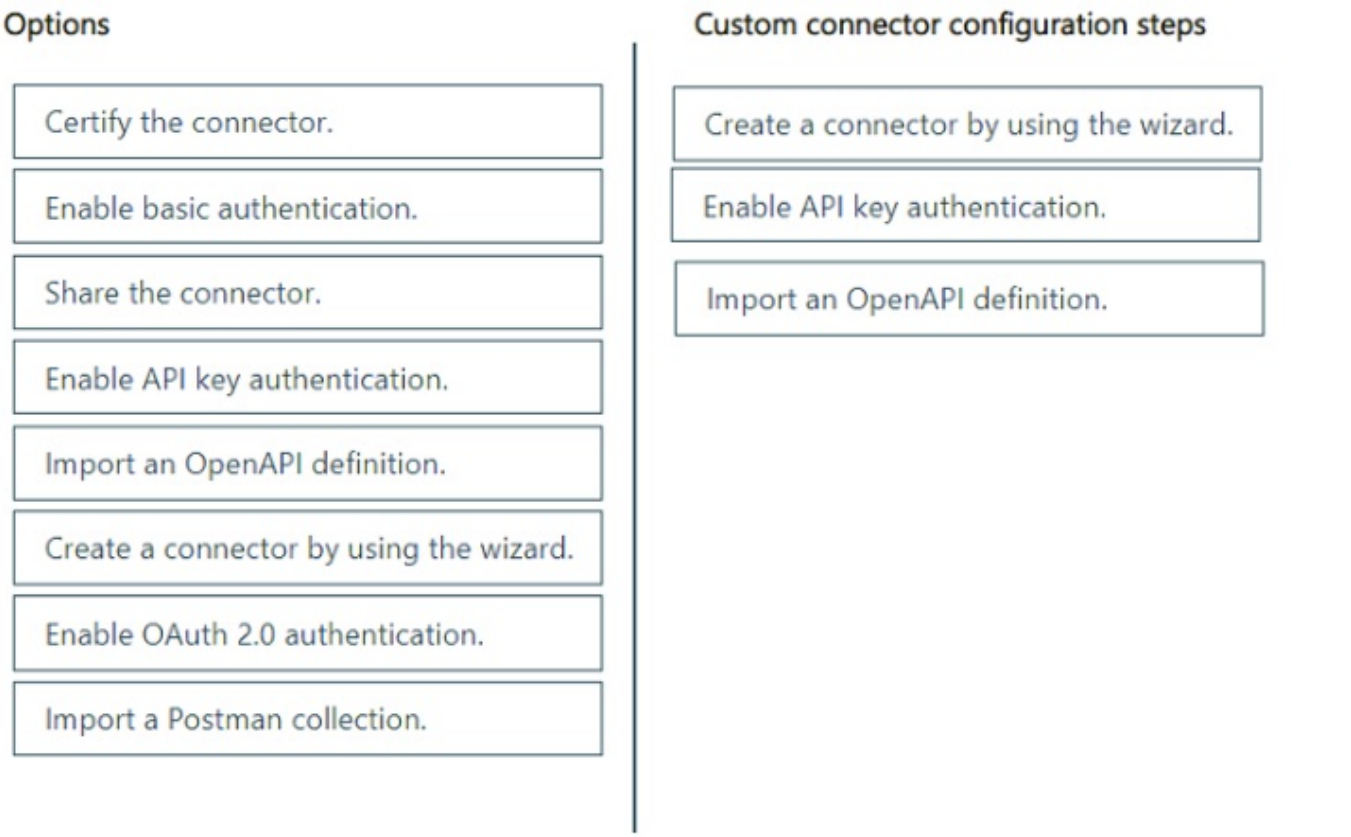

Explanation:

Create a Connector by Using the Wizard: This involves using a guided wizard to create a custom connector. The wizard simplifies the process by providing step-by-step instructions and prompts.


Enable API Key Authentication: This allows the connector to use API keys for authentication. API keys are a common method for controlling access to APIs and are often used in conjunction with other security measures.

Import an OpenAPI Definition: OpenAPI (formerly Swagger) is a specification for building APIs. Importing an OpenAPI definition allows you to quickly create a connector based on the API's documented endpoints and parameters.


Question: 313

CertyIQ

HOTSPOT
-
You are creating an application using the Microsoft Dataverse SDK for .NET.
A record must be created by using the column types of lookup and choices.
You need to set the record's column values.
Which attribute type should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

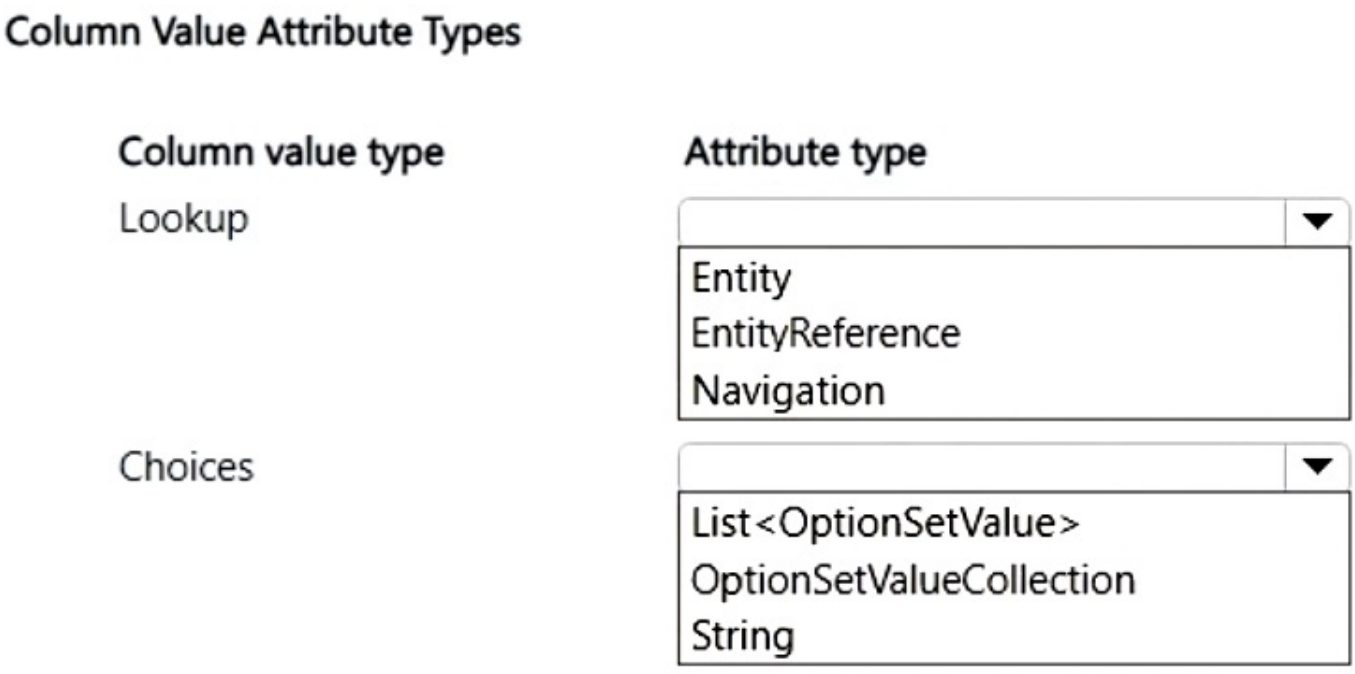

Answer:

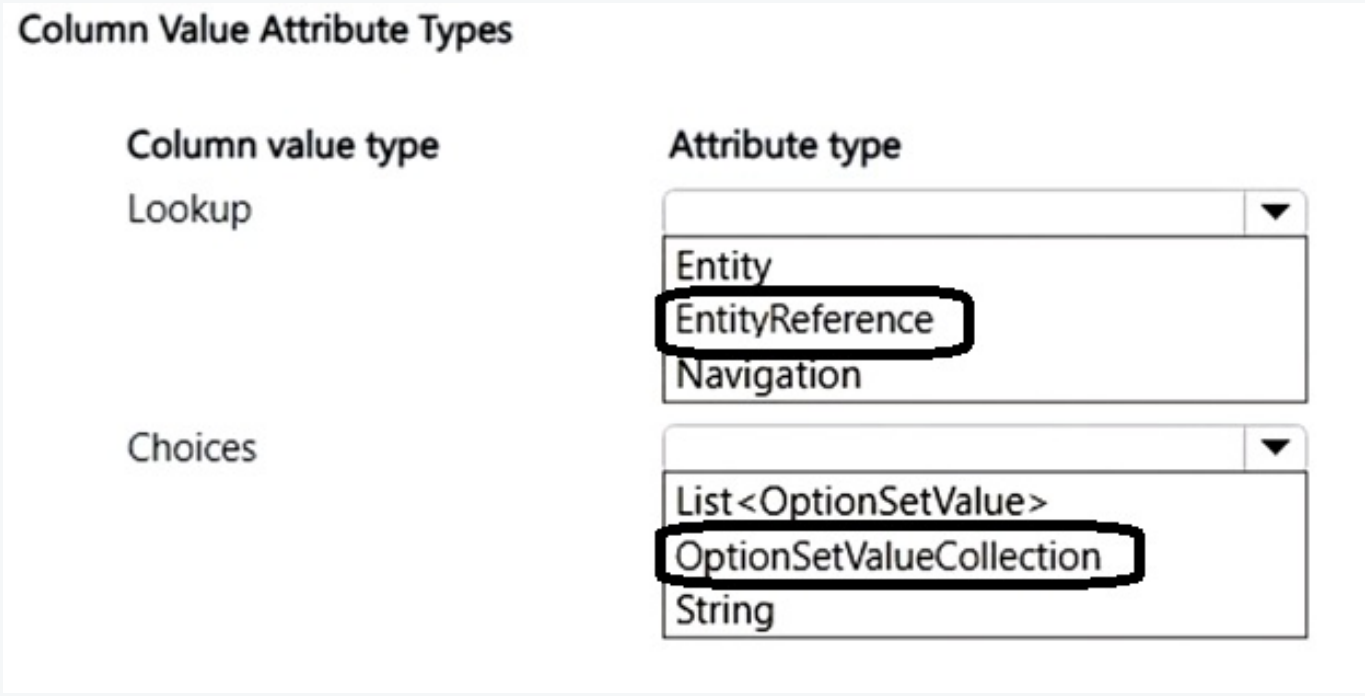

Question: 314 CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.
What should you do?

A.Send requests to use multiple threads.

B.Register the plug-in to run synchronously.

C.Register the plug-in step once for each web service request.

D.Set the HTTP connection timeout value explicitly to limit how long each connection can remain open.

Answer: B


Explanation:

B. Register the plug-in to run synchronously.

Synchronous execution: When a plug-in is registered to run synchronously, it executes in real-time and waits for the external web service to respond before proceeding. This ensures that multiple web service requests can be handled sequentially, preventing timeouts due to slow responses from the web service.

Question: 315 CertyIQ

DRAG DROP
-
You are creating a model-driven app that requires complex business logic when a Dataverse record is updated. The app must provide the following functionality:
•Update a record using a REST API and able to manually retry in the event of a failure without additional development.
•Validate the record values and display an error message next to those that are invalid.
You need to configure the app with the required business logic.
Which implementation method should you use? To answer, move the appropriate implementation methods to the correct functionalities. You may use each implementation method once, more than once, or not at all. You may need to move the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

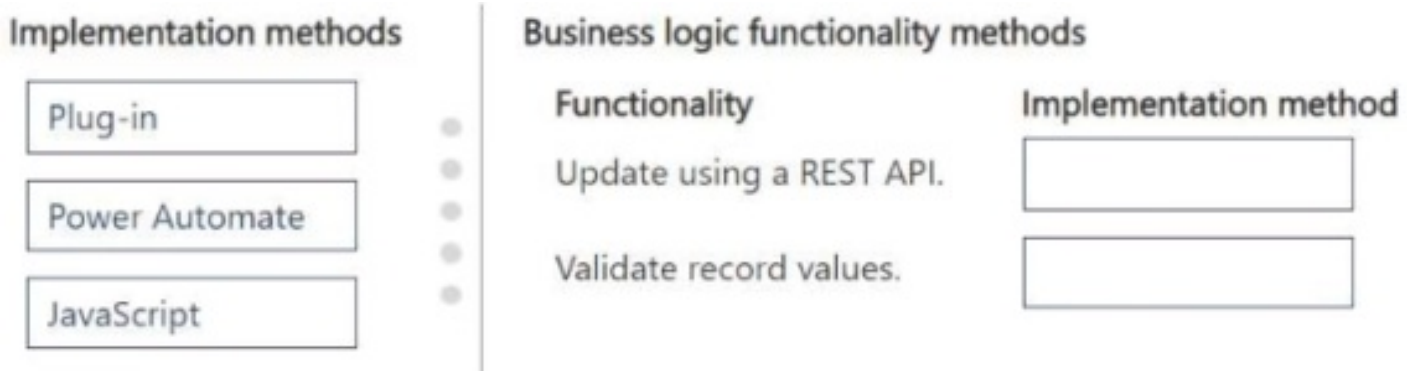

Answer:



Explanation:

Power Automate is used for REST API-based updates and asynchronous automation.

JavaScript is used for client-side record validation.

Question: 316 CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.
What should you do?

A.Register the plug-in to run synchronously.

B.Set the HTTP connection KeepAlive property to false.

C.Register the plug-in by using isolation mode = none.

D.Assign the IOrganizationService object to a member variable.

Answer: A

Explanation:

A is correct because registering the plug-in to run synchronously ensures that all operations complete before returning control to the caller, thus preventing timeouts during external service calls.

Reasoning:

When a plug-in is registered to execute synchronously, it runs in the same thread context as the operation triggering it, allowing for real-time processing of the tasks, including making multiple web service calls. This is crucial for ensuring that the required actions are completed sequentially and that no premature termination occurs due to timeouts associated with asynchronous processing. Real-time interaction with web services necessitates robust error handling to manage responses effectively, improving the reliability of the application.

Evaluation of Other Options:

B. Set the HTTP connection KeepAlive property to false: Setting KeepAlive to false may optimize certain requests, but it does not directly influence the handling of multiple requests or mitigate timeouts. In scenarios of slow response from the service, this setting could lead to increased latency due to the overhead of establishing new connections for each request.
C. Register the plug-in by using isolation mode = none: Using isolation mode level "none" allows the plug-in to run in the same process as the calling assembly but may expose it to more risks and potential failure points. This mode can lead to issues if the external service fails, impacting the stability of the main process and increasing the likelihood of timeouts, rather than addressing the core issue of handling external calls effectively.
D. Assign the IOrganizationService object to a member variable: While this may help optimize service calls by reusing the service instance, it doesn't specifically address the timeout scenario or the handling of slow external requests. The plug-in would still ultimately fail if the external service is unresponsive, regardless of how the service object is managed.

References:

1. Microsoft Docs - Register a plug-in
2. Microsoft Docs - Plug-in and Custom Workflow Activity Registration Tool
3. Microsoft Docs - Performance considerations and best practices

Question: 317 CertyIQ

A company requires a plug-in that makes multiple requests to an external web service. The plug-in must not time out when the web service has issues or is slow to respond.
You need to create the plug-in.

What should you do?

A.Register the plug-in to run synchronously.
B.Register the plug-in by using isolation mode = none.
C.Set the HTTP connection timeout value explicitly to limit how long each connection can remain open.
D.Register the plug-in step once for each web service request.

Answer: C

Explanation:

C is correct because setting the HTTP connection timeout value explicitly allows for better control over the duration of external web service requests, thereby preventing timeouts during slow responses.

In the context of plug-ins in the Microsoft Power Platform, managing external web service calls is critical for ensuring smooth operational flows. By configuring the HTTP connection timeout, a developer can specify how long the system should wait for a response before it considers the connection failed. This is particularly beneficial when external services are unreliable or slow, as it allows the application to remain responsive rather than timing out abruptly, which can lead to incomplete operations.

Critical Evaluation of Incorrect Options:

A. Register the plug-in to run synchronously. This approach would lead to a synchronous operation that blocks the execution thread until the service responds. If the external service is slow or unresponsive, this can cause significant delays or timeouts in the overall process, defeating the purpose of robustness against slow responses.
B. Register the plug-in by using isolation mode = none. Isolation mode = none runs the plug-in in the same process as the calling code, which can cause stability issues. If the external web service hangs or crashes, it could also crash the entire application, making it unsuitable for handling unreliable services.
D. Register the plug-in step once for each web service request. This approach would unnecessarily complicate the registration process and increase maintenance overhead. It does not enhance the robustness of handling slow responses, as each registered instance would still suffer from the same timeout limitations as a single request.

By opting for option C, a developer ensures that the plug-in maintains high responsiveness and resilience against external service latencies, facilitating overall application stability and user experience.

References:

https://docs.microsoft.com/en-us/powerapps/developer/data-platform/plugins
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/web-service-requests
https://docs.microsoft.com/en-us/powerapps/developer/data-platform/plug-ins-isolation-modes

Question: 318 CertyIQ

You are creating a canvas app that will create rows in a Dataverse table.
When a row is created, additional business logic must be performed on a related row. A cloud flow triggered by the canvas app must perform the business logic.
You need to create the cloud flow.
Which trigger should you use?

A. Dataverse - When an action is performed
B. Manually trigger a flow

C. Dataverse - When a row is added

D. Power Apps (V2)

Answer: C

Explanation:

The correct trigger for the cloud flow is **C. Dataverse - When a row is added**.

Here's why: The canvas app creates rows in a Dataverse table. The core requirement is that when a new row is created, additional business logic must be executed on a related row. The "Dataverse - When a row is added" trigger is specifically designed to fire automatically whenever a new row is inserted into the specified Dataverse table. This aligns directly with the scenario's need to react to row creation events.

Option A, "Dataverse - When an action is performed," requires a specific action to be called which isn't the intent here, as the trigger should simply react to row creation.

Option B, "Manually trigger a flow," requires manual initiation, contradicting the automatic execution requirement following row creation in the canvas app. This option would not provide the automatic response that is necessary for this scenario.

Option D, "Power Apps (V2)," is suitable when the cloud flow needs to be initiated from within the Power App and passed information from the app. While the app is involved in the broader process, it is the row creation event in Dataverse that should trigger the business logic, not the Power App directly. The Power Apps (V2) trigger is designed primarily to accept input from the Power App, which is not required in this scenario - we only want to respond to the new row creation.

Therefore, the "Dataverse - When a row is added" trigger is the most appropriate choice because it directly addresses the scenario's need for automated execution of business logic based on the creation of a new row in a Dataverse table. It's an event-driven approach that simplifies the workflow and ensures that the logic executes immediately after a new row is added without requiring manual intervention or action calls.

For further reading on Power Automate triggers, particularly those involving Dataverse, refer to these resources:

Use triggers to start a cloud flow
Dataverse connector - Triggers

Question: 319 CertyIQ

You have a Power Automate flow. The flow uses an HTTP action to connect to a web service and update a Microsoft Dataverse record with the result.
You must modify the flow to send an email if the web service connection fails.
You need to update the flow.
Which two actions should you perform? Each correct answer presents part of the solution. Choose two.
NOTE: Each correct selection is worth one point.

A. Configure the send email step to run when the previous step fails.

B. Add a send email step after the update Dataverse record step.

C. Add a send email step after the HTTP step.

D. Update the HTTP step settings and set the retry policy to: None.

Answer: AC

Explanation:

Technical justification (exam-style)

OptionA – Configure the Send Email step to run when the previous step fails
Sets the **Run-after** condition to "has failed". This explicitly tells the flow to execute the email action only when the preceding HTTP activity throws an error, which is exactly the requirement (notify on connection failure).

OptionC – Add a Send Email step after the HTTP step
Places the email action in the flow sequence immediately downstream of the HTTP call. Because the email step follows the HTTP step, it can be triggered by the failure condition defined inA. The order is important: the email must be evaluated after the HTTP action so that its execution context reflects the success/failure of that call.

Why the other options are unsuitable

B – Add a Send Email step after the Update Dataverse record step – This would cause the email to fire only when the **record-update** step fails, not when the HTTP call fails. The failure point is mis-aligned with the requirement.
D – Update the HTTP step settings and set the retry policy to: None – Changing the retry policy does not provide any notification mechanism; it merely controls how retries are attempted. It does not trigger an email on failure.

Conclusion – The combination of **A** (defining the failure-triggered run-after condition) and **C** (positioning the email action right after the HTTP step) correctly implements the needed error-notification logic in the Power Automate flow.

Question: 320 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are an integration that sends created records from a custom Dataverse table to an exposed REST API.
When the REST API is unavailable, you must be able to retry if the response status code is 500.
You need to select a solution that meets the requirement.
Solution: Register a webhook by using the REST API as the endpoint. Wait for the webhook to automatically retry when a failure occurs.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:

Answer: B – No

Registering a webhook only creates the subscription; the platform does **not** automatically retry on HTTP500 responses.
Webhook retry behavior is limited to transient connectivity failures (e.g., network timeouts) and is not

configurable for specific status codes such as 500.
To meet the requirement you must implement explicit retry logic (e.g., exponential back-off) that inspects the response status and retries only when the code is 500.
Therefore the proposed solution does not satisfy the “retry on 500” condition, making option **B** the correct choice.

(Alternative approaches such as using Azure Logic Apps, Azure Functions, or a custom connector with built-in retry policies would be appropriate.)


Question: 321 CertyIQ

HOTSPOT
-
You are implementing a Power Automate flow in a model-driven app. The flow will facilitate an approval process to increase customer credit limits.
A user must be able to initiate the process from a customer record. The user must be prompted for the amount of the increase.
Once the increase is approved, the customer record must update to reflect the new amount.
You need to add a trigger to the flow and locate the ID of the record to update. The flow should be written to use the least number of steps.
How should you create the flow? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Flow component solutions

Component	Solution
Trigger type	When a Dataverse record is selected Manually trigger a flow When Power Apps calls a flow
Record ID to update	From the trigger From a variable From a list Dataverse rows step

Answer:

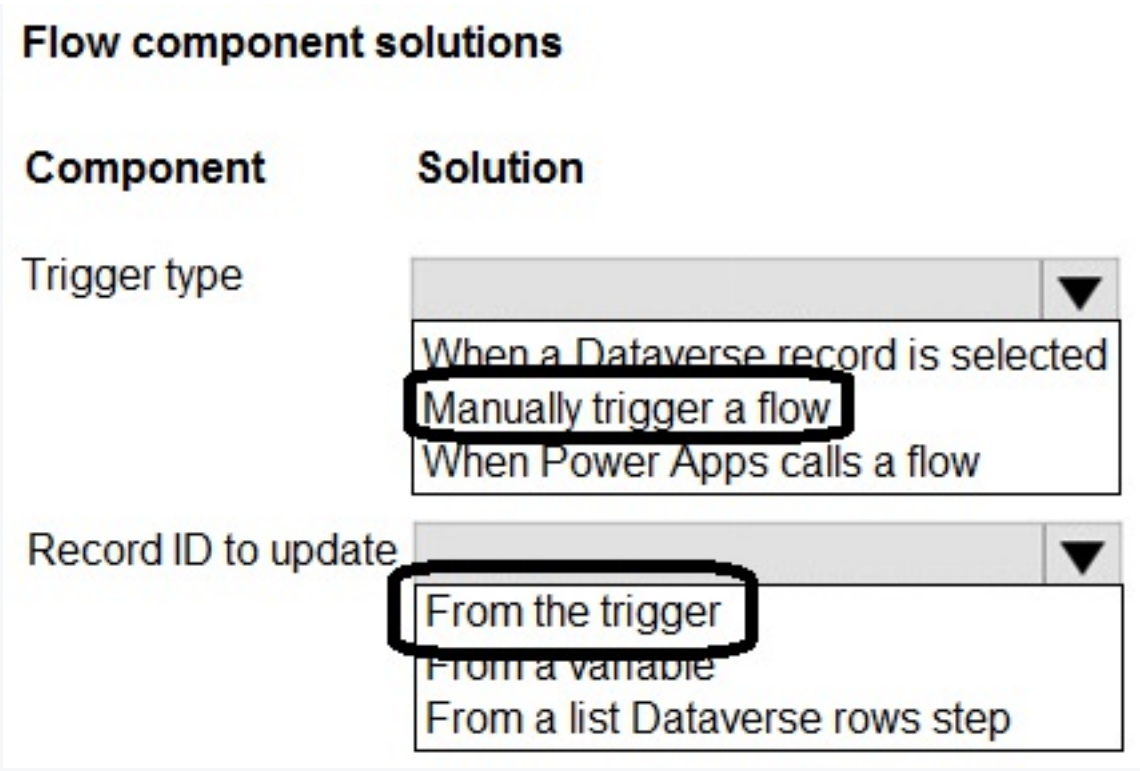

Explanation:

1. Trigger type: Manually trigger a flow

Why: This trigger is used when an automation needs to run instantly based on an explicit user action (like clicking a button in a canvas app, a mobile app, or inputting on-demand data). It allows the flow to accept input parameters directly from the user at the exact moment of execution.

2. Record ID to update: From the trigger

Why: When using an instant or manual trigger, any record context or unique identifiers (IDs) captured during the initiation phase are exposed as dynamic content outputs immediately under the trigger block. Selecting **From the trigger** ensures the flow passes that exact identifier downstream to a Dataverse "Update a row" action without needing extra query steps or variables.

Question: 322 CertyIQ

You write a plug-in that creates a row in a custom table.
Only some users have permission to create rows in the custom table.
You need to allow the plug-in to run for all users by using the principle of least privilege.
What should you do?

A. Initiate the iOrganizationService by passing the ID of a user with permissions to create rows in the custom table.

B. Ensure all users have been granted the Environment Maker role.

C. Set Run in the User's Context to Calling User in the plug-in step.

D. Ensure all users have the Acton Behalf of Another User permission assigned to one of their security roles.

Answer: A

Explanation:

Why optionA is correct

The plug-in must execute under an account that actually possesses the **Create** privilege on the custom table. By initializing IOrganizationService with the **GUID of a user** (or a service account) that already has that permission, the plug-in runs with the **minimum set of rights required** – only that user can create rows, and the plug-in inherits those rights.
This satisfies the **principle of least privilege**: the plug-in does not grant every user full access; instead it relies on a dedicated privileged identity to perform the privileged operation on behalf of the caller.

Why the other options are unsuitable

B – Environment Maker role – This role is intended for environment-level customizations, not for granting table-level write permissions. Granting it to all users would give them broad admin capabilities, violating least-privilege and creating security over-reach.

C – Run in the User's Context (Calling User) – When a plug-in runs in the calling user's context, it inherits that user's security rights. Since most users lack the **Create** privilege on the custom table, the plug-in would fail for them; the approach does not provide the needed privilege.

D – "Act on Behalf Of Another User" permission – This permission is used for **impersonation** scenarios (e.g., when a user explicitly chooses to act on behalf of another). It does not automatically grant the ability to create rows, nor does it ensure the plug-in runs with the required rights for all callers.

Implementation tip

```
using Microsoft.Xrm.Sdk;var service = new OrganizationService(Guid.Parse("UserIdWithCreatePermission"));Entity newF
```


By passing the GUID of a user (or a dedicated service account) that holds the **Create** right on the custom table, the plug-in can create rows for any caller while still adhering to least-privilege principles.

Question: 323 CertyIQ

DRAG DROP
-
You are building a webhook-based integration for a Microsoft Azure Function.
Each environment has a separate Azure Function endpoint that it must be connected to. You must successfully complete testing in each environment before changes are applied in production. You copy the endpoint details from the Azure Portal by using the Get function URL option.
You need to configure the webhooks.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions	Configure a webhook-based integration
Select Register New Web Hook.	
Configure WebhookKey authentication.	
Configure the webhook manually in production after testing.	
Navigate to a Power Apps Maker portal solution.	
Configure a HttpHeader authentication.	
Deploy the solution to production after testing.	
Open the Plug-in Registration tool.	
Create an environment variable for the endpoint URL.	

Answer:

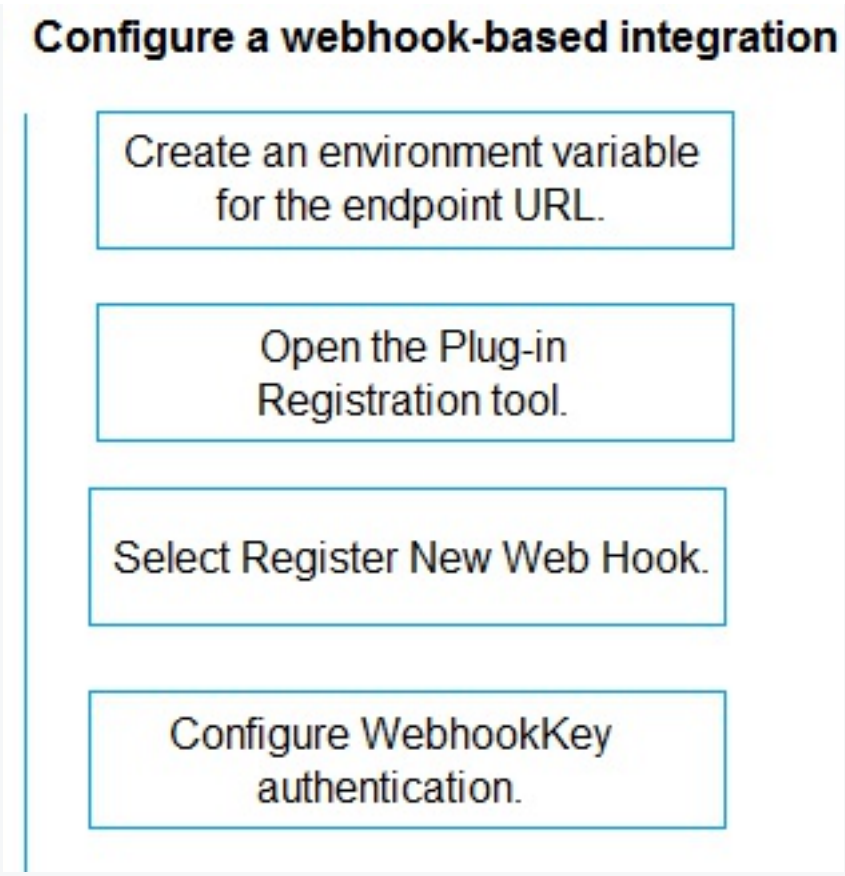

Explanation:

Create an environment variable for the endpoint URL

While environment variables are highly recommended for managing app deployment configuration transport within solutions, **the Plug-in Registration tool cannot natively read or reference Dataverse environment variables** inside its registration wizard properties. The endpoint URL must be supplied as a direct string value during manual webhook definition registration.

Open the Plug-in Registration tool.

To interact with Dataverse's event pipeline framework at a deep architectural layer (including webhooks, plugins, and custom workflow activities), you must use the desktop **Plug-in Registration Tool** from the Power Platform SDK.

Select Register New Web Hook.

Once connected to your targeted Dataverse sandbox or production environment inside the tool, you click the top-level **Register** menu and select **Register New Web Hook**. This opens the specific endpoint registration dialog wizard.

Configure WebhookKey authentication.

Within the registration wizard interface, you must input the destination endpoint URL and supply security keys. Selecting and configuring **WebhookKey authentication** ensures that incoming HTTP POST data payloads transmitted by Dataverse can be securely verified and trusted by your target hosting environment (such as an external web service or Azure Function).

Question: 324 CertyIQ

You have a model-driven app form that uses Xrm.WebApi.updateRecord during the OnSave event to update a related record.

You observe during testing that the related record does not always update when it should.
You need to ensure that the current record is saved and the related record is updated consistently.
Which two actions should you perform? Each correct answer presents part of the solution. Choose two.
NOTE: Each correct selection is worth one point.

A. Add logic before the update to ensure that the request is made only when the value has changed.
B. Enable the Async OnSave app setting.
C. Wrap the update in a promise.
D. Add executionContext.getEventArgs[].disableAsyncTimeout[] before the update.
E. Add executionContext.getEventArgs[].preventDefault[] before the update.

Answer: BC

Explanation:

WhyBandC are the correct choices

B – Enable the AsyncOnSave app setting

When this setting is turned on, the OnSave event runs asynchronously, giving the platform enough time to complete the Xrm.WebApi.updateRecord call without aborting the form save.
Asynchronous execution prevents the “record not saved” race condition that occurs when the update is forced synchronously during the save transaction.

C – Wrap the update in a promise

Returning a promise from the OnSave handler tells the framework that the operation is asynchronous and that the save should wait until the promise resolves.
This guarantees that the related record is successfully updated before the current record’s save completes, ensuring consistent state across both records.

Why the other options are not appropriate

A – Add logic to fire only when the value has changed

While this reduces unnecessary calls, it does not address the underlying timing issue that causes the related record to be missed; the problem is not about unnecessary calls but about reliable completion of the async update.

D – Add executionContext.getEventArgs[].disableAsyncTimeout[]

This method does not exist in the XRM SDK; attempting to use it would cause a runtime error and cannot influence the async timeout behavior.

E – Add executionContext.getEventArgs[].preventDefault[]

preventDefault is not a supported API for the OnSave event and would have no effect on the asynchronous update; it is unrelated to ensuring the related record is saved.

Conclusion
Enabling the AsyncOnSave setting (B) and properly handling the asynchronous operation with a promise (C) together guarantee that the current record is saved and the related record is updated reliably and consistently. The other options either do not solve the timing problem or are not valid APIs.

Question: 325 CertyIQ

HOTSPOT
-
Users are directed to a form in a model-driven app through a special URL that passes values for three lookup columns.
The form consists of three tabs: A, which is the default tab, B, and C. The form has JavaScript code registered on the OnLoad and OnSave events as follows:
•OnLoad: A lookup column on each tab is used to retrieve data. The data is used to populate columns on that same tab.
•OnSave: Data validation involves calculations of columns on the form. If a value is outside the acceptable range, the record must not be saved.
Users report that loading and saving the form takes too long when they create a new record.
You need to shorten the time it takes to load and save the form without losing functionality.
Which new event registrations should you create? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Event	Modification
OnLoad	TabStateChange events on tabs B and C TabStateChange events on tabs A, B, and C OnChange events for the lookup columns on tabs B and C OnChange events for the lookup columns on tabs A, B, and C
OnSave	PostSave event for the form OnChange events for the columns involved in the calculations OnOutputChange events for the columns involved in the calculations

Answer:

Answer Area

Event	Modification
OnLoad	TabStateChange events on tabs B and C **TabStateChange events on tabs A, B, and C** OnChange events for the lookup columns on tabs B and C OnChange events for the lookup columns on tabs A, B, and C
OnSave	PostSave event for the form **OnChange events for the columns involved in the calculations** OnOutputChange events for the columns involved in the calculations

Explanation:

1. OnLoad Event: TabStateChange events on tabs B and C

Why it is correct: Tab A is expanded by default, while tabs B and C are collapsed. Registering OnChange events for fields located on collapsed tabs during the form's initial load causes an unnecessary performance hit.

By shifting the script registration to the **TabStateChange events of tabs B and C**, the browser only loads and binds those event handlers lazily — meaning the code executes **only if and when** a user explicitly clicks to expand those specific tabs. This keeps the initial form loading time fast and responsive.

OnSave Event: OnChange events for the columns involved in the calculations

Why it is correct: Running synchronous, heavy calculation logic during a form's OnSave event is a major architectural anti-pattern. It blocks the saving pipeline, increases form submission latency, and risks creating dirty data fields or infinite loops.

Moving this calculation logic to the individual fields' **OnChange events** ensures that calculations run immediately as soon as a user alters a dependent value. This provides real-time visual feedback to the user and leaves the OnSave pipeline clean and lightweight.

Question: 326 CertyIQ

HOTSPOT -
A company updates their client contact information periodically. The contact entity has alternate keys defined.
You have the following code. (Line numbers are included for reference only.)

```
1. Entity contact = new Entity()
2. {
3.   LogicalName = "contact",
4.   KeyAttributes =
5.   {
6.     {"lastname", "Smith"},
7.     {"clientnumber", "abc123"}
8.    }
9.  },
10 contact["lastname"] = "Doe";
11. UpsertRequest updcontact = new UpsertRequest ();
12. {
13.   Target = contact;
14.  }
15. UpsertResponse response = ( UpsertResponse )service.Execute(updcontact);
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statement	Yes	No
If the last name is an alternate key and there are no contacts with the last name Smith, the stored value of the last name is Smith.	○	○
If the client number is an alternate key and the client number exists, the stored value of the last name is Smith.	○	○
If the last name is an alternate key and there are people who have the last name Smith, the stored value of the last name is Smith.	○	○
If the client number is an alternate key and the client number does not exist, the stored value of the last name is Smith.	○	○

Answer:

Answer Area

Statement	Yes	No
If the last name is an alternate key and there are no contacts with the last name Smith, the stored value of the last name is Smith.	○	◉
If the client number is an alternate key and the client number exists, the stored value of the last name is Smith.	◉	○
If the last name is an alternate key and there are people who have the last name Smith, the stored value of the last name is Smith.	◉	○
If the client number is an alternate key and the client number does not exist, the stored value of the last name is Smith.	○	◉

Explanation:

No: attributecollection has prio over keyattributes, so the created contact would have doe

Yes: No change to the exisitng contact, so same as before

Yes: one or multiple contacts found, doesn't matter, stored value stays the same

No: Same as first question, a newly created contact would be named Doe

Question: 327

CertyIQ

HOTSPOT -
A company is building a new model-driven app.

The app must integrate with a number of on-premises and cloud solutions. No VPNs are in place.
You need to determine the method for each integration.
Which methods should you use? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Integration	Method
Outbound synchronous calls to a third-party Web API service	Webhook / Microsoft Flow / Azure Event Hub / Azure Service Bus
Calls to and from a website hosted in Azure with high peak loads	Plug-in / Webhook / Azure Event Hub / Azure Service Bus
Outbound calls to multiple on-premises and cloud systems to notify of customer address changes	Plug-in / Azure Event Hub / Webhook

Answer:

Answer Area

Integration	Method
Outbound synchronous calls to a third-party Web API service	**Webhook** / Microsoft Flow / Azure Event Hub / Azure Service Bus
Calls to and from a website hosted in Azure with high peak loads	Plug-in / Webhook / Azure Event Hub / **Azure Service Bus**
Outbound calls to multiple on-premises and cloud systems to notify of customer address changes	Plug-in / **Azure Event Hub** / Webhook

Explanation:

Box 1: Webhook -

With Dataverse, you can send data about events that occur on the service to a web app by using webhooks. A webhook is a lightweight HTTP pattern for connecting web APIs and services with a publish-and-subscribe model. Webhook senders notify receivers about events by making requests to receiver endpoints with some information about the events.

Webhooks enable developers and ISVs to integrate Dataverse data with their own custom code hosted on external services.

Box 2: Azure Service Bus -

Service Bus provides a secure and reliable communication channel between Dataverse runtime data and external, cloud-based line-of-business apps. This capability is especially useful in keeping disparate Dataverse systems or other Dataverse servers synchronized with business data changes.

Box 3: Azure Event hub -

Azure Event Hubs is a big data streaming platform and event ingestion service. It can receive and process millions of events per second. Data sent to an event hub can be transformed and stored by using any real-time analytics provider or batching/storage adapters.

Note: The most popular approaches in Dataverse involve webhooks, Azure messaging (Service Bus, Event Hubs), Azure Logic Apps, or Power Automate.

Reference:

https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/why-cds-any-type-app

Question: 328 CertyIQ

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You are designing a one-way integration from the Microsoft Dataverse to another system.
You must use an Azure Function to update the other system. The integration must send only newly created records to the other system. The solution must support scenarios where a component of the integration is unavailable for more than a few seconds to avoid data loss.
You need to design the integration solution.
Solution: Register a webhook in the Dataverse instance that connects to the Azure Function. Register a step on the webhook which runs synchronously on the record's Create message and in the post-operation stage.
Does the solution meet the goal?

A. Yes
B. No

Answer: B

Explanation:
Instead use asynchronous communication.

Question: 329 CertyIQ