

Database Design Project

Oracle Baseball League Store Database

Project Scenario:

You are a small consulting company specializing in database development. You have just been awarded the contract to develop a data model for a database application system for a small retail store called Oracle Baseball League (OBL).

The Oracle Baseball League store serves the entire surrounding community selling baseball kit. The OBL has two types of customer, there are individuals who purchase items like balls, cleats, gloves, shirts, screen printed t-shirts, and shorts. Additionally customers can represent a team when they purchase uniforms and equipment on behalf of the team.

Teams and individual customers are free to purchase any item from the inventory list, but teams get a discount on the list price depending on the number of players. When a customer places an order we record the order items for that order in our database.

OBL has a team of three sales representatives that officially only call on teams but have been known to handle individual customer complaints.

Section 6 Lesson 9 Exercise 1: Joining Tables Using JOIN

Write SELECT Statements Using Data From Multiple Tables Using Equijoins and Non-Equijoins (S6L9 Objective 1)


In this exercise you will write SELECT statements to access data from more than one table.

Part 1: Creating Natural Joins.


1. Display all of the information about sales representatives and their addresses using a natural join.

SELECT*

FROM sales_representatives NATURAL JOIN sales_rep_addresses;

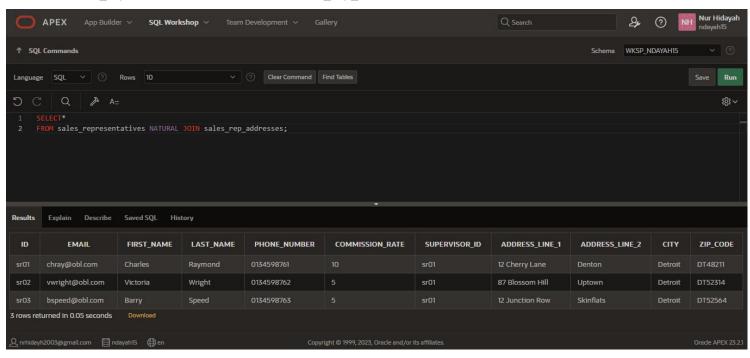

Adapt the query from the previous question to only show the id, first name, last name, address line 1, address line 2, city, email and phone_number for the sales representatives.
SELECT id, first_name, last_name, address_line_1, address_line_2, cuty, email, phone_number FROM sales_representatives NATURAL JOIN sales_rep_addresses;

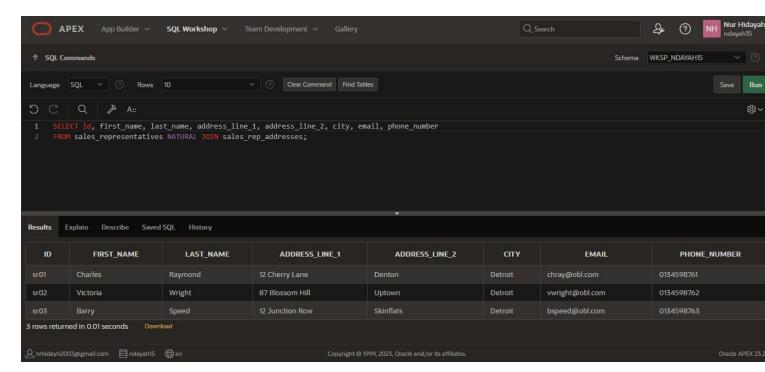


Part 2: Creating Joins with the USING Clause

Adapt the previous query answer to use the USING clause instead of a natural join.
SELECT id, first_name, last_name, address_line_1, address_line_2, city, email, phone_number
FROM sales_representatives JOIN sales_rep_addresses
USING (id);



2. Display all of the information about items and their price history by joining the items and price_history tables. SELECT*

FROM items JOIN price_history USING (itm_number);

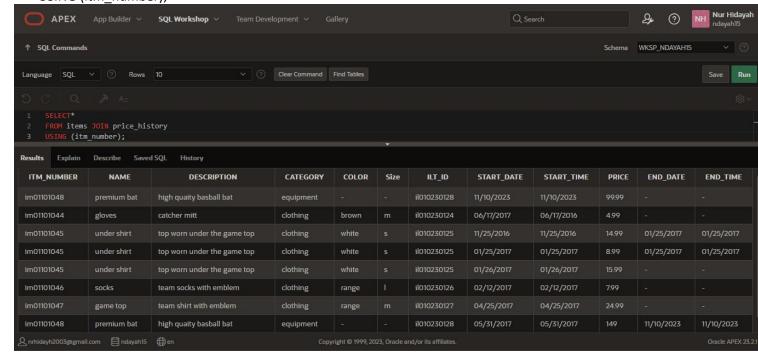


Part 3: Creating Joins with the ON Clause

1. Use an ON clause to join the customer and sales representative table so that you display the customer number, customer fist name, customer last name, customer phone number, customer email, sales representative id, sales representative first name, sales representative last name and sales representative email. You will need to use a table alias in your answer as both tables have columns with the same name.

SELECT c.ctr_number, c.first_name, c.last_name, c.phone_number, c.email, s.id, s.first_name, s.last_name, s.email

FROM CUSTOMERS C JOIN SALES REPRESENTATIVES S

ON C.SRE ID - S.ID;

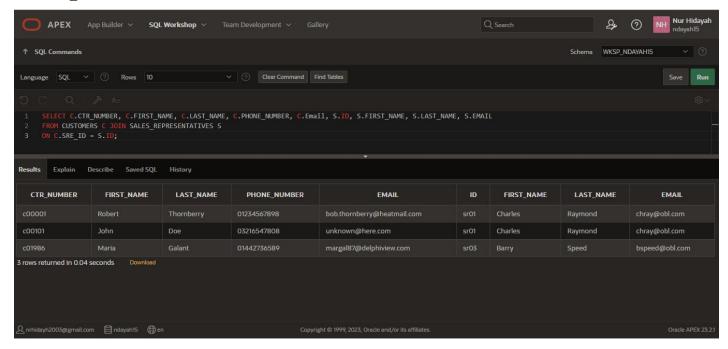

Part 4- Creating Three-Way Joins with the ON Clause


1. Using the answer to Task 3 add a join that will allow the team name that the customer represents to be included in the results.

SELECT ctr_number, c.first_name, c.last_name, c.phone_number, c.email, s.id, s.first_name, s.last_name, s.email, t.name "Team Name"

FROM customers c JOIN sales_representatives s

ON (s.id = c.sre id) JOIN teams t

ON (t.id = c.tem id);

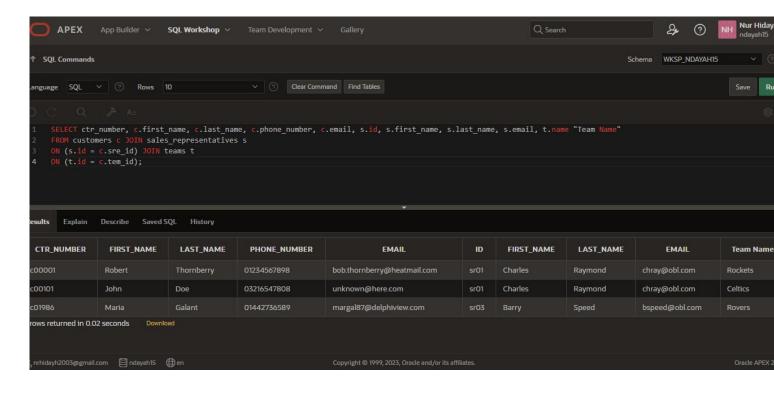

Part 5: Applying Additional Conditions to a Join


1. Using the answer to Task 4 add an additional condition to only show the results for the customer that has the number - c00001.

SELECT ctr_number, c.first_name, c.last_name, c.phone_number, c.email, s.id, s.first_name, s.last_name, s.email, t.name "Team Name"

FROM customers c JOIN sales_representatives s

ON (s.id = c.sre id) JOIN teams t

ON (t.id = c.tem_id) WHERE c.ctr_number = c00001';

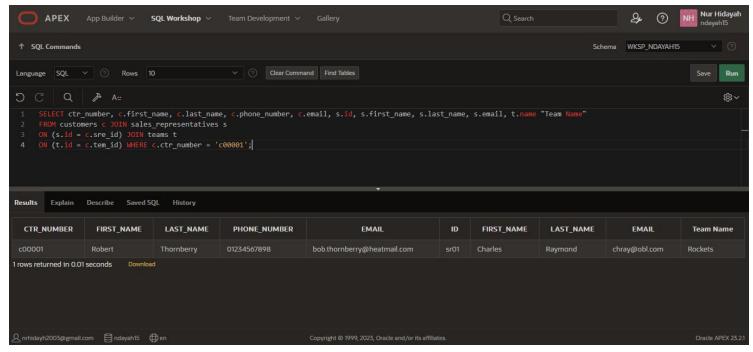


Part 6: Retrieving Records with Nonequijoins

1. Write a query that will display name and cost of the item with the number im01101045 on the 12th of December 2016. The output of the query should look like this:

The cost of the under shirt on this day was 14.99 SELECT 'The cost of the ' \parallel I.NAME \parallel 'on this day was ' \parallel P.PRICE AS "ITEM DETAILS" FROM ITEMS I

JOIN PRICE_HISTORY P ON (TO_DATE('12-Dec-2016', 'DD-MM-YYYY') BETWEEN P.START_DATE AND P.END_DATE)

WHERE I.ITM NUMBER = 'im01101045'

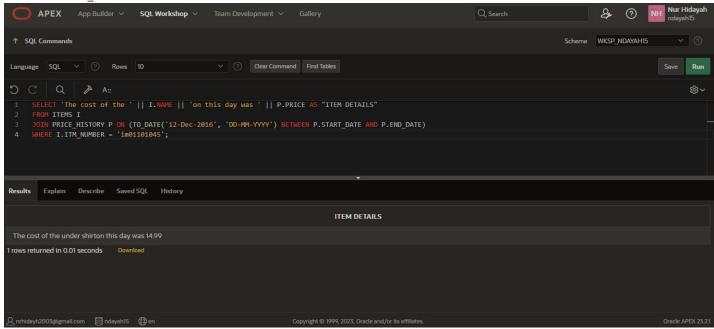

Copyright © 2020, Oracle and/or its affiliates. All rights reserved. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.



Database Design Project

Oracle Baseball League Store Database

Project Scenario:

You are a small consulting company specializing in database development. You have just been awarded the contract to develop a data model for a database application system for a small retail store called Oracle Baseball League (OBL).

The Oracle Baseball League store serves the entire surrounding community selling baseball kit. The OBL has two types of customer, there are individuals who purchase items like balls, cleats, gloves, shirts, screen printed t-shirts, and shorts. Additionally customers can represent a team when they purchase uniforms and equipment on behalf of the team.

Teams and individual customers are free to purchase any item from the inventory list, but teams get a discount on the list price depending on the number of players. When a customer places an order we record the order items for that order in our database.

OBL has a team of three sales representatives that officially only call on teams but have been known to handle individual customer complaints.


Section 6 Lesson 9 Exercise 2: Joining Tables Using JOIN

Write SELECT Statements Using Data From Multiple Tables Using Equijoins and Non-Equijoins (S6L9 Objective 1)

Part 1: Use a Self-Join to Join a Table to Itself (S6L9 Objective 2)

1. Write a query that will display who the supervisor is for each of the sales representatives. The information should be displayed in two columns, the first column will be the first name and last name of the sales representative and the second will be the first name and last name of the supervisor. The column aliases should be Rep and Supervisor.


SELECT r.first_name||''|| r.last_name AS "Rep", s.first_name||''|| s.last_name AS "Supervisor" FROM sales_representatives r JOIN sales_representatives s ON (r.supervisor id = s.id);

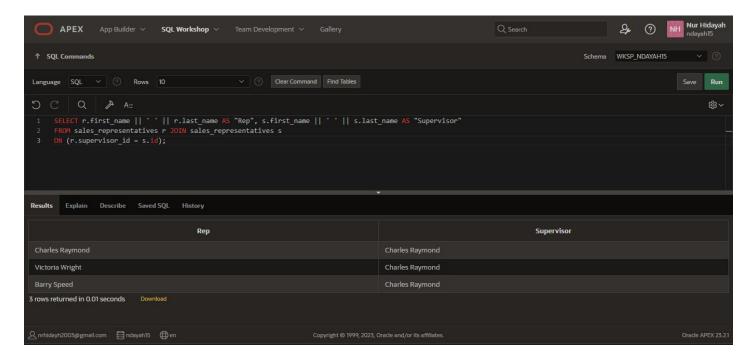

Part 2: Use OUTER joins (S6L9 Objective 3)

1. Write a query that will display all of the team and customer information even if there is no match with the table on the left (team).

SELECT * FROM teams t RIGHT OUTER JOIN customers c ON (t.id = c.tem_id);

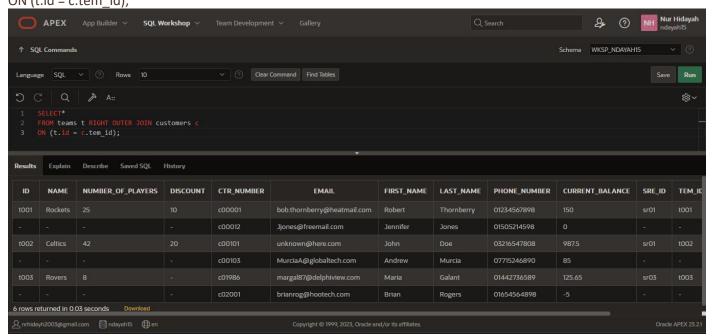


Part 3: Generating a Cartesian Product (S6L9 Objective 4)

1. Create a Cartesian product between the customer and sales representative tables.

SELECT*

FROM customers CROSS JOIN sales_representatives;

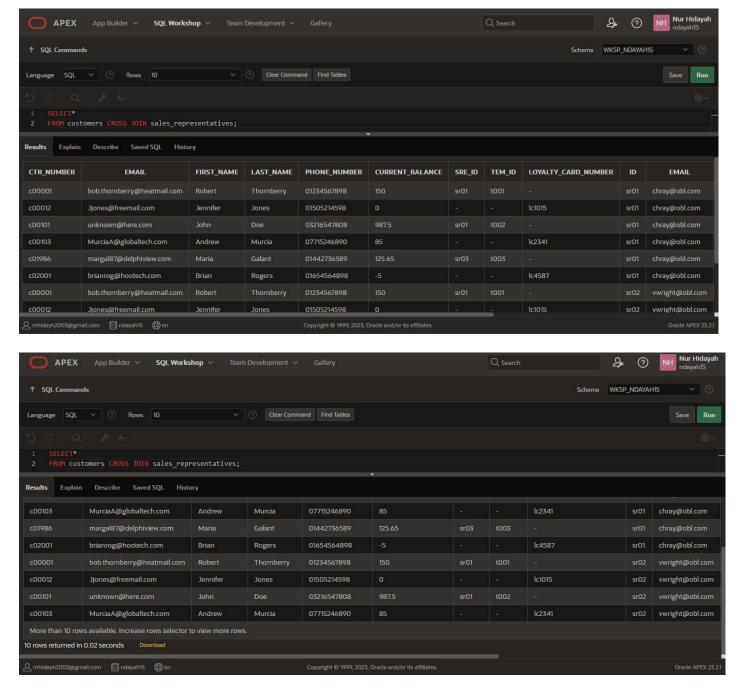

Copyright © 2020, Oracle and/or its affiliates. All rights reserved. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.