

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/08/2026

Week No.: 6

Program S. No. 11

Title	Interactive Bar Chart with Plotly			
Problem Statement	Create an interactive bar chart showing the population of different cities.			
Objectives	• To understand the creation of interactive data visualizations using Plotly. • To organize city population data in a Pandas DataFrame. • To create an interactive bar chart for comparing population across different cities. • To sort and analyze population data to identify the highest, lowest, and average values. • To save the interactive chart as an HTML file and the dataset as a CSV file.			
Dataset URL Link / File	City		Population (Lakhs)	
	Mumbai		204	
	Delhi		167	
	Bengaluru		136	
	Hyderabad		108	
	Chennai		115	
	Kolkata		149	
	Dataset source: Manually defined in the Jupyter Notebook for this exercise; no external dataset URL is required.			
Functions Details	Sl. No.	Function	Package	Description of function
	1	pd.DataFrame()	pandas	Creates a structured DataFrame from the city and population data.
	2	px.bar()	plotly.express	Creates an interactive bar chart from the DataFrame.
	3	update_traces()	plotly	Updates trace properties such as the position of value labels on the bars.
	4	update_layout()	plotly	Updates chart layout properties including axis titles.
	5	show()	plotly	Displays the interactive Plotly figure in the Jupyter Notebook.
	6	sort_values()	pandas	Sorts the DataFrame based on population values in ascending or descending order.
	7	idxmax()	pandas	Returns the index of the row containing

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/08/2026

Week No.: 6

Program S. No. 11

				the maximum population value.
	8	idxmin()	pandas	Returns the index of the row containing the minimum population value.
	9	mean()	pandas	Calculates the average population of all cities.
	10	round()	Python	Rounds the calculated average population to the required decimal places.
	11	write_html()	plotly	Saves the interactive Plotly chart as an HTML file.
	12	to_csv()	pandas	Saves the DataFrame as a CSV file without the index column.
Steps/ Process/ Procedure/ Algorithm/ Flowchart/ Model	1. Import the Pandas library and Plotly Express for data handling and interactive visualization. 2. Create a dictionary containing the names of six Indian cities and their population values in lakhs. 3. Convert the dictionary into a Pandas DataFrame and display the dataset. 4. Check the dataset shape and print the city and population lists to verify the input data. 5. Create an interactive bar chart using Plotly Express with City on the X-axis and Population (Lakhs) on the Y-axis. 6. Display population values above the bars and provide appropriate chart and axis titles. 7. Sort the DataFrame in descending order of population using <code>sort_values()</code>. 8. Create and display a second interactive bar chart using the sorted population data. 9. Use <code>idxmax()</code> and <code>idxmin()</code> to identify the cities with the highest and lowest populations. 10. Calculate the average population using <code>mean()</code> and round the result to two decimal places. 11. Display the final population analysis summary in the notebook. 12. Save the interactive Plotly chart as <code>city_population_chart.html</code> and save the dataset as <code>city_population.csv</code>. Flow: START → Import Libraries → Create Dataset → DataFrame → Verify Data → Interactive Bar Chart → Sort Data → Sorted Chart → Population Statistics → Save HTML/CSV → STOP			
Program	import pandas as pd			

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/08/2026

Week No.: 6

Program S. No. 11

```
import plotly.express as px

data = {
    "City": [
        "Mumbai",
        "Delhi",
        "Bengaluru",
        "Hyderabad",
        "Chennai",
        "Kolkata"
    ],
    "Population (Lakhs)": [
        204,
        167,
        136,
        108,
        115,
        149
    ]
}

df = pd.DataFrame(data)
df

print("Dataset Shape:", df.shape)
print("\nCities:")
print(df["City"].tolist())
print("\nPopulation:")
print(df["Population (Lakhs)"].tolist())

fig = px.bar(
    df,
    x="City",
    y="Population (Lakhs)",
    title="Population of Major Indian Cities",
    text="Population (Lakhs)"
)
fig.update_traces(textposition="outside")
fig.update_layout(
    xaxis_title="City",
    yaxis_title="Population (Lakhs)"
)
fig.show()

sorted_df = df.sort_values(
    by="Population (Lakhs)",
```

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/08/2026

Week No.: 6

Program S. No. 11

```
        ascending=False
    )
    sorted_df

    fig = px.bar(
        sorted_df,
        x="City",
        y="Population (Lakhs)",
        title="City-wise Population Analysis",
        text="Population (Lakhs)"
    )
    fig.update_traces(textposition="outside")
    fig.update_layout(
        xaxis_title="City",
        yaxis_title="Population (Lakhs)"
    )
    fig.show()

    highest = df.loc[
        df["Population (Lakhs)"].idxmax()
    ]
    print("City with Highest Population:")
    print(highest)

    lowest = df.loc[
        df["Population (Lakhs)"].idxmin()
    ]
    print(
        "Lowest Population:",
        lowest["City"],
        "-",
        lowest["Population (Lakhs)"],
        "Lakhs"
    )

    average_population = df["Population (Lakhs)"].mean()
    print(
        "Average Population:",
        round(average_population, 2),
        "Lakhs"
    )

    print("CITY POPULATION ANALYSIS")
    print("-" * 35)
    print("Total Cities:", len(df))
    print(
```

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology
(VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/08/2026

Week No.: 6

Program S. No. 11

```
"Highest Population:",
df.loc[df["Population (Lakhs)"].idxmax(), "City"]
)
print(
    "Lowest Population:",
    df.loc[df["Population (Lakhs)"].idxmin(), "City"]
)
print(
    "Average Population:",
    round(df["Population (Lakhs)"].mean(), 2),
    "Lakhs"
)

fig.write_html(
    "city_population_chart.html"
)
print("Interactive chart saved successfully.")

df.to_csv(
    "city_population.csv",
    index=False
)
print("Dataset saved successfully.")
```

**Output
Snapshots
With
Explanation/
Observations**

The following output snapshots are taken from the completed Jupyter Notebook. Each image is inserted at full content width so that the dataset, charts, code cells, and output values remain readable and are not cut off.

```
[5]:      City  Population (Lakhs)
0    Mumbai             204
1      Delhi             167
2  Bengaluru             136
3   Hyderabad             108
4     Chennai             115
5     Kolkata             149

[6]: print("Dataset Shape:", df.shape)

print("\nCities:")
print(df["City"].tolist())

print("\nPopulation:")
print(df["Population (Lakhs)"].tolist())

Dataset Shape: (6, 2)

Cities:
['Mumbai', 'Delhi', 'Bengaluru', 'Hyderabad', 'Chennai', 'Kolkata']

Population:
[204, 167, 136, 108, 115, 149]

[8]: fig = px.bar(
      df,
```

Fig. 1.1: Population Dataset and Dataset Structure

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/08/2026

Week No.: 6

Program S. No. 11

Explanation/Observation: The DataFrame verifies 6 cities and their corresponding population values.



Fig. 1.2: Interactive Bar Chart of Major Indian Cities

Explanation/Observation: Plotly Express generates an interactive bar chart for the original city order. The population values are displayed above the bars, with Mumbai showing the highest value of 204 lakhs in the given dataset.

```
[9]: sorted_df = df.sort_values(
    by="Population (Lakhs)",
    ascending=False
)

sorted_df
```

	City	Population (Lakhs)
0	Mumbai	204
1	Delhi	167
5	Kolkata	149
2	Bengaluru	136
4	Chennai	115
3	Hyderabad	108

Fig. 1.3: Population Data Sorted in Descending Order

Explanation/Observation: The DataFrame is sorted using `sort_values()` in descending order of population. The resulting order is Mumbai, Delhi, Kolkata, Bengaluru, Chennai, and Hyderabad.



Fig. 1.4: City-wise Population Analysis after Sorting

Explanation/Observation: The sorted bar chart displays the cities from

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/08/2026

Week No.: 6

Program S. No. 11

highest to lowest population, making comparison and ranking easier.

```
[11]: highest = df.loc[
      df["Population (Lakhs)"].idxmax()
    ]

print("City with Highest Population:")
print(highest)
```

```
City with Highest Population:
City                Mumbai
Population (Lakhs)    204
Name: 0, dtype: object
```

```
[12]: lowest = df.loc[
      df["Population (Lakhs)"].idxmin()
    ]

print(
    "Lowest Population:",
    lowest["City"],
    "-",
    lowest["Population (Lakhs)"],
    "Lakhs"
)
```

```
Lowest Population: Hyderabad - 108 Lakhs
```

```
[13]: average_population = df["Population (Lakhs)"].mean()

print(
    "Average Population:",
    round(average_population, 2),
    "Lakhs"
)
```

```
Average Population: 146.5 Lakhs
```

Fig. 1.5: Highest, Lowest, and Average Population Analysis

Explanation/Observation: The program identifies Mumbai as the city with the highest population (204 lakhs), Hyderabad as the city with the lowest population (108 lakhs), and calculates the average population as 146.5 lakhs.

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/08/2026

Week No.: 6

Program S. No. 11

```
[14]: print("CITY POPULATION ANALYSIS")
      print("-" * 35)

      print("Total Cities:", len(df))

      print(
          "Highest Population:",
          df.loc[df["Population (Lakhs)"].idxmax(), "City"]
      )

      print(
          "Lowest Population:",
          df.loc[df["Population (Lakhs)"].idxmin(), "City"]
      )

      print(
          "Average Population:",
          round(df["Population (Lakhs)"].mean(), 2),
          "Lakhs"
      )

CITY POPULATION ANALYSIS
-----
Total Cities: 6
Highest Population: Mumbai
Lowest Population: Hyderabad
Average Population: 146.5 Lakhs

[15]: fig.write_html(
      "city_population_chart.html"
      )

      print("Interactive chart saved successfully.")

Interactive chart saved successfully.

[16]: df.to_csv(
      "city_population.csv",
      index=False
      )

      print("Dataset saved successfully.")

Dataset saved successfully.

[ ]:
```

Fig. 1.6: Final Analysis Summary and File Saving Output

Explanation/Observation: The final summary confirms 6 cities were analyzed, with Mumbai highest and Hyderabad lowest. The interactive chart and CSV dataset are saved successfully.

Conclusions	The experiment was successfully completed using Pandas and Plotly. The population data was organized in a DataFrame, visualized with interactive bar charts, and sorted for comparison. Mumbai had the highest population, Hyderabad the lowest, and the average population was 146.5 lakhs. The interactive chart was saved as HTML and the dataset as CSV.
References	1. Michael Freeman and Joel Ross, Programming Skills for Data Science, Addison-Wesley, 2018. 2. Python Program (GitHub link): https://github.com/hasnainmakada-99/Data-Science-Codes/blob/main/Week%206/Week-6-PP.ipynb 3. Class lecture link: Open Lecture File

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

Title	Interactive Scatter Plot with Plotly																									
Problem Statement	Create an interactive scatter plot showing the relationship between house size and price.																									
Objectives	• To understand interactive scatter plot visualization using Plotly. • To organize house size and house price data using a Pandas DataFrame. • To visualize and interpret the relationship between house size and house price. • To compute descriptive measures such as minimum, maximum, average, and correlation. • To create a trendline for the relationship and save the interactive chart and dataset for further use.																									
Dataset URL Link / File	<table><thead><tr><th>House Size (sq.ft.)</th><th>House Price (₹ Lakhs)</th></tr></thead><tbody><tr><td>800</td><td>35</td></tr><tr><td>1000</td><td>45</td></tr><tr><td>1200</td><td>55</td></tr><tr><td>1400</td><td>65</td></tr><tr><td>1600</td><td>78</td></tr><tr><td>1800</td><td>90</td></tr><tr><td>2000</td><td>105</td></tr><tr><td>2200</td><td>120</td></tr><tr><td>2500</td><td>140</td></tr><tr><td>2800</td><td>165</td></tr></tbody></table> Dataset source: Manually defined in the Jupyter Notebook using the house-size and house-price values shown above; no external dataset URL is required.				House Size (sq.ft.)	House Price (₹ Lakhs)	800	35	1000	45	1200	55	1400	65	1600	78	1800	90	2000	105	2200	120	2500	140	2800	165
House Size (sq.ft.)	House Price (₹ Lakhs)																									
800	35																									
1000	45																									
1200	55																									
1400	65																									
1600	78																									
1800	90																									
2000	105																									
2200	120																									
2500	140																									
2800	165																									
Functions Details	Sl. No.	Function	Package	Description of function																						
	1	pd.DataFrame()	pandas	Creates a structured DataFrame from the house size and price data.																						
	2	px.scatter()	plotly.express	Creates an interactive scatter plot from the DataFrame.																						
	3	update_traces()	plotly	Updates marker size and text-position properties of the plotted points.																						

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

	4	update_layout()	plotly	Updates the chart layout and axis titles.
	5	show()	plotly	Displays the interactive Plotly chart inside the Jupyter Notebook.
	6	sort_values()	pandas	Sorts the dataset based on house size in ascending order.
	7	idxmax()	pandas	Returns the index of the record with the maximum house price.
	8	idxmin()	pandas	Returns the index of the record with the minimum house price.
	9	mean()	pandas	Calculates the average house price and average house size.
	10	corr()	pandas	Calculates the correlation between house size and house price.
	11	write_html()	plotly	Saves the interactive Plotly scatter plot as an HTML file.
	12	to_csv()	pandas	Saves the house-price DataFrame as a CSV file without the index column.
Steps/ Process/ Procedure/ Algorithm/ Flowchart/ Model		1. Import Pandas and Plotly Express for tabular data handling and interactive visualization. 2. Create a dictionary containing house sizes in square feet and corresponding house prices in lakhs. 3. Convert the dictionary into a Pandas DataFrame and display all ten records. 4. Verify the dataset shape and print the complete house-size and house-price lists. 5. Create a basic interactive scatter plot with house size on the X-axis and house price on the Y-axis. 6. Create an improved scatter plot with larger markers, value labels, title, and proper axis labels. 7. Sort the DataFrame by house size in ascending order and display the sorted dataset. 8. Use idxmax() and idxmin() to identify the most expensive and least expensive houses. 9. Calculate the average house price and average house size using mean(). 10. Calculate the correlation between house size and price using corr() to measure the strength of their relationship. 11. Create a scatter plot with an OLS trendline to visually represent the positive relationship between size and price.		

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

	12. Display the final house-price analysis and save the interactive chart as HTML and the dataset as CSV. Flow: START → Import Libraries → Create Dataset → DataFrame → Verify Data → Scatter Plot → Enhanced Plot → Sort Data → Price Statistics → Average Values → Correlation → Trendline → Save HTML/CSV → STOP
Program	<pre>import pandas as pd import plotly.express as px data = { "House Size (sq.ft.)": [800, 1000, 1200, 1400, 1600, 1800, 2000, 2200, 2500, 2800], "House Price (Lakhs)": [35, 45, 55, 65, 78, 90, 105, 120, 140, 165] } df = pd.DataFrame(data) df print("Dataset Shape:", df.shape) print("\nHouse Sizes:") print(df["House Size (sq.ft.)"].tolist()) print("\nHouse Prices:") print(df["House Price (Lakhs)"].tolist())</pre>

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

```
fig = px.scatter(
    df,
    x="House Size (sq.ft.)",
    y="House Price (Lakhs)",
    title="House Size vs House Price"
)
fig.show()

fig = px.scatter(
    df,
    x="House Size (sq.ft.)",
    y="House Price (Lakhs)",
    title="Relationship Between House Size and Price",
    text="House Price (Lakhs)"
)
fig.update_traces(
    marker=dict(size=12),
    textposition="top center"
)
fig.update_layout(
    xaxis_title="House Size (sq.ft.)",
    yaxis_title="House Price (Lakhs)"
)
fig.show()

sorted_df = df.sort_values(
    by="House Size (sq.ft.)",
    ascending=True
)
sorted_df

highest = df.loc[
    df["House Price (Lakhs)"].idxmax()
]
print("Most Expensive House:")
print(highest)

lowest = df.loc[
    df["House Price (Lakhs)"].idxmin()
]
print(
    "Least Expensive House:",
    lowest["House Size (sq.ft.)"],
    "sq.ft. - ",
    lowest["House Price (Lakhs)"],
```

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

```
"Lakhs"
)

average_price = df["House Price (Lakhs)"].mean()
print(
    "Average House Price:",
    round(average_price, 2),
    "Lakhs"
)

average_size = df["House Size (sq.ft.)"].mean()
print(
    "Average House Size:",
    round(average_size, 2),
    "sq.ft."
)

correlation = df[
    "House Size (sq.ft.)"
].corr(
    df["House Price (Lakhs)"]
)
print(
    "Correlation between House Size and Price:",
    round(correlation, 3)
)

fig = px.scatter(
    df,
    x="House Size (sq.ft.)",
    y="House Price (Lakhs)",
    title="House Size vs Price with Trendline",
    trendline="ols"
)
fig.update_traces(
    marker=dict(size=12)
)
fig.update_layout(
    xaxis_title="House Size (sq.ft.)",
    yaxis_title="House Price (Lakhs)"
)
fig.show()

print("HOUSE PRICE ANALYSIS")
print("-" * 40)
print("Total Houses:", len(df))
```

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

	<pre> print("Smallest House:", df["House Size (sq.ft.)"].min(), "sq.ft.") print("Largest House:", df["House Size (sq.ft.)"].max(), "sq.ft.") print("Lowest Price: ", df["House Price (Lakhs)"].min(), "Lakhs") print("Highest Price: ", df["House Price (Lakhs)"].max(), "Lakhs") print("Average Price: ", round(df["House Price (Lakhs)"].mean(), 2), "Lakhs") print("Correlation:", round(correlation, 3)) fig.write_html("house_size_price_scatter.html") print("Interactive scatter plot saved successfully.") df.to_csv("house_price_data.csv", index=False) print("Dataset saved successfully.") </pre>
Output Snapshots With Explanation/ Observations	The following snapshots are taken from the completed Jupyter Notebook. The images retain the complete visible code/output blocks from each source page; only unused white margins were removed so no program output is cut off.

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

```
165
    ]
}

[3]: df = pd.DataFrame(data)

df

[3]:   House Size (sq.ft.)  House Price (Lakhs)
0                800             35
1               1000             45
2               1200             55
3               1400             65
4               1600             78
5               1800             90
6               2000            105
7               2200            120
8               2500            140
9               2800            165

[4]: print("Dataset Shape:", df.shape)

print("\nHouse Sizes:")
print(df["House Size (sq.ft.)"].tolist())

print("\nHouse Prices:")
print(df["House Price (Lakhs)"].tolist())

Dataset Shape: (10, 2)

House Sizes:
[800, 1000, 1200, 1400, 1600, 1800, 2000, 2200, 2500, 2800]

House Prices:
[35, 45, 55, 65, 78, 90, 105, 120, 140, 165]

[5]: fig = px.scatter(
    df,
    x="House Size (sq.ft.)",
    y="House Price (Lakhs)",
    title="House Size vs House Price"
)

fig.show()
```

2

Fig. 1.1: DataFrame Creation, Dataset Verification, and Basic Scatter Plot Code

Explanation/Observation: The dataset is converted into a Pandas DataFrame with 10 rows and 2 columns. The complete house-size and house-price lists are verified, and the code for the initial interactive scatter plot is executed.

Student Reg. No: 26MML0031 Name: Hasnain Makada


Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

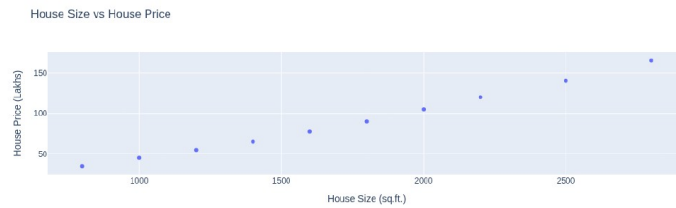

```
[6]: fig = px.scatter(  
    df,  
    x="House Size (sq.ft.)",  
    y="House Price (Lakhs)",  
    title="Relationship Between House Size and Price",  
    text="House Price (Lakhs)"  
)  
  
fig.update_traces(  
    marker=dict(size=12),  
    textposition="top center"  
)  
  
fig.update_layout(  
    xaxis_title="House Size (sq.ft.)",  
    yaxis_title="House Price ( Lakhs)"  
)  
  
fig.show()
```



3

Fig. 1.2: Interactive and Enhanced Scatter Plots

Explanation/Observation: The first scatter plot shows house size versus price. The enhanced Plotly chart adds larger markers and price labels, making the strong upward relationship between size and price visually clear.

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

```
[7]: sorted_df = df.sort_values(
      by="House Size (sq.ft.)",
      ascending=True
    )

sorted_df

[7]:   House Size (sq.ft.)  House Price (Lakhs)
0              800             35
1             1000             45
2             1200             55
3             1400             65
4             1600             78
5             1800             90
6             2000            105
7             2200            120
8             2500            140
9             2800            165

[8]: highest = df.loc[
      df["House Price (Lakhs)"].idxmax()
    ]

print("Most Expensive House:")
print(highest)

Most Expensive House:
House Size (sq.ft.)    2800
House Price (Lakhs)    165
Name: 9, dtype: int64

[9]: lowest = df.loc[
      df["House Price (Lakhs)"].idxmin()
    ]

print(
    "Least Expensive House:",
    lowest["House Size (sq.ft.)"],
    "sq.ft. - ",
    lowest["House Price (Lakhs)"],
    "Lakhs"
)

Least Expensive House: 800 sq.ft. - 35 Lakhs

[10]: average_price = df["House Price (Lakhs)"].mean()

print()
```

4

Fig. 1.3: Sorted Dataset and Extreme Price Analysis

Explanation/Observation: The dataset is sorted by house size in ascending order. The program identifies the 2800 sq.ft. house priced at 165 lakhs as the most expensive and the 800 sq.ft. house priced at 35 lakhs as the least expensive.

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

```
"Average House Price:",  
round(average_price, 2),  
"Lakhs"  
)
```

Average House Price: 89.8 Lakhs

```
[11]: average_size = df["House Size (sq.ft.)"].mean()  
  
print(  
    "Average House Size:",  
    round(average_size, 2),  
    "sq.ft."  
)
```

Average House Size: 1730.0 sq.ft.

```
[12]: correlation = df[  
    "House Size (sq.ft.)"  
].corr(  
    df["House Price (Lakhs)"]  
)  
  
print(  
    "Correlation between House Size and Price:",  
    round(correlation, 3)  
)
```

Correlation between House Size and Price: 0.996

```
[14]: fig = px.scatter(  
    df,  
    x="House Size (sq.ft.)",  
    y="House Price (Lakhs)",  
    title="House Size vs Price with Trendline",  
    trendline="ols"  
)  
  
fig.update_traces(  
    marker=dict(size=12)  
)  
  
fig.update_layout(  
    xaxis_title="House Size (sq.ft.)",  
    yaxis_title="House Price ( Lakhs)"  
)  
  
fig.show()
```

5

Fig. 1.4: Average Values, Correlation, and Trendline Program

Explanation/Observation: The average house price is 89.8 lakhs and the average house size is 1730 sq.ft. The calculated correlation is 0.996, indicating a very strong positive relationship. The trendline scatter-plot code is also shown.

Student Reg. No: 26MML0031 Name: Hasnain Makada


Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

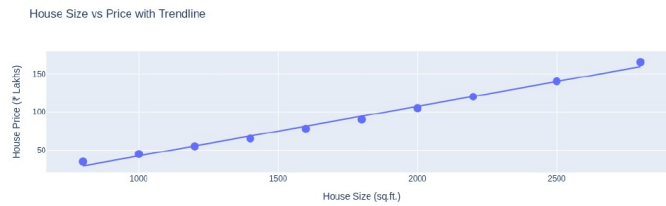

```
[15]: print("HOUSE PRICE ANALYSIS")
      print("-" * 40)

      print("Total Houses:", len(df))

      print(
        "Smallest House:",
        df["House Size (sq.ft.)"].min(),
        "sq.ft."
      )

      print(
        "Largest House:",
        df["House Size (sq.ft.)"].max(),
        "sq.ft."
      )

      print(
        "Lowest Price: ",
        df["House Price (Lakhs)"].min(),
        "Lakhs"
      )

      print(
        "Highest Price: ",
        df["House Price (Lakhs)"].max(),
        "Lakhs"
      )

      print(
        "Average Price: ",
        round(df["House Price (Lakhs)"].mean(), 2),
        "Lakhs"
      )
```

6

Fig. 1.5: Scatter Plot with OLS Trendline and Final Analysis Code

Explanation/Observation: The Plotly scatter plot with an OLS trendline confirms that house price rises strongly with house size. The final analysis code computes the smallest/largest houses and lowest/highest/average prices.

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

```
)

print(
    "Correlation:",
    round(correlation, 3)
)

HOUSE PRICE ANALYSIS
-----

Total Houses: 10
Smallest House: 800 sq.ft.
Largest House: 2800 sq.ft.
Lowest Price: 35 Lakhs
Highest Price: 165 Lakhs
Average Price: 89.8 Lakhs
Correlation: 0.996

[16]: fig.write_html(
        "house_size_price_scatter.html"
    )

print("Interactive scatter plot saved successfully.")

Interactive scatter plot saved successfully.

[17]: df.to_csv(
        "house_price_data.csv",
        index=False
    )

print("Dataset saved successfully.")

Dataset saved successfully.

[ ]:
```

7

Fig. 1.6: Final House Price Analysis and File Saving Output

Explanation/Observation: The final output confirms 10 houses, sizes from 800 to 2800 sq.ft., prices from 35 to 165 lakhs, an average price of 89.8 lakhs, and correlation of 0.996. The interactive HTML chart and CSV dataset are saved successfully.

Conclusions

The experiment was successfully completed using Pandas and Plotly. House size and price data were organized in a Pandas DataFrame and visualized through interactive scatter plots. The analysis found an average house size of 1730 sq.ft., an average price of 89.8 lakhs, and a correlation of 0.996, showing a very strong positive relationship between house size and price. An OLS trendline further confirmed this relationship. The interactive

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore

2026 FALL SEMESTER
Programming for Data Science (MACSE502) Lab Record
Practice Program

Date: 20/082026

Week No.: 6

Program S. No. 12

	chart and dataset were successfully saved as HTML and CSV files.
References	1. Michael Freeman and Joel Ross, Programming Skills for Data Science: Start Writing Code to Wrangle, Analyze, and Visualize Data with R, Addison-Wesley, 2018. 2. Python Program (GitHub link): https://github.com/hasnainmakada-99/Data-Science-Codes/blob/main/WEEK%206/Week-6-PP2.pdf 3. Class lecture link: Open Lecture File

Student Reg. No: 26MML0031 Name: Hasnain Makada

Faculty: Dr Rajasekhara Babu M, Professor, School of CSE, Vellore Institute of Technology (VIT), Vellore