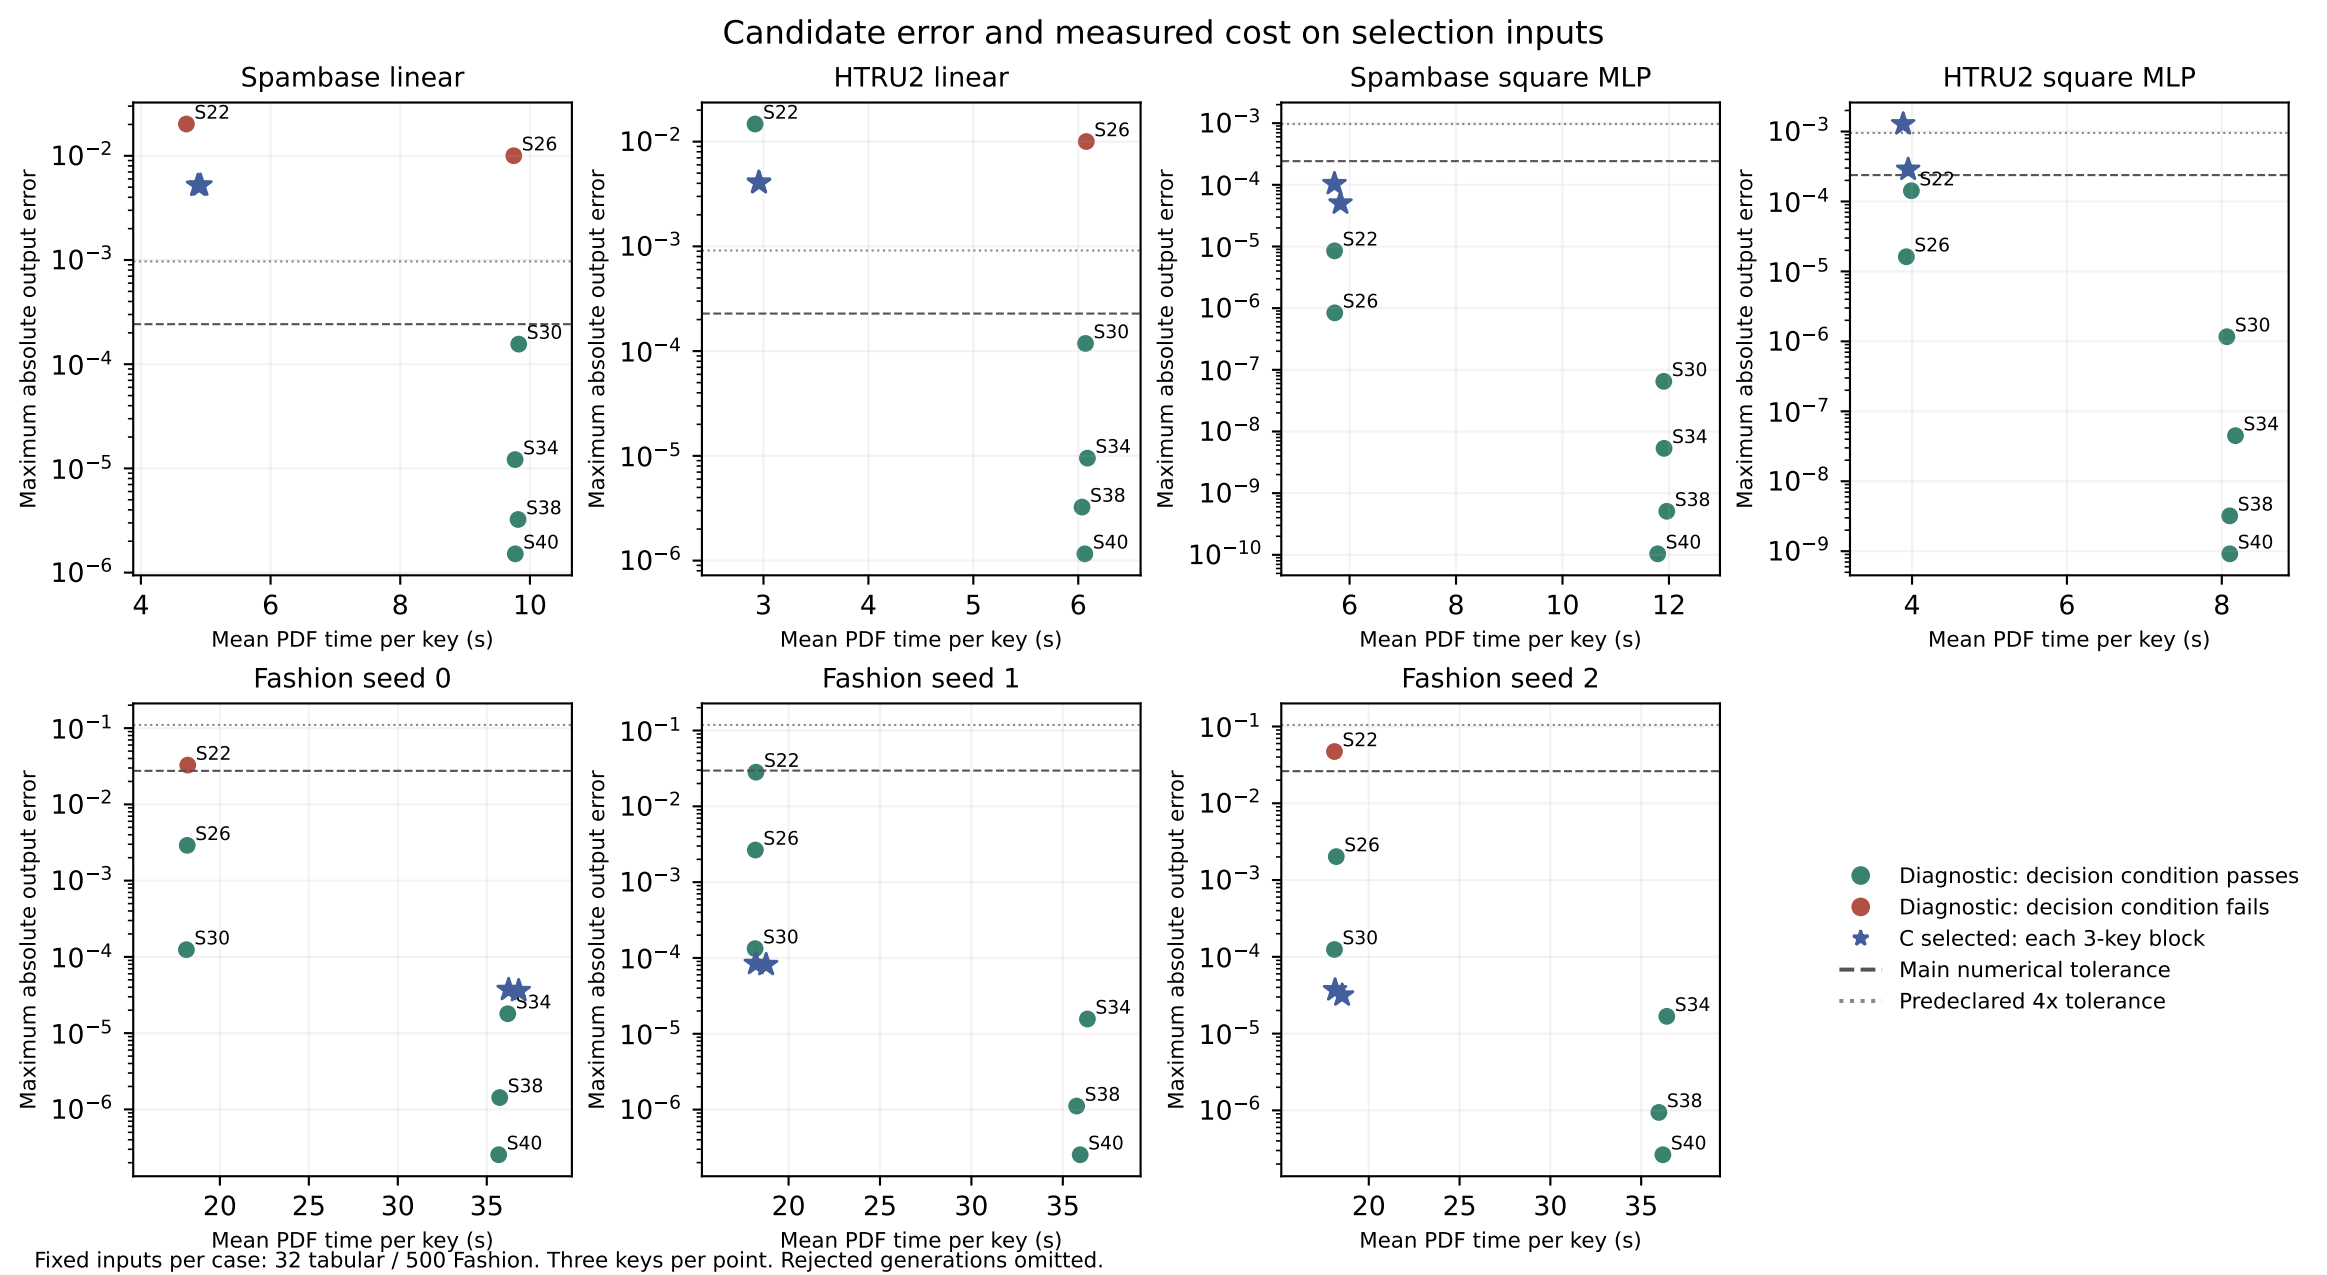
Candidate error and measured cost on selection inputs
Spambase linear
HTRU2 linear
Spambase square MLP
HTRU2 square MLP
Fashion seed 0
Fashion seed 1
Fashion seed 2
Maximum absolute output error
Mean PDF time per key (s)
S22
S26
S30
S34
S38
S40
Diagnostic: decision condition passes
Diagnostic: decision condition fails
C selected: each 3-key block
Main numerical tolerance
Predeclared 4x tolerance
Fixed inputs per case: 32 tabular / 500 Fashion. Three keys per point. Rejected generations omitted.
These diagnostic times do not replace the separate post-selection paired latency experiment.