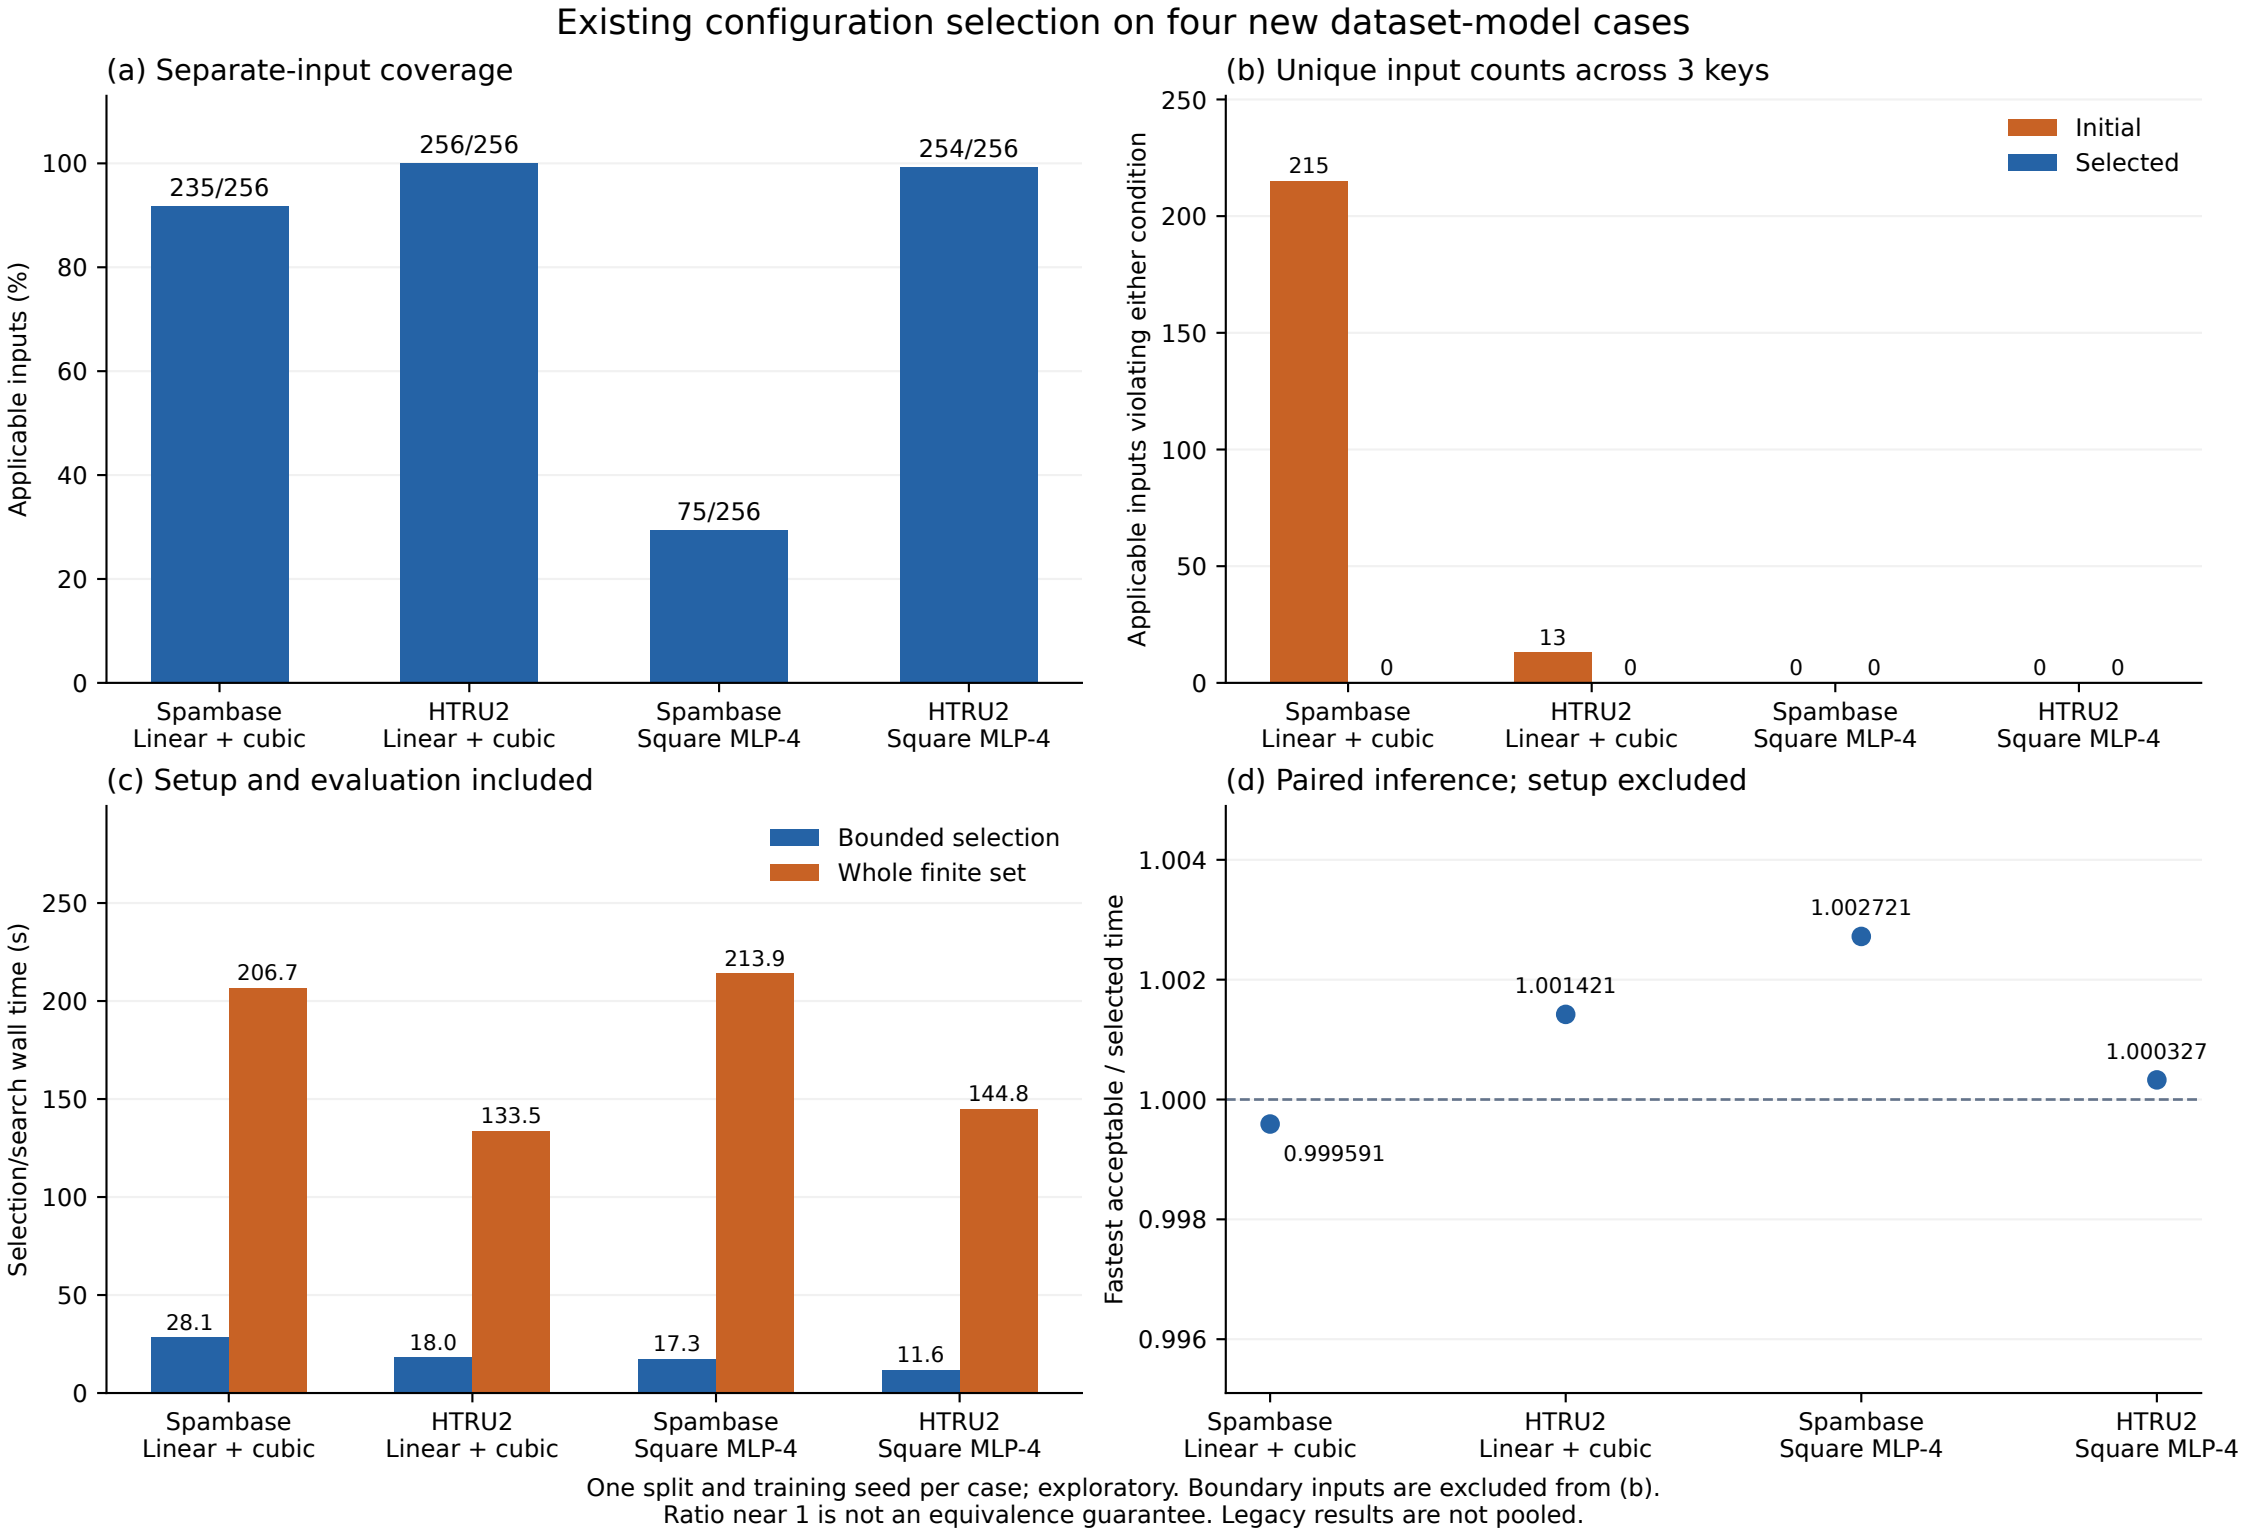
Existing configuration selection on four new dataset-model cases
(a) Separate-input coverage
Applicable inputs (%)
235/256
256/256
75/256
254/256
Spambase Linear + cubic
HTRU2 Linear + cubic
Spambase Square MLP-4
HTRU2 Square MLP-4
(b) Unique input counts across 3 keys
Applicable inputs violating either condition
Initial
Selected
215
0
13
0
0
0
0
0
(c) Setup and evaluation included
Selection/search wall time (s)
Bounded selection
Whole finite set
206.7
28.1
133.5
18.0
213.9
17.3
144.8
11.6
(d) Paired inference; setup excluded
Fastest acceptable / selected time
1.002721
1.001421
1.000327
0.999591
One split and training seed per case; exploratory. Boundary inputs are excluded from (b).
Ratio near 1 is not an equivalence guarantee. Legacy results are not pooled.