

React Js

- React js is a library Function of Java Script
- React js Make by Face book Site.
- In React js Lots of library Function in JS.
- We can Easly App in React js

1) First to Install of Node Js App. (Download nodejs.tech)

(Note :Auto download by npm Version)

- Node Version : Check the version : Open cmd Command & Type = node --version
- npm Version : Check the version : Open cmd Command & Type = npm --version

2) Install To Vs Code (Download Vs code)

3) Download to React developer tool > Add Chrome > Add Extension

4) **Install Now** : Extension File – Short cut Code

- **ES7 React/Redux/GraphQL/React-Native snippets**
- **Thunder Client (Api Check krva mate)**
- **Bracket Pair Colorizer 2**
- **Auto Rename Tag**
- Live Server
- **Prettier**

React Official Website

reactjs.org

npm is a Package Manager

We can use create react app in Programm. bcz it is very useful Packaging library

use can npm use for create-react-app.

we can easily programm so you can use npx (its call for node js)

crate new App

1) npx create-react-app **aspire** (બધી જ ફાઇલ આ Folder માં આવી જશે.)

➤ what is Props?

કોઈ એક Component માં Name, Address, Birthdates, Place, વગેરે નાખવામાં આવે તેને Props કહેવાય છે.

➤ What is State?

કોઈ એક Component માં Name nu Title આપવામાં આવે તેને State કહે છે. જેમાં Props ની બધી Details આપી હોય છે.

➤ Code Type

npx create-react-app **aspire**

In Aspire Folder > src > App.js & index.js

In App.js > npm start (Create-react-app is Start in this folder)

JavaScript Refresher

Create a Java Refresh folder

```
<script>
  let a=50;
  console.log(a);
</script>
</head>
<body>
  I am Ramesh & My Out put is :
</body>
```

Run to Live Server (Right click & Open) & Open Console

String Value Print

```
<script>
  let a= "Good Morning";
  console.log(a);
</script>
</head>
<body>
  My name is Ramesh.
</body>
```

Number

objects

Boolean : true & False

undefined

null

- Function Call

```
<script>
  function Hello(){
    console.log("Ramesh");
  }
</script>
```

type : Hello()

- objects

```
let obj = {
  r:50,
  k:51
}
```

Type : obj.r or obj.k

- objects with Function

```
let obj = {
  r:50,
  k:51,
  func:function myfunc(number){
    console.log("This Number is " + number);
  }
}
```

type : obj.func(50)

- Boolean : true & False

```
let conf = confirm("Aspire Multimedia & Design ?");
console.log(conf);
```

- Event

```
document.addEventListener("click",function click(){
  console.log("click now");
  alert("Good Morning");
})
```

// JSX //
(Javascript + xml)

Open the Public & Src Folder

SRC folder > App.js > this code

This Code is Jsx (in app.js)

In jsx use for function & class Components....but most important point in jsx is function

```
<div className="App">
  <header className="App-header">
    <img src={logo} className="App-logo" alt="logo" />
    <p>
      Edit <code>src/App.js</code> and save to reload.
    </p>
    <a
      className="App-link"
      href="https://reactjs.org"
      target="_blank"
      rel="noopener noreferrer"
    >
      Learn React hello kem
    </a>
  </header>
</div>
```

નોંધ : JSX અંદર જ Java Script ઉપયોગ કરવામાં આવે છે.

React ની અંદર Jsx Use કરવું હોય તો ફક્ત એક જ Element ઉપયોગ કરવો. (ઉપરના Example માં આપેલ છે.)

Vs code ma Shortcut Element lavava mate

Vs Code > Setting > type emmet > include Languages > add item > key (javascript) & value(javascriptreact)

```
1.1. <div className="App">
  -----
  -----
  -----
</div>
```

App.js(type)

className defined in div tag (its a jsx in js)

```
function App() {
  return (
    <div className='blank'>Aspire Multimedia & Design</div>
  );
}
```

App.css(type)


```
.blank{
  color: red;
}
```

Simple App in jsx


```
let name="Product Description";
function App() {
  return (
    <>
    <nav>
    <li>Home</li>
    <li>Gallery</li>
    <li>Contacus</li>
    <li>About Us</li>
    <li>Product</li>
    </nav>
    <h1>Subject : {name}</h1>
    <div className="container">
    <p>Lorem ipsum dolor, sit amet consectetur adipisicing elit. Quisquam velit quod doloremque accusamus numquam eos officia voluptates quo veniam nobis, iusto repellat nihil explicabo in inventore cupiditate ipsam magnam ipsa corporis dolorum vero soluta.</p>
    </div>

    </>
  );
}
```

Multi Page Application in React Js

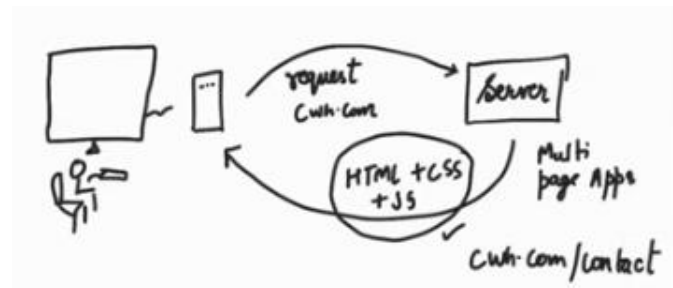

Single Page Application in React Js

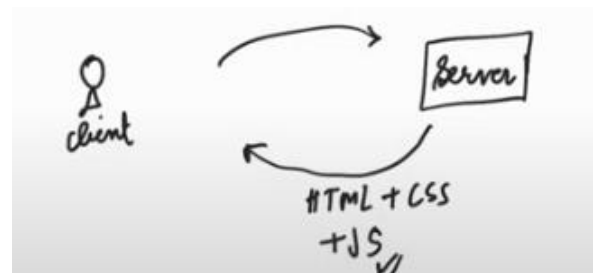

Single page apps is complete Given Response (Javascript is Takeover to apps)

નોંધ : જ્યારે કોઇ પણ વ્યક્તિ ને બનાવેલ થીયેબ આપીએ ત્યારે હંગિકરેનેજ ખંજીધીના કરી ને આપવુ. જેથી આપણા દયર તેની પાસે જરથી ના થાય.

મીય ખંજીલિવવા માટે હંરે હજારજ આપવુ.

Simple Create App in React js.(Project -1) textutils

First : getbootstrap.com > copy to Css link & js Script > paste to public folder > index.html

In App.js

```
function App() {
  return (
    <>
      <nav className="navbar navbar-expand-lg navbar-light bg-light">
        <a className="navbar-brand" href="/">Navbar</a>
        <button className="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSupportedContent" aria-controls="navbarSupportedContent"
aria-expanded="false" aria-label="Toggle navigation">
          <span className="navbar-toggler-icon"></span>
        </button>

        <div className="collapse navbar-collapse" id="navbarSupportedContent">
          <ul className="navbar-nav mr-auto">
            <li className="nav-item active">
              <a className="nav-link" href="/">Home <span className="sr-only">(current)</span></a>
            </li>
            <li className="nav-item">
              <a className="nav-link" href="/">Link</a>
            </li>
            <li className="nav-item dropdown">
              <a className="nav-link dropdown-toggle" href="/" role="button" data-toggle="dropdown" aria-expanded="false">
                Dropdown
              </a>
              <div className="dropdown-menu">
                <a className="dropdown-item" href="/">Action</a>
                <a className="dropdown-item" href="/">Another action</a>
                <div className="dropdown-divider"></div>
                <a className="dropdown-item" href="/">Something else here</a>
              </div>
            </li>
            <li className="nav-item">-
              <a className="nav-link disabled">Disabled</a>
            </li>
          </ul>
          <form className="form-inline my-2 my-lg-0">
            <input className="form-control mr-sm-2" type="search" placeholder="Search" aria-label="Search" />
            <button className="btn btn-outline-success my-2 my-sm-0" type="submit">Search</button>
          </form>
        </div>
      </nav>
    </>
  );
}
export default App;
```


First : getbootstrap.com open > component > Navbar > copy to coding

Second : ctrl + F > class repalce to className

Third : ctrl + F > href="*" replace to href=""

Fourth : input Tag close to <input ----- />

Output :

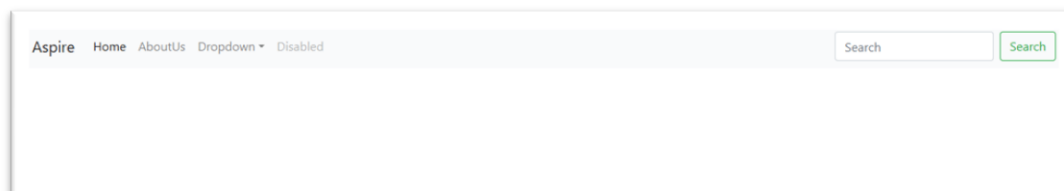

Props : means Property...

Javascript Important point : named export & default export

create to folder in our folder

module1.mjs

```
import ui from './module2.mjs'  
  
console.log(ui);
```

module2.mjs

```
const a = "Ramesh";  
const b = "Anita";  
const c = "Dhruv";  
const d = "Dax";  
  
export default d;
```

run : type (node .\module1.mjs)

Other Example:

module1.mjs

```
import rk, {a, b, c} from './module2.mjs'  
  
console.log(rk);  
console.log(a);  
console.log(b);  
console.log(c);
```

module2.mjs

```
const a = "Ramesh";  
const b = "Anita";  
const c = "Dhruv";  
const d = "Dax";  
  
export default d;  
export {a};  
export {b};  
export {c};
```

run ; node .\module1.mjs (note: All name will be export)

State & Handling Events...

in Components Folder > Create a file > textform.js

react imports function type is **rfc**

React Js : Default export & Named export

default export

નોંધ : એક સમય પર એક જ File import / export કરી શકાય છે.

Type : npm init -y > Create a Folder > package.jsom > “main”: index.js after > “type”: “module”,(cerate krrvu)

create File > maths.js

```
let sumData =(a,b)=>{  
  return a+b;  
}  
  
export default sumData
```

Create File > index.js

```
import sumData from "./math.js";  
  
console.log(sumData(130,20))
```

Run : node index.js

named export

create File > maths.js

```
let sumData =(a,b)=>{  
  return a+b;  
}  
let minData =(a,b)=>{  
  return a-b;  
}  
let mulData =(a,b)=>{  
  return a*b;  
}  
  
export {sumData,minData,mulData}
```

Create File > index.js

```
import {sumData,minData,mulData} from "./math.js";  
  
console.log(sumData(130,20))  
console.log(minData(130,20))  
console.log(mulData(20,20))
```

React Components

1) Functional Components

2) Class Components

Functional Components

- export components

Header Section

Basic Programme-1st part

src folder > create file Header.jsx

```
function Header(){
  return(
    <div>
      <h1>Welcome To Header Section</h1>
      <div>Childe Component 1</div>
      <div>Childe Component 2</div>
      <div>Childe Component 3</div>
    </div>
  )
}
```

export default Header;

in App.js

```
import Header from './Header';

function App() {
  return (
    <Header/>
  );
}

export default App;
```

Or

Named Components

```
function Header(){
  return(
    <div>
      <h1>Welcome To Header Section</h1>
      <div>Childe Component 1</div>
      <div>Childe Component 2</div>
      <div>Childe Component 3</div>
    </div>
  )
}
```

export {Header};

```
import {Header} from './Header';

function App() {
  return (
    <Header/>
  );
}

export default App;
```


Footer Section > rfc type

Footer.jsx

```
import React from 'react'

export default function Footer() {
  return (
    <h1>Footer Section</h1>
  )
}
```

App.js

```
import {Header} from './Header';
import Footer from './Footer';

function App() {
  return (
    <div className='main'>
      <Header/>
      <Footer/>
    </div>
  );
}
export default App;
```

Basic Program.... 2nd parts

App.js

```
import {Header} from './Header';
import Footer from './Footer';
function App() {
  return (
    <div className='main'>
      <Header/>
      <div className='row'>
        <Card/>
        <Card/>
        <Card/>
        <Card/>
        <Card/>
        <Card/>
        <Card/>
        <Card/>
      </div>
      <Footer/>
    </div>
  );
}
export default App;

function Card(){
  return(
    <div className='cardItems'>Card Div</div>
  )
}
```

App.css

```
.row{
  width: 1320px;
  margin: auto;
  display: flex;
}
.cardItems{
  flex-basis: 23%;
  flex-wrap: wrap;
  background-color:crimson;
  margin: 1%;
  height: 200px;
}
```

Output:



// How Can Bootstrap Framework Install ? //

- 1) npx create-react-app firstapp >
- 2) in firstapp folder > npm i bootstrap
- 3) in index.js file create 2 file >

```
import "bootstrap/dist/css/bootstrap.css"
import "bootstrap/dist/js/bootstrap.bundle"
```

App.js

```
function App() {
  return (
    <div className='main'>
      <Header/>
      <div className='container'>
        <h1 className='text-danger'> Hello Aspire </h1>
      </div>
      <Footer/>
    </div>
  );
}
export default App;
```

Output :

Welcome To Header Section

Child Component 1
Child Component 2
Child Component 3

Hello Aspire

Footer Section

// React Bootstrap Install //

type : npm i react-bootstrap

App.js

```
import {Header} from './Header';
import Footer from './Footer';
import {Container, Row, Col, Card, Button} from 'react-bootstrap';

function App() {
  return (
    <div className='main'>
      <Header/>

      <Container fluid>
        <Container>
          <Row>
            <Col className="col-12 text-center py-4">
              <h1>Aspire IT Course</h1>
            </Col>
          </Row>
        </Container>
      </Container>
      <Footer/>
    </div>
  );
}
```

```

</Row>
<Row>
  <Col lg="3" md="6">
    <Card style={{ width: '18rem' }}>

      <Card.Body>
        <Card.Title>Graphics Design</Card.Title>
        <Card.Text>
          Some quick example text to build on the card title and make up the
          bulk of the card's content.
        </Card.Text>
        <Button variant="primary">Go somewhere</Button>
      </Card.Body>
    </Card>
  </Col>
  <Col lg="3" md="6">
    <Card style={{ width: '18rem' }}>

      <Card.Body>
        <Card.Title>Ui-Ux Design</Card.Title>
        <Card.Text>
          Some quick example text to build on the card title and make up the
          bulk of the card's content.
        </Card.Text>
        <Button variant="primary">Go somewhere</Button>
      </Card.Body>
    </Card>
  </Col>
  <Col lg="3" md="6">
    <Card style={{ width: '18rem' }}>

      <Card.Body>
        <Card.Title>Jewellery Design</Card.Title>
        <Card.Text>
          Some quick example text to build on the card title and make up the
          bulk of the card's content.
        </Card.Text>
        <Button variant="primary">Go somewhere</Button>
      </Card.Body>
    </Card>
  </Col>
  <Col lg="3" md="6">
    <Card style={{ width: '18rem' }}>


      <Card.Body>
        <Card.Title>Digital Print</Card.Title>
        <Card.Text>
          Some quick example text to build on the card title and make up the
          bulk of the card's content.
        </Card.Text>
        <Button variant="primary">Go somewhere</Button>
      </Card.Body>
    </Card>
  </Col>
</Row>
</Container>
</Container>

<Footer/>
</div>

);
}
export default App;

```

Props is create custom Attributes..

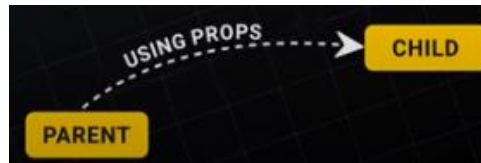

App.js

```
function App() {
  return (
    <div className='main'>
      <Header email="rams.dk1212@gmail.com" phone="9825240543"/>

      <Container fluid>
        <Container>
```

Header.jsx

```
function Header(props){

  return(
    <div>
      <h1>Welcome To Header Section {props.email} || {props.phone}</h1>

    </h1>

    /* <div>Childe Component 1</div>
    <div>Childe Component 2</div>
    <div>Childe Component 3</div> */
    </div>

  )
}
export {Header};
```

Props create custom objects

App.js

```
function App() {
  let headerInfo={
    email:"rams.dk1212@gmail.com",
    phone:"9825240543",
    city:"Surat"
  }
  return (
    <div className='main'>
      <Header headerInfo={headerInfo}/>

      <Container fluid>
```

Header.jsx

```
function Header(props){
  console.log(props.headerInfo.email);
  return(
    <div>
      <h1>Welcome To Header Section </h1>
      /* <div>Childe Component 1</div>
      <div>Childe Component 2</div>
      <div>Childe Component 3</div> */
    </div>

  )
}
export {Header};
```

Output : console.log

rams.dk1212@gmail.com

// Header Parameter //

app.js

```
function App() {
  let headerInfo={
    email:"rams.dk1212@gmail.com",
    phone:"9825240543"
  }
  return (
    <div className='main'>
      <Header headerInfo={headerInfo} cname="Aspire"/>
    </div>
  )
}
```

Header.jsx

```
function Header({headerInfo,cname}){
  //let {headerInfo,cname}=props;
  // console.log(headerInfo,cname)
  //console.log(props.headerInfo.email)
  // console.log(props.headerInfo.phone)
  return(
    <div>
      <h1>Welcome To Header Section {headerInfo.email}|| {cname}</h1>
      <div>Childe Component 1</div>
      <div>Childe Component 2</div>
      <div>Childe Component 3</div>
    </div>
  )
}
export {Header};
```

```
1. {email: 'rams.dk1212@gmail.com', phone: '9825240543'}
   1. email: "rams.dk1212@gmail.com"
   2. phone: "9825240543"
```

// Children Props //

Header ni vacche koi Data Lakhvama aave to tene Children kevay.

<Header>

.....

</Header>

app.js

```
function App() {
  let headerInfo={
    email:"rams.dk1212@gmail.com",
    phone:"9825240543"
  }
  return (
    <div className='main'>
      <Header headerInfo={headerInfo} cname="Aspire">
        <h1>Welcome to React Js Learning</h1>
      </Header>
    </div>
  )
}
```

Header.jsx

```
function Header({headerInfo,cname,children}){
  return(
    <div>
      {children}
      <h3>Welcome to Aspire Multimedia & Design Institute</h3>
      <h1> {headerInfo.email} || {cname}</h1>
    </div>
  )
}
export {Header};
```

// Font Awesome Icon //

Open > <https://docs.fontawesome.com/web/use-with/react>

install 5 Library>

```
npm i --save @fortawesome/fontawesome-svg-core
```

```
npm i --save @fortawesome/free-solid-svg-icons
```

```
npm i --save @fortawesome/free-regular-svg-icons
```

```
npm i --save @fortawesome/free-brands-svg-icons
```

```
npm i --save @fortawesome/react-fontawesome@latest
```

```
import { FontAwesomeIcon } from '@fortawesome/react-fontawesome';
import { faWhatsapp } from '@fortawesome/free-brands-svg-icons';
import { faPhone, faSearch } from '@fortawesome/free-solid-svg-icons';
```

```
function App() {
  let headerInfo={
    email:"rams.dk1212@gmail.com",
    phone:"9825240543"
  }
  return (
    <div className='main'>
      <Header headerInfo={headerInfo} cname="Aspire">
        <h1>Welcome to React Js Learning</h1>

        <FontAwesomeIcon icon={faWhatsapp} className='text-danger' />
        <FontAwesomeIcon icon={faPhone} className='text-danger' />
        <FontAwesomeIcon icon={faSearch} />
      </Header>
    </div>
  )
}
```

Output

Welcome to React Js Learning

Welcome to Aspire Multimedia & Design Institute
rams.dk1212@gmail.com || Aspire

Aspire IT Course

Graphics Design

Some quick example text to build on the card title and make up the bulk of the card's content.

[Go somewhere](#)

Ui-Ux Design

Some quick example text to build on the card title and make up the bulk of the card's content.

[Go somewhere](#)

Jewellery Design

Some quick example text to build on the card title and make up the bulk of the card's content.

[Go somewhere](#)

Digital Print

Some quick example text to build on the card title and make up the bulk of the card's content.

[Go somewhere](#)

Footer Section

// Tailwind CSS in react Js //

step – 1 [tailwind.com](https://tailwindcss.com) > get started > Framework guides > Create react app >

```
npm install -D tailwindc
```

```
npx tailwindcss init
```

step -2 tailwind.config.js ma rahel data copy kri

```
/** @type {import('tailwindcss').Config} */
module.exports = {
  content: [
    "./src/**/*..{js,jsx,ts,tsx}",
  ],
  theme: {
    extend: {},
  },
  plugins: [],
}
```

tailwind.config.js folder ma paste krva

step-3

index.css

```
@tailwind base;
@tailwind components;
@tailwind utilities;
```

index.css ma paste krva

Simple Code:

app.js

```
import logo from './logo.svg';
import './App.css';

function App() {
  return (
    <div className="App">
      <h1 className='text-[40px] font-bold text-red-900'>Welcome to Aspire</h1>
    </div>
  );
}

export default App;
```

Output :

Welcome to Aspire

// Css + Image in React js //

Simple Program....

App.js

```
import logo from './logo.svg';
import './App.css';
import Header from './Header';

function App() {
  return (

    <div className="App">
      <Header/>
      <h1 className='text-[40px] font-bold text-red-900'>Welcome to Aspire</h1>
    </div>
  );
}

export default App;
```

Header.jsx

```
import React from 'react'
import './Header.css'
export default function Header() {
  return (
    <div>
      <div className='Header'> Good Morning Friend</div>
    </div>
  )
}
```

Header.css

```
.Header{
  width: 100%;
  padding: 20px ;
  background-color: aqua;
  color: brown;
  font-size:xx-large;
}
```

Output :

Good Morning Friend

Welcome to Aspire

- Image

app.js

```
import logo from './logo.svg';
import './App.css';
import Header from './Header';
import photo from './images/7.jpg'
import photo1 from './images/4.jpg'

function App() {
  return (

    <div className="App">
      <img src={photo}/>
      <img src={photo1}/>
      <Header/>
      <h1 className='text-[40px] font-bold text-red-900'>Welcome to Aspire</h1>
    </div>
  );
}

export default App;
```


Header.css

```
img{  
  width: 200px;  
  height: 200px;  
  border: 0cqh;  
  border-radius: 5px;  
}
```

Output:



// Event Handling //

OnClick : Function Call

app.js

```
import logo from './logo.svg';  
import './App.css';  
import Header from './Header';  
import photo from './images/7.jpg'  
import photo1 from './images/4.jpg'  
  
function App() {  
  let dispalyData={()=>{  
    alert("Welcome Aspire Institute")  
  }}  
  let disData={()=>{  
    alert("Good Morning")  
  }}  
  let clickData={()=>{  
    alert("Good Evening")  
  }}  
  return (  
    <div className="App">  
      <button onClick={dispalyData}>Open</button>  
      <button onClick={disData}>Close</button>  
      <button onClick={clickData}>Save</button>  
      <img src={photo}/>  
      <img src={photo1}/>  
      <Header/>  
      <h1 className='text-[40px] font-bold text-red-900'>Welcome to Aspire</h1>  
    </div>  
  );  
}  
export default App;
```

Header.css

```
button{  
  background-color: chocolate;  
  width: 100px;  
  height: 50px;  
  border-radius: 10px;  
}
```

Output :

Open

Close

Save


Parameter Function with button

app.js

```
let addData=(a,b)=>{  
  console.log(a+b)
```

```
<button onClick={()=>addData(50,50)}>Sum Item</button>
```

Output : console.log

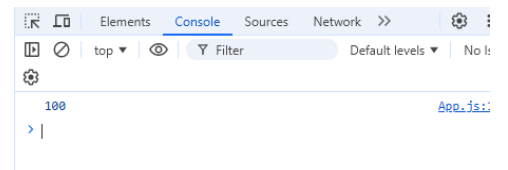


//Hooks //

app.js

```
function App() {  
  let n=10;  
  let dispalyData={()=>{  
    n=n+1;  
    console.log(n)  
  }}  
}
```

```
<div className="App">  
  {10}  
  <button onClick={()=>addData(50,50)}>Sum Item</button>
```

Output



usestate Hooks

```
import { useState } from 'react';  
  
function App() {  
  let [count, setCount]=useState(1)  
  let dispalyData={()=>{  
    setCount(count+1)  
  }}  
}
```

```
<div className="App">  
  {count}  
  
  <button onClick={dispalyData}>Open</button>
```

output : 1 value step by step click krta + thase

//If...else Condition //

app.js

```
import logo from './logo.svg';
import './App.css';
import Header from './Header';
import { useState } from 'react';

function App() {
  let template="";

  let [pshow,setPshow]=useState(false)
  if(pshow){
    template=<
      <button onClick={()=>setPshow(!pshow)}>Hide</button>
      <p>Hello !!! Good Morning</p>
    </>
  }
  else
  {
    template=<button onClick={()=>setPshow(!pshow)}>Show</button>
  }
  return (
    <div className="App">
      {template}
      <Header/>
    </div>
  );
}
export default App;
```

Output



// Ternary Condition //

app.js

```
import logo from './logo.svg';
import './App.css';
import { useState } from 'react';


function App() {
  let [status,setStatus]=useState(false)
  return (
    <div className="App">
      <button onClick={()=>setStatus(!status)}>Show</button>
      {
        (status)
        ?
        <p className='para'>Aspire Multimedia & Design</p>

        :
        ""
      }
    </div>
  );
}
export default App;
```

app.css

```
.para{
  background-color: red;
  width: 1000px;
  margin: auto;
  padding: 10px;
  text-align: center;
}
button{
  background-color: cadetblue;
  size: 200px;
  border-radius: 50px;
  width: 100px;
  padding: 10px;
  color: white;
}
```

output



// Module Style //

app.js

```
import logo from './logo.svg';
import './App.css';
import btnmodule from "././Button.module.css"

function App() {
  return (
    <div className="App">
      <button className={btnmodule.home}>Home</button>
      <button className={btnmodule.gallery}> Gallery</button>
    </div>
  );
}
```

button.module.css

```
.home{
  background-color: blue;
  color: white;
}
.gallery{
  background-color: chartreuse;
  color: blue;
}
```

Output:



// Show & Hide Password //

app.js

```
import logo from './logo.svg';
import './App.css';
import { useState } from 'react';

function App() {

  let [pstatus,setStatus]=useState(false)

  return (
    <div className="App">
      <input type={pstatus ? 'text' : 'password'}/>

      <button onClick={()=>setStatus(!pstatus)}>{pstatus ? 'Hide' : 'Show'}</button>
    </div>
  );
}

export default App;
```

Output :

Show

Hide

// Responsive Menubar //

app.js

```
import logo from './logo.svg';
import './App.css';
import { useState } from 'react';

function App() {
  let[menustatus,setMenustatus]=useState(false)
  return (
    <div className="App">
      <button className='micon' onClick={()=>setMenustatus(!menustatus)} >
        {
          menustatus ?
            <span>&times;</span>
            :
            <span> &#9776;</span>
          }
        </button>
      <div className={`menu ${menustatus ? 'activeMenu' : ''}`}>
        <ul>
          <li>Home</li>
          <li>About Us</li>
          <li>Course</li>
          <li>Gallery</li>
          <li>Contact us</li>
        </ul>
      </div>
    </div>
  );
}
```

export default App;

app.css

```
.menu{
  width: 80%;
  position: fixed;
  text-align: left;
  transition: 0.5s;
  left: -100%;
  height: 100vh;
  background-color: chocolate;
}

.activeMenu{
  left: 0%;
}

.menu ul li{
  list-style: none;
  padding: 10px 0px;
}

.micon{
  position: absolute;
  right: 10px;
}
```

Output :



// Login Model //

Step-1 app.js

```
import logo from './logo.svg';
```

```
import './App.css';
import { useState } from 'react';

function App() {
  return (
    <div className="App">
      <button className='en'>Enquiry Now</button>
      <div className="modelOverlay"></div>
      <div className='modelDiv'>
        <h1>Enquiry Now</h1>
      </div>
    </div>
  );
}
export default App;
```

app.css

```
.modelOverlay{
  width: 100%;
  height: 100%;
  display: none;
  position: fixed;
  background-color:rgba(0, 0, 0, 0.5)
}
.modelDiv{
  width: 320px;
  position: fixed;
  left: 50%;
  top: -500px;
  transition: 0.5s;
  transform: translate(-50%,-50%);
  height: 320px;
  background-color: white;
}
.en{
  width: 100px;
  height: 100px;
  position: fixed;
  top: 30%;
  right: -10px;
  transform: rotate(90deg);
}
```

step-2 (use for usestate)


```
function App() {
  let[modelstatus,setModelstatus]=useState(false)

  return (
    <div className="App">
      <button className='en' onClick={()=>setModelstatus(!modelstatus)}>Enquiry Now</button>
      <div className={`modelOverlay ${modelstatus ? 'modelShow' : ''} `}></div>
      <div className={`modelDiv ${modelstatus ? 'showmodelDiv' : ''} `}>
        <h1>Enquiry Now</h1>
      </div>
    </div>
  );
}
```

app.css

```
.modelShow{
  display: block;
}
.showmodelDiv
{
  top: 50%;
}
```

Output :

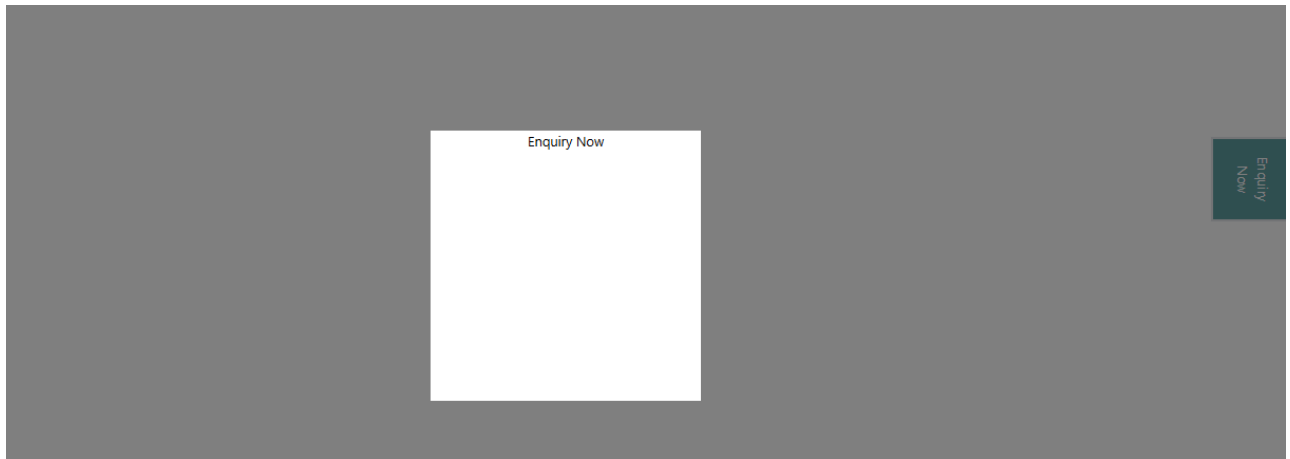

Ecommerce Website

First : tailwind.css

Install : `npm install -D tailwindcss`

Install : `npx tailwindcss init`

Tailwindconfig.js > tailwind.css > code copy paste

```
/** @type {import('tailwindcss').Config} */
module.exports = {
  content: [
    "./src/**/*..{js,jsx,ts,tsx}",
  ],
  theme: {
    extend: {},
  },
  plugins: [],
} theme: {
  extend: {}
},
plugins: [],
}
```

Index.css > Copy paste

```
@tailwind base;
@tailwind components;
@tailwind utilities;
```