

Firestore: REST and Web API

INF 551

Wensheng Wu


Firebase

- A cloud-based platform to support web and mobile app development
- Used to be Envolv, a startup founded in 2011
 - For adding online chat functions into websites
- Later expanded into Firebase which was then acquired by Google in 2015

Products

- Firebase (realtime) database
 - Manage JSON documents
 - Real-time syncing data between users and devices
- Firebase (cloud) storage
 - Store images, photos, videos
- Firebase (user) authentication
 - Support signin using Google, Facebook

Firebase realtime database

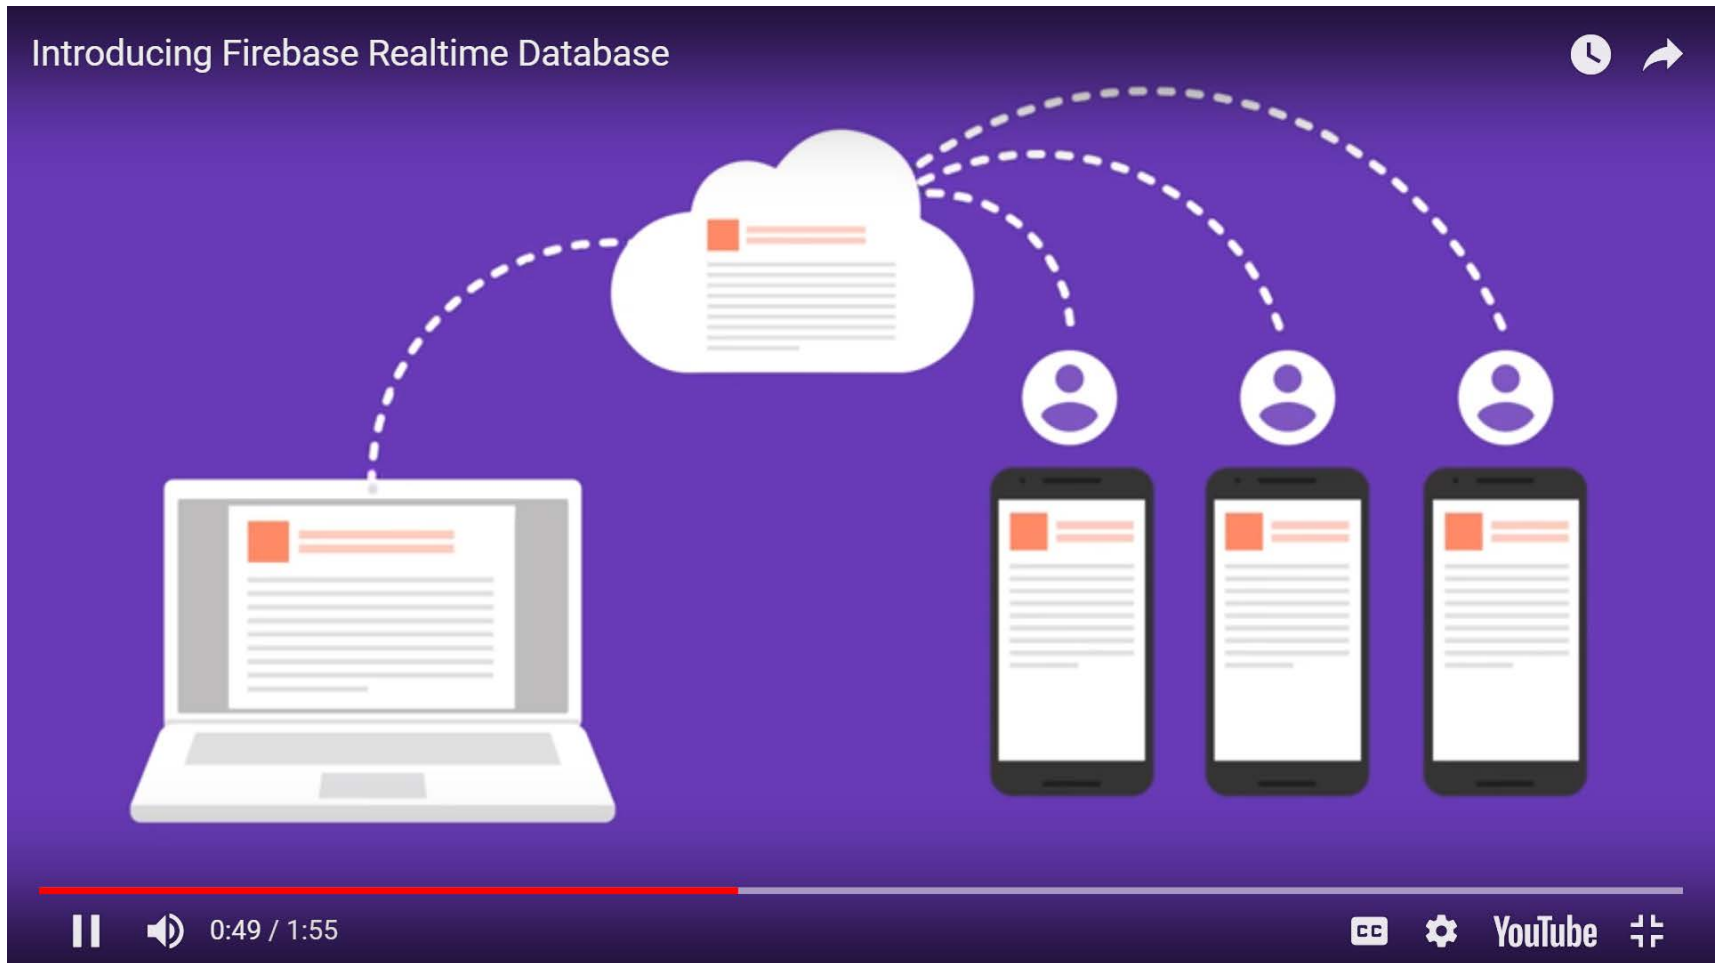

Create a Firebase account

- You may use your Google account
- Go to Firebase console:
 - <https://console.firebase.google.com/>

Click on "Add project"

Welcome to Firebase

Tools from Google for developing great apps,
engaging with your users, and earning more through
mobile ads.

 [Learn more](#)  [Documentation](#)  [Support](#)

Recent projects



Add project



Explore a demo project

INF551

inf551-1b578

Create a Firebase project


Create a project

×

Project name

INF551

Project ID ?

inf551-faa50 

Country/region ?

United States ▼

By default, your Analytics data will enhance other Firebase features and Google products. You can control how your analytics data is shared in your settings at anytime. [Learn more](#)

CANCEL

CREATE PROJECT

Pricing plan

- Free Spark plan is sufficient for coursework

Firestore pricing plans

Spark

Free \$0/month

✓

Usage quotas for Database, Storage, Hosting, Test Lab, and Functions

✗

Ability to extend your project with Google Cloud Platform

✓

Included in all plans
Analytics, Notifications, Crash Reporting, support, and more

[See full plan details](#)

CURRENT PLAN

Flame

Fixed \$25/month

✓

Increased Database, Storage, and Hosting space. Outbound connections for Functions.

✗

Ability to extend your project with Google Cloud Platform

✓

Included in all plans
Analytics, Notifications, Crash Reporting, support, and more

[See full plan details](#)

SELECT PLAN

Blaze

Pay as you go

✓

No quotas for Database, Storage, Hosting, Test Lab, and Functions

✓

Ability to extend your project with Google Cloud Platform

✓

Included in all plans
Analytics, Notifications, Crash Reporting, support, and more

[See full plan details](#)

SELECT PLAN

Spark plan

Realtime Database Simultaneous connections ? GB stored GB downloaded Automated backups	100 1 GB 10 GB/month ×
Storage ? GB stored GB downloaded Upload operations Download operations	5 GB 1 GB/day 20K/day 50K/day

Change authentication rule



Default security rules require users to be authenticated

```
1 {  
2   "rules": {  
3     ".read": "auth != null",  
4     ".write": "auth != null"  
5   }  
6 }
```


Open to public (for testing only)

```
{  
  "rules": {  
    ".read": true,  
    ".write": true  
  }  
}
```

JSON (Javascript Object Notation)

- Light-weight data exchange format
 - Much simpler than XML
 - Language-independent
 - Inspired by syntax of JavaScript object literals
- Some differences from JavaScript objects, e.g.,
 - String in JSON must be double-quoted
 - Ok to single-quote in JavaScript (& Python)

Syntax of JSON

- value =
string | number | object | array | **true** | **false** | **null**

- object = { } | { members }
 - members = pair | pair, members
 - pair = string : value
- array = [] | [elements]
 - elements = value | value, elements

Valid JSON or not?

- []
- {}
- {[]}
- [{}]
- {"name": john}
- {name: "john"}
- {"name": 25}
- "name"
- 25
- {25}
- [25]


JSON is case-sensitive

- Valid or not?
 - True
 - true
 - TRUE
 - Null
 - false


Example JSON

```
{
  "firstName": "John",
  "lastName": "Smith",
  "isAlive": true,
  "age": 25,
  "address": {
    "streetAddress": "21 2nd Street",
    "city": "New York",
    "state": "NY",
    "postalCode": "10021-3100"
  },
  "phoneNumbers": [
    {
      "type": "home",
      "number": "212 555-1234"
    },
    {
      "type": "office",
      "number": "646 555-4567"
    }
  ],
  "children": [],
  "spouse": null
}
```

Value is an object




Value is an array



Stored in Firebase

inf551-1b578

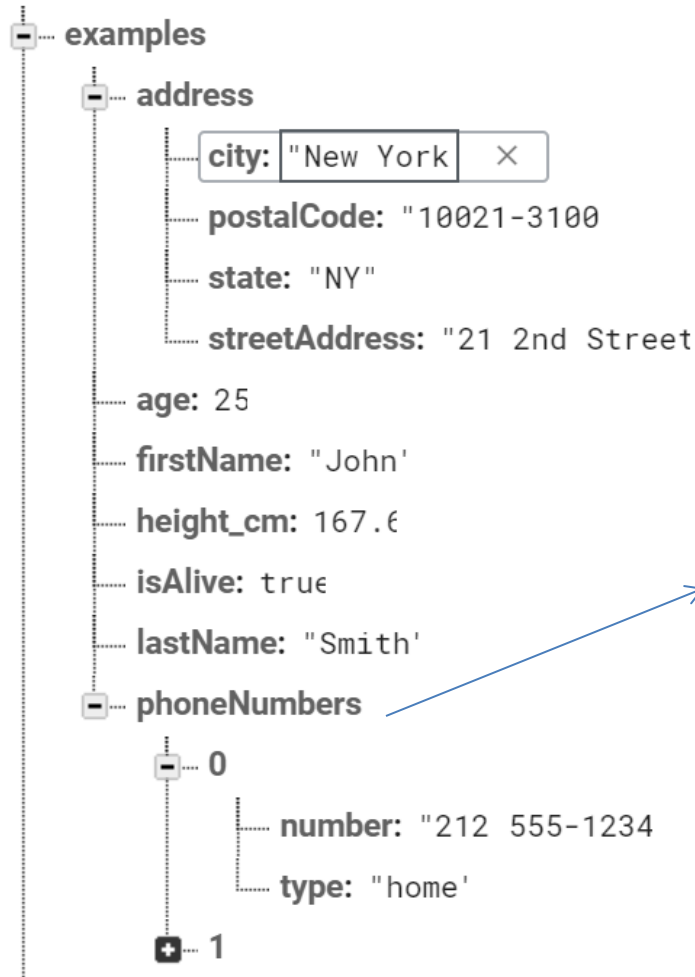

Note: array stored as an object
Key = index of element in array

Check syntax of JSON

- JSON validator
 - <http://jsonlint.com/>

Roadmap

- **Firestore REST API**
- **Firestore Javascript API**
 - Useful for your project




curl

- Command line tool for data transfer
- Download from here (has Windows & Mac OS versions):
 - <https://curl.haxx.se/download.html>
- You may easily grab a copy of curl in Cygwin (see next slide)


Install curl in Cygwin

Select to install this one

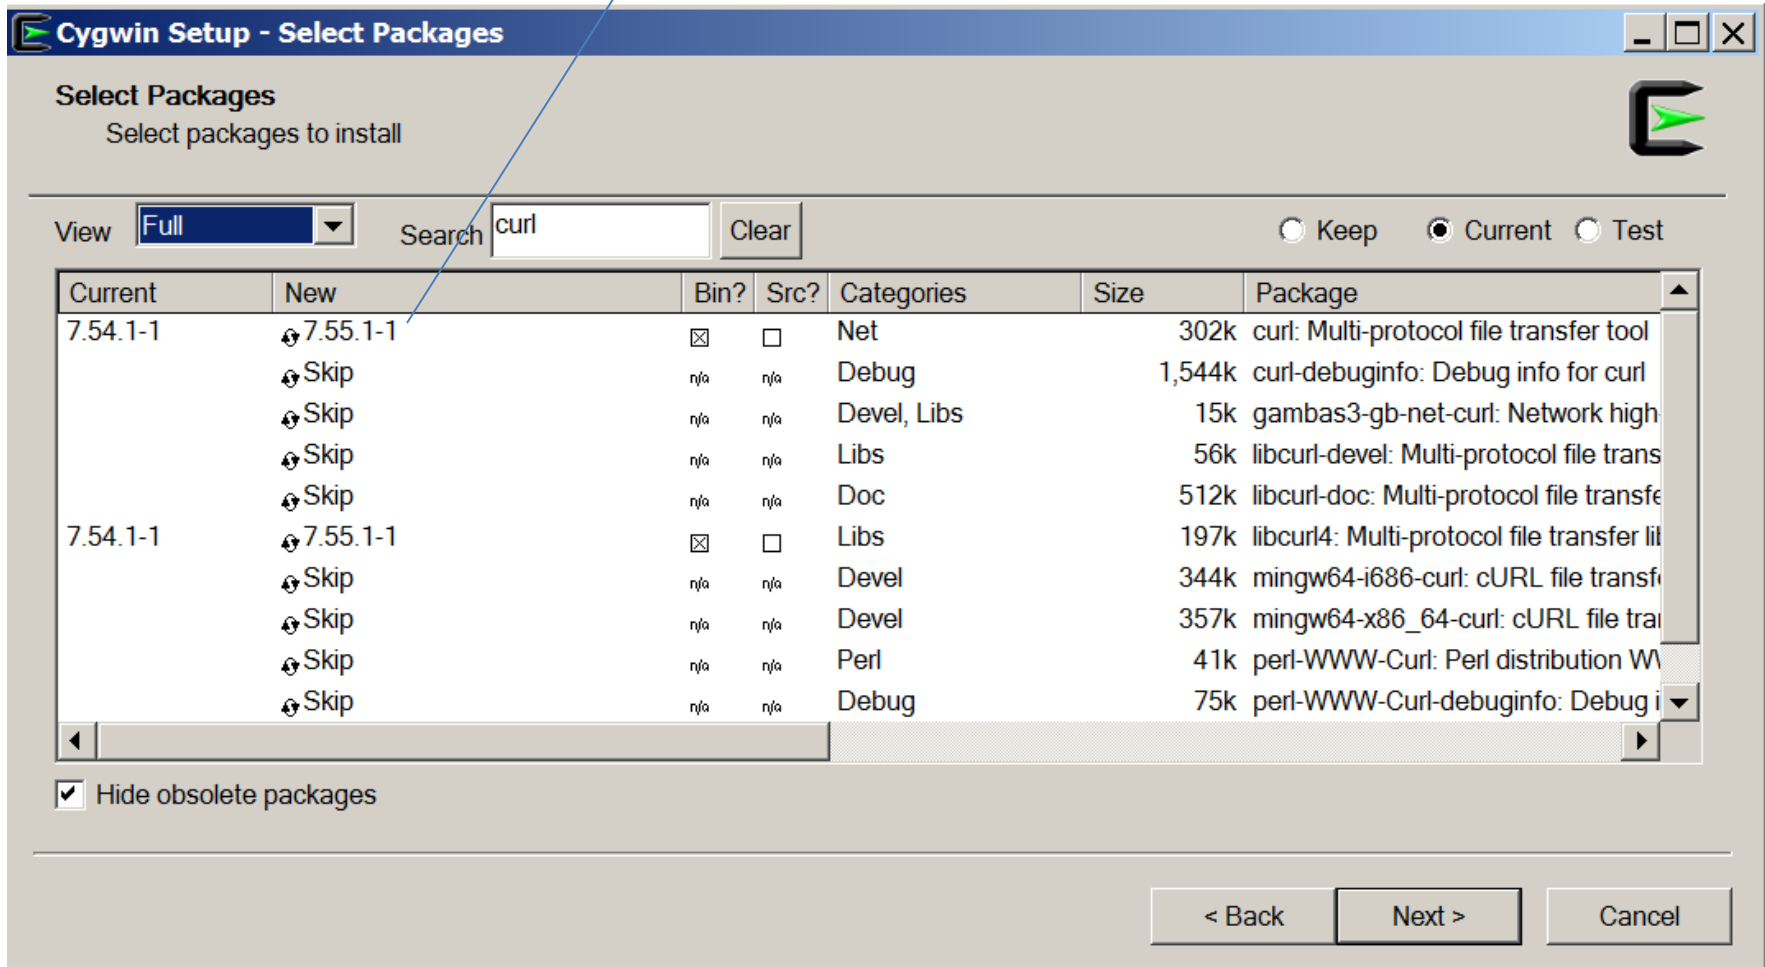

Firebase REST API

- PUT & POST (C in CRUB)
- GET (R)
- PATCH (U)
- DELETE (D)

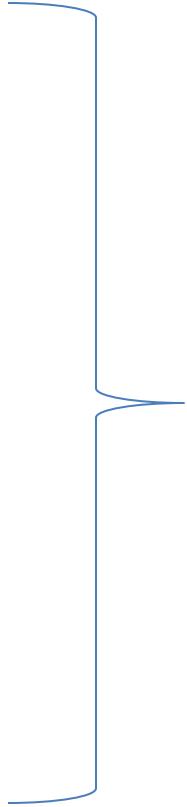

All request commands
are case sensitive (all uppercases)


GET

- `curl 'https://inf551-1b578.firebaseio.com/weather.json'`
- Or
 - `curl -X GET 'https://inf551-1b578.firebaseio.com/weather.json'`

Another example

- `curl -X GET 'https://inf551-1b578.firebaseio.com/examples/phoneNumbers/0.json'`
 - `{"number": "212 555-1234", "type": "home"}`

Note: refer to array element by index

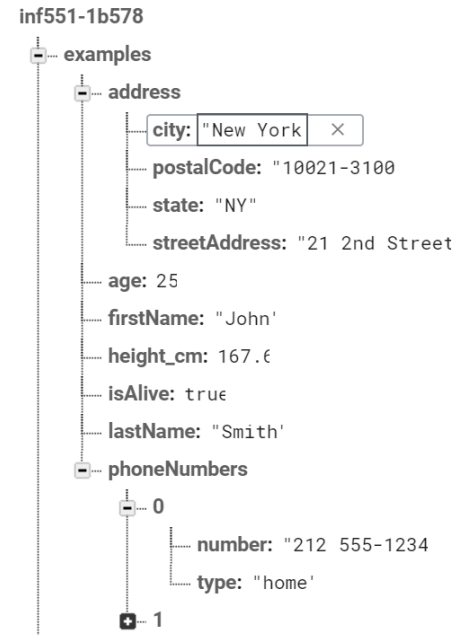

PUT

- `curl -X PUT 'https://inf551-1b578.firebaseio.com/weather.json' -d '"hot"'`
 - `"hot"`
- PUT: write a given value (e.g., `"hot"`) to the specify node (e.g., `"weather"`)
 - Overwrite if node already has value

PUT

- `curl -X PUT 'https://inf551-1b578.firebaseio.com/users/100.json' -d '{"name": "john"}'`
- This will add a new node "users" (assuming it does not exist yet) and a child of this node with key "100" and content: `{"name": "john"}`

Example

- Is the previous command the same as this?
 - `curl -X PUT -d '{"100": {"name": "John"}}'`
<https://inf551-1b578.firebaseio.com/users.json>



Note we now write to the "users" node

- Can you think of a situation where two commands give different results?

POST

- `curl -X POST -d '{"name": "John"}'`
<https://inf551-1b578.firebaseio.com/users.json>
- Note post automatically generates a new key & then store the value for the new key
 - In contrast, PUT will simply overwrite the value

PATCH

- `curl -X PATCH -d '{"name": "John Smith", "age": 25}' 'https://inf551-1b578.firebaseio.com/users/100.json'`
- PATCH performs the update if value already exists (e.g., name) ; otherwise, it inserts the new value (e.g., age)
 - ... an upsert

DELETE

- `curl -X DELETE 'https://inf551-1b578.firebaseio.com/users/100.json'`
- What does this do?
 - `curl -X DELETE 'https://inf551-1b578.firebaseio.com/users.json'`


Query: filtering by key

- `curl 'https://inf551-1b578.firebaseio.com/users.json?orderBy="$key"&equalTo="200"'`

→ Must be a string. Why?

- This returns:
 - `{"200":{"age":25,"name":"David"}}`

Another example


- `curl 'https://inf551-1b578.firebaseio.com/users.json?orderBy="$key"&startAt="200"'`
 `Users with keys >= 200`
- This returns:
 - `{"200":{"age":25,"name":"David"},"300":{"gender":"female","gpa":4.0,"name":"Mary"}}`

Ways of filtering data

- By key:
 - orderBy="\$key"

- By child key:
 - (direct) child key: address
 - (nested) child key: address.city
 - orderBy="<path-to-child-key>"

- By value:
 - orderBy="\$value"

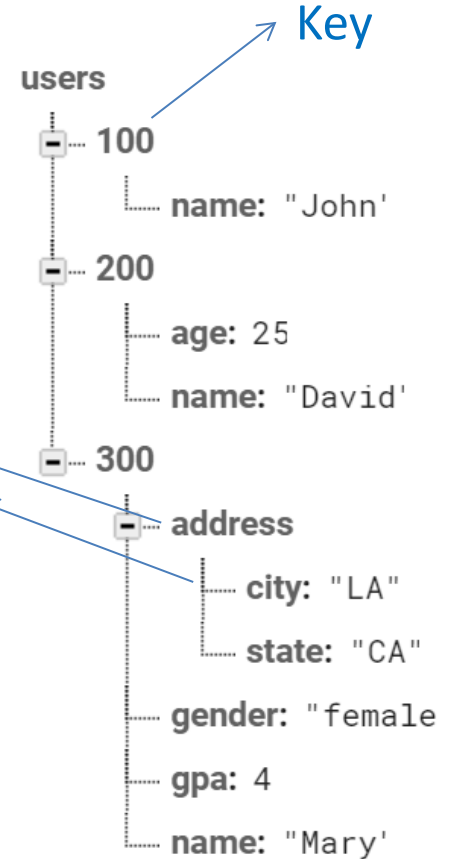

Parameters

- startAt
- endAt
- equalTo
- limitToFirst
- limitToLast

Watch out...

- <https://firebase.google.com/docs/database/rest/retrieve-data#filtering-by-a-specified-child-key>




Filtered data is returned unordered: When using the REST API, the filtered results are returned in an undefined order since JSON interpreters don't enforce any ordering. If the order of your data is important you should sort the results in your application after they are returned from Firebase.

Example: filtering by child key

- `curl 'https://inf551-1b578.firebaseio.com/users.json?orderBy="name"&limitToFirst=1&print=pretty'`
- What will this return?

Example: filtering by value

- `curl 'https://inf551-1b578.firebaseio.com/student-scores/q1.json?orderBy="$value"&limitToFirst=1&print=pretty'`
- What will this return?

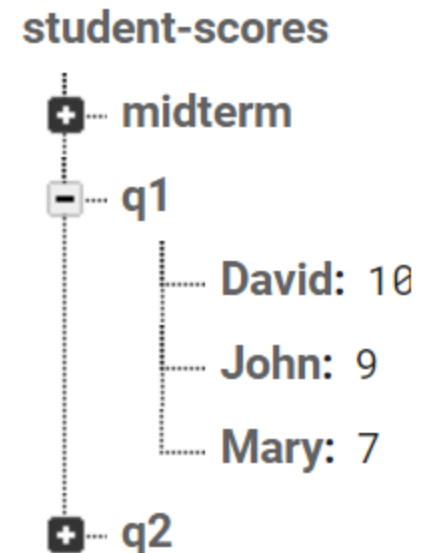

Creating index for value/child key

- Specified in database rules:
 - <https://firebase.google.com/docs/database/security/indexing-data>
- Only required for REST API

DATA	RULES	BACKUPS	USAGE
<pre>1 { 2 "rules": { 3 ".read": true, 4 ".write": true, 5 "users": { 6 ".indexOn": "name" 7 }, 8 "student-scores": { 9 "q1": { ".indexOn": ".value" } 10 } 11 } 12 }</pre>			

Using REST in Python

- import requests
 - May need to "pip install requests" first
- url = 'https://inf551-1b578.firebaseio.com/users.json'
- response = requests.get(url)
- response.json()
 - {u'200': {u'age': 25, u'name': u'David'},...

Writing

- `url1 = 'https://inf551-1b578.firebaseio.com/users/888.json'`
- `data = '{"name": "jimmy", "sex": "male"}'`
- `response = requests.put(url1, data)`

Pretty printing

- `import json`
- `print json.dumps(response.json(), indent=4)`




```
{  
  "200": {  
    "age": 25,  
    "name": "David"  
  },  
  ...  
}
```


Roadmap

- Firebase REST API
- **Firebase Javascript/Web API**
 - Useful for your project



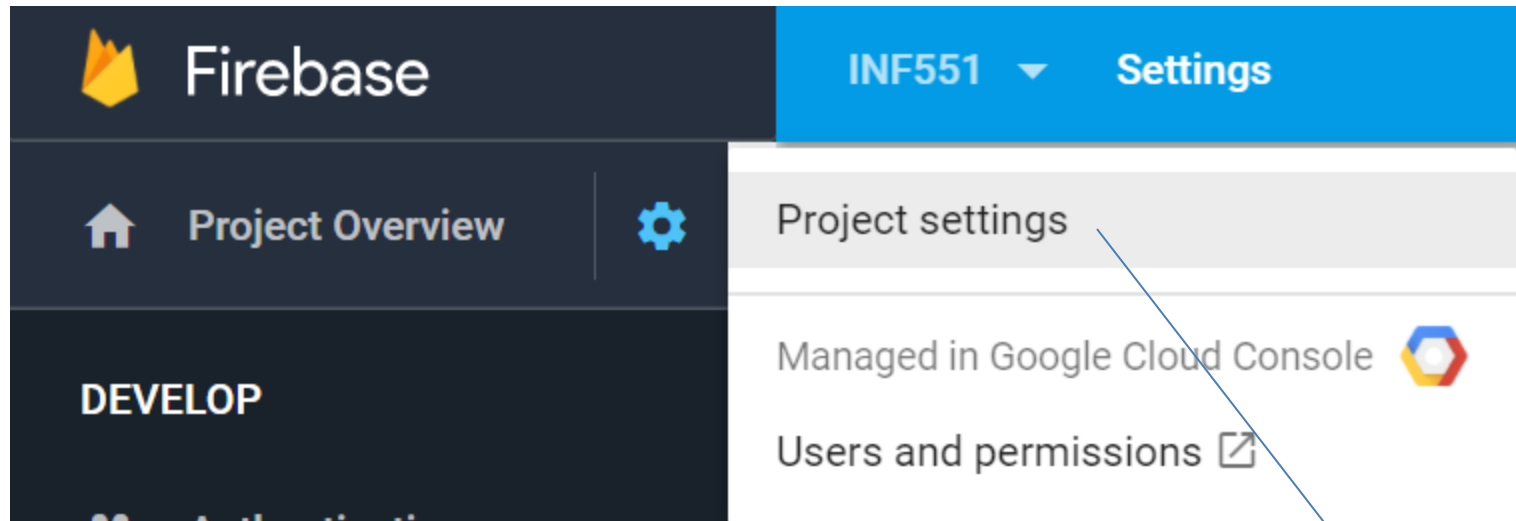

Add Firebase to
your iOS app




Add Firebase to
your Android app



Add Firebase to
your web app

Select this

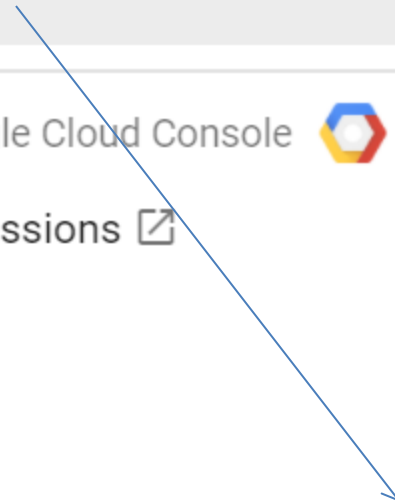

Copy the integration script

Add Firebase to your web app



Copy and paste the snippet below at the bottom of your HTML, before other `script` tags.

```
<script src="https://www.gstatic.com/firebasejs/4.8.1/firebase.js"></script>
<script>
  // Initialize Firebase
  var config = {
    apiKey: "AIzaSyCnysutcHVtVDcSHJl8Hi5FVp0H9oLVzEk",
    authDomain: "inf551-1b578.firebaseio.com",
    databaseURL: "https://inf551-1b578.firebaseio.com",
    projectId: "inf551-1b578",
    storageBucket: "inf551-1b578.appspot.com",
    messagingSenderId: "252330872531"
  };
  firebase.initializeApp(config);
</script>
```

COPY

A html page for testing

```
<html>
<head><title>Test Firebase</title></head>
<body>
```

It is today!

```
<script src="https://www.gstatic.com/firebasejs/4.3.0/firebase.js"></script>
<script>
```

```
  // Initialize Firebase
```

```
  var config = {
```

```
    apiKey: "AIzaSyCnysutCHVtVDcSHJl8Hi5FVpOH9oLVzEk",
```

```
    authDomain: "inf551-1b578.firebaseio.com",
```

```
    databaseURL: "https://inf551-1b578.firebaseio.com",
```

```
    projectId: "inf551-1b578",
```

```
    storageBucket: "inf551-1b578.appspot.com",
```

```
    messagingSenderId: "252330872531"
```

```
  };
```

```
  firebase.initializeApp(config);
```

```
  var value = document.getElementById("value");
```

```
  var dbRef = firebase.database().ref().child("weather");
```

```
  dbRef.on('value', snap => value.innerText = snap.val());
```

```
</script>
```

```
</body>
```

```
</html>
```

val() returns a Javascript object
representing content of snapshot

Internet explorer does not support "=>" notation
Change it to function(snap) {...}

Database reference

- `Firebase.database()` returns a reference to the firebase database as specified by "config"
- `ref()`: returns a reference to the root node of the database
- `ref("weather")` returns a reference to the "weather" child of the root
 - same as `ref().child("weather")`


Modify the data in database

- Observe the data automatically changed in the browser

The screenshot shows a database browser interface. At the top, there is a header bar with the text "inf551-1b578:" followed by a dropdown menu showing "null" and a close button (X). Below this, there is a form with two main sections: "Name" and "Value". The "Name" section has a text input field containing "weather". The "Value" section has a text input field containing "sunny" and a close button (X). Below the form, there are two buttons: "CANCEL" and "ADD". The "ADD" button is highlighted in blue.

Write data using set()

- ```
function writeUserData(userId, name, email) {
 firebase.database().ref("users/" + userId).set({
 name: name,
 email: email
 });
}
```



Setting/overwriting the data of user 123
- ```
writeUserData("123", "John", "john@usc.edu");
```

Write data using push() and set()

- `firebase.database().ref("users").push().set({name: "John", email: "john@usc.edu"});`
- `push()` will automatically generate a key
 - In this case, id for the new user
- Which REST command is this similar to?


Update data

- ```
function updateUserData(userId, phone) {
 firebase.database().ref("users/"+userId).update({
 phone: phone
 });
}
```

Note this does not remove other data of user 123  
What if you replace "update" with "set"?

- ```
updateUserData("123", "(626)123-0000");
```

Retrieve a list of values

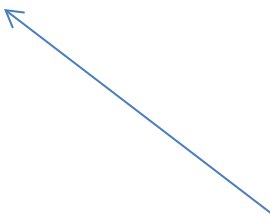- `userRef = firebase.database().ref("users");`
 - `userRef.on("value", function(snapshot) {
 snapshot.forEach(function(child) {
 console.log(child.key + ": " + child.val());
 });
});`
- 

Press Ctrl+Shift+J in Chrome for console window

Listening to child events instead

- `userRef.on("value", function(snapshot) {...`
 - Will retrieve a list of values in the path specified by `userRef`
 - Not efficient, since entire list will be retrieved whenever changes occur
- `userRef.on("child_added", function(...)) {...`
 - Firebase will callback for every existing child and new child added to the path `userRef`
 - Other events: `child_changed`, `child_removed`

Filtering data

- queryRef =
 firebase.database().ref("users").orderByChild(
 "name").equalTo("David");
- queryRef.on("value", function(snapshot) {
 snapshot.forEach(function(child) {
 console.log(child.key + ": " + child.val());
 });
});

Resources

- Add Firebase to your JavaScript Project
 - <https://firebase.google.com/docs/web/setup>
- Getting Started with Firebase on the Web
 - https://www.youtube.com/watch?v=k1D0_wFlXgo&feature=youtu.be
- Realtime Database: Installation & Setup in JavaScript, Read & Write Data ...
 - <https://firebase.google.com/docs/database/web/start>

Resources

- Firebase REST API
 - <https://firebase.google.com/docs/reference/rest/database/>
- Requests for Python
 - <http://docs.python-requests.org/en/master/user/quickstart/#make-a-request>