

API-FOOTBALL (3.9.3)

support: <https://dashboard.api-football.com> | URL: <https://www.api-football.com>

Introduction

Welcome to Api-Football! You can use our API to access all API endpoints, which can get information about Football Leagues & Cups.

We have language bindings in C, C#, cURL, Dart, Go, Java, Javascript, NodeJs, Objective-c, OCaml, Php, PowerShell, Python, Ruby, Shell and Swift! You can view code examples in the dark area to the right, and you can switch the programming language of the examples with the tabs in the top right.

The update frequency indicated in the documentation is given as an indication and may vary for certain competitions.

Authentication

We uses API keys to allow access to the API. You can register a new API key in [rapidapi](#) or directly on our [dashboard](#).

The accounts on **RapidAPI** and on our **Dashboard** are dissociated. Each of these registration methods has its own **URL** and **API-KEY**. You must therefore adapt your scripts according to your subscription by adapting the URL and your API-KEY.

RAPIDAPI : <https://api-football-v1.p.rapidapi.com/v3/>

API-SPORTS : <https://v3.football.api-sports.io/>

Our API expects for the API key to be included in all API requests to the server in a header that looks like the following:

Make sure to replace `XXXXXXXXXXXXXX` with your API key.

REQUESTS HEADERS & CORS

The API is configured to work only with **GET** requests and allows only the headers listed below:

- `x-rapidapi-host`
- `x-rapidapi-key`
- `x-apisports-key`

If you make non-GET requests or add headers that are not in the list, you will receive an error from the API.

Some frameworks (*especially in JS, nodeJS..*) automatically add extra headers, you have to make sure to remove them in order to get a response from the API.

RAPIDAPI Account

All information related to your subscription are available on the rapidApi developer dashboard.

The RapidAPI developer dashboard is where you can see all of your apps, locate API keys, view analytics, and manage billing settings.

To access the dashboard, simply login to RapidAPI and select 'My Apps' in the top-right menu.
Alternatively, you can head directly to <https://rapidapi.com/developer/dashboard>.

In the main dashboard, you will see account-wide analytics and account information. To get more detailed information, you can select tabs on the left-hand side of the screen.

App Specific Analytics

Using the RapidAPI dashboard, you can also view analytics specific to each app in your account. To do so, switch over to the 'Analytics' tab of your application in the dashboard.

On the top of the page, you'll be able to see a chart with all the calls being made to all the APIs your app is connected to. You'll also be able to see a log with all the request data. You are also able to filter these analytics to only show certain APIs within the app.

In each graph, you can view the following metrics:

- `API Calls`: how many requests are being made
- `Error rates`: how many requests are error some
- `Latency`: how long (on average) requests take to execute

You may change the time period you're looking at by clicking the calendar icon and choosing a time range.

Headers sent as response

When consuming our API, you will always receive the following headers appended to the response:

- `server`: The current version of the API proxy used by RapidAPI.
- `x-ratelimit-requests-limit`: The number of requests the plan you are currently subscribed to allows you to make, before incurring overages.
- `x-ratelimit-requests-remaining`: The number of requests remaining before you reach the limit of requests your application is allowed to make, before experiencing overage charges.
- `X-RapidAPI-Proxy-Response`: This header is set to true when the RapidAPI proxy generates the response, (i.e. the response is not generated from our servers)

API-SPORTS Account

If you decided to subscribe directly on our site, you have a dashboard at your disposal at the following url: [dashboard](#)

It allows you to:

- To follow your consumption in real time
- Manage your subscription and change it if necessary
- Check the status of our servers
- Test all endpoints without writing a line of code.

You can also consult all this information directly through the API by calling the endpoint `status`.

This call does not count against the daily quota.

```
get("https://v3.football.api-sports.io/status");

// response
{
  "get": "status",
  "parameters": [],
  "errors": [],
  "results": 1,
  "response": {
    "account": {
      "firstname": "xxxx",
      "lastname": "XXXXXX",
      "email": "xxx@xx.com"
    },
    "subscription": {
      "plan": "Free",
      "end": "2020-04-10T23:24:27+00:00",
      "active": true
    },
    "requests": {
      "server": "RapidAPI"
    }
  }
}
```

```
"current": 12,  
"limit_day": 100  
}  
}  
}  
}
```

Headers sent as response

When consuming our API, you will always receive the following headers appended to the response:

- `x-ratelimit-requests-limit`: The number of requests allocated per day according to your subscription.
 - `x-ratelimit-requests-remaining`: The number of remaining requests per day according to your subscription.
 - `X-RateLimit-Limit`: Maximum number of API calls per minute.
 - `X-RateLimit-Remaining`: Number of API calls remaining before reaching the limit per minute.

Dashboard

The screenshot displays the API FOOTBALL website's dashboard. On the left sidebar, there are sections for 'News' (with a 'UP TO 50% OFF' offer for crypto subscriptions), 'Subscribe with Crypto' (listing payment methods like Binance, Coinbase, etc.), and 'Tweets from @ApiFootball' (two tweets from the official account). The main content area features a grid of nine API cards: API-FOOTBALL (5% used), API-BASEBALL (7% used), API-BASKETBALL (7% used), API-FORMULA-1 (23% used), API-HANDBALL (7% used), API-HOCKEY (7% used), API-NBA (0% used), API-NFL (17% used), and API-RUGBY (53% used). Below this is a 'Requests' section showing a heatmap of API usage over time, with a color scale from 0 to 160. To the right is a 'My Activity' log showing recent API requests with timestamps and endpoints.

News

UP TO 50% OFF
For any subscription according to the chosen duration

Subscribe with Crypto

You can subscribe to any of our plans with your favorite cryptocurrency.

How?

Tweets from @ApiFootball

API-SPORTS @apifootball · Oct 6
A new api is coming!

API-SPORTS @apifootball · Jun 9
New release available for API-FOOTBALL!

what's new?
New endpoints
In-play odds available
More parameters for fixtures endpoints

api-football.com API-FOOTBALL - NEW RELEASE! ...

8 6 8 11

Home - Dashboard

Quick Access

Changelog

API FOOTBALL

5% Used

API-BASEBALL

7% Used

API-BASKETBALL

7% Used

API-FORMULA-1

23% Used

API-HANDBALL

7% Used

API-HOCKEY

7% Used

API-NBA

0% Used

API-NFL

17% Used

API-RUGBY

53% Used

API-VOLLEYBALL

7% Used

Requests

160

120

80

40

0

0h 1h 2h 3h 4h 5h 6h 7h 8h 9h 10h 11h 12h 13h 14h 15h 16h 17h 18h 19h 20h 21h 22h 23h

Football Baseball Basketball Formula-1 Handball Hockey Rugby Formula-1 Rugby Handball Hockey

My Activity

10:24 leagues/id<1 #Handball

10:24 v3/leagues/seasons #Football

10:24 leagues/id<1 #NFL

10:24 leagues/id<1 #Volleyball

10:24 leagues/id<1 #Rugby

10:24 leagues/id<1 #Basketball

10:24 leagues/id<1 #Baseball

10:24 competitions/id<1 #Formula-1

10:24 leagues/id<1 #Hockey

10:24 leagues/id<1 #Basketball

Chat

Requests

The screenshot shows the API-Football Documentation homepage. On the left, a sidebar lists various sports categories: Baseball, Basketball, Football (selected), Requests, Live Demo, Documentation, Widgets, Ids, Formula-1, Handball, Hockey, NBA, NFL, Rugby, and Volleyball. The main content area has a teal header "API-FOOTBALL". Below it are four cards: "MEGA PLAN" (150 000 Requests per day), "Quota reset in [00:02 UTC time]" (13H32), "Daily Requests" (7% Used), and "Remaining Requests" (148 494). Two charts are displayed: "Daily Requests" (a blue area chart showing requests from 0h to 12h) and "Monthly Requests" (an orange area chart showing requests from 2022-10-20 to 2022-10-20, with a point labeled "Requests: 3188"). A section titled "Last 1510 Requests" includes a search bar and a "Chat" button.

Live tester


The screenshot shows the API-Football Live Tester interface for the Football API. The sidebar on the left is identical to the documentation page. The main area has a teal header "Home - Live API-SOCCER". It features an "Endpoint" form with fields: Endpoint (set to `https://v3.football-api-sports.io/`), API KEY (empty), Endpoint (set to `fixtures`), id (empty), ids (empty), league (empty), season (empty), team (empty), live (empty), date (set to `2021-10-22`), from (empty), to (empty), next (empty), and last (empty). To the right, a JSON response is shown for the endpoint `/v3/football-api-sports.io/fixtures?date=2021-10-22`. The response includes parameters, errors, results (328 fixtures), and a detailed fixture object:

```

{
  "get": "Fixtures",
  "parameters": {
    "date": "2021-10-22"
  },
  "errors": [
  ],
  "results": 328,
  "paging": {
    "current": 1,
    "total": 1
  },
  "response": [
    {
      "fixture": {
        "id": 680549,
        "referee": null,
        "timezone": "UTC",
        "date": "2021-10-22T00:00:00+00:00",
        "timestamp": 1634866900
      },
      "Periods": {
        "first": null,
        "second": null
      },
      "venue": {
        "id": 161,
        "name": "Stadion Traktor",
        "city": "Minsk"
      },
      "status": {
        "long": "Match Cancelled",
        "short": "CMC",
        "elapsed": null
      }
    }
  ],
  "league": [
    {
      "id": 116,
      "name": "Premier League",
      "country": "Bolivia",
      "flag": "https://media.api-sports.io/football/bolivia/flag.png",
      "logos": "https://media.api-sports.io/football/bolivia/logo.png"
    }
  ]
}

```

Architecture

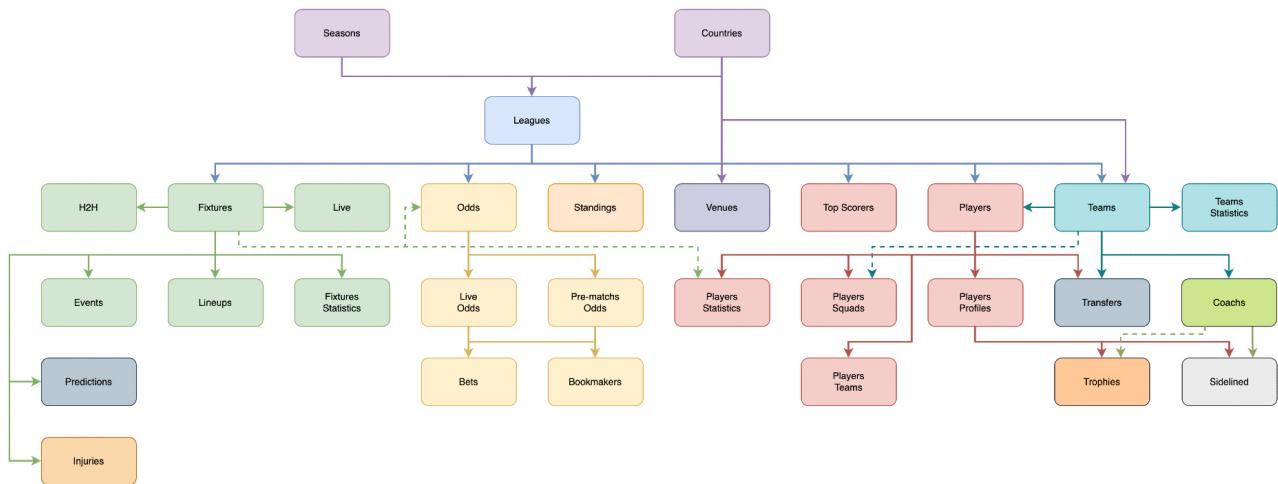

Logos / Images

Calls to logos/images do not count towards your daily quota and are provided for free. However these calls are subject to a **rate per second & minute**, it is recommended to save this data on your side in order not to slow down or impact the user experience of your application or website. For this you can use **CDNs** such as [bunny.net](#).

We have a tutorial available [here](#), which explains how to set up your own media system with **BunnyCDN**.

We follow the fair use law providing the image sources. The images are used solely to identify the public leagues, teams, players or venues. All images belongs to their authors, we have no ownership on any image delivered through the API. Some data may also be copyrighted or restricted in some countries. What you do with it is your own responsibility. To display these types of content in your app or website you must ensure that your use of them complies with the legal framework and you have to arrange the proof of intellectual property yourself.

Sample Scripts

Here are some examples of how the API is used in the main development languages.

You have to replace `{endpoint}` by the real name of the endpoint you want to call, like `leagues` or `fixtures` for example. In all the sample scripts we will use the `leagues` endpoint as example.

Also you will have to replace `XxXxXxXxXxXxXxXxXxXxXxXxXxXxXxXx` with your API-KEY provided in the [dashboard](#) or on [rapidapi](#).

C

curl

```
CURL *curl;
CURLcode res;
curl = curl_easy_init();
if(curl) {
    curl_easy_setopt(curl, CURLOPT_CUSTOMREQUEST, "GET");
    curl_easy_setopt(curl, CURLOPT_URL, "https://v3.football.api-sports.io/leagues");
    curl_easy_setopt(curl, CURLOPT_FOLLOWLOCATION, 1L);
    curl_easy_setopt(curl, CURLOPT_DEFAULT_PROTOCOL, "https");
    struct curl_slist *headers = NULL;
    headers = curl_slist_append(headers, "x-rapidapi-key: XxXxXxXxXxXxXxXxXxXxXxXx");
    headers = curl_slist_append(headers, "x-rapidapi-host: v3.football.api-sports.io");
    curl_easy_setopt(curl, CURLOPT_HTTPHEADER, headers);
    res = curl_easy_perform(curl);
}
curl_easy_cleanup(curl);
```

C#

RestSharp

```
var client = new RestClient("https://v3.football.api-sports.io/leagues");
client.Timeout = -1;
var request = new RestRequest(Method.GET);
request.AddHeader("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx");
request.AddHeader("x-rapidapi-host", "v3.football.api-sports.io");
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

cURL

Curl

```
curl --request GET \
--url https://v3.football.api-sports.io/leagues \
--header 'x-rapidapi-host: v3.football.api-sports.io' \
--header 'x-rapidapi-key: XxXxXxXxXxXxXxXxXxXxXxXx'
```

Dart

http

```
var headers = {
  'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXx',
  'x-rapidapi-host': 'v3.football.api-sports.io'
};
var request = http.Request('GET', Uri.parse('https://v3.football.api-sports.io/lea
request.headers.addAll(headers);

http.StreamedResponse response = await request.send();

if (response.statusCode == 200) {
  print(await response.stream.bytesToString());
}
else {
  print(response.reasonPhrase);
}
```

Go

Native

```
package main

import (
    "fmt"
    "net/http"
    "io/ioutil"
)

func main() {

    url := "https://v3.football.api-sports.io/leagues"
    method := "GET"

    client := &http.Client {
        }
    req, err := http.NewRequest(method, url, nil)

    if err != nil {
        fmt.Println(err)
        return
    }
    req.Header.Add("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx")
    req.Header.Add("x-rapidapi-host", "v3.football.api-sports.io")

    res, err := client.Do(req)
    if err != nil {
        fmt.Println(err)
        return
    }
    defer res.Body.Close()

    body, err := ioutil.ReadAll(res.Body)
    if err != nil {
        fmt.Println(err)
        return
    }
    fmt.Println(string(body))
}
```

Java

OkHttp

```
var myHeaders = new Headers();
myHeaders.append("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx");
myHeaders.append("x-rapidapi-host", "v3.football.api-sports.io");

var requestOptions = {
  method: 'GET',
  headers: myHeaders,
  redirect: 'follow'
};
```

Unirest

```
Unirest.setTimeouts(0, 0);
HttpResponse<String> response = Unirest.get("https://v3.football.api-sports.io/leagues")
  .header("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx")
  .header("x-rapidapi-host", "v3.football.api-sports.io")
  .asString();
```

Javascript

Fetch

```
var myHeaders = new Headers();
myHeaders.append("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx");
myHeaders.append("x-rapidapi-host", "v3.football.api-sports.io");

var requestOptions = {
  method: 'GET',
  headers: myHeaders,
```

```

    redirect: 'follow'
};

fetch("https://v3.football.api-sports.io/leagues", requestOptions)
  .then(response => response.text())
  .then(result => console.log(result))
  .catch(error => console.log('error', error));

```

jQuery

```

var settings = {
  "url": "https://v3.football.api-sports.io/leagues",
  "method": "GET",
  "timeout": 0,
  "headers": {
    "x-rapidapi-key": "XxXxXxXxXxXxXxXxXxXxXxXxXx",
    "x-rapidapi-host": "v3.football.api-sports.io"
  },
};

$.ajax(settings).done(function (response) {
  console.log(response);
});

```

XHR

```

var xhr = new XMLHttpRequest();
xhr.withCredentials = true;

xhr.addEventListener("readystatechange", function() {
  if(this.readyState === 4) {
    console.log(this.responseText);
  }
});

xhr.open("GET", "https://v3.football.api-sports.io/leagues");
xhr.setRequestHeader("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx");
xhr.setRequestHeader("x-rapidapi-host", "v3.football.api-sports.io");

xhr.send();

```

NodeJs

Axios

```
var axios = require('axios');

var config = {
  method: 'get',
  url: 'https://v3.football.api-sports.io/leagues',
  headers: {
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host': 'v3.football.api-sports.io'
  }
};

axios(config)
  .then(function (response) {
    console.log(JSON.stringify(response.data));
  })
  .catch(function (error) {
    console.log(error);
  });
}
```

Native

```
var https = require('follow-redirects').https;
var fs = require('fs');

var options = {
  'method': 'GET',
  'hostname': 'v3.football.api-sports.io',
  'path': '/leagues',
  'headers': {
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host': 'v3.football.api-sports.io'
  },
  'maxRedirects': 20
};

var req = https.request(options, function (res) {
  var chunks = [];
  res.on('data', function (chunk) {
    chunks.push(chunk);
  });
  res.on('end', function () {
    var fullResponse = Buffer.concat(chunks);
    console.log(fullResponse);
  });
});
```

```

res.on("data", function (chunk) {
  chunks.push(chunk);
});

res.on("end", function (chunk) {
  var body = Buffer.concat(chunks);
  console.log(body.toString());
});

res.on("error", function (error) {
  console.error(error);
});
);

req.end();

```

Requests

```

var request = require('request');
var options = {
  'method': 'GET',
  'url': 'https://v3.football.api-sports.io/leagues',
  'headers': {
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host': 'v3.football.api-sports.io'
  }
};
request(options, function (error, response) {
  if (error) throw new Error(error);
  console.log(response.body);
});

```

Unirest

```

var unirest = require('unirest');
var req = unirest('GET', 'https://v3.football.api-sports.io/leagues')
  .headers({
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host': 'v3.football.api-sports.io'
  })
  .end(function (res) {
    if (res.error) throw new Error(res.error);
    console.log(res.raw_body);
  });

```

Objective-c

NSURLSession

```
#import <Foundation/Foundation.h>

dispatch_semaphore_t sema = dispatch_semaphore_create(0);

NSMutableURLRequest *request = [NSMutableURLRequest requestWithURL:[NSURL URLWithString:@"https://api-football-v1.p.rapidapi.com/v3/football"]
    cachePolicy:NSURLRequestUseProtocolCachePolicy
    timeoutInterval:10.0];
NSDictionary *headers = @{
    @"x-rapidapi-key": @"XxXxXxXxXxXxXxXxXxXxXxXxXx",
    @"x-rapidapi-host": @"v3.football.api-sports.io"
};

[request setAllHTTPHeaderFields:headers];

[request setHTTPMethod:@"GET"];

NSURLSession *session = [NSURLSession sharedSession];
NSURLSessionDataTask *dataTask = [session dataTaskWithRequest:request
completionHandler:^(NSData *data, NSURLResponse *response, NSError *error) {
    if (error) {
        NSLog(@"%@", error);
        dispatch_semaphore_signal(sema);
    } else {
        NSHTTPURLResponse *httpResponse = (NSHTTPURLResponse *) response;
        NSError *parseError = nil;
        NSDictionary *responseDictionary = [NSJSONSerialization JSONObjectWithData:data
            options:0
            error:&parseError];
        NSLog(@"%@", responseDictionary);
        dispatch_semaphore_signal(sema);
    }
}];
[dataTask resume];
dispatch_semaphore_wait(sema, DISPATCH_TIME_FOREVER);
```

OCaml

Cohttp

```
open Lwt
open Cohttp
open Cohttp_lwt_unix

let reqBody =
  let uri = Uri.of_string "https://v3.football.api-sports.io/leagues" in
  let headers = Header.init () in
  |> fun h -> Header.add h "x-rapidapi-key" "XxXxXxXxXxXxXxXxXxXxXxXx"
  |> fun h -> Header.add h "x-rapidapi-host" "v3.football.api-sports.io"
  in
  Client.call ~headers `GET uri >>= fun (_resp, body) ->
  body |> Cohttp_lwt.Body.to_string >|= fun body -> body

let () =
  let respBody = Lwt_main.run reqBody in
  print_endline (respBody)
```

PHP

cURL

```
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => 'https://v3.football.api-sports.io/leagues',
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => '',
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
  CURLOPT_CUSTOMREQUEST => 'GET',
```

```

CURLOPT_HTTPHEADER => array(
    'x-rapidapi-key: XxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host: v3.football.api-sports.io'
),
);
);

$response = curl_exec($curl);

curl_close($curl);
echo $response;

```

Request2

```

<?php
require_once 'HTTP/Request2.php';
$request = new HTTP_Request2();
$request->setUrl('https://v3.football.api-sports.io/leagues');
$request->setMethod(HTTP_Request2::METHOD_GET);
$request->setConfig(array(
    'follow_redirects' => TRUE
));
$request->setHeader(array(
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host' => 'v3.football.api-sports.io'
));
try {
    $response = $request->send();
    if ($response->getStatus() == 200) {
        echo $response->getBody();
    }
    else {
        echo 'Unexpected HTTP status: ' . $response->getStatus() . ' ' .
        $response->getReasonPhrase();
    }
}
catch(HTTP_Request2_Exception $e) {
    echo 'Error: ' . $e->getMessage();
}

```

Http

```

$client = new http\Client;
$request = new http\Client\Request;
$request->setRequestUrl('https://v3.football.api-sports.io/leagues');
$request->setRequestMethod('GET');
$request->setHeaders(array(

```

```
'x-rapidapi-host' => 'v3.football.api-sports.io',
'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));
$client->enqueue($request)->send();
$response = $client->getResponse();
echo $response->getBody();
```

PowerShell

RestMethod

```
$headers = New-Object "System.Collections.Generic.Dictionary[[String],[String]]"
$headers.Add("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXx")
$headers.Add("x-rapidapi-host", "v3.football.api-sports.io")

$response = Invoke-RestMethod 'https://v3.football.api-sports.io/leagues' -Method Get
$response | ConvertTo-Json
```

Python

http.client

```
import http.client

conn = http.client.HTTPSConnection("v3.football.api-sports.io")

headers = {
    'x-rapidapi-host': "v3.football.api-sports.io",
    'x-rapidapi-key': "XxXxXxXxXxXxXxXxXxXxXxXxXx"
}

conn.request("GET", "/leagues", headers=headers)

res = conn.getresponse()
data = res.read()
```

```
print(data.decode("utf-8"))
```

Requests

```
url = "https://v3.football.api-sports.io/leagues"

payload={}
headers = {
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host': 'v3.football.api-sports.io'
}

response = requests.request("GET", url, headers=headers, data=payload)

print(response.text)
```

Ruby

Net::HTTP

```
require 'uri'
require 'net/http'
require 'openssl'

url = URI("https://v3.football.api-sports.io/leagues")

http = Net::HTTP.new(url.host, url.port)
http.use_ssl = true
http.verify_mode = OpenSSL::SSL::VERIFY_NONE

request = Net::HTTP::Get.new(url)
request["x-rapidapi-host"] = 'v3.football.api-sports.io'
request["x-rapidapi-key"] = 'XxXxXxXxXxXxXxXxXxXxXxXxXx'

response = http.request(request)
puts response.read_body
```

Shell

Httpie

```
http --follow --timeout 3600 GET 'https://v3.football.api-sports.io/leagues' \
  x-rapidapi-key:'XxXxXxXxXxXxXxXxXxXxXxXxXx' \
  x-rapidapi-host:'v3.football.api-sports.io'
```

wget

```
wget --no-check-certificate --quiet \
  --method GET \
  --timeout=0 \
  --header 'x-rapidapi-key: XxXxXxXxXxXxXxXxXxXxXxXx' \
  --header 'x-rapidapi-host: v3.football.api-sports.io' \
  'https://v3.football.api-sports.io/leagues'
```

Swift

URLSession

```
import Foundation
#if canImport(FoundationNetworking)
import FoundationNetworking
#endif

var semaphore = DispatchSemaphore (value: 0)

var request = URLRequest(url: URL(string: "https://v3.football.api-sports.io/leagu
request.addValue("XxXxXxXxXxXxXxXxXxXxXxXx", forHTTPHeaderField: "x-rapidapi-key"))
request.addValue("v3.football.api-sports.io", forHTTPHeaderField: "x-rapidapi-host

request.httpMethod = "GET"
```

```
let task = URLSession.shared.dataTask(with: request) { data, response, error in
    guard let data = data else {
        print(String(describing: error))
        semaphore.signal()
        return
    }
    print(String(data: data, encoding: .utf8)!)
    semaphore.signal()
}

task.resume()
semaphore.wait()
```

Changelog

3.9.3

- Add endpoint `players/profiles` that returns the list of all available players
- Add endpoint `players/teams` that returns the list of teams and seasons in which the player played
 - ◀ during his career ▶
- Endpoint `fixtures`
 - Add field `extra` that returns the additional time played in a half
- Endpoint `fixtures/rounds`
 - Add the `dates` parameter that allows to retrieve the dates of each round in the response
- Endpoint `fixtures/statistics`
 - Add the `half` parameter that allows to retrieve the halftime statistics in the response
- Endpoint `injuries`
 - Add the `ids` parameter that allows to retrieve data from several fixtures in one call
- Endpoint `teams/statistics`, more statistics added
 - Goals Over
 - Goals Under
- Endpoint `sidelined`

- Add the `players` and `coachs` parameters that allows to retrieve data from several players/coachs in one call
- Endpoint `trophies`
 - Add the `players` and `coachs` parameters that allows to retrieve data from several players/coachs in one call

3.9.2

- Endpoint `odds`
 - Add endpoint `odds/live`
 - Add endpoint `odds/live/bets`
- Endpoint `teams`
 - Add parameter `code`
 - Add parameter `venue`
 - Add endpoint `teams/countries`
- Endpoint `fixtures`
 - Add the `ids` parameter that allows to retrieve data from several fixtures including events, lineups, statistics and players in one Api call
 - Add the Possibility to add several status for the `status` parameter
 - Add parameter `venue`
- Endpoint `fixtures/headtohead`
 - Add the Possibility to add several status for the `status` parameter
 - Add parameter `venue`

3.8.1

- Add endpoint `injuries`
- Add endpoint `players/squads`
- Add endpoint `players/topassists`
- Add endpoint `players/topyellowcards`
- Add endpoint `players/topredcards`
- Endpoint `fixtures/lineups`
 - Add players positions on the grid
 - Add players' jerseys colors
- Endpoint `fixtures/events`
 - add VAR events
- Endpoint `teams`
 - Add tri-code
- Endpoint `teams/statistics`, more statistics added
 - Scoring minute

- Cards per minute
- Most played formation
- Penalty statistics
- Add Coaches Photos

CDN

Optimizing Sports Websites with BunnyCDN

BunnyCDN is a Content Delivery Network (*CDN*) that delivers a global content distribution experience. With strategically positioned servers, BunnyCDN ensures swift and reliable delivery of static content, optimizing website performance with features like intelligent image optimization, sophisticated caching, and advanced security measures.

Unlocking Media Delivery Excellence with BunnyCDN:

- **Quick Configuration:** Set up your media CDN in just 5 minutes. Define cache times, customize your domain – it's that simple.
- **Global Accessibility:** Leverage BunnyCDN's expansive server network for swift and dependable content delivery worldwide.
- **Customized Configuration:** Tailor caching, define cache times, and implement CORS headers to create an efficient and seamless user experience.
- **Own Your Domain:** Personalize your media delivery with your domain, enhancing your brand's online presence.
- **Robust Security:** BunnyCDN integrates advanced security features, guaranteeing a secure environment for delivering your content.
- **Responsive Performance:** Experience responsive performance without the need for prior media downloads. Discover the capabilities of BunnyCDN for optimized media delivery.

A tutorial is available [here](#) on our blog to help you configure it.

Databases Solutions

Enhance Your Data Management with Aiven

Integrating databases into your application can greatly enhance data management and storage. If you're looking for high-performing, flexible, and secure database solutions, we recommend checking out [Aiven](#).

Aiven is a cloud platform that offers a range of managed database services, including relational databases, NoSQL databases, streaming data processing systems, and much more. Their offerings include [PostgreSQL](#), [MySQL](#), [Cassandra](#), [Redis](#), [Kafka](#), and many other databases, all with simplified management, high availability, and advanced security.

Moreover, **Aiven** provides a free tier to get started, along with testing credits to explore their offerings. This opportunity allows you to evaluate their platform and determine if it meets your needs.

One particularly attractive feature of **Aiven** is that they work with multiple cloud providers, including [Google Cloud](#), [Amazon Web Services \(AWS\)](#), [Microsoft Azure](#), [DigitalOcean](#), and more. This means you have the flexibility to choose the best cloud infrastructure for your project.

In terms of reliability, **Aiven** is committed to providing a **99.99%** Service Level Agreement (SLA), ensuring continuous and highly available service.

- To test their services, visit [this page](#).
- If you're a developer, explore their [DEV center](#) for technical information.
- Check out [Aiven's documentation](#) for detailed information on their services and features.

By integrating **Aiven** with our API, you can efficiently store, manage, and analyze your data while taking advantage of their cloud database solutions' flexibility and scalability.

Real-Time Data Management with Firebase

When you're looking for a real-time data management solution for your application, [Firebase's Realtime Database](#) is a powerful choice. Explore how Firebase can enhance real-time data management for your application.

[Firebase's Realtime Database](#) offers a cloud-based real-time database that synchronizes data in real-time across users and devices. This makes it an ideal choice for applications that require instant data updates.

Why Choose Firebase's Realtime Database?

- **Real-Time Data:** Firebase allows you to store real-time data, meaning that updates are instantly propagated to all connected users.
- **Easy Synchronization:** Data is automatically synchronized across all devices, providing a consistent and real-time user experience.
- **Built-In Security:** Firebase offers flexible security rules to control data access and ensure privacy.
- **Simplified Integration:** Firebase's Realtime Database easily integrates with other Firebase services, simplifying backend management.

Helpful Links:

- [Explore Firebase's Realtime Database](#): Discover the features and advantages of Firebase's Realtime Database for efficient real-time data management.
- [Firebase's Realtime Database Documentation](#): Refer to the comprehensive documentation for Firebase's Realtime Database for a smooth integration.

A tutorial describing each step is available on our blog [here](#).

Widgets

Our widgets are completely **free** and work with all our plans including the free plan.

To integrate the widgets to your site you just have to [copy/paste](#) the code provided and fill in the tags needed for the widget to work properly. If you integrate several widgets on the same page a single theme will be applied for all widgets. Also you will only have to integrate the **script** tag once.

For all widgets the following tags are needed :

data-host : **v3.football.api-sports.io** or **api-football-v1.p.rapidapi.com** depending on whether you have subscribed with us or RapidApi.

data-key : Indicate your API-KEY obtained on our Dashboard or on RapidApi.

data-theme : If you leave the field empty, the **default** theme will be applied, otherwise the possible values are **grey** or **dark**. It is also possible to indicate **false** which will not display any theme and lets you customize the widget with your own css.

`data-show-errors` : By default **false**, used for debugging, with a value of **true** it allows to display the errors.

Widgets use the requests associated with your account and therefore they will stop working if your daily limit is reached. You can track all requests made directly in the dashboard.

Security :

When using these widgets it is important to be aware that your API-KEY will be visible to the users of your site, it is possible to protect yourself from this by allowing only the desired domains in our dashboard. This way no one else can use your API-KEY for you. If you have already set up your widget and have not activated this option, you can reset your API-KEY and activate this option after.

Debugging :

If the widget does not display the requested information, it is possible to set the `data-show-errors` tag to **true** to display error messages directly in the widget and in the console. This can be due to several things like : (*Non-exhaustive list*)

- You have reached your daily number of requests
- Tags are incorrectly filled in
- Your API-KEY is incorrect

Tutorials :

- [HOW CUSTOM API-FOOTBALL WIDGETS](#)
- [HOW TO CHANGE WIDGET ATTRIBUTES DYNAMICALLY](#)
- [HOW TO ADD TWO WIDGETS ON THE SAME PAGE](#)

Changelog :

2.0.3

- Merge of `Livescore` and `Fixtures` widgets in `Games` widget
- Add a date selector in the `Games` widget
- Add a status selector in the `Games` widget
- Add a modal to display standings in `games` widget
- Add the possibility to display or not the logos or images
- Add widgets for other sports (Baseball, Basketball, Handball, Hockey, Rugby and Volleyball).
- Rename `Fixture` widget in `Game` widget

1.1.8

- Add the widget `Fixture`
- Add the possibility to load a modal containing the details of a fixture in the widgets `Livescore` and `Fixtures`

1.0.0

- Starting version with widgets [Livescore](#) [Fixtures](#) and [Standings](#)

Sources :

All the sources to make your own CSS can be downloaded here :

- [2.0.3 files](#)
- [1.1.8 files](#)

Games

Display the list of matches grouped by competition according to the parameters used.

The matches are automatically updated according to the selected frequency [data-refresh](#).

You can find all the leagues ids on our [Dashboard](#).

Example of the widget with the default theme

| Rank | Team | MP | W | D | L | G | +/- | P |
|------|------------------|----|---|---|---|-------|-----|----|
| 1 | Navbahor | 9 | 5 | 2 | 2 | 10:6 | 4 | 17 |
| 2 | Nasaf | 7 | 4 | 3 | 0 | 10:2 | 8 | 15 |
| 3 | Oimalq | 8 | 4 | 2 | 2 | 13:7 | 6 | 14 |
| 4 | Sogdiana | 8 | 4 | 2 | 2 | 11:8 | 3 | 14 |
| 5 | Qizilqum | 9 | 4 | 2 | 3 | 12:13 | -1 | 14 |
| 6 | Pakhtakor | 7 | 3 | 4 | 0 | 7:3 | 4 | 13 |
| 7 | Lokomotiv | 9 | 4 | 0 | 5 | 11:11 | 0 | 12 |
| 8 | Bunyodkor | 9 | 3 | 3 | 3 | 11:14 | -3 | 12 |
| 9 | Metalourg | 8 | 2 | 4 | 2 | 6:7 | -1 | 10 |
| 10 | Kokand-1912 | 8 | 3 | 0 | 5 | 4:9 | -5 | 9 |
| 11 | Olympic | 9 | 1 | 5 | 3 | 8:9 | -1 | 8 |
| 12 | Neftchi | 9 | 1 | 3 | 5 | 4:11 | -7 | 6 |
| 13 | Dinamo Samarqand | 9 | 1 | 3 | 5 | 7:11 | -4 | 6 |
| 14 | Surkhan | 7 | 1 | 3 | 3 | 5:8 | -3 | 6 |

QUERY PARAMETERS

data-host required string
 Enum: `"v3.football.api-sports.io"` `"api-football-v1.p.rapidapi.com"`

data-key required string
 Your Api Key

data-refresh integer >15
 Number in seconds corresponding to the desired data update frequency. If you indicate **0** or leave this field empty the data will not be updated automatically

| | |
|-----------------------|--|
| data-date | string YYYY-MM-DD Fill in the desired date. If empty the current date is automatically applied |
| data-league | integer Fill in the desired league id |
| data-season | integer = 4 characters YYYY Fill in the desired season |
| data-theme | string If you leave the field empty, the default theme will be applied, otherwise the possible values are grey or dark |
| data-show-toolbar | string Enum: true false Displays the toolbar allowing to change the view between the current, finished or upcoming fixtures and to change the date |
| data-show-logos | string Enum: true false If true display teams logos |
| data-modal-game | string Enum: true false If true allows to load a modal containing all the details of the game |
| data-modal-standings | string Enum: true false If true allows to load a modal containing the standings |
| data-modal-show-logos | string Enum: true false If true display teams logos and players images in the modal |
| data-show-errors | string Enum: true false By default false, used for debugging, with a value of true it allows to display the errors |

GET /widgets/Games

Request samples

Html

Copy

```
<div id="wg-api-football-games"
      data-host="v3.football.api-sports.io"
      data-key="Your-Api-Key-Here"
      data-date=""
      data-league=""
      data-season=""
      data-theme=""
      data-refresh="15"
      data-show-toolbar="true"
      data-show-errors="false"
      data-show-logos="true"
      data-modal-game="true"
      data-modal-standings="true"
      data-modal-show-logos="true">
</div>
<script
  type="module"
  src="https://widgets.api-sports.io/2.0.3/widgets.js">
</script>
```

Game

Display a specific fixture as well as **events**, **statistics**, **lineups** and **players statistics** if they are available.

The fixture is automatically updated according to the selected frequency `data-refresh`.

Example of the widget with the default theme



QUERY PARAMETERS

data-host
required

string

Enum: "v3.football.api-sports.io" | "api-football-v1.p.rapidapi.com"

data-key
required

string

Your Api Key

data-refresh

integer >15

Number in seconds corresponding to the desired data update frequency. If you indicate **0** or leave this field empty the data will not be updated automatically

data-id

integer

Fill in the desired fixture id

data-theme

string

If you leave the field empty, the **default** theme will be applied, otherwise the possible values are **grey** or **dark**

data-show-errors

string

Enum: **true** | **false**By default **false**, used for debugging, with a value of **true** it allows to display the errors

data-show-logos

string

Enum: **true** | **false**If **true** display teams logos and players images

GET /widgets/game

Request samples

Html

Copy

```
<div id="wg-api-football-game"
      data-host="v3.football.api-sports.io"
      data-key="Your-Api-Key-Here"
      data-id="718243"
      data-theme=""
      data-refresh="15"
      data-show-errors="false"
      data-show-logos="true">
</div>
<script
  type="module"
  src="https://widgets.api-sports.io/2.0.3/widgets.js">
</script>
```

Standings

Display the ranking of a competition or a team according to the parameters used.

You can find all the leagues and teams ids on our [Dashboard](#).

Example of the widget with the available themes

| ENGLAND: PREMIER LEAGUE | | | | | | | | | | |
|-------------------------|----|----|----|----|-------|-----|----|--------|---|--|
| | MP | W | D | L | G | A/- | P | | | |
| 1 ⚪ Manchester City | 37 | 28 | 6 | 3 | 96:24 | 72 | 90 | 🟩WWWW | ? | |
| 2 ⚫ Liverpool | 37 | 27 | 8 | 2 | 91:25 | 66 | 89 | WWWWW | ? | |
| 3 ⚪ Chelsea | 36 | 20 | 10 | 6 | 73:31 | 42 | 70 | WDLWW | ? | |
| 4 ⚪ Tottenham | 37 | 21 | 5 | 11 | 64:40 | 24 | 68 | WWBWB | ? | |
| 5 ⚪ Arsenal | 37 | 21 | 3 | 13 | 56:47 | 9 | 66 | LLWWWW | ? | |
| 6 ⚪ Manchester United | 37 | 16 | 10 | 11 | 57:56 | 1 | 58 | LWDL | ? | |
| 7 ⚫ West Ham | 37 | 16 | 8 | 13 | 59:48 | 11 | 56 | DWLWD | ? | |
| 8 ⚪ Wolves | 37 | 15 | 6 | 16 | 37:40 | -3 | 51 | DLDL | ? | |
| 9 ⚪ Leicester | 36 | 13 | 9 | 14 | 57:57 | 0 | 48 | WWLLD | ? | |
| 10 ⚪ Brighton | 37 | 11 | 15 | 11 | 39:43 | -4 | 48 | DWWB | ? | |
| 11 ⚪ Brentford | 37 | 13 | 7 | 17 | 47:54 | -7 | 46 | WWLDW | ? | |
| 12 ⚪ Newcastle | 37 | 12 | 10 | 15 | 42:61 | -19 | 46 | WLWW | ? | |
| 13 ⚪ Crystal Palace | 36 | 10 | 15 | 11 | 47:43 | 4 | 45 | DWWB | ? | |
| 14 ⚪ Aston Villa | 36 | 13 | 5 | 18 | 49:50 | -1 | 44 | DLWWB | ? | |
| 15 ⚪ Southampton | 37 | 9 | 13 | 15 | 42:63 | -21 | 40 | LLDLD | ? | |
| 16 ⚪ Everton | 36 | 10 | 6 | 20 | 39:59 | -20 | 36 | LDWWL | ? | |
| 17 ⚪ Leeds | 37 | 8 | 11 | 18 | 40:78 | -38 | 35 | DLLLD | ? | |
| 18 ⚪ Burnley | 36 | 7 | 13 | 16 | 32:50 | -18 | 34 | LLWWWW | ? | |
| 19 ⚪ Watford | 37 | 6 | 5 | 26 | 33:75 | -42 | 23 | LDLLL | ? | |
| 20 ⚪ Norwich | 37 | 5 | 7 | 25 | 23:79 | -56 | 22 | DLLEL | ? | |

| ENGLAND: PREMIER LEAGUE | | | | | | | | | | |
|-------------------------|----|----|----|----|-------|-----|----|--------|---|--|
| | MP | W | D | L | G | A/- | P | | | |
| 1 ⚪ Manchester City | 37 | 28 | 6 | 3 | 96:24 | 72 | 90 | 🟩WWWW | ? | |
| 2 ⚫ Liverpool | 37 | 27 | 8 | 2 | 91:25 | 66 | 89 | WWWWW | ? | |
| 3 ⚪ Chelsea | 36 | 20 | 10 | 6 | 73:31 | 42 | 70 | WDLWW | ? | |
| 4 ⚪ Tottenham | 37 | 21 | 5 | 11 | 64:40 | 24 | 68 | WWBWB | ? | |
| 5 ⚪ Arsenal | 37 | 21 | 3 | 13 | 56:47 | 9 | 66 | LLWWWW | ? | |
| 6 ⚪ Manchester United | 37 | 16 | 10 | 11 | 57:56 | 1 | 58 | LWDL | ? | |
| 7 ⚫ West Ham | 37 | 16 | 8 | 13 | 59:48 | 11 | 56 | DWLWD | ? | |
| 8 ⚪ Wolves | 37 | 15 | 6 | 16 | 37:40 | -3 | 51 | DLDL | ? | |
| 9 ⚪ Leicester | 36 | 13 | 9 | 14 | 57:57 | 0 | 48 | WWLLD | ? | |
| 10 ⚪ Brighton | 37 | 11 | 15 | 11 | 39:43 | -4 | 48 | DWWB | ? | |
| 11 ⚪ Brentford | 37 | 13 | 7 | 17 | 47:54 | -7 | 46 | WWLDW | ? | |
| 12 ⚪ Newcastle | 37 | 12 | 10 | 15 | 42:61 | -19 | 46 | WLWW | ? | |
| 13 ⚪ Crystal Palace | 36 | 10 | 15 | 11 | 47:43 | 4 | 45 | DWWB | ? | |
| 14 ⚪ Aston Villa | 36 | 13 | 5 | 18 | 49:50 | -1 | 44 | DLWWB | ? | |
| 15 ⚪ Southampton | 37 | 9 | 13 | 15 | 42:63 | -21 | 40 | LLDLD | ? | |
| 16 ⚪ Everton | 36 | 10 | 6 | 20 | 39:59 | -20 | 36 | LDWWL | ? | |
| 17 ⚪ Leeds | 37 | 8 | 11 | 18 | 40:78 | -38 | 35 | DLLLD | ? | |
| 18 ⚪ Burnley | 36 | 7 | 13 | 16 | 32:50 | -18 | 34 | LLWWWW | ? | |
| 19 ⚪ Watford | 37 | 6 | 5 | 26 | 33:75 | -42 | 23 | LDLLL | ? | |
| 20 ⚪ Norwich | 37 | 5 | 7 | 25 | 23:79 | -56 | 22 | DLLEL | ? | |

| ENGLAND: PREMIER LEAGUE | | | | | | | | | | |
|-------------------------|----|----|----|----|-------|-----|----|--------|---|--|
| | MP | W | D | L | G | A/- | P | | | |
| 1 ⚪ Manchester City | 37 | 28 | 6 | 3 | 96:24 | 72 | 90 | 🟩WWWW | ? | |
| 2 ⚫ Liverpool | 37 | 27 | 8 | 2 | 91:25 | 66 | 89 | WWWWW | ? | |
| 3 ⚪ Chelsea | 36 | 20 | 10 | 6 | 73:31 | 42 | 70 | WDLWW | ? | |
| 4 ⚪ Tottenham | 37 | 21 | 5 | 11 | 64:40 | 24 | 68 | WWBWB | ? | |
| 5 ⚪ Arsenal | 37 | 21 | 3 | 13 | 56:47 | 9 | 66 | LLWWWW | ? | |
| 6 ⚪ Manchester United | 37 | 16 | 10 | 11 | 57:56 | 1 | 58 | LWDL | ? | |
| 7 ⚫ West Ham | 37 | 16 | 8 | 13 | 59:48 | 11 | 56 | DWLWD | ? | |
| 8 ⚪ Wolves | 37 | 15 | 6 | 16 | 37:40 | -3 | 51 | DLDL | ? | |
| 9 ⚪ Leicester | 36 | 13 | 9 | 14 | 57:57 | 0 | 48 | WWLLD | ? | |
| 10 ⚪ Brighton | 37 | 11 | 15 | 11 | 39:43 | -4 | 48 | DWWB | ? | |
| 11 ⚪ Brentford | 37 | 13 | 7 | 17 | 47:54 | -7 | 46 | WWLDW | ? | |
| 12 ⚪ Newcastle | 37 | 12 | 10 | 15 | 42:61 | -19 | 46 | WLWW | ? | |
| 13 ⚪ Crystal Palace | 36 | 10 | 15 | 11 | 47:43 | 4 | 45 | DWWB | ? | |
| 14 ⚪ Aston Villa | 36 | 13 | 5 | 18 | 49:50 | -1 | 44 | DLWWB | ? | |
| 15 ⚪ Southampton | 37 | 9 | 13 | 15 | 42:63 | -21 | 40 | LLDLD | ? | |
| 16 ⚪ Everton | 36 | 10 | 6 | 20 | 39:59 | -20 | 36 | LDWWL | ? | |
| 17 ⚪ Leeds | 37 | 8 | 11 | 18 | 40:78 | -38 | 35 | DLLLD | ? | |
| 18 ⚪ Burnley | 36 | 7 | 13 | 16 | 32:50 | -18 | 34 | LLWWWW | ? | |
| 19 ⚪ Watford | 37 | 6 | 5 | 26 | 33:75 | -42 | 23 | LDLLL | ? | |
| 20 ⚪ Norwich | 37 | 5 | 7 | 25 | 23:79 | -56 | 22 | DLLEL | ? | |

QUERY PARAMETERS

| | |
|------------------|--|
| data-host | string |
| required | Enum: "v3.football.api-sports.io" "api-football-v1.p.rapidapi.com" |
| data-key | string |
| required | Your Api Key |
| data-league | integer |
| | Fill in the desired league id |
| data-team | integer |
| | Fill in the desired team id |
| data-season | integer = 4 characters YYYY |
| required | Fill in the desired season |
| data-theme | string |
| | If you leave the field empty, the <code>default</code> theme will be applied, otherwise the possible values are <code>grey</code> or <code>dark</code> |
| data-show-errors | string |
| | Enum: <code>true</code> <code>false</code> |
| | By default <code>false</code> , used for debugging, with a value of <code>true</code> it allows to display the errors |
| data-show-logos | string |
| | Enum: <code>true</code> <code>false</code> |
| | If <code>true</code> display teams logos |

GET /widgets/standings

Request samples

Html

Copy

```
<div id="wg-api-football-standings"
  data-host="v3.football.api-sports.io"
```

```
data-key="Your-Api-Key-Here"
data-league="39"
data-team=""
data-season="2021"
data-theme=""
data-show-errors="false"
data-show-logos="true"
class="wg_loader">
</div>
<script
  type="module"
  src="https://widgets.api-sports.io/2.0.3/widgets.js">
</script>
```

Timezone

Timezone

Get the list of available timezone to be used in the fixtures endpoint.

This endpoint does not require any parameters.

Update Frequency : This endpoint contains all the existing timezone, it is not updated.

Recommended Calls : 1 call when you need.

HEADER PARAMETERS

| | |
|-----------------|--------------|
| x-rapidapi-key | string |
| required | Your Api-Key |

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /timezone

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

200

204

499

500

Content type

application/json

Copy Expand all Collapse all

```
{
  "get": "timezone",
  "parameters": [ ],
  "errors": [ ],
  "results": 425,
  - "paging": {
      "current": 1,
      "total": 1
    },
  - "response": [
      "Africa/Abidjan",
      "Africa/Accra",
      "Africa/Addis_Ababa",
      "Africa/Algiers",
      "Africa/Asmara"
    ]
}
}
```

Countries

Countries

Get the list of available countries for the `leagues` endpoint.

The `name` and `code` fields can be used in other endpoints as filters.

To get the flag of a country you have to call the following url: https://media.api-sports.io/flags/{country_code}.svg

Examples available in Request samples "Use Cases".

All the parameters of this endpoint can be used together.

Update Frequency : This endpoint is updated each time a new league from a country not covered by the API is added.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

| | | |
|--------|--|-------------------------------|
| name | string | The name of the country |
| code | string [2 .. 6] characters FR, GB-ENG, IT... | The Alpha code of the country |
| search | string = 3 characters | The name of the country |

HEADER PARAMETERS

| | | |
|---|--------|--------------|
| x-rapidapi-key <small>required</small> | string | Your Api-Key |
|---|--------|--------------|

Responses

> **200** OK

> **204** No Content

> **499** Time Out

> **500** Internal Server Error

GET /countries

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;  
$request = new http\Client\Request;
```

```
$request->setRequestUrl('https://v3.football.api-sports.io/countries');
$request->setRequestMethod('GET');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "countries",
    - "parameters": {
        "name": "england"
    },
    "errors": [ ],
    "results": 1,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

Leagues

Leagues

Get the list of available leagues and cups.

The league `id` are **unique** in the API and leagues keep it across all `seasons`

To get the logo of a competition you have to call the following url: https://media.apisports.io/football/leagues/{league_id}.png

This endpoint also returns the `coverage` of each competition, which makes it possible to know what is available for that league or cup.

The values returned by the coverage indicate the **data available at the moment** you call the API, so for a competition that has not yet started, it is normal to have all the features set to `False`. This will be updated once the competition has started.

You can find all the leagues ids on our [Dashboard](#).

Example :

```
"coverage": {  
    "fixtures": {  
        "events": true,  
        "lineups": true,  
        "statistics_fixtures": false,  
        "statistics_players": false  
    },  
    "standings": true,  
    "players": true,  
    "top_scorers": true,  
    "top_assists": true,  
    "top_cards": true,  
    "injuries": true,  
    "predictions": true,  
    "odds": false  
}
```

In this example we can deduce that the competition does not have the following features:

`statistics_fixtures`, `statistics_players`, `odds` because it is set to `False`.

The coverage of a competition can vary from season to season and values set to `True` do not guarantee 100% data availability.

Some competitions, such as the `friendlies`, are exceptions to the coverage indicated in the `leagues` endpoint, and the data available may differ depending on the match, including livescore, events, lineups, statistics and players.

Competitions are automatically renewed by the API when a new season is available. There may be a delay between the announcement of the official calendar and the availability of data in the API.

For `cup` competitions, fixtures are automatically added when the two participating teams are known. For example if the current phase is the 8th final, the quarter final will be added once the teams playing this phase are known.

Examples available in Request samples "Use Cases".

Most of the parameters of this endpoint can be used together.

Update Frequency : This endpoint is updated several times a day.

Recommended Calls : 1 call per hour.

QUERY PARAMETERS

| | | |
|----------------------|--|--|
| <code>id</code> | integer | The id of the league |
| <code>name</code> | string | The name of the league |
| <code>country</code> | string | The country name of the league |
| <code>code</code> | string [2 .. 6] characters FR, GB-ENG, IT... | The Alpha code of the country |
| <code>season</code> | integer = 4 characters YYYY | The season of the league |
| <code>team</code> | integer | The id of the team |
| <code>type</code> | string Enum: "league" "cup" | The type of the league |
| <code>current</code> | string Enum: "true" "false" | Return the list of active seasons or the last 10 seasons. Show pattern |

The state of the league

search

string **>= 3 characters**

The name or the country of the league

last

integer **<= 2 characters**

The X last leagues/cups added in the API

HEADER PARAMETERS

x-rapidapi-key

required

string

Your Api-Key

Responses

> 200 OK**> 204 No Content****> 499 Time Out****> 500 Internal Server Error**

GET /leagues

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'YOUR_API_KEY'
));
```

```
'x-rapidapi-key' => 'XXXXXXXXXXXXXX'
) ) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "leagues",
    - "parameters": {
        "id": "39"
    },
    "errors": [ ],
    "results": 1,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

Seasons

Get the list of available seasons.

All seasons are only **4-digit keys**, so for a league whose season is `2018-2019` like the English Premier League (EPL), the `2018-2019` season in the API will be `2018`.

All `seasons` can be used in other endpoints as filters.

This endpoint does not require any parameters.

Update Frequency : This endpoint is updated each time a new league is added.

Recommended Calls : 1 call per day.

HEADER PARAMETERS

x-rapidapi-key string
required
Your Api-Key

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> **500 Internal Server Error**

GET /leagues/seasons

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));
```

```
$client->enqueue($request)->send();  
$response = $client->getResponse();  
  
echo $response->getBody();
```

Response samples

200**204****499****500**

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
    "get": "leagues/seasons",  
    "parameters": [ ],  
    "errors": [ ],  
    "results": 12,  
    - "paging": {  
        "current": 1,  
        "total": 1  
    },  
    - "response": [  
        2008,  
        2010,  
        2011,  
        2012,  
        2013,  
        2014,  
        2015,  
        2016,  
        2017,  
        2018,  
        2019,  
        2020  
    ]  
}
```

Teams

Teams information

Get the list of available teams.

The team `id` are **unique** in the API and teams keep it among all the leagues/cups in which they participate.

To get the logo of a team you have to call the following url: https://media.api-sports.io/football/teams/{team_id}.png

You can find all the teams ids on our [Dashboard](#).

Examples available in Request samples "Use Cases".

All the parameters of this endpoint can be used together.

This endpoint requires at least one parameter.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

Tutorials :

- [HOW TO GET ALL TEAMS AND PLAYERS FROM A LEAGUE ID](#)

QUERY PARAMETERS

`id`

integer

The id of the team

`name`

string

The name of the team

`league`

integer

The id of the league

season integer = 4 characters YYYY

The season of the league

country string

The country name of the team

code string = 3 characters

The code of the team

venue integer

The id of the venue

search string >= 3 characters

The name or the country name of the team

HEADER PARAMETERS

x-rapidapi-key string

required

Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /teams

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```

$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/teams');
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'id' => '33'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();

```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "teams",
    - "parameters": {
        "id": "33"
    },
    "errors": [ ],
    "results": 1,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

Teams statistics

Returns the statistics of a team in relation to a given competition and season.

It is possible to add the `date` parameter to calculate statistics from the beginning of the season to the given date. By default the API returns the statistics of all games played by the team for the competition and the season.

Update Frequency : This endpoint is updated twice a day.

Recommended Calls : 1 call per day for the teams who have at least one fixture during the day otherwise 1 call per week.

Here is an example of what can be achieved

| | LIVERPOOL  | | | MANCHESTER UNITED  | | |
|----------------------|---|------|-----|---|------|-----|
| | HOME | AWAY | ALL | HOME | AWAY | ALL |
| Games played | 11 | 10 | 21 | 11 | 11 | 22 |
| Wins | 11 | 9 | 20 | 6 | 3 | 9 |
| Draws | 0 | 1 | 1 | 4 | 3 | 7 |
| Loss | 0 | 0 | 0 | 1 | 5 | 6 |
| GOALS | | | | | | |
| Goals For | 29 | 21 | 50 | 24 | 12 | 36 |
| Goals Against | 9 | 5 | 14 | 10 | 15 | 25 |
| GOALS AVERAGE | | | | | | |
| Goals For | 2.6 | 2.1 | 2.4 | 2.2 | 1.1 | 1.6 |
| Goals Against | 0.8 | 0.5 | 0.7 | 0.9 | 1.4 | 1.1 |

QUERY PARAMETERS

`league`
required

integer
The id of the league

`season`
required

integer **= 4 characters** YYYY
The season of the league

`team`
required

integer
The id of the team

date string **YYYY-MM-DD**

The limit date

HEADER PARAMETERS

x-rapidapi-key string
required
Your Api-Key

Responses

> **200** OK

> **204** No Content

> **499** Time Out

> **500** Internal Server Error

GET /teams/statistics

Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/teams/statistics');

$request->setHeaders(array(
    'x-rapidapi-key' => 'YOUR_API_KEY',
    'Content-Type' => 'application/json'
));

$request->setBody(json_encode([
    'league' => 39,
    'team' => 33,
    'season' => 2019
]));

$response = $client->send($request);

echo $response->getBody();
```

```
'x-rapidapi-host' => 'v3.football.api-sports.io',
'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
) ) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  "get": "teams/statistics",
  - "parameters": {
      "league": "39",
      "season": "2019",
      "team": "33"
    },
  "errors": [ ],
  "results": 11,
  - "paging": {
      "current": 1,
      "total": 1
    },
  - "response": {
      + "league": { ... },
      + "team": { ... },
      "form": "WDLDWLWLWDDWWDLWWLWLWLDWWWDWWWWWDWDW",
      + "fixtures": { ... },
      + "goals": { ... },
      + "biggest": { ... },
      + "clean_sheet": { ... },
      + "failed_to_score": { ... },
      + "penalty": { ... },
      + "lineups": [ ... ],
      + "cards": { ... }
    }
}
```

}

Teams seasons

Get the list of seasons available for a team.

Examples available in Request samples "Use Cases".

This endpoint requires at least one parameter.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

team integer
required The id of the team

HEADER PARAMETERS

x-rapidapi-key string
required Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /teams/seasons

Request samples

[Php](#)
[Python](#)
[Node](#)
[JavaScript](#)
[Curl](#)
[Ruby](#)
[Use Cases](#)
[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/teams/seasons');
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'team' => '33'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXxXx'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "teams/seasons",
    - "parameters": {
        "team": "33"
    },
    "errors": [ ],
    "results": 1,
```

```
- "paging": {  
    "current": 1,  
    "total": 1  
},  
- "response": [  
    2010,  
    2011,  
    2012,  
    2013,  
    2014,  
    2015,  
    2016,  
    2017,  
    2018,  
    2019,  
    2020,  
    2021  
]  
}
```

Teams countries

Get the list of countries available for the `teams` endpoint.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

HEADER PARAMETERS

| | |
|-----------------------------|--------------|
| <code>x-rapidapi-key</code> | string |
| required | Your Api-Key |

Responses

> **200 OK**

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /teams/countries

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/teams/countries');

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
    "get": "teams/countries",  
    "parameters": [ ],  
    "errors": [ ],  
    "results": 258,  
    - "paging": {  
        "current": 1,  
        "total": 1  
    },  
    - "response": [  
        + { ... }  
    ]  
}
```

Venues

Venues

Get the list of available venues.

The venue `id` are **unique** in the API.

To get the image of a venue you have to call the following url: https://media.api-sports.io/football/venues/{venue_id}.png

Examples available in Request samples "Use Cases".

All the parameters of this endpoint can be used together.

This endpoint requires at least one parameter.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

| | | |
|---------|--|--|
| id | integer | |
| | | The id of the venue |
| name | string | |
| | | The name of the venue |
| city | string | |
| | | The city of the venue |
| country | string | |
| | | The country name of the venue |
| search | string >= 3 characters | |
| | | The name, city or the country of the venue |

HEADER PARAMETERS

| | | |
|---|--------|--------------|
| x-rapidapi-key | string | |
| required | | Your Api-Key |

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /venues

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```

$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/venues');
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'id' => '556'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();

```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "venues",
    - "parameters": {
        "id": "556"
    },
    "errors": [ ],
    "results": 1,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

Standings

Standings

Get the standings for a league or a team.

Return a table of one or more rankings according to the league / cup.

Some competitions have several rankings in a year, group phase, opening ranking, closing ranking etc...

Examples available in Request samples "Use Cases".

Most of the parameters of this endpoint can be used together.

Update Frequency : This endpoint is updated every hour.

Recommended Calls : 1 call per hour for the leagues or teams who have at least one fixture in progress otherwise 1 call per day.

Tutorials :

- [HOW TO GET STANDINGS FOR ALL CURRENT SEASONS](#)

QUERY PARAMETERS

league integer
The id of the league

season integer **= 4 characters** YYYY
The season of the league

team integer
The id of the team

HEADER PARAMETERS

x-rapidapi-key string
required
Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /standings

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'league' => '39',
    'season' => '2019'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
    "get": "standings",  
    - "parameters": {  
        "league": "39",  
        "season": "2019"  
    },  
    "errors": [ ],  
    "results": 1,  
    - "paging": {  
        "current": 1,  
        "total": 1  
    },  
    - "response": [  
        + { ... }  
    ]  
}
```

Fixtures

Rounds

Get the rounds for a league or a cup.

The `round` can be used in endpoint fixtures as filters

Examples available in Request samples "Use Cases".

Update Frequency : This endpoint is updated every day.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

league **required** integer
The id of the league

season **required** integer **= 4 characters** YYYY
The season of the league

current boolean
Enum: "true" "false"
The current round only

dates boolean
Default: false
Enum: "true" "false"
Add the dates of each round in the response

timezone string
A valid timezone from the endpoint **Timezone**

HEADER PARAMETERS

x-rapidapi-key **required** string
Your Api-Key

Responses

> **200** OK

> **204** No Content

> **499** Time Out

> **500** Internal Server Error

GET /fixtures/rounds

Request samples

[Php](#)
[Python](#)
[Node](#)
[JavaScript](#)
[Curl](#)
[Ruby](#)
[Use Cases](#)
[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'season' => '2019',
    'league' => '61'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

Example

Default

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "fixtures/rounds",
```

```
- "parameters": {  
    "league": "39",  
    "season": "2019"  
},  
"errors": [ ],  
"results": 38,  
- "paging": {  
    "current": 1,  
    "total": 1  
},
```

```
- "response": [  
    "Regular Season - 1",  
    "Regular Season - 2",  
    "Regular Season - 3",  
    "Regular Season - 4",  
    "Regular Season - 5",  
    "Regular Season - 6",  
    "Regular Season - 7",  
    "Regular Season - 8",  
    "Regular Season - 9",  
    "Regular Season - 10",  
    "Regular Season - 11",  
    "Regular Season - 12",  
    "Regular Season - 13",  
    "Regular Season - 14",  
    "Regular Season - 15",  
    "Regular Season - 16",  
    "Regular Season - 17",  
    "Regular Season - 18",  
    "Regular Season - 19",  
    "Regular Season - 20",  
    "Regular Season - 21",  
    "Regular Season - 22",  
    "Regular Season - 23",  
    "Regular Season - 24",  
    "Regular Season - 25",  
    "Regular Season - 26",  
    "Regular Season - 27",  
    "Regular Season - 28",  
    "Regular Season - 29",  
    "Regular Season - 30",  
    "Regular Season - 31",  
    "Regular Season - 32",  
    "Regular Season - 33",  
    "Regular Season - 34",  
    "Regular Season - 35",  
    "Regular Season - 36",  
    "Regular Season - 37",  
    "Regular Season - 38"  
]
```

}

Fixtures

For all requests to fixtures you can add the query parameter `timezone` to your request in order to retrieve the list of matches in the time zone of your choice like “*Europe/London*”

To know the list of available time zones you have to use the endpoint `timezone`.

Available fixtures status

| SHORT | LONG | TYPE | DESCRIPTION |
|-------|-------------------------------|-----------|---|
| TBD | Time To Be Defined | Scheduled | Scheduled but date and time are not known |
| NS | Not Started | Scheduled | |
| 1H | First Half, Kick Off | In Play | First half in play |
| HT | Halftime | In Play | Finished in the regular time |
| 2H | Second Half, 2nd Half Started | In Play | Second half in play |
| ET | Extra Time | In Play | Extra time in play |
| BT | Break Time | In Play | Break during extra time |
| P | Penalty In Progress | In Play | Penaly played after extra time |
| SUSP | Match Suspended | In Play | Suspended by referee's decision, may be rescheduled another day |
| INT | Match Interrupted | In Play | Interrupted by referee's decision, should resume in a few minutes |
| FT | Match Finished | Finished | Finished in the regular time |
| AET | Match Finished | Finished | Finished after extra time without going to the penalty shootout |
| PEN | Match Finished | Finished | Finished after the penalty shootout |
| PST | Match Postponed | Postponed | Postponed to another day, once the new date and time is known the status will change to Not Started |

| SHORT | LONG | TYPE | DESCRIPTION |
|-------|-----------------|------------|---|
| CANC | Match Cancelled | Cancelled | Cancelled, match will not be played |
| ABD | Match Abandoned | Abandoned | Abandoned for various reasons (Bad Weather, Safety, Floodlights, Playing Staff Or Referees), Can be rescheduled or not, it depends on the competition |
| AWD | Technical Loss | Not Played | |
| WO | WalkOver | Not Played | Victory by forfeit or absence of competitor |
| LIVE | In Progress | In Play | Used in very rare cases. It indicates a fixture in progress but the data indicating the half-time or elapsed time are not available |

Fixtures with the status `TBD` may indicate an incorrect fixture date or time because the fixture date or time is not yet known or final. Fixtures with this status are checked and updated daily. The same applies to fixtures with the status `PST`, `CANC`.

The fixtures ids are unique and specific to each fixture. In no case an `ID` will change.

Not all competitions have livescore available and only have `final result`. In this case, the status remains in `NS` and will be updated in the minutes/hours following the match (this can take up to 48 hours, depending on the competition).

Although the data is updated every 15 seconds, depending on the competition there may be a delay between reality and the availability of data in the API.

Update Frequency : This endpoint is updated every 15 seconds.

Recommended Calls : 1 call per minute for the leagues, teams, fixtures who have at least one fixture in progress otherwise 1 call per day.

Here are several examples of what can be achieved



QUERY PARAMETERS

`id` integer
Value: `"id"`
The id of the fixture

`ids` string **Maximum of 20 fixtures ids**
Value: `"id-id-id"`
One or more fixture ids

`live` string
Enum: `"all"` `"id-id"`
All or several leagues ids

`date` string **YYYY-MM-DD**
A valid date

`league` integer
The id of the league

`season` integer **= 4 characters** **YYYY**
The season of the league

`team` integer
The id of the team

`last` integer **<= 2 characters**
For the X last fixtures

`next` integer **<= 2 characters**
For the X next fixtures

`from` string **YYYY-MM-DD**
A valid date

`to` string **YYYY-MM-DD**
A valid date

`round` string
The round of the fixture

`status` string
Enum: `"NS"` `"NS-PST-FT"`
One or more fixture status short

venue

integer

The venue id of the fixture

timezone

string

A valid timezone from the endpoint [Timezone](#)

HEADER PARAMETERS

x-rapidapi-key

required

string

Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /fixtures

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/fixtures');

$request->setQuery(new http\QueryString(array(
    'live' => 'all'
))');
```

```
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXx'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

200
204
499
500

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "fixtures",
    - "parameters": {
        "live": "all"
    },
    "errors": [ ],
    "results": 4,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

Head To Head

Get heads to heads between two teams.

Update Frequency : This endpoint is updated every 15 seconds.

Recommended Calls : 1 call per minute for the leagues, teams, fixtures who have at least one fixture in progress otherwise 1 call per day.

Here is an example of what can be achieved

| SUNDAY 20 OCTOBER 2019 | | |
|---|---------|---|
|  Manchester United | 1 - 1 | Liverpool  |
| SUNDAY 24 FEBRUARY 2019 | | |
|  Manchester United | 0 - 0 | Liverpool  |
| SUNDAY 16 DECEMBER 2018 | | |
|  Liverpool | ► 3 - 1 | Manchester United  |
| SATURDAY 28TH JULY 2018 | | |
|  Manchester United | 1 - 4 ◀ | Liverpool  |
| SATURDAY 10 MARCH 2018 | | |
|  Manchester United | ► 2 - 1 | Liverpool  |

QUERY PARAMETERS

h2h
required

string **ID-ID**

The ids of the teams

date

string **YYYY-MM-DD**

league

integer

The id of the league

season

integer **= 4 characters** **YYYY**

The season of the league

last

integer

For the X last fixtures

next

integer

For the X next fixtures

from

string **YYYY-MM-DD**

| | |
|----------|---|
| to | string YYYY-MM-DD |
| status | string Enum: "NS" "NS-PST-FT" One or more fixture status short |
| venue | integer The venue id of the fixture |
| timezone | string A valid timezone from the endpoint Timezone |

HEADER PARAMETERS

| | |
|-----------------------------------|------------------------|
| x-rapidapi-key required | string Your Api-Key |
|-----------------------------------|------------------------|

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /fixtures/headtohead

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;  
$request = new http\Client\Request;
```

```

$request->setRequestUrl('https://v3.football.api-sports.io/fixtures/headtohead')
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'h2h' => '33-34'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
))();

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();

```

Response samples

◀
▶
200
204
499
500

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "fixtures/headtohead",
    - "parameters": {
        "h2h": "33-34",
        "last": "1"
    },
    "errors": [ ],
    "results": 1,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

Statistics

Get the statistics for one fixture.


Available statistics

- Shots on Goal
- Shots off Goal
- Shots insidebox
- Shots outsidebox
- Total Shots
- Blocked Shots
- Fouls
- Corner Kicks
- Offsides
- Ball Possession
- Yellow Cards
- Red Cards
- Goalkeeper Saves
- Total passes
- Passes accurate
- Passes %

Update Frequency : This endpoint is updated every minute.

Recommended Calls : 1 call every minute for the teams or fixtures who have at least one fixture in progress otherwise 1 call per day.

Here is an example of what can be achieved

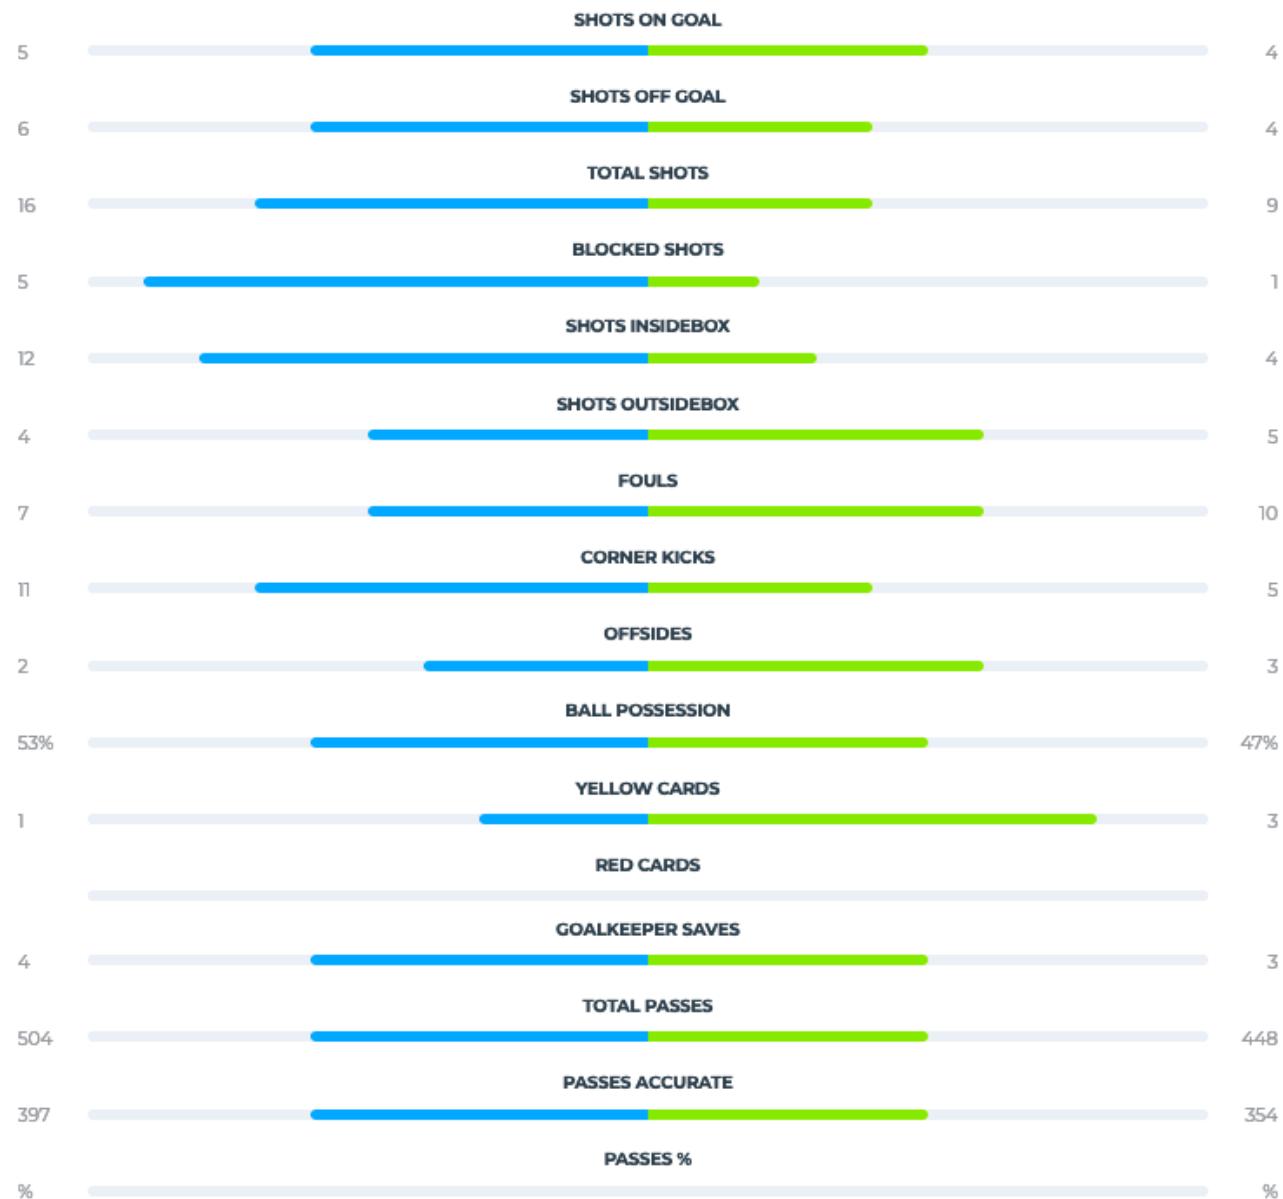

QUERY PARAMETERS

| | |
|-----------------|--|
| fixture | integer |
| required | The id of the fixture |
| team | integer |
| | The id of the team |
| type | string |
| | The type of statistics |
| half | boolean |
| | Default: <code>false</code> |
| | Enum: <code>"true"</code> <code>"false"</code> |

Add the halftime statistics in the response Data start from 2024 season
for half parameter

HEADER PARAMETERS

`x-rapidapi-key` string
required
Your Api-Key

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> **500 Internal Server Error**

GET /fixtures/statistics

Request samples

[Php](#) [Python](#) [Node](#) [JavaScript](#) [Curl](#) [Ruby](#) [Use Cases](#)

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'fixture' => '215662',
    'team' => '463'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'YOUR_API_KEY'
));
```

```
'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
) ) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

Example

Default

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  "get": "fixtures/statistics",
  - "parameters": {
      "team": "463",
      "fixture": "215662"
    },
  "errors": [ ],
  "results": 1,
  - "paging": {
      "current": 1,
      "total": 1
    },
  - "response": [
    + { ... }
  ]
}
```

Events

Get the events from a fixture.

Available events

| TYPE | | | | |
|-------|---------------------------|-------------------|---------|----------------|
| Goal | Normal Goal | Own Goal | Penalty | Missed Penalty |
| Card | Yellow Card | Red card | | |
| Subst | Substitution [1, 2, 3...] | | | |
| Var | Goal cancelled | Penalty confirmed | | |

- VAR events are available from the 2020-2021 season.

Update Frequency : This endpoint is updated every 15 seconds.

Recommended Calls : 1 call per minute for the fixtures in progress otherwise 1 call per day.

You can also retrieve all the events of the fixtures in progress with to the endpoint `fixtures?live=all`

Here is an example of what can be achieved



QUERY PARAMETERS

`fixture` required integer
The id of the fixture

`team` integer
The id of the team

`player` integer
The id of the player

`type` string
The type

HEADER PARAMETERS

`x-rapidapi-key` required string
Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /fixtures/events

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/fixtures/events');

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key'  => 'XXXXXXXXXXXXXXXXXXXXXX'
));

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)**Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
    "get": "fixtures/events",  
    - "parameters": {  
        "fixture": "215662"  
    },  
    "errors": [ ],  
    "results": 18,  
    - "paging": {  
        "current": 1,  
        "total": 1  
    },  
    - "response": [  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... }  
    ]  
}
```

Lineups

Get the lineups for a fixture.

Lineups are available between 20 and 40 minutes before the fixture when the competition covers this feature. You can check this with the endpoint `leagues` and the `coverage` field.

It's possible that for some competitions the lineups are not available before the fixture, this can be the case for minor competitions

Available data

- Formation
- Coach
- Start XI
- Substitutes

Players' positions on the grid *

X = row and **Y** = column (X:Y)

Line 1 **X** being the one of the goal and then for each line this number is incremented. The column **Y** will go from left to right, and incremented for each player of the line.

* As a new feature, some irregularities may occur, do not hesitate to report them on our public Roadmap

Update Frequency : This endpoint is updated every 15 minutes.

Recommended Calls : 1 call every 15 minutes for the fixtures in progress otherwise 1 call per day.

Here are several examples of what can be done



LIVERPOOL 4-3-3**COACH**

J. Klopp

STARTING XI

| | |
|----|-----------------------|
| 1 | Alisson |
| 4 | V. van Dijk |
| 26 | A. Robertson |
| 12 | J. Gomez |
| 66 | T. Alexander-Arnold |
| 5 | G. Wijnaldum |
| 14 | J. Henderson |
| 15 | A. Oxlade-Chamberlain |
| 9 | Roberto Firmino |
| 11 | Mohamed Salah |
| 10 | S. Mané |

SUBSTITUTES

| | |
|----|-------------|
| 20 | A. Lallana |
| 3 | Fabinho |
| 27 | D. Origı |
| 18 | T. Minamino |
| 13 | Adrián |
| 48 | C. Jones |
| 32 | J. Matip |

MANCHESTER UNITED 3-4-1-2**COACH**

O. Solskjær

STARTING XI

| | |
|----|-----------------|
| 1 | David de Gea |
| 2 | V. Lindelöf |
| 5 | H. Maguire |
| 23 | L. Shaw |
| 29 | A. Wan-Bissaka |
| 53 | B. Williams |
| 31 | N. Matić |
| 17 | Fred |
| 15 | Andreas Pereira |
| 21 | D. James |
| 9 | A. Martial |

SUBSTITUTES

| | |
|----|--------------|
| 8 | Mata |
| 26 | M. Greenwood |
| 20 | Diogo Dalot |
| 22 | S. Romero |
| 14 | J. Lingard |
| 3 | E. Bailly |
| 4 | P. Jones |

QUERY PARAMETERS

fixture required integer
The id of the fixture

team integer
The id of the team

player integer
The id of the player

type string
The type

HEADER PARAMETERS

x-rapidapi-key required string
Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /fixtures/lineups

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/fixtures/lineups');

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)**Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
    "get": "fixtures/lineups",  
    - "parameters": {  
        "fixture": "592872"  
    },  
    "errors": [ ],  
    "results": 2,  
    - "paging": {  
        "current": 1,  
        "total": 1  
    },  
    - "response": [  
        + { ... },  
        + { ... }  
    ]  
}
```

Players statistics

Get the players statistics from one fixture.

Update Frequency : This endpoint is updated every minute.

Recommended Calls : 1 call every minute for the fixtures in progress otherwise 1 call per day.

QUERY PARAMETERS

fixture required integer
The id of the fixture

team integer
The id of the team

HEADER PARAMETERS

x-rapidapi-key**required**

string

Your Api-Key

Responses

> 200 OK**> 204 No Content****> 499 Time Out****> 500 Internal Server Error**

GET /fixtures/players

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'fixture' => '169080'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

$client->enqueue($request)->send();
$response = $client->getResponse();
```

```
echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "fixtures/players",
    - "parameters": {
        "fixture": "169080"
    },
    "errors": [ ],
    "results": 2,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

Injuries

Injuries

Get the list of players not participating in the fixtures for various reasons such as [suspended](#), [injured](#) for example.

Being a new endpoint, the data is only available from April 2021.

There are two types:

- `Missing Fixture` : The player will not play the fixture.
- `Questionable` : The information is not yet 100% sure, the player may eventually play the fixture.

Examples available in Request samples "Use Cases".

All the parameters of this endpoint can be used together.

This endpoint requires at least one parameter.

Update Frequency : This endpoint is updated every 4 hours.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

| | | |
|----------|--|---|
| league | integer | The id of the league |
| season | integer <code>= 4 characters</code> YYYY | The season of the league, required with <code>league</code> , <code>team</code> and <code>player</code> parameters |
| fixture | integer | The id of the fixture |
| team | integer | The id of the team |
| player | integer | The id of the player |
| date | string YYYY-MM-DD | A valid date |
| ids | string Maximum of 20 fixtures ids Value: "id-id-id" | One or more fixture ids |
| timezone | string | A valid timezone from the endpoint <code>Timezone</code> |

HEADER PARAMETERS

x-rapidapi-key string
required
 Your Api-Key

Responses

> **200** OK

> **204** No Content

> **499** Time Out

> **500** Internal Server Error

GET /injuries

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/injuries');

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();
```

```
echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

{

```
    "get": "injuries",
    - "parameters": {
        "fixture": "686314"
    },
    "errors": [ ],
    "results": 13,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... }
    ]
}
```

Predictions

Predictions

Get predictions about a fixture.

The predictions are made using several algorithms including the poisson distribution, comparison of team statistics, last matches, players etc...

Bookmakers odds are not used to make these predictions

Also provides some comparative statistics between teams

Available Predictions


- Match winner : Id of the team that can potentially win the fixture
- Win or Draw : If `True` indicates that the designated team can win or draw
- Under / Over : -1.5 / -2.5 / -3.5 / -4.5 / +1.5 / +2.5 / +3.5 / +4.5 *
- Goals Home : -1.5 / -2.5 / -3.5 / -4.5 *
- Goals Away : -1.5 / -2.5 / -3.5 / -4.5 *
- Advice (*Ex : Deportivo Santani or draws and -3.5 goals*)

* -1.5 means that there will be a maximum of 1.5 goals in the fixture, i.e : 1 goal

Update Frequency : This endpoint is updated every hour.

Recommended Calls : 1 call per hour for the fixtures in progress otherwise 1 call per day.

Here is an example of what can be achieved

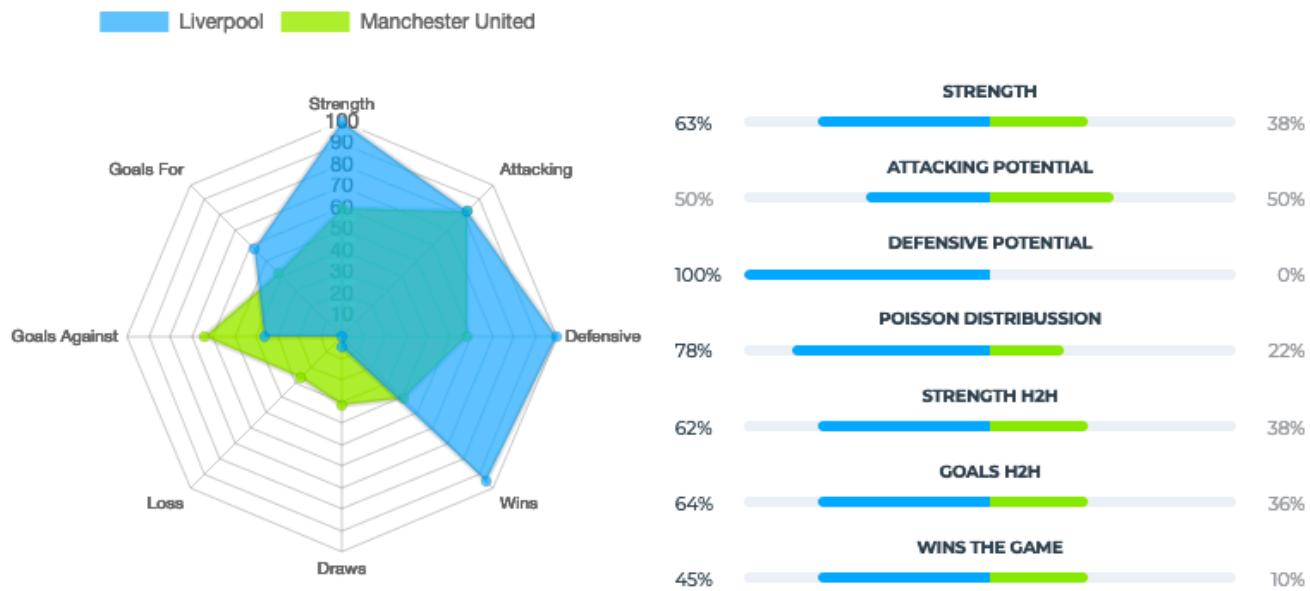

QUERY PARAMETERS

`fixture` required integer
The id of the fixture

HEADER PARAMETERS

`x-rapidapi-key` required string
Your Api-Key

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> **500 Internal Server Error**

GET /predictions

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'fixture' => '198772'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "predictions",
    - "parameters": {
        "fixture": "198772"
    },
    "errors": [ ],
    "results": 1,
    - "paging": {
        "current": 1,
        "total": 1
    },
}
```

```
- "response": [
    + { ... }
]
}
```

Coachs

Coachs

Get all the information about the coaches and their careers.

To get the photo of a coach you have to call the following url: https://media.api-sports.io/football/coachs/{coach_id}.png

Update Frequency : This endpoint is updated every day.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

| | | |
|--------|---|-----------------------|
| id | integer | The id of the coach |
| team | integer | The id of the team |
| search | string >= 3 characters | The name of the coach |

HEADER PARAMETERS

| | | |
|----------------|--------|--------------|
| x-rapidapi-key | string | Your Api-Key |
|----------------|--------|--------------|

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /coachs

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/coachs');

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
    "get": "coachs",  
    - "parameters": {  
        "team": "85"  
    },  
    "errors": [ ],  
    "results": 1,  
    - "paging": {  
        "current": 1,  
        "total": 1  
    },  
    - "response": [  
        + { ... }  
    ]  
}
```

Players

Seasons

Get all available seasons for players statistics.

Update Frequency : This endpoint is updated every day.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

player integer
The id of the player

HEADER PARAMETERS

x-rapidapi-key string
required
Your Api-Key

Responses

> **200** OK

> **204** No Content

> **499** Time Out

> **500** Internal Server Error

GET /players/seasons

Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();
```

```
echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "players/seasons",
    "parameters": [ ],
    "errors": [ ],
    "results": 35,
    - "paging": {
        "current": 1,
        "total": 1
    },
}
```

```
- "response": [  
    1966,  
    1982,  
    1986,  
    1990,  
    1991,  
    1992,  
    1993,  
    1994,  
    1995,  
    1996,  
    1997,  
    1998,  
    1999,  
    2000,  
    2001,  
    2002,  
    2003,  
    2004,  
    2005,  
    2006,  
    2007,  
    2008,  
    2009,  
    2010,  
    2011,  
    2012,  
    2013,  
    2014,  
    2015,  
    2016,  
    2017,  
    2018,  
    2019,  
    2020,  
    2022  
]
```

{}

Profiles

Returns the list of all available players.

It is possible to call this endpoint without parameters, but you will need to use the **pagination** to get all available players.

To get the photo of a player you have to call the following url: https://mediaapis.sports.io/football/players/{player_id}.png

This endpoint uses a **pagination system**, you can navigate between the different pages with the [page](#) parameter.

Pagination : 250 results per page.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per week.

QUERY PARAMETERS

| | | |
|--------|---|----------------------------|
| player | integer | The id of the player |
| search | string >= 3 characters | The lastname of the player |
| page | integer Default: 1 | Use for the pagination |

HEADER PARAMETERS

| | | |
|----------------|--------|--------------|
| x-rapidapi-key | string | Your Api-Key |
|----------------|--------|--------------|

Responses

[> 200 OK](#)

[> 204 No Content](#)

> 499 Time Out

> 500 Internal Server Error

GET /players/profiles

Request samples

[Php](#)
[Python](#)
[Node](#)
[JavaScript](#)
[Curl](#)
[Ruby](#)
[Use Cases](#)
[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/players/profiles');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));
$request->setBody('{"player": "276"}');

$response = $client->send();
echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  "get": "players/profiles",
  - "parameters": {
      "player": "276"
    },
  "errors": [ ],
  "results": 1,
  - "paging": {
      "current": 1,
      "total": 1
    },
  - "response": [
    + { ... }
  ]
}
```

Statistics

Get players statistics.

This endpoint returns the players for whom the `profile` and `statistics` data are available. Note that it is possible that a player has statistics for 2 teams in the same season in case of transfers.

The statistics are calculated according to the team `id`, league `id` and `season`.

You can find the available `seasons` by using the endpoint `players/seasons`.

To get the squads of the teams it is better to use the endpoint `players/squads`.

The players `id` are unique in the API and players keep it among all the teams they have been in.

In this endpoint you have the `rating` field, which is the rating of the player according to a match or a season. This data is calculated according to the performance of the player in relation to the other players of the game or the season who occupy the same position (*Attacker, defender, goal...*). There are different algorithms that take into account the position of the player and assign points according to his performance.

To get the photo of a player you have to call the following url: https://media.api-sports.io/football/players/{player_id}.png

This endpoint uses a **pagination system**, you can navigate between the different pages with the `page` parameter.

Pagination : 20 results per page.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

Tutorials :

- [HOW TO GET ALL TEAMS AND PLAYERS FROM A LEAGUE ID](#)

QUERY PARAMETERS

| | | |
|--------|---------------------------|--|
| id | integer | The id of the player |
| team | integer | The id of the team |
| league | integer | The id of the league |
| season | integer = 4 characters | YYYY Requires the fields Id, League or Team... The season of the league |
| search | string >= 4 characters | Requires the fields League or Team The name of the player |
| page | integer Default: 1 | Use for the pagination |

HEADER PARAMETERS

| | | |
|----------------|--------|--------------|
| x-rapidapi-key | string | Your Api-Key |
|----------------|--------|--------------|

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> 500 Internal Server Error

GET /players

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'id' => '276',
    'season' => '2019'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

{

"get": "players",

```
- "parameters": {  
    "id": "276",  
    "season": "2019"  
},  
"errors": [ ],  
"results": 1,  
- "paging": {  
    "current": 1,  
    "total": 1  
},  
- "response": [  
    + { ... }  
]  
}  
}
```

Squads

Return the current squad of a team when the `team` parameter is used. When the `player` parameter is used the endpoint returns the set of teams associated with the player.

The response format is the same regardless of the parameter sent.

This endpoint requires at least one parameter.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per week.

QUERY PARAMETERS

team integer
The id of the team

player integer
The id of the player

HEADER PARAMETERS

x-rapidapi-key string
required
Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /players/squads

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/players/squads');

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)**Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
    "get": "players/squads",  
    - "parameters": {  
        "team": "33"  
    },  
    "errors": [ ],  
    "results": 1,  
    - "paging": {  
        "current": 1,  
        "total": 1  
    },  
    - "response": [  
        + { ... }  
    ]  
}
```

Teams

Returns the list of teams and seasons in which the player played during his career.

This endpoint requires at least one parameter.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per week.

QUERY PARAMETERS

player
required

integer
The id of the player

HEADER PARAMETERS

x-rapidapi-key**required**

string

Your Api-Key

Responses

> 200 OK**> 204 No Content****> 499 Time Out****> 500 Internal Server Error**

GET /players/teams

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/players/teams');

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

$client->enqueue($request)->send();
$response = $client->getResponse();
```

```
echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "players/teams",
    - "parameters": {
        "player": "276"
    },
    "errors": [ ],
    "results": 8,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... }
    ]
}
```

Top Scorers

Get the 20 best players for a league or cup.

How it is calculated:

- 1 : The player that has scored the higher number of goals
- 2 : The player that has scored the fewer number of penalties
- 3 : The player that has delivered the higher number of goal assists
- 4 : The player that scored their goals in the higher number of matches
- 5 : The player that played the fewer minutes
- 6 : The player that plays for the team placed higher on the table
- 7 : The player that received the fewer number of red cards
- 8 : The player that received the fewer number of yellow cards

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

league required integer
The id of the league

season required integer = 4 characters YYYY
The season of the league

HEADER PARAMETERS

x-rapidapi-key required string
Your Api-Key

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> **500 Internal Server Error**

GET /players/topscorers

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'season' => '2018',
    'league' => '61'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```



Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "players/topscorers",
    "parameters": {
        "league": "61",
        "season": "2018"
    },
    "errors": [ ],
    "results": 20,
```

```
- "paging": {  
    "current": 1,  
    "total": 1  
},  
- "response": [  
    + { ... },  
    + { ... }  
]  
}  
}
```

Top Assists

Get the 20 best players assists for a league or cup.

How it is calculated:

- 1 : The player that has delivered the higher number of goal assists
- 2 : The player that has scored the higher number of goals
- 3 : The player that has scored the fewer number of penalties
- 4 : The player that assists in the higher number of matches
- 5 : The player that played the fewer minutes
- 6 : The player that received the fewer number of red cards
- 7 : The player that received the fewer number of yellow cards

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

league integer
required The id of the league

season integer **= 4 characters** YYYY
required The season of the league

HEADER PARAMETERS

x-rapidapi-key string
required Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /players/topassists

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/players/topassists');
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'season' => '2020',
    'league' => '61'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```



Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#)[Expand all](#)[Collapse all](#)

```
{  
    "get": "players/topassists",  
    - "parameters": {  
        "season": "2020",  
        "league": "61"  
    },  
    "errors": [ ],  
    "results": 20,  
    - "paging": {  
        "current": 0,  
        "total": 1  
    },  
    - "response": [  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... }  
    ]  
}
```

Top Yellow Cards

Get the 20 players with the most yellow cards for a league or cup.

How it is calculated:

- 1 : The player that received the higher number of yellow cards
- 2 : The player that received the higher number of red cards
- 3 : The player that assists in the higher number of matches
- 4 : The player that played the fewer minutes

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

league **integer**
required The id of the league

season **integer** = 4 characters YYYY
required The season of the league

HEADER PARAMETERS

x-rapidapi-key **string**
required Your Api-Key

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> **500 Internal Server Error**

GET /players/topyellowcards

Request samples

[Php](#)
[Python](#)
[Node](#)
[JavaScript](#)
[Curl](#)
[Ruby](#)
[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/players/topyellowcards');
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'season' => '2020',
    'league' => '61'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#)
[Expand all](#)
[Collapse all](#)

```
{
    "get": "players/topyellowcards",
    - "parameters": {
        "season": "2020",
        "league": "61"
    },
    "errors": [ ],
    "results": 20,
```

```
- "paging": {
    "current": 0,
    "total": 1
},
- "response": [
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... },
    { ... }
]
}
```

Top Red Cards

Get the 20 players with the most red cards for a league or cup.

How it is calculated:

- 1 : The player that received the higher number of red cards
- 2 : The player that received the higher number of yellow cards
- 3 : The player that assists in the higher number of matches
- 4 : The player that played the fewer minutes

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

league required integer
The id of the league

season required integer = 4 characters YYYY
The season of the league

HEADER PARAMETERS

x-rapidapi-key required string
Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /players/topredcards

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setRequestUrl('https://v3.football.api-sports.io/players/topredcards');
```

```
$request->setQuery(new http\QueryString(array(
    'season' => '2020',
    'league' => '61'
)));


$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));


$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

200
204
499
500


Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "players/topredcards",
    - "parameters": {
        "season": "2020",
        "league": "61"
    },
    "errors": [ ],
    "results": 20,
    - "paging": {
        "current": 0,
        "total": 1
    },
}
```

```
- "response": [
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... }
]
```

```
}
```

Transfers

Transfers

Get all available transfers for players and teams

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

player

integer

The id of the player

team

integer

The id of the team

HEADER PARAMETERS

x-rapidapi-key

required

string

Your Api-Key

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> **500 Internal Server Error**

GET /transfers

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setUri('https://v3.football.api-sports.io/transfers');

$request->setQuery(new http\QueryString(array(
    'player' => '35845'
))');
```

```
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key'  => 'XXXXXXXXXXXXXXXXXXXXXX'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

{

```
    "get": "transfers",
    - "parameters": {
        "player": "35845"
    },
    "errors": [ ],
    "results": 1,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

Trophies

Trophies

Get all available trophies for a player or a coach.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

player integer
The id of the player

players string **Maximum of 20 players ids**
Value: `"id-id-id"`
One or more players ids

coach integer
The id of the coach

coachs string **Maximum of 20 coachs ids**
Value: `"id-id-id"`
One or more coaches ids

HEADER PARAMETERS

x-rapidapi-key string
required
Your Api-Key

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> **500 Internal Server Error**

GET /trophies

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)
[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'player' => '276'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)

Content type

application/json

Example

Default

[Copy](#) [Expand all](#) [Collapse all](#)

{

```
"get": "trophies",
```

```
- "parameters": {
    "player": "276"
},
"errors": [ ],
"results": 38,
- "paging": {
    "current": 1,
    "total": 1
},
- "response": [
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... }
]
}
```

Sidelined

Sidelined

Get all available sidelined for a player or a coach.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

player

integer

The id of the player

players

string Maximum of 20 players ids

Value: "id-id-id"

One or more players ids

coach

integer

The id of the coach

coachs

string Maximum of 20 coachs ids

Value: "id-id-id"

One or more coachs ids

HEADER PARAMETERS

x-rapidapi-key

required

string

Your Api-Key

Responses

> 200 OK

> 204 No Content

> 499 Time Out

> 500 Internal Server Error

GET /sidelined

Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```

$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/sidelined');
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'player' => '276'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();

```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)
Content type

application/json

Example

Default

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "sidelined",
    - "parameters": {
        "player": "276"
    },
    "errors": [ ],
    "results": 27,
    - "paging": {
        "current": 1,
        "total": 1
    },
}
```

```
- "response": [
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... }
]
```

}

Odds (In-Play)

odds/live

This endpoint returns in-play odds for fixtures in progress.

Fixtures are added between 15 and 5 minutes before the start of the fixture. Once the fixture is over they are removed from the endpoint between 5 and 20 minutes. **No history is stored**. So fixtures that are about to start, fixtures in progress and fixtures that have just ended are available in this endpoint.

Update Frequency : This endpoint is updated every 5 seconds. 

* This value can change in the range of 5 to 60 seconds

INFORMATIONS ABOUT STATUS

```
"status": {
  "stopped": false, // True if the fixture is stopped by the referee for X reasons
  "blocked": false, // True if bets on this fixture are temporarily blocked
  "finished": false // True if the fixture has not started or if it is finished
},
```

INFORMATIONS ABOUT VALUES

When several identical values exist for the same bet the `main` field is set to `True` for the bet being considered, the others will have the value `False`.

The `main` field will be set to `True` only if several identical values exist for the same bet.

When a value is unique for a bet the `main` value will always be `False` or `null`.

Example below :

```
"id": 36,
"name": "Over/Under Line",
"values": [
  {
    "value": "Over",
    "odd": "1.975",
    "handicap": "2",
    "main": true, // Bet to consider
    "suspended": false // True if this bet is temporarily suspended
  },
  {
    "value": "Over",
    "odd": "3.45",
    "handicap": "2",
    "main": false, // Bet to no consider
    "suspended": false
  }
]
```

QUERY PARAMETERS

fixture

integer

The id of the fixture

league

integer (In this endpoint the "season" parameter is ... Show pattern)

The id of the league

bet

integer

The id of the bet

HEADER PARAMETERS

x-rapidapi-key

required

string

Your Api-Key

Responses

> 200 OK**> 204 No Content****> 499 Time Out****> 500 Internal Server Error**

GET /odds/live

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setRequestUrl('https://v3.football.api-sports.io/odds/live');
```

```
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXx'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

200
204
499
500

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "odds/live",
    - "parameters": {
        "fixture": "721238"
    },
    "errors": [ ],
    "results": 1,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... }
    ]
}
```

odds/live/bets

Get all available bets for in-play odds.

All bets `id` can be used in endpoint `odds/live` as filters, **but are not compatible with endpoint `odds` for pre-match odds.**

Update Frequency : This endpoint is updated every 60 seconds.

QUERY PARAMETERS

`id` string
The id of the bet name

`search` string `= 3 characters`
The name of the bet

HEADER PARAMETERS

`x-rapidapi-key` string
required
Your Api-Key

Responses

> **200** OK

> **204** No Content

> **499** Time Out

> **500** Internal Server Error

GET /odds/live/bets

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');

$request->setRequestUrl('https://v3.football.api-sports.io/odds/live/bets');
```

```
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXx'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

200**204****499****500****Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "odds/live/bets",
    "parameters": [ ],
    "errors": [ ],
    "results": 137,
    - "paging": {
        "current": 1,
        "total": 1
    },
}
```



```
+ { ... },  
+ { ... },  
+ { ... },  
+ { ... },  
+ { ... },  
+ { ... },  
+ { ... },  
+ { ... },  
+ { ... },  
+ { ... },  
+ { ... }  
]  
}
```

Odds (Pre-Match)

Odds

Get odds from fixtures, leagues or date.

This endpoint uses a **pagination system**, you can navigate between the different pages with to the [page](#) parameter.

Pagination : 10 results per page.

We provide pre-match odds between 1 and 14 days before the fixture.

We keep a 7-days history (*The availability of odds may vary according to the leagues, seasons, fixtures and bookmakers*)

Update Frequency : This endpoint is updated every 3 hours.

Recommended Calls : 1 call every 3 hours.

QUERY PARAMETERS

| | | |
|-----------|--|--|
| fixture | integer | The id of the fixture |
| league | integer | The id of the league |
| season | integer = 4 characters YYYY | The season of the league |
| date | string YYYY-MM-DD | A valid date |
| timezone | string | A valid timezone from the endpoint Timezone |
| page | integer Default: 1 | Use for the pagination |
| bookmaker | integer | The id of the bookmaker |
| bet | integer | The id of the bet |

HEADER PARAMETERS

| | |
|----------------|----------|
| x-rapidapi-key | string |
| | required |

Responses

- > **200 OK**
- > **204 No Content**
- > **499 Time Out**
- > **500 Internal Server Error**

GET /odds

Request samples

[Php](#)
[Python](#)
[Node](#)
[JavaScript](#)
[Curl](#)
[Ruby](#)
[Use Cases](#)
[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/odds');
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array(
    'season' => '2019',
    'bet' => '1',
    'bookmaker' => '6',
    'fixture' => '157140',
    'league' => '39'
))));

$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
));

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)
[204](#)
[499](#)
[500](#)

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "odds",
```

```
- "parameters": {
    "fixture": "326090",
    "bookmaker": "6"
},
"errors": [ ],
"results": 1,
- "paging": {
    "current": 1,
    "total": 1
},
- "response": [
    + { ... }
]
}
```

Mapping

Get the list of available fixtures `id` for the endpoint odds.

All fixtures, leagues `id` and `date` can be used in endpoint odds as filters.

This endpoint uses a **pagination system**, you can navigate between the different pages with the `page` parameter.

Pagination : 100 results per page.

Update Frequency : This endpoint is updated every day.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

| | |
|------|------------------------|
| page | integer |
| | Default: 1 |
| | Use for the pagination |

HEADER PARAMETERS

| | |
|-----------------|--------------|
| x-rapidapi-key | string |
| required | Your Api-Key |

Responses

> **200** OK

> **204** No Content

> **499** Time Out

> **500** Internal Server Error

GET /odds/mapping

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Copy

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestMethod('GET');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

200

204

499

500

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  "get": "odds/mapping",
  "parameters": [ ],
  "errors": [ ],
  "results": 129,
  - "paging": {
      "current": 1,
      "total": 1
    },
  - "response": [
      + { ... },
      + { ... },
      + { ... },
      + { ... }
    ]
}
```

Bookmakers

Get all available bookmakers.

All bookmakers `id` can be used in endpoint odds as filters.

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

`id` integer
The id of the bookmaker

`search` string `= 3 characters`
The name of the bookmaker

HEADER PARAMETERS

x-rapidapi-key string
required
Your Api-Key

Responses

- > **200** OK
- > **204** No Content
- > **499** Time Out
- > **500** Internal Server Error

GET /odds/bookmakers

Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/odds/bookmakers');
$request->setRequestMethod('GET');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();
```

Response samples

[200](#)[204](#)[499](#)[500](#)**Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
    "get": "odds/bookmakers",  
    "parameters": [ ],  
    "errors": [ ],  
    "results": 15,  
    - "paging": {  
        "current": 1,  
        "total": 1  
    },  
    - "response": [  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... },  
        + { ... }  
    ]  
}
```

Bets

Get all available bets for pre-match odds.

All bets `id` can be used in endpoint odds as filters, **but are not compatible with endpoint `odds/live` for in-play odds.**

Update Frequency : This endpoint is updated several times a week.

Recommended Calls : 1 call per day.

QUERY PARAMETERS

`id` string
The id of the bet name

`search` string `= 3 characters`
The name of the bet

HEADER PARAMETERS

`x-rapidapi-key` string
required
Your Api-Key

Responses

> **200 OK**

> **204 No Content**

> **499 Time Out**

> **500 Internal Server Error**

GET /odds/bets

Request samples

PHP

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```

$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v3.football.api-sports.io/odds/bets');
$request->setRequestMethod('GET');
$request->setHeaders(array(
    'x-rapidapi-host' => 'v3.football.api-sports.io',
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXX'
)) ;

$client->enqueue($request)->send();
$response = $client->getResponse();

echo $response->getBody();

```

Response samples

200
204
499
500

Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
    "get": "odds/bets",
    - "parameters": {
        "search": "under"
    },
    "errors": [ ],
    "results": 7,
    - "paging": {
        "current": 1,
        "total": 1
    },
    - "response": [
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... },
        + { ... }
    ]
}
```

}