


Insidor

User & System Flows


Companion to Architecture Reference · v4 prototype · March 2026

□ Screen / view □ Modal / overlay □ User action □ Data change

System overview

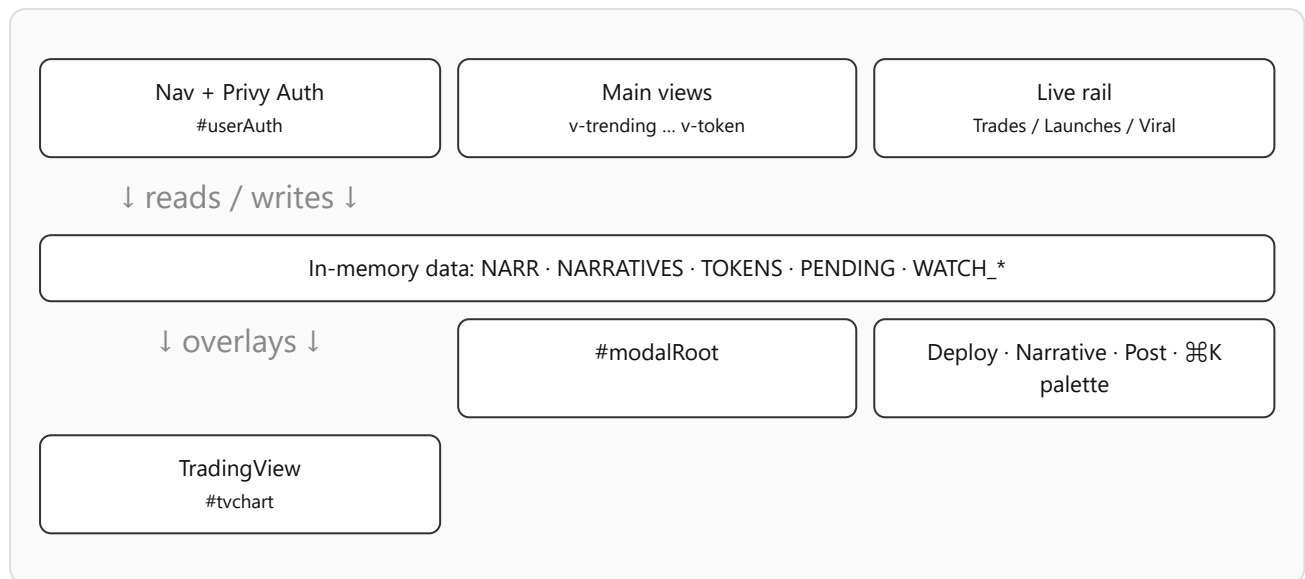


Flow 1 — Browse → Narrative → Buy token

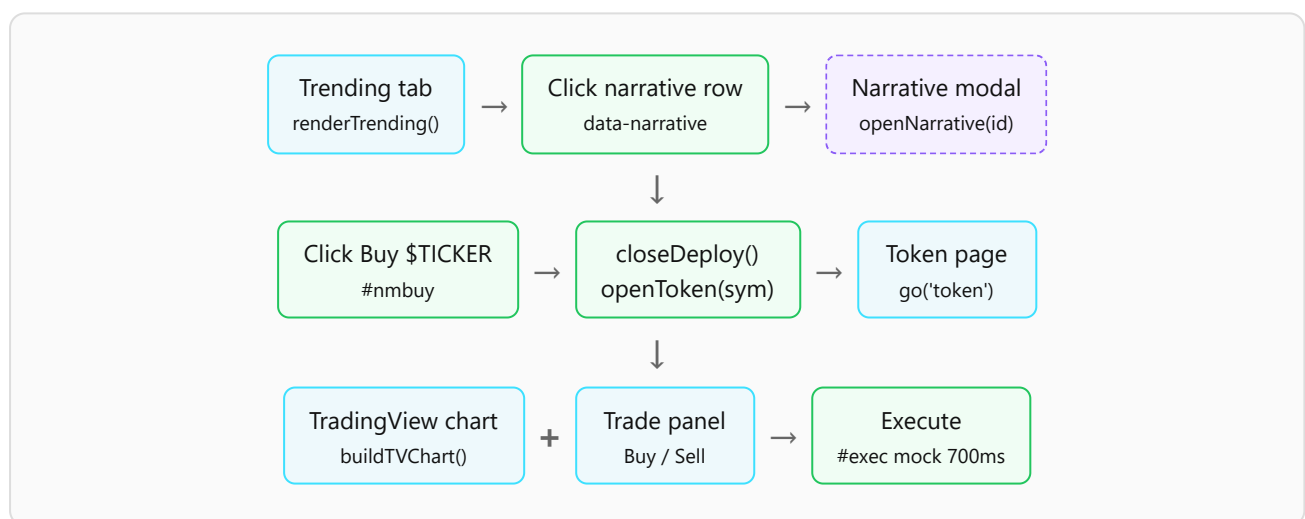


1. User lands on **Trending** (default view).
2. Clicks a narrative row → `openNarrative(id)` mounts modal in `#modalRoot`.
3. Modal shows top post, viral metrics, Google Trends sparkline, top token stats.
4. If token exists: footer **Buy \$TICKER** → closes modal → `openToken(sym)`.
5. Token page shows origin narrative strip (`tokenOriginStrip`), chart, trades, mock buy panel.
6. Origin strip click reopens narrative modal (round-trip).

Flow 2 — Create coin from narrative

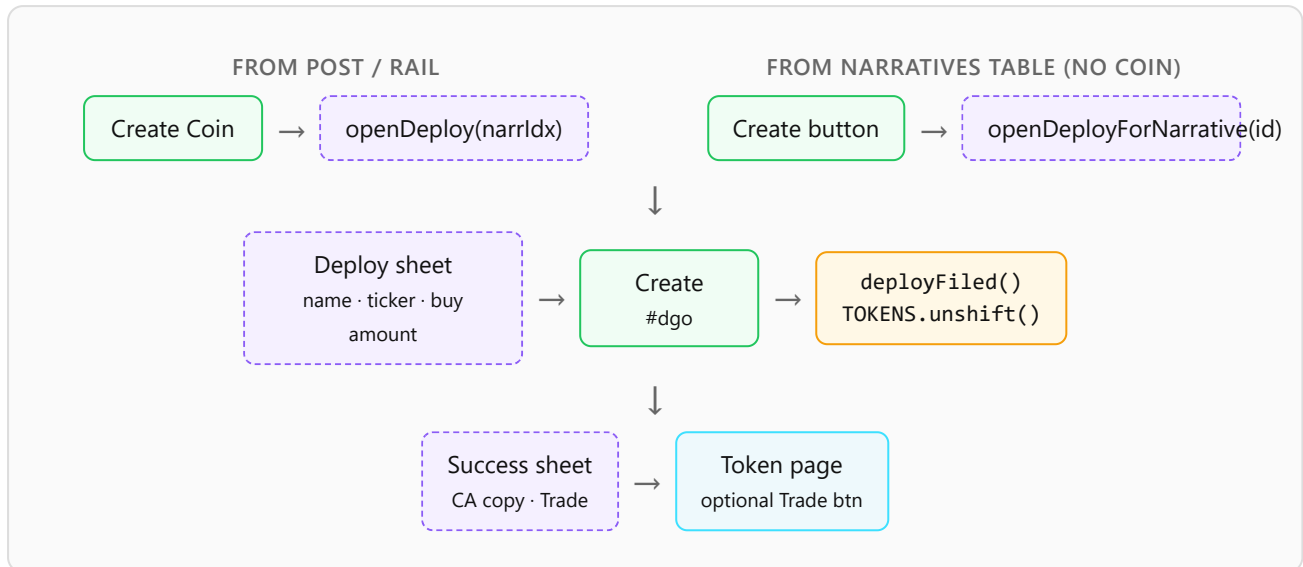


1. User triggers deploy from trending card, rail launch, or **Create** in Narratives/Trending mcap column.
2. `openDeploy(idx)` or `openDeployForNarrative(id)` — edits coin name, ticker, first buy (0 / 0.5 / 1 / 2 SOL).
3. `recheck()` validates ticker availability against TOKENS + PENDING.
4. `deployFiled()` → `mkToken()` → pushes to TOKENS, removes PENDING entry, refreshes all list views.
5. Success modal shows contract address + **Trade** shortcut → `openToken(sym)` .

Flow 3 — Search (⌘K palette + Search page)

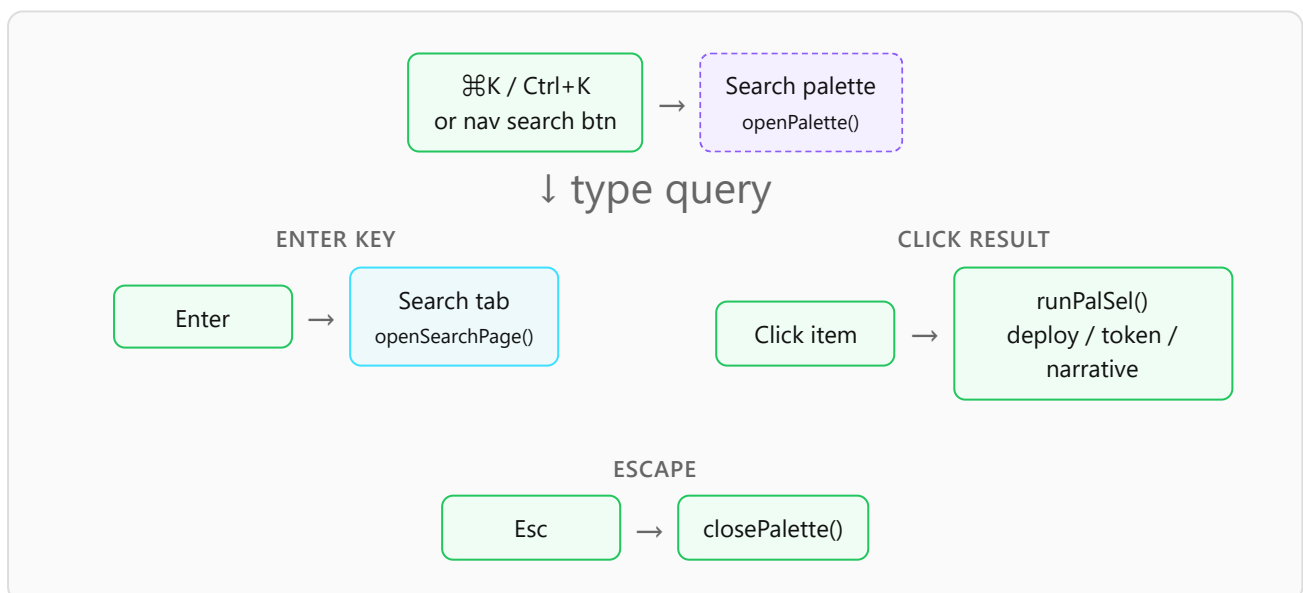

1. Palette live preview: Candidates → Tokens → Narratives via `buildPalPreview(q)` .
2. Arrow keys navigate; Enter opens full Search page with query preserved.
3. Search tab (`#v-search`) has no nav link — only reachable via palette or programmatic routing.
4. Token section uses `searchTokenMatches(q)` ; narrative section uses `searchNarratives(q)` .

Flow 4 — Token page detail

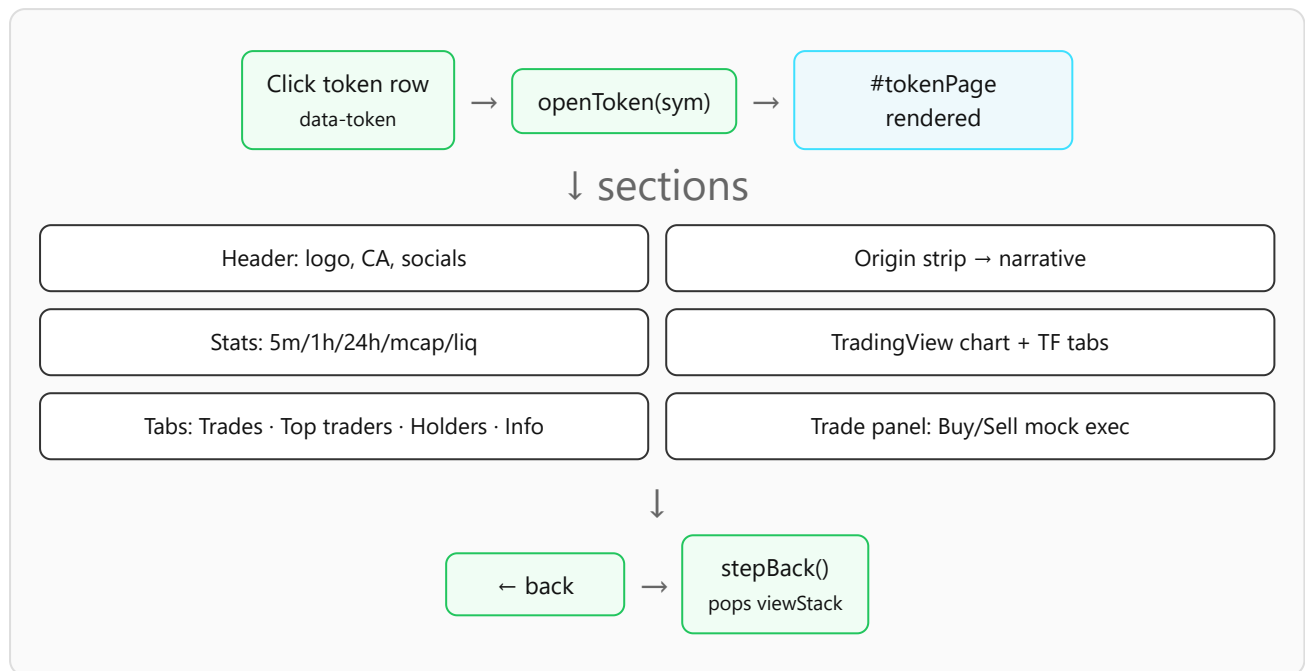


1. `openToken` calls `closeDeploy()` first (clears any open modal).
2. Rail collapses on token view (`railCollapsed`); user can reopen via gutter.
3. Info tab links to origin narrative when cluster exists.
4. Mock trades regenerate via `genTrade(t)` ; holders via `genHolders(t)` .

Flow 5 — Watchlist




1. Stars toggle via `toggleWatchNarr(id)` / `toggleWatchToken(sym)` .
2. Stored in session Sets — lost on page refresh (no persistence yet).
3. `refreshWatchStars()` updates star UI across all tabs.

Flow 6 — New pairs

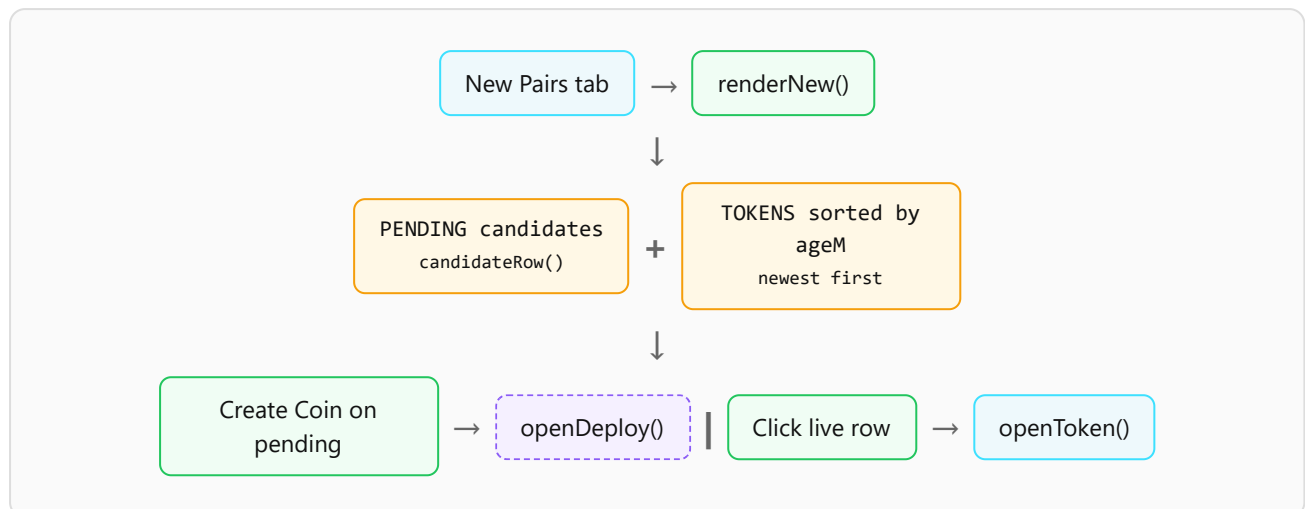


1. No Hot/Gainers filter chips — always sorted newest first.
2. Column headers still allow manual sort override via `newColSort`.
3. Pending rows show **Create Coin**; live rows open token page.


Flow 7 — Navigation & back stack

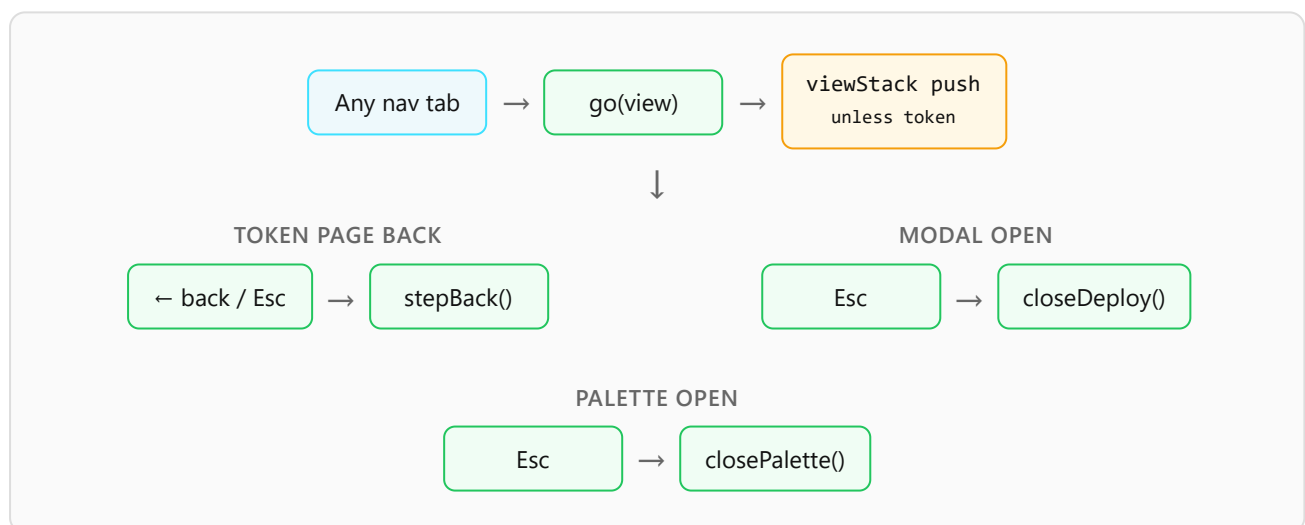

Flow 8 — Live activity rail

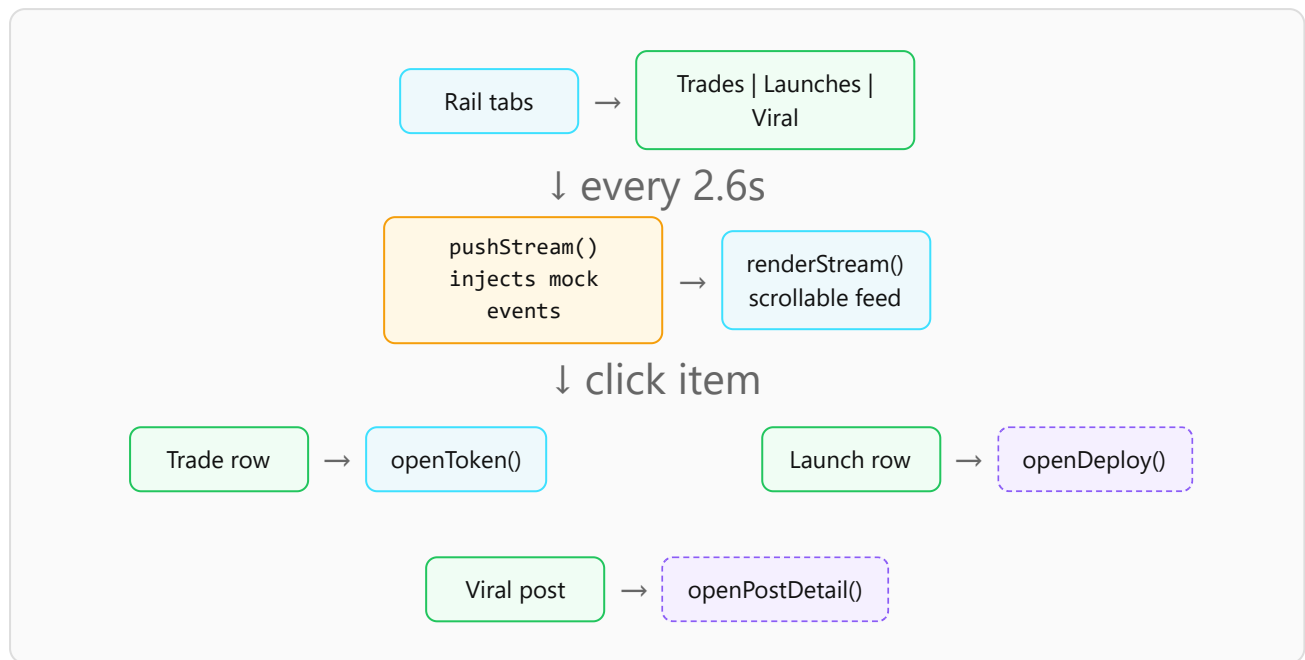

Flow 9 — Auth (Privy)

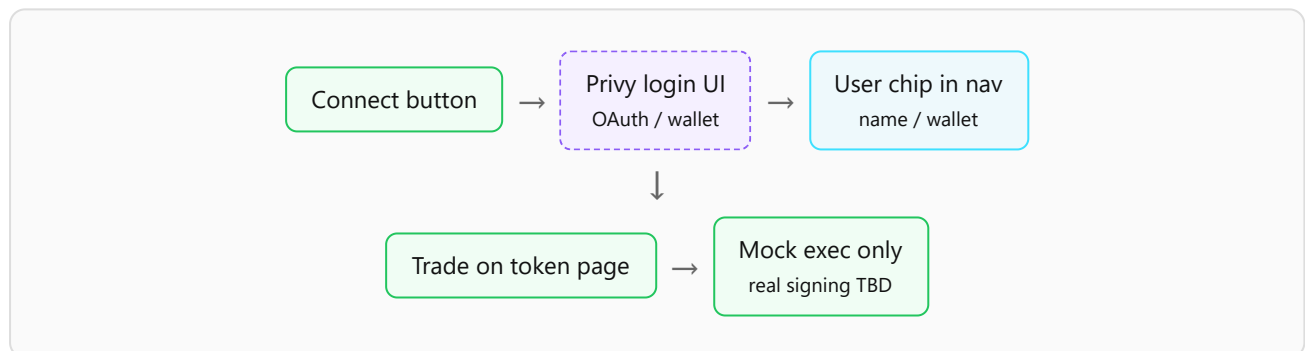

1. Privy React SDK loaded via esm.sh module script.
2. Requires http origin + Privy Dashboard allowlist.
3. Auth state is separate from app state — trade flow does not yet gate on wallet connection.