


Practical-1

=====

Create the below tables as specified:

Create the below tables as specified:

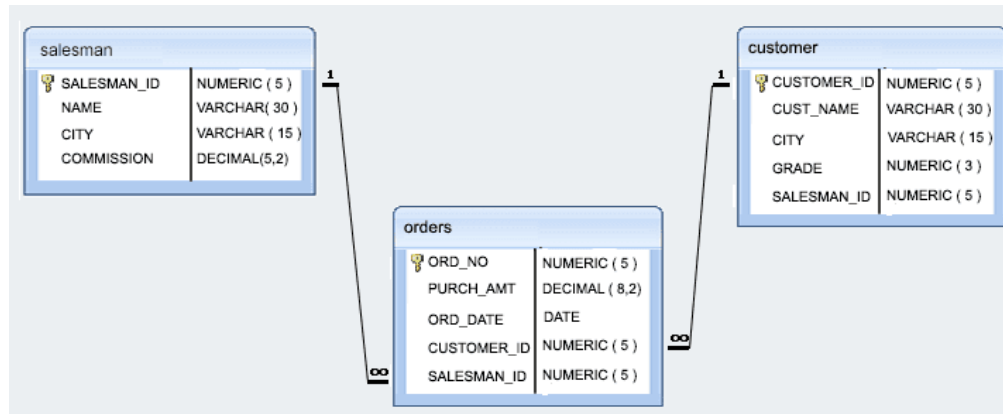

salespeople(snum number(4) primary key,sname varchar2(20),city varchar2(15),comm number(5,2));

customer(cnum number(4) primary key,cname varchar2(20),city varchar2(15),rating number(4),snum number(4) references salespeople);

orders(onum number(4) primary key,amt number(6,2),odate date,cnum number(4) references customer,snum number(4) references salespeople);

=====

create table **salespeople**(snum number(4) primary key,sname varchar2(20),city varchar2(15),comm number(5,2));

<u>snum</u> number(4) primary key	<u>sname</u> varchar2(20)	<u>city</u> varchar2(15)	<u>comm</u> number(5,2)
101	Devendra	Ahmedabad	4.5
102	Yogini	Ahmedabad	25.52
103	Yana	Ahmedabad	12.21

104	Vashi	Kosamba	11.11
-----	-------	---------	-------

create table **customer**(cnum number(4) primary key,cname varchar2(20),city varchar2(15),rating number(4),
snum number(4) references salespeople);

<u>cnum</u> number(4) primary key	<u>cname</u> varchar2(20)	<u>city</u> varchar2(15)	<u>rating</u> number(4)	<u>snum</u> number(4) references salespeople)
201	Rajanikant	Ahmedabad	1	101
202	Mohanlal	Boridara	2	102
203	Sanjay	Ankleshwar	3	102
204	Allu	Surat	4	101

create table **orders**(onum number(4) primary key,amt number(6,2),odate date,
cnum number(4) references customer,
snum number(4) references salespeople);

<u>onum</u> number(4) primary key	<u>amt</u> number(6,2)	<u>odate</u> date	<u>cnum</u> number(4) references customer	<u>snum</u> number(4) references salespeople)
301	10000	'01-jan-2006'	201	101
302	20000	'15-feb-2010'	202	104
303	30000	'14-feb-2004'	203	103
304	40000	'15-feb-2003'	204	102

Insert the records as specified:

=====

SQL> insert into **salespeople** values(&snum,&sname','&city',&comm);

Enter value for snum: 101

Enter value for sname: Devendra Vashi

Enter value for city: Kosamba

Enter value for comm: 25.52

old 1: insert into salespeople values(&snum,'&sname','&city',&comm)

new 1: **insert into salespeople values**(101,'Devendra Vashi','Kosamba',25.52)

1 row created.

SQL> /

Enter value for snum: 102

Enter value for sname: Yogini Vashi

Enter value for city: Boridara

Enter value for comm: 12.21

old 1: insert into salespeople values(&snum,'&sname','&city',&comm)

new 1: insert into salespeople values(102,'Yogini Vashi','Boridatr',12.21)

SQL> insert into **customer** values(&cnum,'&cname','&city',&rating,&snum);

Enter value for cnum: 201

Enter value for cname: Aladin

Enter value for city: Goa

Enter value for rating: 1

Enter value for snum: 101

old 1: insert into customer values(&cnum,&cname','&city',&rating,&snum)

new 1: insert into customer values(201,'Aladin','Goa',1,101)

1 row created.

SQL> /

Enter value for cnum: 202

Enter value for cname: Malaram

Enter value for city: Surat

Enter value for rating: 1

Enter value for snum: 101

old 1: insert into customer values(&cnum,&cname','&city',&rating,&snum)

new 1: insert into customer values(202,'Malaram','Surat',1,101)

1 row created.

SQL> insert into **orders** values(&onum,&amt,'&odate',&cnum, &snum);

Enter value for onum: 301

Enter value for amt: 100

Enter value for odate: 01-jan-2006

Enter value for cnum: 201

Enter value for snum: 101

old 1: insert into orders values(&onum,&amt,'&odate',&cnum, &snum)

new 1: insert into orders values(301,100,'01-jan-2006',201, 101)

1 row created.

SQL> /

Enter value for onum: 302

Enter value for amt: 120

Enter value for odate: 15-feb-2010

Enter value for cnum: 202

Enter value for snum: 102

old 1: insert into orders values(&onum,&amt,'&odate',&cnum, &snum)

new 1: insert into orders values(302,120,'15-feb-2010',202, 102)

1 row created.

=====

Write a query that produces the salesperson table with the columns in the following order : city, sname, snum, comm.

SQL> select city, sname, snum, comm from salespeople;

CIRY	SNAME	SNUM	COMM
Kosamba	Devendra Vashi	101	25.52
Boridatr	Yogini Vashi	102	12.21

SQL> select * from salespeople;

SNUM	SNAME	CIRY	COMM
101	Devendra Vashi	Kosamba	25.52
102	Yogini Vashi	Boridatr	12.21

SQL> select * from customer;

CNUM	CNAME	CITY	RATING	SNUM
201	Aladin	Goa	1	101
202	Malaram	Surat	1	101

SQL> select * from orders;

ONUM	AMT	ODATE	CNUM	SNUM
301	100	01-JAN-06	201	101
302	120	15-FEB-10	202	102

Write a SELECT command that produces the order number, amount and date for all rows in the order table.

SQL> select onum,amt,odate from orders;

ONUM	AMT	ODATE
301	100	01-JAN-06
302	120	15-FEB-10

Write a query that produces all rows from the customer table for which the salesperson's number is 101.

SQL> select * from customer where snum = 101;

CNUM	CNAME	CITY	RATING	SNUM
201	Aladin	Goa	1	101
202	Malaram	Surat	1	101

Write a query to display only salesman no from the orders table.

SQL> select snum from orders;

SNUM
101
102

Write a query that will give you all orders for more than Rs. 100/-.

SQL> select * from orders where amt >= 100;

ONUM	AMT ODATE	CNUM	SNUM
301	100 01-JAN-06	201	101
302	120 15-FEB-10	202	102
303	130 14-FEB-04	203	103

Write a query that produces all customers serviced by salespeople who is located in Kosamba with a commission above 10%. Output the salespeople's name and city.

**SQL> select sname,city from salespeople
where ciry = 'kosamba' and comm >= 10;**

no rows selected

SQL> select sname, city from salespeople where ciry = 'Belgaum' and comm >= 10;

SNAME	CIRY
Ada Lawrence	Belgaum

**SQL> select sname,city from salespeople
where ciry = 'belgaum' and comm >= 10;**

no rows selected

SQL> select * from customer;

CNUM CNAME	CITY	RATING	SNUM
-----	-----	-----	-----
201 Aladin	Goa	1	101
202 Malaram	Surat	1	101
203 Ram	Surat	2	102

Write a query on the Customers table whose output will exclude all customers with a rating <>1, they are not located in Ahmedabad.

SQL> select * from customer

where rating > 1 and city <> 'Ahmedabad';

CNUM CNAME	CITY	RATING	SNUM
-----	-----	-----	-----
203 Ram	Surat	2	102
204 Kishan	Bharuch	3	104
205 Mehul	Dhandhinagar	4	105

Write a queries that will produce all orders taken on October 14th feb 2004 or 15th feb 2005.

SQL> select * from orders

where odate = '14-feb-2004' or odate = '15-feb-2005';

ONUM	AMT ODATE	CNUM	SNUM
303	130 14-FEB-04	203	103

Write a queries to select cname,sname from **customer, salespeople** and snum should be matched with both customer and salespeople table.

SQL> select cname,sname

from customer c, salespeople s where c.snum = s.snum;

CNAME	SNAME
Malaram	Devendra Vashi
Aladin	Devendra Vashi
Ram	Yogini Vashi
Kishan	Yesha Rana
Mehul	Maggi Vashi

Write a queries to select cname,sname from customer, **salespeople** and snum should be matched with both customer and salespeople table and sname should be from ('Devendra Vashi','Yogini Vashi') only.

```
SQL> select cname,sname from customer c,salespeople s
where c.snum = s.snum and sname in('Devendra Vashi','Yogini Vashi');
```

CNAME	SNAME
Aladin	Devendra Vashi
Malaram	Devendra Vashi
Ram	Yogini Vashi

Write a query that selects all customers whose names begin with A or B.

```
SQL> select * from customer
where cname like 'A%' or cname like 'B%';
```

CNUM	<u>CNAME</u>	CITY	RATING	SNUM
201	<u>A</u> ladin	Goa	1	101

Write a query that will produce all of the customers whose names begin with a letter from A to G.

```
SQL> select * from customer
where cname like 'A%' or cname like 'B%' or cname like 'C%'
or cname like 'D%' or cname like 'E%' or cname like 'F%'
or cname like 'G%';
```

CNUM	CNAME	CITY	RATING	SNUM
------	-------	------	--------	------

201 Aladin	Goa	1	101
------------	-----	---	-----

=====

SQL> desc salespeople;

Name	Null?	Type

SNUM	NOT NULL	NUMBER(4)
SNAME		VARCHAR2(20)
CITY		VARCHAR2(15)
COMM		NUMBER(5,2)

SQL> desc customer;

Name	Null?	Type

CNUM	NOT NULL	NUMBER(4)
CNAME		VARCHAR2(20)
CITY		VARCHAR2(15)
RATING		NUMBER(4)
SNUM		NUMBER(4)
SALARY		NUMBER(38)

SQL> desc orders;

Name	Null?	Type

ONUM

NOT NULL NUMBER(4)

AMT

NUMBER(6,2)

ODATE

DATE

CNUM

NUMBER(4)

SNUM

NUMBER(4)

SQL> **commit;**

Commit complete.