



Darslab system working scheme

Hayk's suggestion

First stage: initialization

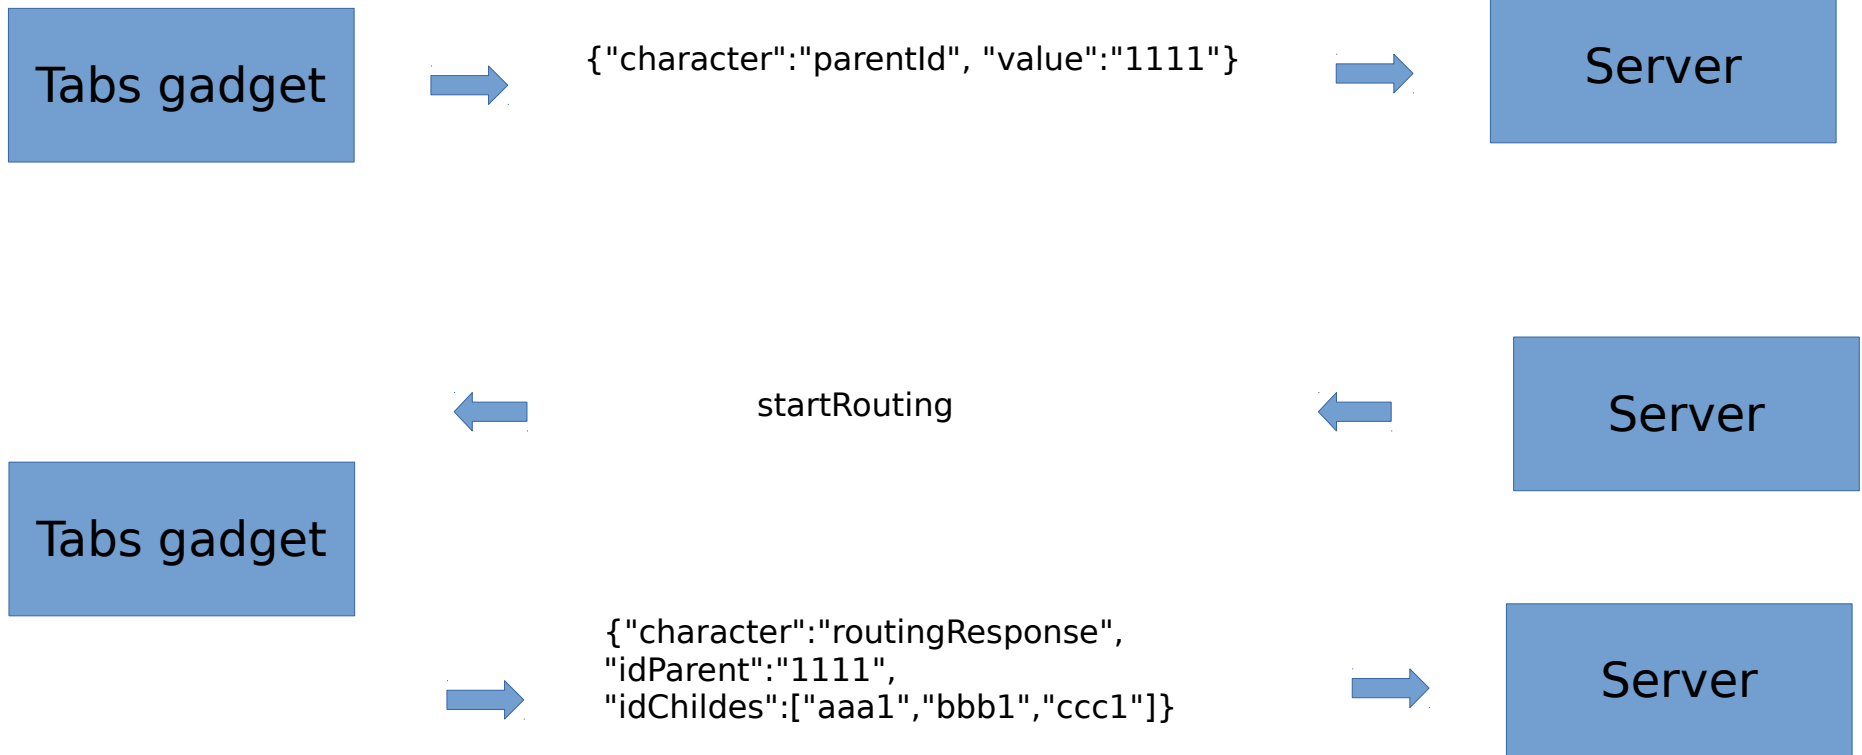

When user do any change server send new changed data for that parent id

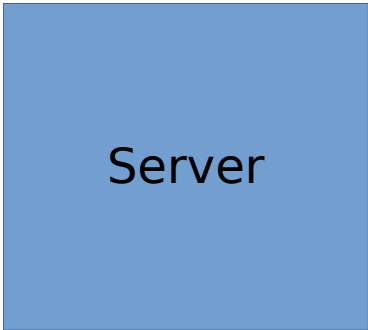

When connection was broken or other mistakes, we can take data again



Common information

<http://darslab-env.eba-n3kpsgmk.us-east-1.elasticbeanstalk.com/socket/technical-main>

Technical admin: you can show, connected or not, gateway id, node ids

<http://darslab-env.eba-n3kpsgmk.us-east-1.elasticbeanstalk.com/socket/main>

User admin: show regimes and nodes, and...