COOCHILLA

TECHNICAL RIDER | European Summer Tour - June 2027

Five musicians / three vocal positions. Both guitarists sing backing vocals; the central singer handles lead vocals. Bass and drums do not sing.

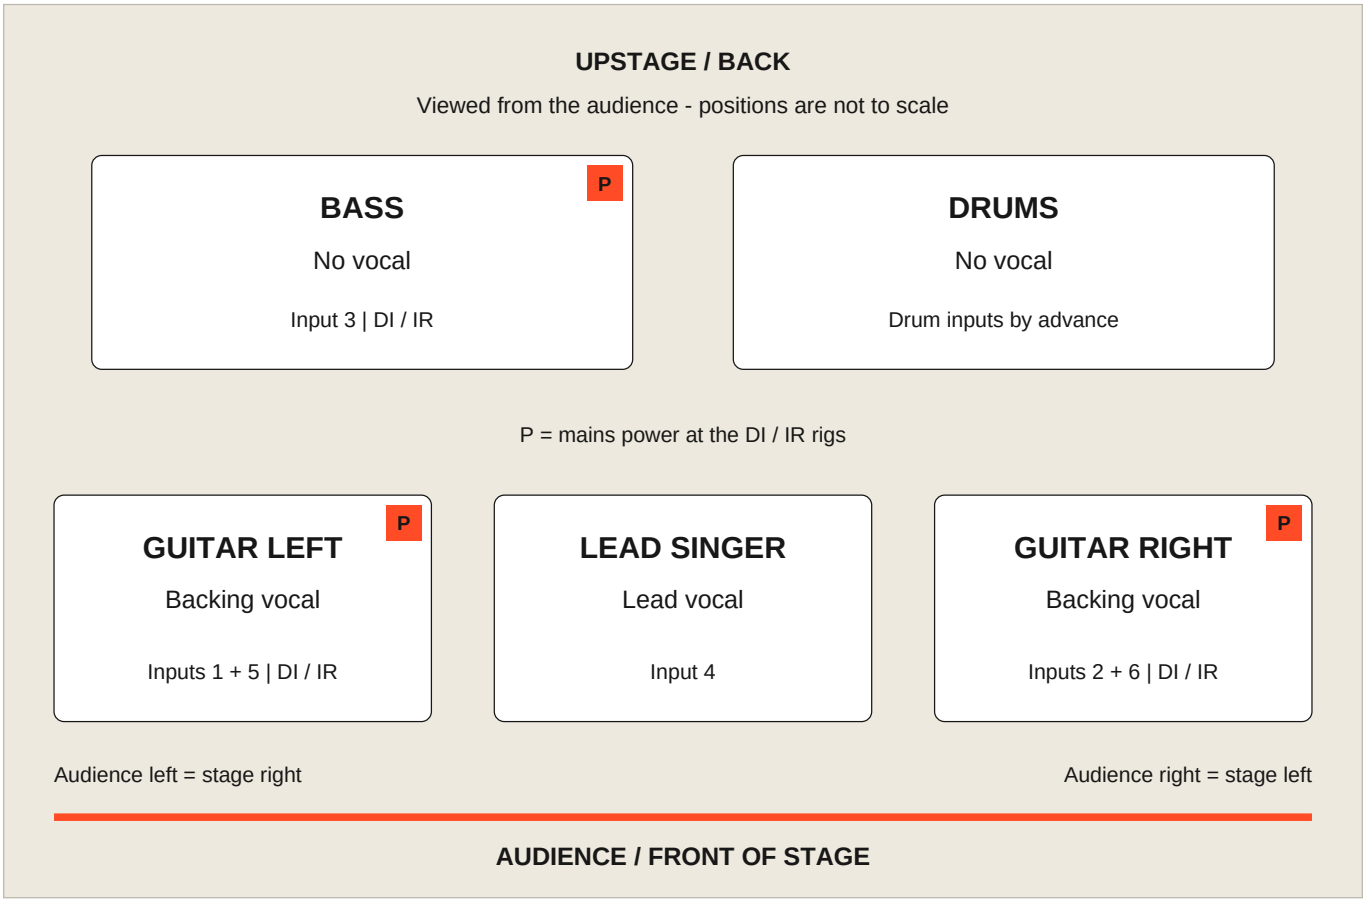

Instrument routing - guitars and bass

Direct to PA: both guitars and bass use DI / impulse-response rigs. A cabinet-free setup is supported. Keep cabinet simulation / IR on the feed going to the PA or full-range monitoring.

Optional house cabinets: compatible cabinets may be used by prior agreement. A passive cabinet needs a suitable power amplifier or amplifier head; a DI output alone does not drive it. Bypass cab simulation on a conventional-cabinet feed.

PA plus cabinet: where a rig supports separate outputs, keep IR on the PA feed and bypass it on the cabinet feed. Confirm the actual outputs and routing with the band before the show.

COOCHILLA

INPUT LIST & VENUE ADVANCE | June 2027

Suggested mono band patch below. Console numbering is flexible. Drum inputs are additional and should match the agreed kit and venue mic plan.

Input	Source / position	Connection / notes
1	Guitar - audience left	1 mono DI / IR feed to PA
2	Guitar - audience right	1 mono DI / IR feed to PA
3	Bass - back, audience left	1 mono DI / IR feed to PA
4	Lead vocal - front center	Vocal microphone + stand
5	Backing vocal - guitar left	Vocal microphone + boom stand
6	Backing vocal - guitar right	Vocal microphone + boom stand
D1-Dn	Drums - back, audience right	Mic package / patch agreed in advance

PA, microphones & direct connections

Please provide a PA appropriate for the room and a house FOH engineer, three live vocal microphones with stands, and sufficient console inputs for the six band feeds plus drums. Balanced instrument connections are preferred; agree XLR/TRS, signal levels and any house DI boxes with the band.

Monitoring & power

Please provide clear monitoring at all three front vocal positions and monitor coverage for bass and drums. Prioritize the lead vocal and both backing vocals. Wedges, available mixes and any shared rhythm-section feed are agreed with the house engineer. Mains power is needed at the two guitar rigs and the bass rig.

Confirm before the show

Confirm drum kit/backline supply, kit configuration and drum mic channels; optional cabinets and compatible amplification; instrument output connectors and levels; monitor allocation; stage footprint, load-in, soundcheck and set length. The six-input list assumes one mono feed per string instrument; confirm any stereo requirement in advance.