

Contact Run 1 - NIP / BIT / CII / IAQ / CET-EET

Deep Analysis

Narrative Immersion Proxy, Bivariate Immersion Threshold, Continuous Immersion Index, Immersion Attenuation Quotient, Cinematic Entrainment, Residualization, and Endogenous Echo Tracking

Interpretive boundary: This is a macroscopic PR-AYC-G proxy analysis. It does not measure dopamine, oxytocin, microtubules, biophotons, OSM biology, consciousness, or hidden cellular Y. It estimates whether the Contact target branch showed a stronger attention-plus-integration immersion proxy than control or contextual override, and whether that pattern survives the limited available exogenous tracking regressors.

1. Executive summary

- Mean NIP density was Target 0.551, Control 0.028, and Override 0.016.
- Strict BIT produced 1 pass, located at the Target ~161 s MeaningGamma father/avatar recognition event.
- CII/IAQ showed Target greater than both Control and Override for 5 of 5 conceptual Contact anchors.
- CET cue tracking was weak at the 1 Hz feature-table resolution; available cue-train correlations were small. The optional visualizer-derived Target visual proxy produced moderate visual tracking correlations but is not a substitute for raw stimulus audio/visual fingerprint extraction.
- CET-R residualization explained little of the NIP variance. The Target anchor CII pattern remained positive after available cue/visual proxies were modeled.
- EET is best read as state-vector echo analysis. It does not prove replay or memory; it estimates whether the Target anchor state geometry resembles subsequent washout or Baseline 2 periods.

2. Method formalization

NIP_v0.1 defines semantic attention A_{sem} from MeaningGamma, TSP, NAST/alpha-drop, and penalties for visual drive and artifact. It defines integration/resonance R_{int} from delayed theta/topological carryover and local state availability. NIP density is the product of positive A_{sem} and positive R_{int} with artifact and visual penalties.

BIT_v0.1 is a gate, not an average. It requires attention, resonance, K/topological coupling, artifact pass, MRED MR_HIGH_ENC_HIGH, and PRAYCG event-lock status for strict pass.


CII_v0.1 is the mean NIP density inside a predefined/annotation anchor window. It is duration-normalized. IAQ_v0.1 compares Target and Override CII values: positive IAQ means Override attenuated the NIP proxy relative to Target.

CET_EET_v0.1 separates exogenous tracking from candidate meaning/integration effects. In this run, raw source media/audio were not available inside the analysis container, so CET used the

cue schedule and the top stimulus region from the uploaded visualizer MP4 as a Target-only visual proxy. This is useful, but not final media-level CET.

3. NIP branch summary


condition	mean_NIP_density
TARGET_1	0.551
CONTROL_1	0.028
CONTEXTUAL_OVERRIDE_1	0.016

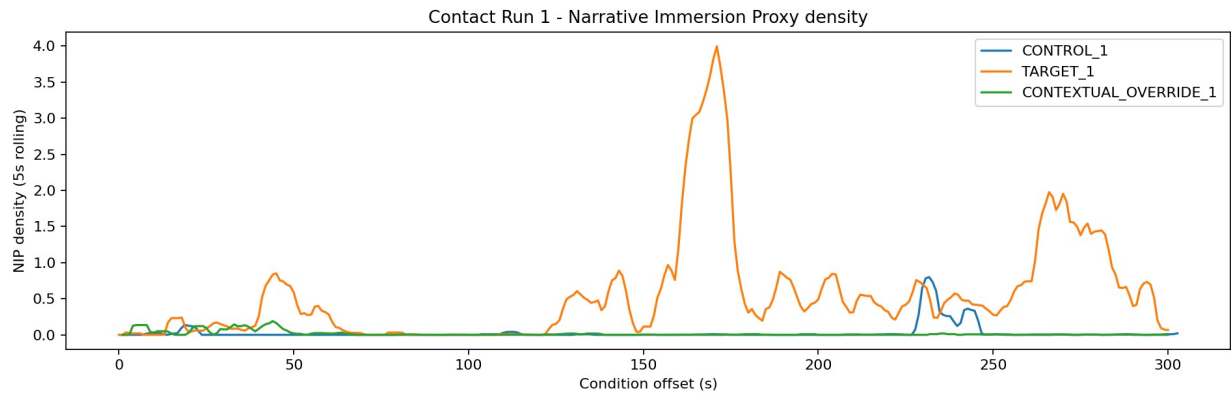

4. CII / IAQ anchor results

anchor_id	scene_label	CII_Target	CII_Control	CII_Override	Target_minus_Override_CII	IAQ_Target_vs_Override	Target_greater_Control	Target_greater_Override
CONTACT_A1_PENSACOLA_REALIZATION	Pensacola realization	0.379	0.000	0.068	0.311	0.820	True	True
CONTACT_A2_BAVATAR_FATHER_RECOGNITION_TSP_CLUSTER	Father/avatar recognition TSP follow-through	1.191	0.001	0.003	1.188	0.997	True	True
CONTACT_A2_AVATAR_FATHER_RECOGNITION	Father/avatar recognition	1.652	0.002	0.002	1.650	0.999	True	True

CONTA CT_A3_ EXISTE NTIAL_ PAYLO AD_ON SET	Existent ial payload onset	0.633	0.015	0.037	0.596	0.941	True	True
CONTA CT_A4_ SMALL _MOVE S_TAP ER_RE LEASE _OR_L ATE_P AYLOA D_REL EASE	Late payload / terminal release	0.611	0.018	0.001	0.611	0.999	True	True

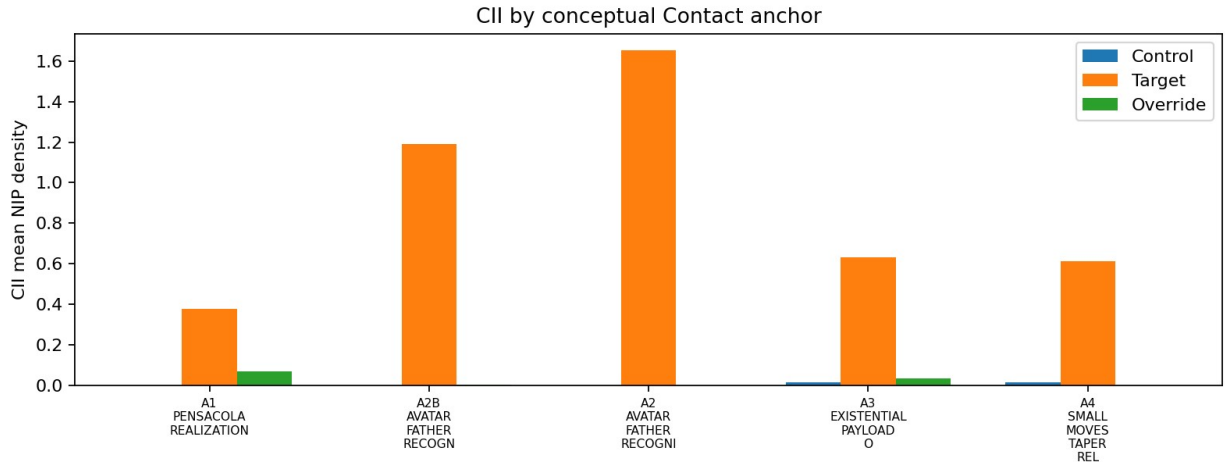

5. BIT event results

conditi on	conditi on_offs et_sec	anchor _metric	K_HT_t opo_lo cal	theta_d elta_10 _30	MR_sc ore	ENC_s core	mred_q uadrant	BIT_pa ss_pra ycg_str ict
TARGE T_1	161.007	meanin ggamm a_score	4.375	2.171	2.357	1.038	MR_HI GH_EN C_HIG H	True

6. CET tracking and CET-R residualization

Cue-train correlations were small in all three branches, which is expected at 1 Hz processed feature resolution for 0.85-second cues. This does not prove absence of cue tracking; it means cue-locked analysis needs OCM025/raw-XDF windows for cue microstates. CET-R here is most useful as a guardrail: the available exogenous regressors did not explain much NIP variance.

condition	stimulus_regressor	signal	max_abs_corr	lag_sec_signal_after_regressor	signal_dominant_freq_hz
CONTROL_1	cue_on_3s	meaninggamma_score	-0.070	2	0.047
CONTROL_1	cue_on_3s	tsp_z	-0.079	2	0.047
CONTROL_1	cue_on_3s	taskgamma_score	-0.045	10	0.078
CONTROL_1	cue_on_3s	theta_integration_z	-0.056	-8	0.055
CONTROL_1	cue_on_3s	gamma_visual_30_45_z	-0.055	10	0.094
CONTROL_1	cue_on_3s	gamma_front_35_40_z	-0.051	10	0.078
CONTROL_1	cue_on_3s	nas_score	0.053	-8	0.094
CONTROL_1	cue_on_3s	NIP_density	0.040	0	0.023
TARGET_1	cue_on_3s	meaninggamma_score	-0.031	8	0.023
TARGET_1	cue_on_3s	tsp_z	-0.022	3	0.023
TARGET_1	cue_on_3s	taskgamma_score	-0.062	-1	0.039
TARGET_1	cue_on_3s	theta_integration_z	0.032	10	0.109
TARGET_1	cue_on_3s	gamma_visual_30_45_z	-0.061	-1	0.062
TARGET_1	cue_on_3s	gamma_front_35_40_z	-0.063	-1	0.039
TARGET_1	cue_on_3s	nas_score	0.050	-1	0.109
TARGET_1	cue_on_3s	NIP_density	-0.015	-10	0.023
CONTEXTUAL_OVERRIDE_1	cue_on_3s	meaninggamma_score	-0.030	0	0.031
CONTEXTUAL_OVERRIDE_1	cue_on_3s	tsp_z	-0.031	3	0.031
CONTEXTUAL_OVERRIDE_1	cue_on_3s	taskgamma_score	-0.077	0	0.039
CONTEXTUAL_OVERRIDE_1	cue_on_3s	theta_integration_z	-0.039	9	0.047
CONTEXTUAL_OVERRIDE_1	cue_on_3s	gamma_visual_30_45_z	-0.070	1	0.039
CONTEXTUAL_OVERRIDE_1	cue_on_3s	gamma_front_35_40_z	-0.076	0	0.023
CONTEXTUAL_OVERRIDE_1	cue_on_3s	nas_score	0.034	0	0.047
CONTEXTUAL_OVERRIDE_1	cue_on_3s	NIP_density	-0.049	-8	0.023

CET-R model summary:

condition	dependent	regressors	n_rows	r2_exogenous_tracking
CONTROL_1	NIP_density	cue_on+cue_phase_sin+cue_phase_cos	303	0.002
TARGET_1	NIP_density	cue_on+cue_phase_sin+cue_phase_cos+video_luminance_z+video_change_z	301	0.058
CONTEXTUAL_OVERRIDE_1	NIP_density	cue_on+cue_phase_sin+cue_phase_cos	300	0.003

Target visualizer-derived visual proxy tracking:

stimulus_regressor	signal	max_abs_corr	lag_sec_signal_after_regressor
video_luminance_z	meaninggamma_score	0.242	7
video_luminance_z	tsp_z	0.191	7
video_luminance_z	theta_integration_z	-0.122	4
video_luminance_z	gamma_visual_30_45_z	0.294	1
video_luminance_z	NIP_density	-0.268	-2
video_change_z	meaninggamma_score	0.214	10
video_change_z	tsp_z	0.194	10
video_change_z	theta_integration_z	0.207	6
video_change_z	gamma_visual_30_45_z	0.350	0
video_change_z	NIP_density	0.170	-9

7. EET after-state / echo analysis

EET estimates state-vector similarity between Target anchor windows and later washout / Baseline 2 windows. It is not proof of memory replay. The highest similarity rows suggest which Target anchor geometries most resembled later reflective state vectors.

anchor_id	scene_label	reference_window	cosine_similarity	euclidean_distance
CONTACT_A1_PENSACOLA_REALIZATION	Pensacola realization	WASHOUT_2_fIRST60	0.957	1.245
CONTACT_A1_PENSACOLA_REALIZATION	Pensacola realization	WASHOUT_2_fIRST45	0.930	1.228
CONTACT_A1_PENSACOLA_REALIZATION	Pensacola realization	WASHOUT_2_fIRST30	0.923	1.137
CONTACT_A4_SMALL_MOVES_TAPER_RELEASE_OR_LATE	Late payload / terminal release	BASELINE_2_align	0.830	2.135

_PAYLOAD_RELEASE				
CONTACT_A4_SMALL_MOVES_TAPER_RELEASE_OR_LATE_PAYLOAD_RELEASE	Late payload / terminal release	WASHOUT_2_fir60	0.830	2.613
CONTACT_A4_SMALL_MOVES_TAPER_RELEASE_OR_LATE_PAYLOAD_RELEASE	Late payload / terminal release	WASHOUT_2_fir30	0.825	2.405
CONTACT_A2B_AVATAR_FATHER_RECOGNITION_TSP_CLUSTER	Father/avatar recognition TSP follow-through	BASELINE_2_al	0.818	2.644
CONTACT_A4_SMALL_MOVES_TAPER_RELEASE_OR_LATE_PAYLOAD_RELEASE	Late payload / terminal release	WASHOUT_2_fir45	0.791	2.617
CONTACT_A2B_AVATAR_FATHER_RECOGNITION_TSP_CLUSTER	Father/avatar recognition TSP follow-through	WASHOUT_2_fir30	0.786	3.162
CONTACT_A1_PENSACOLA_REALIZATION	Pensacola realization	BASELINE_2_al	0.755	2.176
CONTACT_A2B_AVATAR_FATHER_RECOGNITION_TSP_CLUSTER	Father/avatar recognition TSP follow-through	WASHOUT_2_fir60	0.751	3.462
CONTACT_A2B_AVATAR_FATHER_RECOGNITION_TSP_CLUSTER	Father/avatar recognition TSP follow-through	WASHOUT_2_fir45	0.737	3.408

8. Interpretation

The Contact run remains a strong exploratory / future-freeze result. The NIP/CII/IAQ family agrees with the earlier MRED/TTI story: Target carried substantially more attention-plus-integration proxy density than Control or Override across the conceptual Contact anchors. The strict BIT gate is intentionally conservative and only passed the Target father/avatar recognition MeaningGamma event around 161 seconds.

CET did not overturn this pattern. Available exogenous regressors had limited explanatory power for NIP density. Because the raw source stimulus files were not available in the container, this

CET pass is a proxy-level analysis, not final media-level entrainment correction. A future full pass should use MediaPrep/StimulusFingerprint time series for audio envelope, luminance, optical flow, cut train, and cue train in all branches.

The most cautious final statement is: Contact Run 1 shows a strong Target-specific macroscopic narrative immersion proxy, with one strict BIT event at the father/avatar region and positive CII/IAQ across the conceptual anchor family, while CET/EET remain exploratory and proxy-limited.

9. Recommended next steps

- Rerun Contact with PRAYCG2.0 and a LOCKED anchor JSON loaded in the runner.
- Generate full MediaPrep/StimulusFingerprint time-series regressors: audio envelope, luminance, optical flow, cut train, and cue train.
- Run CET-R with the full media regressors before interpreting CII/IAQ as meaning-specific.
- Use OCM025/raw-XDF cue analysis for cue entrainment rather than relying on 1 Hz feature tables.
- Render a new Public/TSC visualizer video with the v1.5.1 NIP/CET/EET overlays.