Goat Latin (/problems/goat-latin/)


Submission Detail

99 / 99 test cases passed.

Runtime: 8 ms

Status: Accepted
Submitted: 1 month ago

Accepted Solutions Runtime Distribution

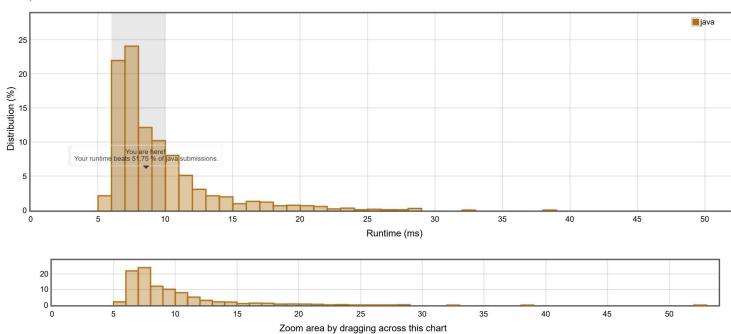

Invite friends to challenge Goat Latin

Submitted Code: 1 month ago

Language: java Edit Code

```
class Solution {
          public String toGoatLatin(String S) {
    if(S=="")return "";
 3
                String []str=S.split(" ");
String ans="";
 4
 5
               String ans="";
String rep="a";
 6
                for(int i=0;i<str.length;i++){
    if(ans!=""){
        ans=ans+" ";</pre>
 8
10
11
                    char cha= str[i].charAt(0);
if(cha== 'A' || cha=='a' || cha=='I' || cha=='i' || cha=='e' ||cha=='E' ||cha=='0'||cha=='o'||cha=='u'||cha=='U' ){
12
13
14
15
                          str[i]=str[i]+"ma";
                     }else{
16
17
                        str[i]=str[i]+str[i].charAt(0)+"ma";
18
19
                          str[i]=str[i].substring(1,(str[i].length()));
20
21
                     ans=ans+str[i]+rep;
22
                     rep=rep+'a';
23
24
25
                return ans;
26
27
          }
```

Back to problem (/problems/goat-latin/)

Copyright © 2018 LeetCode

Contact Us (/support/) | Frequently Asked Questions (/faq/) | Terms of Service (/terms/) | Privacy Policy (/privacy/)

© United States (/region/)