


Query q :

Explain components of conventional Agentic RAG methods.


Corpus graph $\mathcal{G}$:

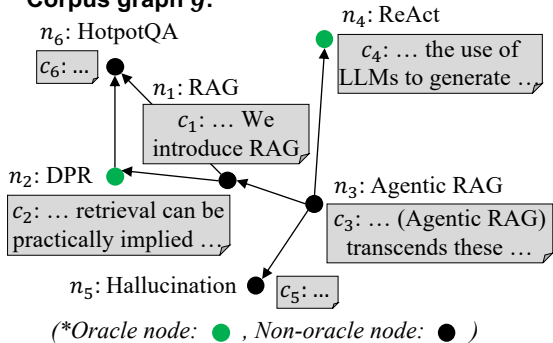


Vector representations:

$$\mathcal{V} = \{Enc_N(n_i)\}, \mathbf{v}_q = Enc_Q(q)$$


(a) Example query and corpus graph.

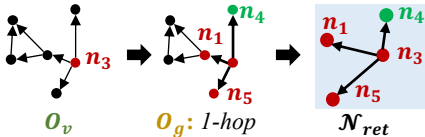


(b) LightRAG ($O_v \rightarrow O_g$)

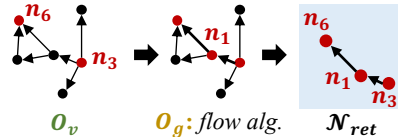

(c) PathRAG ($O_v \rightarrow O_g$)

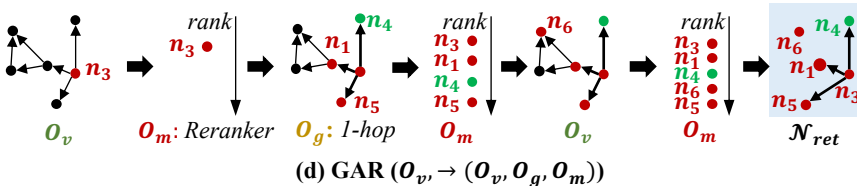

(d) GAR ($O_v \rightarrow (O_v, O_g, O_m)$)

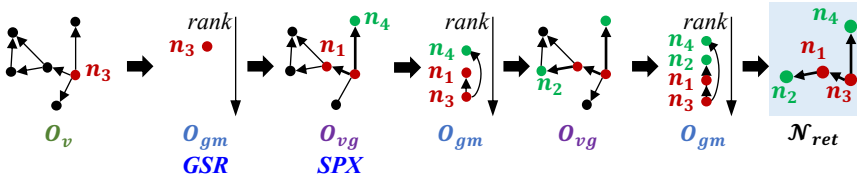

(e) Our GraFine ($O_v \rightarrow (O_{vg}, O_{gm})$)