
Interação Pessoa-Máquina2026/2027

Lab Class 1 Assignment

Good examples of UI

Security Code AutoFill

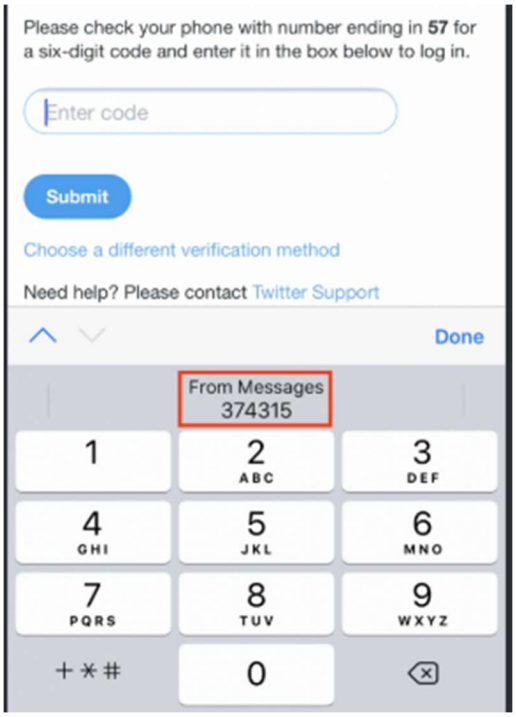

When users need a code from emails or messages it takes a lot of time to change the app, copy the code, change the app again and enter the code.

With this function from Apple, when receiving a code from messages, it gets suggested above the keyboard, so the user just needs to press one button to enter the code.

An advantage of this feature is that it removes the need to switch apps and copy the code and therefore saves a lot of time. These steps would take a lot of time and would need concentration from the user.

Ticket validation machine in the Metro Sul do Tejo

On the metros in Almada everyone needs to validate their tickets by holding the ticket up to a validator machine inside the train.


When the ticket is valid, the monitor turns green and shows a tick. It also gives audible feedback. When the ticket is invalid, the monitor turns red and shows a cross. Additionally, a different sound can be heard.

This user interface makes it easy for the user to understand the outcome. It gives feedback through two different senses. The action of the user has clear feedback, so the user does not have to think about whether their ticket got validated or not. On top of that, symbols are used, so

users who are colorblind still receive feedback about their validation. The audible feedback also makes validation possible for blind users.

Bad examples of UI

Deleting a message in Telegram

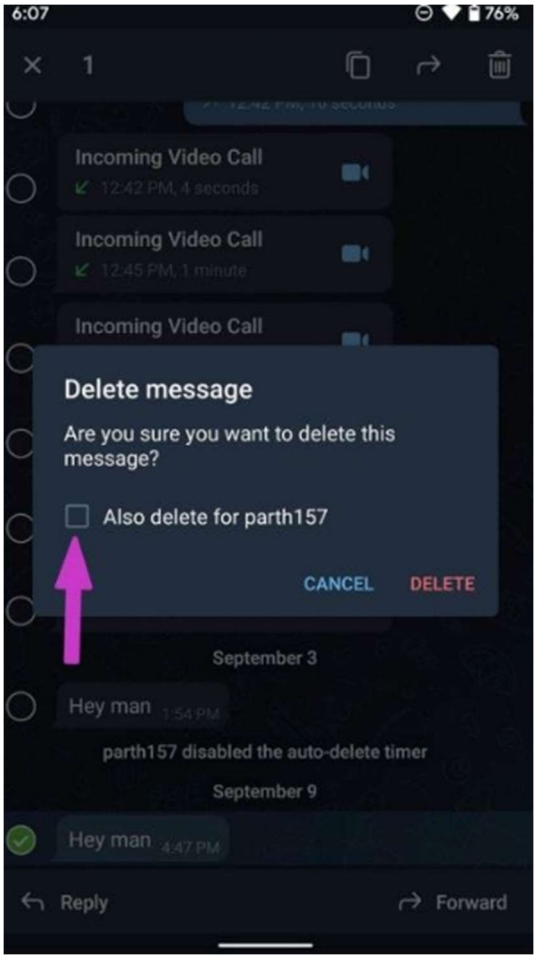

When deleting a message in the messenger Telegram, this message appears. It asks the user if they really want to delete the message and if they also want to delete the message for the other contact.

In many cases, users want to delete the message for everyone in the chat, not just themselves, for example if they send the message by mistake. The default on Telegram is that the message only gets deleted in the own chat. When a user presses the “delete” button too fast, the message gets directly deleted on the user’s phone but can no longer be deleted from the other person’s phone.


Also, while the “cancel” button and the “delete” button are differentiated by different colors, the checkbox the user needs to click on extra is not highlighted.

Additionally, the user needs to press an extra button, just to delete the message for the other person, too, which takes the user more time.

For a better design, two buttons with “delete for me” and “delete for everyone” could be added to make the decision more conscious.

A part of the user interface that helps the user is that it asks again if the user really wants to delete the message, since the deletion is irreversible.

Accepting Cookies on a website

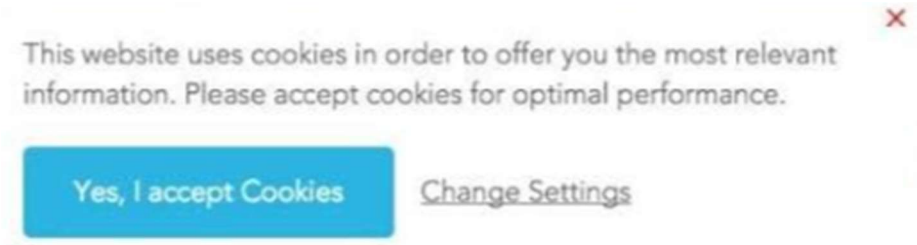

When visiting a website, users often get asked if they want to accept cookies. Most of the time the “Yes, I accept Cookies” button is highlighted with a high-contrast color, while the “I do not accept" button is written as normal text. On some websites like the example picture, for not accepting the cookies the user needs to go to settings first and then can decide to not accept the cookies.

This procedure takes a lot of time and makes the use of the website harder than necessary. In most cases, this design is created intentionally and not by mistake, to make the user accept the cookies faster.

For a more equal decision, the buttons for “I accept” and “I do not accept" should be equally accessible and designed in a similar way.