

# Introduction to the Linux Commandline

Release 1.4

Holger Dinkel, Frank Thommen & Thomas Zichner

February 20, 2014



# Contents

<b>1</b>	<b>Introduction to the Linux Commandline</b>	<b>1</b>
1.1	Why Use the Commandline . . . . .	1
1.2	General Remarks Regarding Using UNIX/Linux Systems . . . . .	2
1.3	General Structure of Linux Commands . . . . .	3
1.4	A Journey Through the Commands . . . . .	4
1.4.1	Useful Terminal Tools & Keyboard Shortcuts . . . . .	4
1.4.2	Getting Help . . . . .	5
1.4.3	Who am I, where am I . . . . .	6
1.4.4	Moving Around . . . . .	7
1.4.5	See What's Around . . . . .	8
1.4.6	Organize Files and Folders . . . . .	10
1.4.7	View Files . . . . .	13
1.4.8	Extracting Informations from Files . . . . .	14
1.4.9	Useful Filetools . . . . .	16
1.4.10	Permissions . . . . .	17
1.4.11	Remote access . . . . .	19
1.4.12	IO and Redirections . . . . .	20
1.4.13	Environment Variables . . . . .	21
<b>2</b>	<b>Exercises</b>	<b>23</b>
2.1	Misc. file tools . . . . .	23
2.2	Searching . . . . .	23
2.3	Misc. terminal . . . . .	23
2.4	Permissions . . . . .	23
2.5	Remote access . . . . .	24
2.6	IO and Redirections . . . . .	24
<b>3</b>	<b>Links and Further Information</b>	<b>27</b>
3.1	Links . . . . .	27
3.2	Command Line Mystery Game . . . . .	28
3.3	Real printed paper books . . . . .	28
3.4	Live - CDs . . . . .	28
3.4.1	Fedora Live CD . . . . .	28
3.4.2	Knoppix . . . . .	29
3.4.3	BioKnoppix . . . . .	29
3.4.4	Vigyaan . . . . .	29
3.4.5	BioSlax . . . . .	29
<b>4</b>	<b>About Bio-IT</b>	<b>31</b>
4.1	Resources . . . . .	31
4.2	Training and Outreach . . . . .	31

4.3	Networking . . . . .	31
4.4	Biocomputing expertise at EMBL . . . . .	32
4.5	Centers . . . . .	32
4.5.1	Biomolecular Network Analysis . . . . .	32
4.5.2	Statistical Data Analysis . . . . .	32
4.5.3	Molecular and Cellular Imaging . . . . .	32
4.5.4	Modeling . . . . .	32
<b>5</b>	<b>Acknowledgements</b>	<b>33</b>
<b>6</b>	<b>Solutions to the Exercises</b>	<b>35</b>
6.1	Misc. file tools . . . . .	35
6.2	Searching . . . . .	35
6.3	Misc. terminal . . . . .	36
6.4	Permissions . . . . .	36
6.5	Remote access . . . . .	37
6.6	IO and Redirections . . . . .	38
	<b>Index</b>	<b>41</b>

# Chapter 1

## Introduction to the Linux Commandline

### 1.1 Why Use the Commandline

- It's **fast**. Productivity is a word that gets tossed around a lot by so-called power users, but the command line can really streamline your computer use, assuming you learn to use it right.
- It's **easier to get help**. The command line may not be the easiest thing to use, but it makes life a whole lot easier for people trying to help you and for yourself when looking for help, especially over the internet. Many times it's as simple as the helper posting a few commands and some instructions and the recipient copying and pasting those commands. Anyone who has spent hours listening to someone from tech support say something like, "OK, now click this, then this, then select this menu command" knows how frustrating the GUI alternative can be.
- It's nearly **universal**. There are hundreds of Linux distros out there, each with a slightly different graphical environment. Thankfully, the various distros do have one common element: the command line. There are distro-specific commands, but the bulk of commands will work on any Linux system.
- It's **powerful**. The companies behind those other operating systems try their best to stop a user from accidentally screwing up their computer. Doing this involves hiding a lot of the components and tools that could harm a computer away from novices. Linux is more of an open book, which is due in part to its prominent use of the command line.
- Many 'modern' bioinformatics tools (samtools, bamtools, ...) are written for the commandline in order to be run on clusters and to be incorporated in scripts.

## 1.2 General Remarks Regarding Using UNIX/Linux Systems

- **Test before run.** Anything written here has to be taken with a grain of salt. On another system - be it a different Linux distribution or another UNIXoid operating system - you might find the same command but without the support of some of the options taught here. It is even possible, that the same option has a different meaning on another system. With this in mind always make sure to test your commands (specially the “dangerous” ones which remove or modify files) when switching from one system to the other.
- **The Linux/UNIX environment.** The behaviour of many commands is influenced or controlled by the so-called “environment”. This environment is the sum of all your environment variables. Some of these environment variables will be shown towards the end of this course.
- **UPPERCASE, lowercase.** Don’t forget that everything is case-sensitive.
- **The Filesystem.** Linux filesystems start on top at the root directory (sic!) “/” which hierarchically broadens towards the ground. The separator between directories or directories and files in Linux is the slash (“/”).

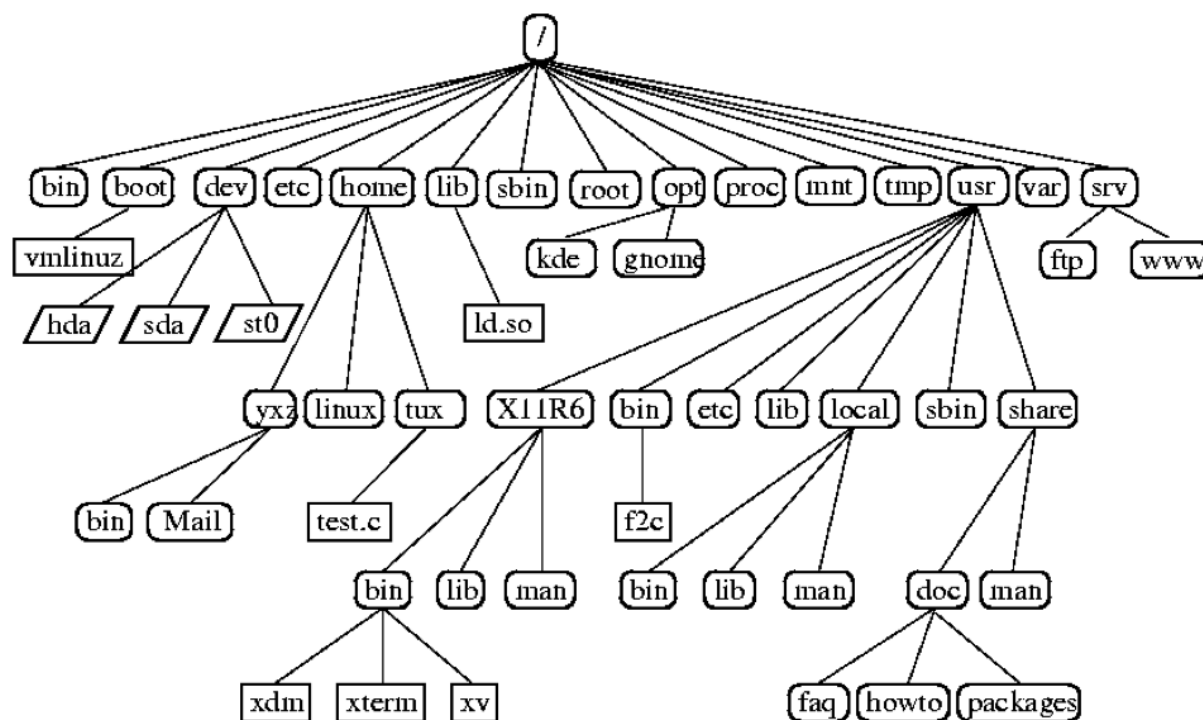


Figure 1.1: Depending on the Linux distribution you might or might not find all of above directories. Most important directories for you are /bin and /usr/bin (sometimes also /usr/local/bin) which contain the user software, /home which usually contains the users’ homedirectories and /tmp which can be used to store temporary data (beware: Its content is regularly removed!).

---

**Note:** The terms “directory” and “folder” are used interchangeably in this document.

---



## 1.4 A Journey Through the Commands

Please note that all examples and usage instructions below are just a glimpse of what you can do and reflect our opinion on what's important and what's not. Most of these commands support many more options and different usages. Consult the manpages to find them.

Typographical conventions: Commands and examples are written in Courier. User Input is written in Courier bold and placeholders are generally written in *italic*.

### 1.4.1 Useful Terminal Tools & Keyboard Shortcuts

#### Navigating previous commands

You can use the ↑/↓ (up/down) arrow keys to navigate previously entered command and the ←/→ (left/right) keys to modify it before re-executing it.

#### Copying / Pasting using the mouse

On most Linux systems you can use the mouse to select text and then press the middle mouse button to paste that text at the position where your cursor is. This is especially useful for long directory or filenames.

#### Printing some text

To simply print some text in the console, use `echo`:

**Usage:** `echo`

```
$ echo "this is some text"
this is some text
$
```

It can also be used to print the content of a variable, see section [Environment Variables](#) (page 21)...

#### Interrupting commands

Whenever a program gets stuck or takes too long to finish, you can *interrupt* it with the shortcut `CONTROL-C`.

#### clear - Clear the “screen”

**Usage:** `clear`



```
$ clear
$
```

In case the output of the terminal/screen gets cluttered, you can use `clear` to redraw the screen...

If this doesn't work, you can use `reset` to perform a re-initialization of the terminal:

## **reset - Reset your terminal**

**Usage:** `reset [options]`

```
$ reset
$
```

## **Leave the shell**

To exit the shell/terminal, just type `exit` or press `CONTROL-D`.

### **1.4.2 Getting Help**

**-h/--help option, no parameters**

Many commands support a “help” option, either through `-h` or through `--help`. Other commands will show a help page or at least a short usage overview if you provide incorrect commandline options

## **man - show the manual page of a command**

**Usage:** `man command or file`

```
$ man man
man (1)

NAME
  man - format and display the on-line manual pages

SYNOPSIS
  man [-acdfFhkKtwW] [--path] [-m system] [-p string] [-C config_file]
  ...
$
```

For the navigation within a manpage see the [paragraph regarding less](#) (page 14).

---

**Note:** The behaviour of `man` is dependent of the `$PAGER` environment variable

---

## **apropos - list manpages containing a keyword in their description**

**Usage:** apropos keyword

```
$ apropos who
...
who                (1)  - show who is logged on
who                (1)  - display who is on the system
whoami             (1)  - print effective userid
$
```

Use apropos to find candidates for specific tasks

## **/usr/share/doc/**

The /usr/share/doc/ directory in some Linux distributions contains additional documentation of installed software packages

### **1.4.3 Who am I, where am I**

#### **whoami - Print your username**

**Usage:** whoami

```
$ whoami
fthommen
$
```

#### **hostname - Print the name of the computer**

**Usage:** hostname

```
$ hostname
pc-teach01
$
```

#### **pwd - Print the current working directory**

**Usage:** pwd

```
$ pwd
/home/fthommen
$
```

## **date - Print current date and time**

---

**Usage:** date

```
$ date
Tue Sep 25 19:57:50 CEST 2012
$
```

---

**Note:** The command `time` does something completely different from `date` and is *not* used to show the current time.

---

## **1.4.4 Moving Around**

### **cd - Change the working directory**

---

**Usage:** cd [new\_directory]

```
$ pwd
/home/fthommen
$ cd /usr/bin
$ pwd
/usr/bin
$
```

---

**Note:** Using `cd` without a directory is equivalent to “`cd ~`” and changes into the users’s homedirectory

---

---

**Note:** Please note the difference between absolute pathes (starting with “/”) and relative pathes (starting with a directory name)

---

Special directories:

- “.”: The current working directory
- “..”: The parent directory of the current working directory
- “~”: Your homedirectory

```
$ pwd
/usr
$ cd /bin
$ pwd
/bin
```

```
$ pwd
/usr
$ cd
```

```
$ pwd
/home/fthommen
```

## 1.4.5 See What's Around

### ls - List directory contents

**Usage:** `ls [options] [file(s) or directory/ies]`

```
$ ls
/home/fthommen
$ ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 24 10:59 aa.pdf
$
```

Useful options:

- |           |  |
|-----------|--|
| <b>-l</b> | Long listing with permissions, user, group and last modification date                                |
| <b>-l</b> | Print listing in one column only   |
| <b>-a</b> | Show all files (hidden, "." and "..")  |
| <b>-A</b> | Show almost all files (hidden, but not "." and "..")   |
| <b>-F</b> | Show filetypes (nothing = regular file, "/" = directory, "*" = executable file, "@" = symbolic link) |
| <b>-d</b> | Show directory information instead of directory content  |
| <b>-t</b> | Sort listing by modification time (most recent on top)   |


### Digression: Shell globs

Files and folders can't only be referred to with their full name, but also with so-called "Shell Globs", which are a kind of simple pattern to address groups of files and folders. Instead of explicit names you can use the following placeholders:

- `?`: Any single character
- `*`: Any number of any character (including no character at all, but **not** matching a starting ".")
- `[...]`: One of the characters included in the brackets. Use "-" to define ranges of characters
- `{word1,word2}`: Each individual word is expanded

Examples:

- `*.pdf`: All files having the extension ".pdf"
- `? .jpg`: Jpeg file consisting of only one character
- `[0-9]*.txt`: All files starting with a number and having the extension ".txt"

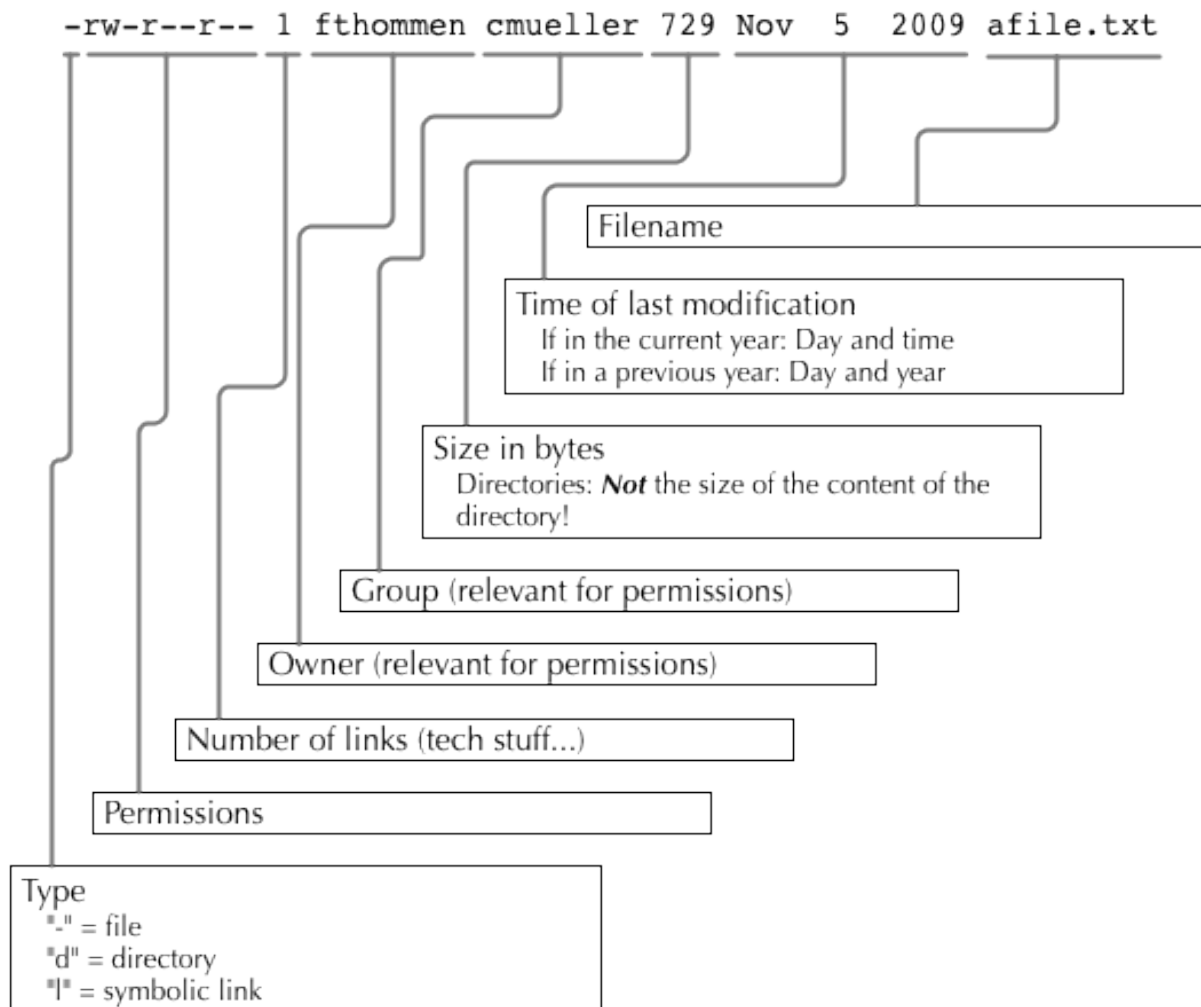Figure 1.3: Elements of a long file listing (`ls -l`)

- \*.???: All files having a three-character extension
  - photo.{jpg,png}: “photo.jpg” and “photo.png”
- 

**Note:** The special directory “~” mentioned above is a shell glob, too.

---

## 1.4.6 Organize Files and Folders

### cp – Copy files and folders

**Usage:** cp [options] sourcefile destinationfile

```
$ cp /usr/bin/less /tmp/backup_of_less
$
```

**Useful options:**

- |           |  |
|-----------|--|
| <b>-r</b> | Copy recursively   |
| <b>-i</b> | Interactive operation, ask before overwriting an existing file |
| <b>-p</b> | Preserve owner, permissions and timestamp                      |

**We copy a set of exercise files from the network share into our home directory:**

```
$ cp -r /g/bio-it/courses/LSB/exercises ~/exercises
$
```

### rsync - intelligently copying files and folders

**Usage:** rsync [options] source target

```
$ rsync -av /etc/ root@taperobot:/etc-backup
...
$
```

rsync allows you to copy files or folders locally or to wherever you have ssh access. You can have rsync have copying only newer files or only older files. If copy operation is interrupted, you can rerun rsync and it will only copy the missing files (in contrast to cp which will just copy everything again).

source and target can be local directories or have the form user@remotehost:directory, in which case you'll have to give your password for the remote host. This latter version will copy over the network.

---

**Note:** rsync is one of the few cases, where it effectively matters if a directory is written with an ending slash (“/”) or not: If the source is a directory and ends with a slash, then the *content* of this directory will be copied into the target directory. If the source

doesn't have an ending slash, then *a directory with the same name* will be created *within the target directory*

---

### Useful option combinations:

- |            |   |
|------------|---|
| <b>-av</b> | Verbosely copies all source files which are different (different size, different age) or missing from the source. <b>Beware:</b> This will also copy files which are older on the source side |
| <b>-au</b> | Silently copies all source files which are different (different size, different age) or missing from the source. This combination will <i>not</i> overwrite newer files by older ones         |

### **touch – Create a file or change last modification date of an existing file**

---

**Usage:** touch file(s) or directory/ies

```
$ ls afile
ls: afile: No such file or directory
$ touch afile
$ ls afile
afile
$
```

```
$ ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 24 10:59 aa.pdf
$ touch aa.pdf
$ ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 25 22:01 aa.pdf
$
```

### **rm - Remove files and directories**

---

**Usage:** rm [options] file(s)

rm -r [options] directory/ies

```
$ ls afile
afile
$ rm afile
$ ls afile
ls: afile: No such file or directory
$
```

### Useful options:

- |           |                                      |
|-----------|--------------------------------------|
| <b>-i</b> | Ask for confirmation of each removal |
| <b>-r</b> | Remove recursively                   |

<b>-f</b>	Force the removal (no questions, no errors if a file doesn't exist)
-----------	---

---

**Note:** `rm` without the `-i` option will usually not ask you if you really want to remove the file or directory

---

## **`mv` - Move and rename files and folders**

---

**Usage:** `mv` [options] sourcefile destinationfile

`mv` [options] sourcefile(s) destinationdirectory

```
$ ls *.txt
a.txt
$ mv a.txt b.txt
$ ls *.txt
b.txt
$
```

### **Useful options:**

<b>-i</b>	Ask for confirmation of each removal
-----------	--------------------------------------

---

**Note:** You cannot overwrite an existing directory by another one with `mv`

---

## **`mkdir` - Create a new directory**

---

**Usage:** `mkdir` [options] directory

```
$ ls adir/
ls: adir/: No such file or directory
$ mkdir adir
$ ls adir
$
```

### **Useful options:**

<b>-p</b>	Create parent directories (when creating nested directories)
-----------	--

```
$ mkdir adir/bdir
mkdir: cannot create directory 'adir/bdir': No such file or directory
$ mkdir -p adir/bdir
$
```

## **`rmdir` - Remove an empty directory**

---

**Usage:** `rmdir` directory



```
$ rmdir adir/  
$
```

---

**Note:** If the directory is not empty, `rmdir` will complain and not remove it.

---

## 1.4.7 View Files

### cat - Print files on terminal (concatenate)

**Usage:** `cat [options] file(s)`

```
$ cat P12931.fasta backup_of_P12931.fasta  
...  
$
```

---

**Note:** The command `cat` only makes sense for short files or for e.g. combining several files into one. See the redirection examples later.

---

### head - Print first lines of a textfile

`head` is a program on Unix and Unix-like systems used to display the beginning of a text file or piped data.

**Usage:** `head [options] file(s)`

```
$ head /etc/passwd  
root:x:0:0:root:/root:/bin/bash  
bin:x:1:1:bin:/bin:/sbin/nologin  
daemon:x:2:2:daemon:/sbin:/sbin/nologin  
adm:x:3:4:adm:/var/adm:/sbin/nologin  
lp:x:4:7:lp:/var/spool/lpd:/sbin/nologin  
sync:x:5:0:sync:/sbin:/bin/sync  
shutdown:x:6:0:shutdown:/sbin:/sbin/shutdown  
halt:x:7:0:halt:/sbin:/sbin/halt  
mail:x:8:12:mail:/var/spool/mail:/sbin/nologin  
news:x:9:13:news:/etc/news:  
$
```

#### **Useful options:**

**-n num**                      Print num lines (default is 10)

### tail - Print last lines of a textfile

The `tail` utility displays the contents of file or, by default, its standard input, to the standard output.

**Usage:** tail [options] file(s)

```
$ tail -n 3 /etc/passwd
xfs:x:43:43:X Font Server:/etc/X11/fs:/sbin/nologin
gdm:x:42:42::/var/gdm:/sbin/nologin
sabayon:x:86:86:Sabayon user:/home/sabayon:/sbin/nologin
$
```

**Useful options:**

<b>-n num</b>	Print num lines (default is 10)
<b>-f</b>	“Follow” a file (print new lines as they are written to the file)

## less - View and navigate files

**Usage:** less [options] file(s)

```
$ less P12931.fasta backup_of_P12931.fasta
...
$
```

---

**Note:** This is the default “pager” (a program for viewing files page by page, not an old-fashioned telecommunications device) for manpages under Linux unless you redefine your \$PAGER *environment variable* (page 21)

---

**Navigation within less:**

Key(s):	Effect:
up, down, right, left:	use cursor keys
top of document:	g
bottom of document:	G
search:	“/” + search-term
find next match:	n
find previous match:	N
quit:	q

## 1.4.8 Extracting Informations from Files

### grep - Find lines matching a pattern in textfiles

grep is a command-line utility for searching plain-text data sets for lines matching a regular expression.

**Usage:** grep [options] pattern file(s)

```
$ grep -i ensembl P04637.txt
DR    Ensembl; ENST00000269305; ENSP00000269305; ENSG00000141510.
DR    Ensembl; ENST00000359597; ENSP00000352610; ENSG00000141510.
```

```
DR   Ensembl; ENST00000419024; ENSP00000402130; ENSG00000141510.
DR   Ensembl; ENST00000420246; ENSP00000391127; ENSG00000141510.
DR   Ensembl; ENST00000445888; ENSP00000391478; ENSG00000141510.
DR   Ensembl; ENST00000455263; ENSP00000398846; ENSG00000141510.
$
```

**Useful options:**

<b>-v</b>	Print lines that do not match
<b>-i</b>	Search case-insensitive
<b>-l</b>	List files with matching lines, not the lines itself
<b>-L</b>	List files without matches
<b>-c</b>	Print count of matching lines for each file

**cut - extracting columns from textfiles**

cut allows to get at individual columns in structured textfiles (for instance CSV files). By default, cut assumes the columns are TAB-separated.

**Usage:** cut [options] file(s)

**Useful options:**

<b>-d DELIM</b>	use DELIM instead of TAB for field delimiter. Make sure to use quotes here!
<b>-f</b>	select only these fields; this can either be a single field, multiple individual fields separated by comma or a range of startfield and endfield separated by dash '-'

**Examples:**

extract column six from the file */exercises/P12931.csv* (which is separated by semicolon ';'):

```
$ cut -d';' -f6 /exercises/P12931.csv
PMID
2136766
11804588
...
$
```

extract columns two, three, eight, nine and ten from the same file:

```
$ cut -d';' -f2,3,8-10 /exercises/P12931.csv
S; 12; 0.21; ; -
S; 17; 0.24; MOD_PKA_1; -
S; 17; 0.24; MOD_PKA_1; -
S; 17; 0.24; MOD_PKA_1; -
...
$
```

## **sort - sort a textfile**

The sort utility is used to sort a textfile (alphabetically or numerically).

**Usage:** sort [options] file(s)

```
$ sort /etc/passwd
...
$
```

**Useful options:**

- f**                fold lower case to upper case characters
- n**                compare according to string numerical value
- b**                ignore leading blanks
- r**                reverse the result of comparisons

## **1.4.9 Useful Filetools**

### **file - determine the filetype**

**Usage:** file [options] file(s)

```
$ file /bin/date
/bin/date: ELF 32-bit LSB executable
$ file /bin
/bin: directory
$ file SRC_HUMAN.fasta
SRC_HUMAN.fasta: ASCII text
$
```

---

**Note:** The command file uses certain tests and some magic to determine the type of a file

---

### **which - find a (executable) command**

**Usage:** which [options] command(s)

```
$ which date
/bin/date
$ which eclipse
/usr/bin/eclipse
$
```

## **find - search/find files in any given directory**

**Usage:** find [starting path(s)] [search filter]

```
$ find /etc
/etc
/etc/printcap
/etc/protocols
/etc/xinetd.d
/etc/xinetd.d/ktalk
...
$
```

find is a powerful command with lots of possible search filters. Refer to the manpage for a complete list.

### **Examples:**

- Find by name:

```
$ find . -name SRC_HUMAN.fasta
./SRC_HUMAN.fasta
$
```

- Find by size: (List those entries in the directory /usr/bin that are bigger than 500kBytes)

```
$ find /usr/bin -size +500k
/usr/bin/oparchive
/usr/bin/kiconedit
/usr/bin/opjitconv
...
$
```

- Find by type (d=directory, f=file, l=link)

```
$ find . -type d
.
./adir
$
```

## **1.4.10 Permissions**

using `ls -l` to view entries of current directory:

```
$ ls -l
drwxr-xr-x 2 dinkel gibson 4096 Sep 17 10:46 adir
lrwxrwxrwx 1 dinkel gibson   15 Sep 17 10:45 H1.fasta -> H2.fasta
-rw-r--r-- 1 dinkel gibson  643 Sep 17 10:45 H2.fasta
$
```

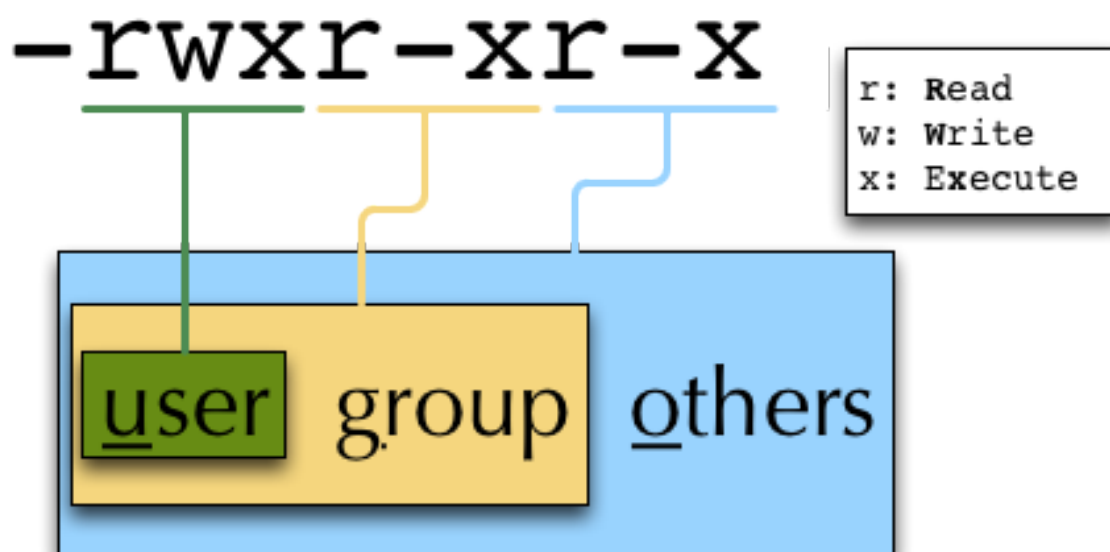


Figure 1.4: Linux file permissions

## Changing Permissions

Permissions are set using the `chmod` (change mode ) command.

**Usage:** `chmod [options] mode(s) files(s)`

```
$ ls -l adir
drwxr-xr-x 2 dinkel gibson 4096 Sep 17 10:46 adir
$ chmod u-w,o=w adir
$ ls -l adir
dr-xr-x-w- 2 dinkel gibson 4096 Sep 17 10:46 adir
$
```

The mode is composed of

Who		What		Which permission	
u:	user/owner	+:	add this permission	r:	read
g:	group	-:	remove this permission	w:	write
o:	other	=:	set exactly this permission	x:	execute
a:	all				

Add executable permission to the group:

```
$ chmod g+x file
$
```

Revoke this permission:

```
$ chmod g-x file
$
```

Allow all to read a directory:

```
$ chmod a+rx adir/  
$
```

### 1.4.11 Remote access

To execute commands at a remote machine/server, you need to log in to this machine. This is done using the `ssh` command (secure shell). In its simplest form, it takes just the machinename as parameter (assuming the username on the local machine and remote machine are identical):

```
$ ssh remote_server  
...  
$
```

---

**Note:** Once logged in, use `hostname`, `whoami`, etc. to determine on which machine you are currently working and to get a feeling for your environment!

---

To use a different username, you can use either:

```
$ ssh -l username remote_server  
...  
$
```

or

```
$ ssh username@remote_server  
...  
$
```

When connecting to a machine for the first time, it might display a warning:

```
$ ssh submaster  
The authenticity of host 'submaster (10.11.4.219)' can't be established.  
RSA key fingerprint is a4:2c:c1:a6:34:49:a3:a9:b2:c3:52:f5:37:94:69:f5.  
Are you sure you want to continue connecting (yes/no)?  
  
...  
$
```

Type *yes* here. If this message appears a second time, you should contact your IT specialist...

To disconnect from the remote machine, type:

```
$ exit
```

If setup correctly, you can even use *graphical tools* from the remote server on the local machine. For this to work, you need to start the `ssh` session with the `-X` parameter:

```
$ ssh -X remote_server
...
$
```

Copying files to and from remote computers can be done using `scp` (secure copy). The order of parameters is the same as in `cp`: first the name of the source, then the name of the destination. Either one can be the remote part.

```
$ scp localfile server:/remotefile
$ scp server:/remotefile localfile
```

An alternative username can be provided just as in `ssh`:

```
$ scp username@server:/remotefile localfile
```

## 1.4.12 IO and Redirections

### Redirect

Redirect the output of one program into e.g. a file:

Inserting the current date into a new file:

```
$ date > file_containing_date
$
```

**Warning:** You can easily overwrite files by this!

Filtering lines containing the term “src” from FASTA files and inserting them into the file `lines_with_src.txt`:

```
$ cd /exercises/
$ grep -i "src" *.fasta > lines_with_src.txt
$
```

### Append

Append something to a file (rather than overwriting it):

```
$ date >> file_containing_date
$
```



## **Pipe**

Use the pipe symbol (`|`) to feed the output of one program into the next program. Here: use `ls` to show the directory contents and then use `grep` to only show those that contain fasta in their name:

```
$ cd /exercises
$ ls | grep fasta
EPSINS.fasta
FYN_HUMAN.fasta
P12931.fasta
SRC_HUMAN.fasta
$
```

### **1.4.13 Environment Variables**

Environment variables are a set of dynamic named values that can affect the way running processes will behave on a computer.

#### **\$HOME**

Contains the location of the user's home directory. Although the current user's home directory can also be found out through the C functions `getpwuid` and `getuid`, `$HOME` is often used for convenience in various shell scripts (and other contexts).

---

**Note:** Do not change this variable unless you have a good reason and you know what you are doing!

---

#### **\$PATH**

`$PATH` contains a colon-separated (`:`) list of directories that the shell searches for commands that do not contain a slash in their name (commands with slashes are interpreted as file names to execute, and the shell attempts to execute the files directly). So if the directory `/usr/bin` is in `$PATH` (which it should), then the command `/usr/bin/less` can be accessed by simply typing `less` instead of `/usr/bin/less`. How convenient!

**Warning:** If you ever need to change this variable, you should always *append* to it, rather than overwriting it:

Overwriting (bad): `export PATH=/my/new/path;`

Appending (good): `export PATH=$PATH:/my/new/path`

#### **\$PAGER**

The `$PAGER` variable contains the path to the program used to list the contents of files through (such as `less` or `more`).

## **\$PWD**

The \$PWD variable points to the current directory. Equivalent to the output of the command `pwd` when called without arguments.

## **Displaying environment variables**

Use `echo` to display individual variables *set* or `env` to view all at once:

```
$ echo $HOME
/localhome/teach01
$ set
...
$ env
...
$
```

## **Setting an environment variable**

Use `export` followed by the variable name and the value of the variable (separated by the equal sign) to set an environment variable:

```
$ export PAGER=/usr/bin/less
$
```

---

**Note:** An environment variable is only valid for your current session. Once you logout of your current session, it is lost or reset.

---

# Chapter 2

## Exercises

### 2.1 Misc. file tools

1. Which tool can be used to determine the type of a file?
2. Use it on the following files/directories and compare the results:
  - (a) `/usr/bin/tail`
  - (b) `~`
  - (c) `~/exercises/SRC_HUMAN.fasta`

### 2.2 Searching

1. Which tool can be used to search for files or directories?
2. Use it to find all directories in the `~/exercises` directory
3. Search for the file `date` in the `/bin` directory
4. List those entries in the directory `/bin` that are bigger than 400kBytes

### 2.3 Misc. terminal

1. Which two tools can be used to redraw/empty the screen?

### 2.4 Permissions

1. Create a directory called `testpermissions`
2. Change your working directory to `testpermissions`
3. Create a directory called `adir`.
4. Use the command `which date` to find out where the `date` program is located.

5. Copy this date program into the directory `adir` and name it `'mydate'`.
6. Check the permissions of the copied program `'mydate'`
7. Change the permissions on `'mydate'` to remove the executable permissions.
8. Check the permissions of the program `'mydate'`
9. Change the permissions back so that the file is executable.
10. Try running it as `./mydate` or `adir/mydate` (depending on your current working directory)
11. Copy a textfile from a previous exercise into `adir`, then change the permissions, so you are not allowed to write to it. Test this by trying to read it via `cat`.
12. Then change the permissions so you can't read/cat it either. Test this by trying to read it via `cat`.
13. Change your working directory to `testpermissions`, and then try changing the permissions on the directory `adir` to non-executable.
14. What are the minimum permissions (on the directory) necessary for you to be able to execute `adir/mydate`?

## 2.5 Remote access

1. Login to machine `"sub-master.embl.de"` (using your own username)
2. Use `exit` to quit the remote shell (Beware to not exit your local shell)
3. Use `clear` to empty the screen after logout from the remote server
4. Use the following commands locally as well as on the remote machine to get a feeling for the different machines:
5. Copy the file `/etc/motd` from machine `sub-master.embl.de` into your local home directory (using `scp`)
6. Determine the filetype and the permissions of the file that you just copied
7. Login to your neighbor's machine (ask him for the hostname) using your own username

## 2.6 IO and Redirections

1. Use `date` in conjunction with the redirection to insert the current date into the (new) file `current_date` (in your homedirectory).
2. Inspect the file to make sure it contains (only a single line with) the date.
3. Use `date` again to append the current date into the same file.
4. Again, check that this file now contains two lines with dates.
5. Use `grep` to filter out lines containing the term `"TITLE"` from all PDB files in the `exercises` directory and use redirection to insert them into a new file `pdb_titles.txt`.

6. (OPTIONAL) Upon inspection of the file `pdb_titles.txt`, you see that it also contains the names of the files in which the term was found.
  - (a) Use either the `grep` manpage or `grep --help` to find out how you can suppress this behaviour.
  - (b) Redo the previous exercise such that the output file `pdb_titles.txt` only contains lines starting with `TITLE`.
7. The *third* column of the file `/etc/passwd` contains user IDs (numbers)
  - (a) Use `cut` to extract just the third column of this file (remember to specify the delimiter `:`)
  - (b) Next, use the *pipe* (page 21) symbol (`|`) and `sort` to sort this output *numerically*



## Chapter 3

# Links and Further Information

### 3.1 Links

- A full 500 page book about the Linux commandline for free(!): [LinuxCommand.org](http://linuxcommand.org) <sup>1</sup>
- Another nice introduction: “A beginner’s guide to UNIX/Linux” <sup>2</sup>
- The “*commandline starter*” chapter of an O’Reilly book: [Learning Debian GNU/Linux - Issuing Linux Commands](http://oreilly.com/openbook/debian/book/ch04_01.html) <sup>3</sup>
- A nice introduction to Linux/UNIX file permissions: “[chmod Tutorial](http://www.catcode.com/teachmod/)” <sup>4</sup>
- [Linux Cheatsheets](http://www.cheat-sheets.org/#linux) <sup>5</sup>
- For the technically interested: [Linux Filesystem Hierarchy Standard](http://www.pathname.com/fhs/) <sup>6</sup> and [Linux Standard Base](http://www.linuxfoundation.org/collaborate/workgroups/lsb) <sup>7</sup>
- [Unix commands applied to bioinformatics](http://rous.mit.edu/index.php/Unix_commands_applied_to_bioinformatics) <sup>8</sup>
- [BioPieces](http://code.google.com/p/biopieces) <sup>9</sup> are a collection of bioinformatics tools that can be pieced together in a very easy and flexible manner to perform both simple and complex tasks.
- [Google shell style guide](https://code.google.com/p/google-styleguide) <sup>10</sup>
- [Useful bash one-liners for bioinformatics](https://github.com/stephenturner/oneliners) <sup>11</sup>
- Interactive explanation of your commandline: [Explain Shell](http://www.explainshell.com) <sup>12</sup>

---

<sup>1</sup> <http://linuxcommand.org/>

<sup>2</sup> <http://www.mn.uio.no/astro/english/services/it/help/basic-services/linux/guide.html>

<sup>3</sup> [http://oreilly.com/openbook/debian/book/ch04\\_01.html](http://oreilly.com/openbook/debian/book/ch04_01.html)

<sup>4</sup> <http://www.catcode.com/teachmod/>

<sup>5</sup> <http://www.cheat-sheets.org/#linux>

<sup>6</sup> <http://www.pathname.com/fhs/>

<sup>7</sup> <http://www.linuxfoundation.org/collaborate/workgroups/lsb>

<sup>8</sup> [http://rous.mit.edu/index.php/Unix\\_commands\\_applied\\_to\\_bioinformatics](http://rous.mit.edu/index.php/Unix_commands_applied_to_bioinformatics)

<sup>9</sup> <http://code.google.com/p/biopieces>

<sup>10</sup> <https://code.google.com/p/google-styleguide>

<sup>11</sup> <https://github.com/stephenturner/oneliners>

<sup>12</sup> <http://www.explainshell.com>

## 3.2 Command Line Mystery Game

**CLMystery** <sup>13</sup> is a game that you play on the commandline: There's been a murder in Terminal City, and TCPD needs your help to solve this crime *by using commandline tools only!*

To play the game, get the files from github and read the instructions:

```
wget https://github.com/veltman/clmystery/archive/master.zip
unzip master.zip
cd clmystery-master/
cat instructions
```

## 3.3 Real printed paper books

- Dietz, M., “*Praxiskurs Unix-Shell*”, O'Reilly (highly recommended!, german language only)
- Herold, H., “*awk & sed*”, Addison-Wesley
- Robbins, A., “*sed & awk Pocket Reference*”, O'Reilly
- Robbins, A. and Beebe, N., “*Classic Shell Scripting*”, O'Reilly
- Siever, E. et al., “*Linux in a Nutshell*”, O'Reilly

## 3.4 Live - CDs

A Live-CD is a complete bootable computer operating system which runs in the computer's memory, rather than loading from the hard disk drive. It allows users to experience and evaluate an operating system without installing it or making any changes to the existing operating system on the computer.

Just download an ISO-Image, burn it onto a CD/DVD and insert it into your DVD-Drive to boot your computer with Linux!

### 3.4.1 Fedora Live CD

This Live CD contains everything the **Fedora** <sup>14</sup> Linux operating system has to offer and it's everything you need to try out Fedora - you don't have to erase anything on your current system to try it out, and it won't put your files at risk. Take Fedora for a test drive, and if you like it, you can install Fedora directly to your hard drive straight from the Live Media desktop.

---

<sup>13</sup> <https://github.com/veltman/clmystery>

<sup>14</sup> <http://fedoraproject.org/wiki/FedoraLiveCD>



### 3.4.2 Knoppix

**Knoppix** <sup>15</sup> is an operating system based on Debian designed to be run directly from a CD / DVD or a USB flash drive, one of the first of its kind for any operating system. When starting a program, it is loaded from the removable medium and decompressed into a RAM drive. The decompression is transparent and on-the-fly. More than 1000 software packages are included on the CD edition and more than 2600 are included on the DVD edition. Up to 9 gigabytes can be stored on the DVD in compressed form.

### 3.4.3 BioKnoppix

**Bioknoppix** <sup>16</sup> is a customized distribution of Knoppix Linux Live CD. With this distribution you just boot from the CD and you have a fully functional Linux OS with open source applications targeted for the molecular biologist. Beside using RAM, BioKnoppix doesn't touch the host computer, being ideal for demonstrations, molecular biology students, workshops, etc.

### 3.4.4 Vigyaan

**Vigyaan** <sup>17</sup> is an electronic workbench for bioinformatics, computational biology and computational chemistry. It has been designed to meet the needs of both beginners and experts.

### 3.4.5 BioSlax

**BioSLAX** <sup>18</sup> is a live CD/DVD suite of bioinformatics tools that has been released by the resource team of the BioInformatics Center (BIC), National University of Singapore (NUS).

---

<sup>15</sup> <http://knopper.net/knoppix>

<sup>16</sup> <http://bioknoppix.hpcf.upr.edu>

<sup>17</sup> <http://www.vigyaan.cd.org>

<sup>18</sup> <http://www.bioslax.com>



## Chapter 4

# About Bio-IT

Bio-IT is a community project aiming to develop and strengthen the bioinformatics user community at EMBL Heidelberg. It is made up of members across the different EMBL Heidelberg units and core facilities. The project works to achieve these aims, firstly, by providing a forum for discussing and sharing information and ideas on computational biology and bioinformatics, focused on the [Bio-IT portal](#). Secondly, we organise and participate in a range of different networking and social activities aiming to strengthen ties across the community.

### 4.1 Resources

A list of biocomputing-related resources associated with the project, in the top-left “Resources” menu, including, for example there is help provided for installing software on Linux computers at EMBL, instructions on using the Git versions control system server provided by EMBL, and various other kinds of information.

### 4.2 Training and Outreach

The “Training and Outreach” menu, bottom left, provides information on events (courses and conferences), both internal to EMBL and organised elsewhere by other organisations, that are related to biocomputing and bioinformatics

### 4.3 Networking

Several different kinds of networking events for the Bio-IT community are being organised, including beer sessions for the EMBL community, and within-Heidelberg events for the larger Heidelberg biocomputing community.

## 4.4 Biocomputing expertise at EMBL

You can use the Bio-IT portal to search for people working at EMBL who have experience working with data or tools you might be interested in.

If you've not yet got a page up on the portal describing your own expertise, please do so. If you need any help doing this, you can read about this in the portal's FAQ section, or get in touch with one of the site administrators.

## 4.5 Centers

EMBL Centres are 'horizontal', cross-departmental structures that promote innovative research projects across disciplines. All the EMBL Centres listed below have a strong computational component.



### 4.5.1 Biomolecular Network Analysis

The [CBNA](#) disseminates expertise, know-how and guidance in network integration and analysis throughout EMBL.

### 4.5.2 Statistical Data Analysis

The [CSDA](#) helps EMBL scientists to use adequate statistical methods for their specific technological or biological applications.

### 4.5.3 Molecular and Cellular Imaging

The [CMCI](#) makes your life in image processing/analysis easier and more fun.

### 4.5.4 Modeling

The [Centre for Biological Modeling \(CBM\)](#) aims to support people to adopt mathematical modeling techniques into their everyday research.

## Chapter 5

# Acknowledgements

Handouts provided by [EMBL Heidelberg](#) Photolab (Many thanks to Udo Ringeisen)

EMBL Logo © [EMBL Heidelberg](#)

Graphic of the *Linux Filesystem* (page 2) taken from the [SuSE 9.2 manual](#) © Novell Inc.

All other graphics © Frank Thommen, EMBL Heidelberg, 2012

**License:** [CC BY-SA 3.0](#)



## Chapter 6

# Solutions to the Exercises

### 6.1 Misc. file tools

1. Which tool can be used to determine the type of a file?

```
$ file
```

2. Use it on the following files/directories and compare the results:

(a) /usr/bin/tail

```
$ file /usr/bin/tail
/usr/bin/tail: binary executable
```

(b) ~

```
$ file ~
/home/dinkel: directory
```

(c) ~/exercises/SRC\_HUMAN.fasta

```
$ file ~/exercises/SRC_HUMAN.fasta
~/exercises/SRC_HUMAN.fasta: ASCII text
```

### 6.2 Searching

1. Which tool can be used to search for files or directories?

```
$ find
```

2. Use it to find all directories in the ~/exercises directory

```
$ find ~/exercises -type d
```

3. Search for the file date in the /bin directory

```
$ find /bin -name date
```

4. List those entries in the directory /bin that are bigger than 400kBytes

```
$ find /bin -size +400k
```

## 6.3 Misc. terminal

1. Which two tools can be used to redraw/empty the screen?

```
$ clear
```

## 6.4 Permissions

1. Create a directory called testpermissions

```
$ mkdir testpermissions
```

2. Change your working directory to testpermissions

```
$ cd testpermissions
```

3. Create a directory called adir.

```
$ mkdir adir
```

4. Use the command which date to find out where the date program is located.

```
$ which date  
/bin/date
```

5. Copy this date program into the directory adir and name it 'mydate'.

```
$ cp /bin/date adir/mydate
```

6. Check the permissions of the copied program 'mydate'

```
$ ls -lh adir/mydate  
-r-xr-xr-x 1 dinkel staff 79K 9 Dec 13:47 mydate*
```

7. Change the permissions on 'mydate' to remove the executable permissions.



```
$ chmod a-x adir/mydate
```

8. Check the permissions of the program 'mydate'

```
$ ls -lh adir/mydate
-r--r--r-- 1 dinkel staff 79K 9 Dec 13:47 mydate*
```

9. Try running it as `./mydate` or `adir/mydate` (depending on your current working directory)

```
$ adir/mydate
permission denied
```

10. Change the permissions back so that the file is executable.

```
$ chmod a+x adir/mydate
```

11. Try running it as `./mydate` or `adir/mydate` (depending on your current working directory)

```
$ adir/mydate
Mon Dec 9 13:50:12 CET 2013
```

12. Copy a textfile from a previous exercise into `adir`, then change the permissions, so you are not allowed to write to it. Test this by trying to read it via `cat`.

```
$ cp ~/exercises/SRC_HUMAN.fasta adir
$ chmod u-w adir/SRC_HUMAN.fasta
```

13. Then change the permissions so you can't read/cat it either. Test this by trying to read it via `cat`.

```
$ chmod u-r adir/SRC_HUMAN.fasta
```

14. Change your working directory to `testpermissions`, and then try changing the permissions on the directory `adir` to non-executable.

```
$ # no need to change directory, as we still are in the directory testpermissions
$ chmod a-x adir
```

15. What are the minimum permissions (on the directory) necessary for you to be able to execute `adir/mydate`?

```
$ chmod u+rx adir
```

## 6.5 Remote access

1. Login to machine "sub-master.embl.de" (using your own username)

```
$ ssh sub-master.embl.de -l username
```

2. Use `exit` to quit the remote shell (Beware to not exit your local shell)

```
$ exit
```

3. Use `clear` to empty the screen after logout from the remote server

```
$ clear
```

4. Use the following commands locally as well as on the remote machine to get a feeling for the different machines:

```
A) ``hostname``  
B) ``whoami``  
C) ``ls -la ~/``
```

5. Copy the file `/etc/motd` from machine `sub-master.embl.de` into your local home directory (using `scp`)

```
$ scp sub-master.embl.de:/etc/motd ~/
```

6. Determine the filetype and the permissions of the file that you just copied

```
$ file ~/motd  
~/motd: ASCII text
```

```
$ ls -l ~/motd
```

7. Login to your neighbor's machine (ask him for the hostname) using your own username

```
$ ssh hostname
```

## 6.6 IO and Redirections

1. Use `date` in conjunction with the redirection to insert the current date into the (new) file `current_date` (in your homedirectory).

```
$ date > ~/current_date
```

2. Inspect the file to make sure it contains (only a single line with) the date.

```
$ cat ~/current_date
```

3. Use `date` again to append the current date into the same file.

```
$ date >> ~/current_date
```

4. Again, check that this file now contains two lines with dates.

```
$ cat ~/current_date
```

5. Use `grep` to filter out lines containing the term “TITLE” from all PDB files in the exercises directory and use redirection to insert them into a new file `pdb_titles.txt`.

```
$ grep TITLE ~/exercises/*.pdb > pdb_titles.txt
```

6. (OPTIONAL) Upon inspection of the file `pdb_titles.txt`, you see that it also contains the names of the files in which the term was found.

- (a) Use either the `grep` manpage or `grep --help` to find out how you can suppress this behaviour.

```
$ grep -h TITLE ~/exercises/*.pdb > pdb_titles.txt
```

- (b) Redo the previous exercise such that the output file `pdb_titles.txt` only contains lines starting with `TITLE`.

```
$ grep -h "^TITLE" ~/exercises/*.pdb > pdb_titles.txt
```

7. The *third* column of the file `/etc/passwd` contains user IDs (numbers)

- (a) Use `cut` to extract just the third column of this file (remember to specify the delimiter ‘:’):

```
$ cut -f3 -d':' /etc/passwd
```

- (b) Next, use the *pipe* (page 21) symbol (`|`) and `sort` to sort this output *numerically*:

```
$ cut -f3 -d':' /etc/passwd | sort -n
```



# Index

## Symbols

\$HOME ..... 21  
\$PAGER ..... 21  
\$PATH ..... 21  
\$PWD ..... 22  
| ..... 21  
>> ..... 20  
> ..... 20

## A

append ..... 20  
apropos ..... 6

## C

cat ..... 13  
cd ..... 7  
chmod ..... 18  
clear ..... 4  
command ..... 3  
    general structure ..... 3  
    interrupt ..... 4  
    switches ..... 3  
cp ..... 10  
cut ..... 15

## D

date ..... 7  
disconnect ..... 19

## E

echo ..... 4, 22  
env ..... 22  
environment variables ..... 21  
    display ..... 22  
    set ..... 22  
exit ..... 5, 19  
export ..... 22

## F

file ..... 16  
    append ..... 20  
    overwrite ..... 20  
find ..... 17

## G

grep ..... 14, 20, 21

## H

head ..... 13  
hostname ..... 6, 19

## L

less ..... 14, 21  
ls ..... 8

## M

man ..... 5  
mkdir ..... 12  
more ..... 21  
mv ..... 12

## O

options ..... 3

## P

Permissions ..... 17  
pipe ..... 21  
pwd ..... 6

## R

redirect ..... 20  
Remote access ..... 19  
reset ..... 5  
rm ..... 11  
rmdir ..... 12  
rsync ..... 10

## S

scp ..... 20  
secure copy ..... 20  
secure shell ..... 19  
set ..... 22  
sort ..... 16  
ssh ..... 19

## T

tail ..... 13  
time ..... 7

touch ..... 11

## W

which ..... 16

whoami ..... 6, 19