



Linux Course Documentation

Release 1.1

Holger Dinkel, Frank Thommen and Thomas Zichner

July 30, 2013

CONTENTS

1	Introduction to the Linux Commandline	3
1.1	Why Use the Commandline	3
1.2	General Remarks Regarding Using UNIX/Linux Systems	3
1.3	General Structure of Linux Commands	4
1.4	Getting Help	5
1.5	Who am I, where am I	6
2	Exercises	17
2.1	Misc. file tools	17
2.2	Searching	17
2.3	Misc. terminal	17
2.4	Permissions	17
2.5	Remote access	18
2.6	IO and Redirections	18
3	More Commandline Tools	21
3.1	Command-line Tools	21
3.2	Hints	26
4	I/O Redirection	29
5	Variables	31
5.1	Setting, Exporting and Removing Variables	31
5.2	Listing Variables	32
5.3	Variable Inheritance	32
5.4	Examples	32
6	Basic Shell Scripting	33
6.1	What is a Script?	33
7	Solutions to the Exercises	41
7.1	Commandline tools	41
8	Appendix	45
8.1	Links and Further Informations	45
8.2	About Bio-IT	47
8.3	Acknowledgements	48
	Index	49

Contents:

INTRODUCTION TO THE LINUX COMMANDLINE

1.1 Why Use the Commandline

- It's **fast**. Productivity is a word that gets tossed around a lot by so-called power users, but the command line can really streamline your computer use, assuming you learn to use it right.
- It's **easier to get help**. The command line may not be the easiest thing to use, but it makes life a whole lot easier for people trying to help you and for yourself when looking for help, especially over the internet. Many times it's as simple as the helper posting a few commands and some instructions and the recipient copying and pasting those commands. Anyone who has spent hours listening to someone from tech support say something like, "OK, now click this, then this, then select this menu command" knows how frustrating the GUI alternative can be.
- It's nearly **universal**. There are hundreds of Linux distros out there, each with a slightly different graphical environment. Thankfully, the various distros do have one common element: the command line. There are distro-specific commands, but the bulk of commands will work on any Linux system.
- It's **powerful**. The companies behind those other operating systems try their best to stop a user from accidentally screwing up their computer. Doing this involves hiding a lot of the components and tools that could harm a computer away from novices. Linux is more of an open book, which is due in part to its prominent use of the command line.

1.2 General Remarks Regarding Using UNIX/Linux Systems

- **Test before run**. Anything written here has to be taken with a grain of salt. On another system – be it a different Linux distribution or another UNIXoid operating system – you might find the same command but without the support of some of the options taught here. It is even possible, that the same option has a different meaning on another system. With this in mind always make sure to test your commands (specially the "dangerous" ones which remove or modify files) when switching from one system to the other.

- **The Linux/UNIX environment.** The behaviour of many commands is influenced or controlled by the so-called “environment”. This environment is the sum of all your environment variables. Some of these environment variables will be shown towards the end of this course.
- **UPPERCASE, lowercase.** Don’t forget that everything is case-sensitive.
- **The Filesystem.** Linux filesystems start on top at the root directory (sic!) “/” which hierarchically broadens towards the ground. The separator between directories or directories and files in Linux is the slash (“/”).

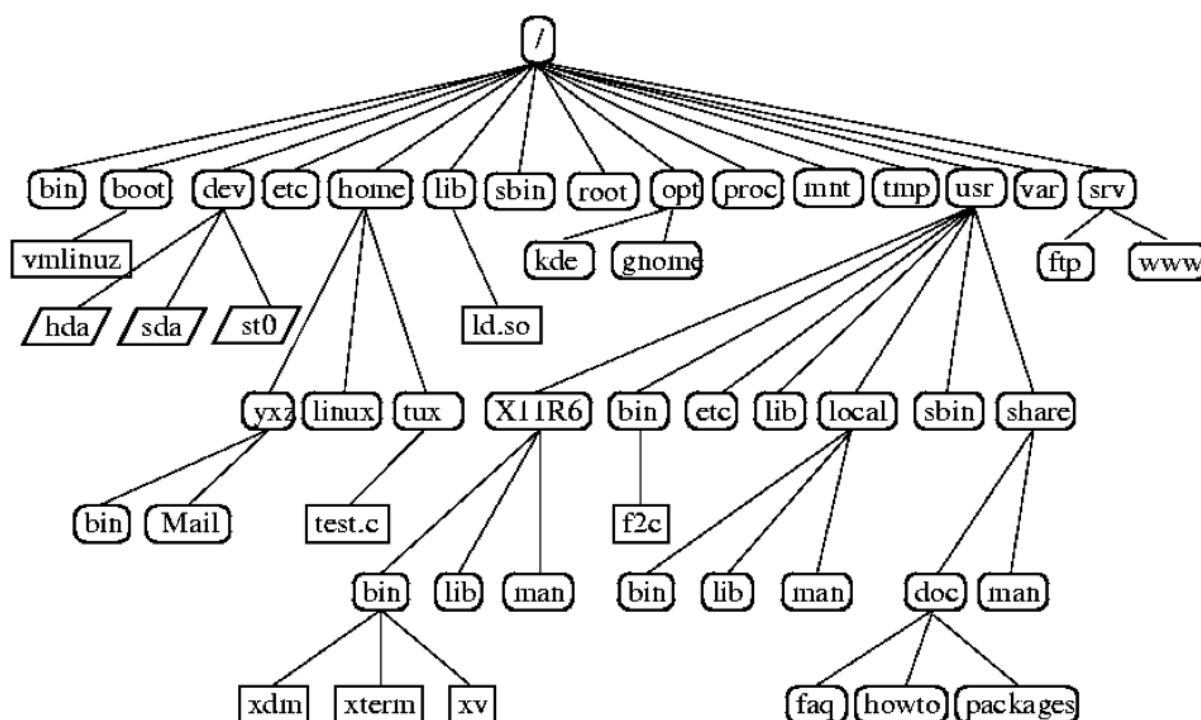


Figure 1.1: Depending on the Linux distribution you might or might not find all of above directories. Most important directories for you are `/bin` and `/usr/bin` (sometimes also `/usr/local/bin`) which contain the user software, `/home` which usually contains the users’ homedirectories and `/tmp` which can be used to store temporary data (beware: Its content is regularly removed!).

..note:: The terms “directory” and “folder” are used interchangeably in this document.


1.3 General Structure of Linux Commands

Linux commands have the following general structure:

commandline options (sometimes called comandline switches) commonly have one of the two following forms: The short form `-character` or the long form `--string`. E.g.

```
> man -h
> man --help
```

Short options are usually – though not always – concatenable:

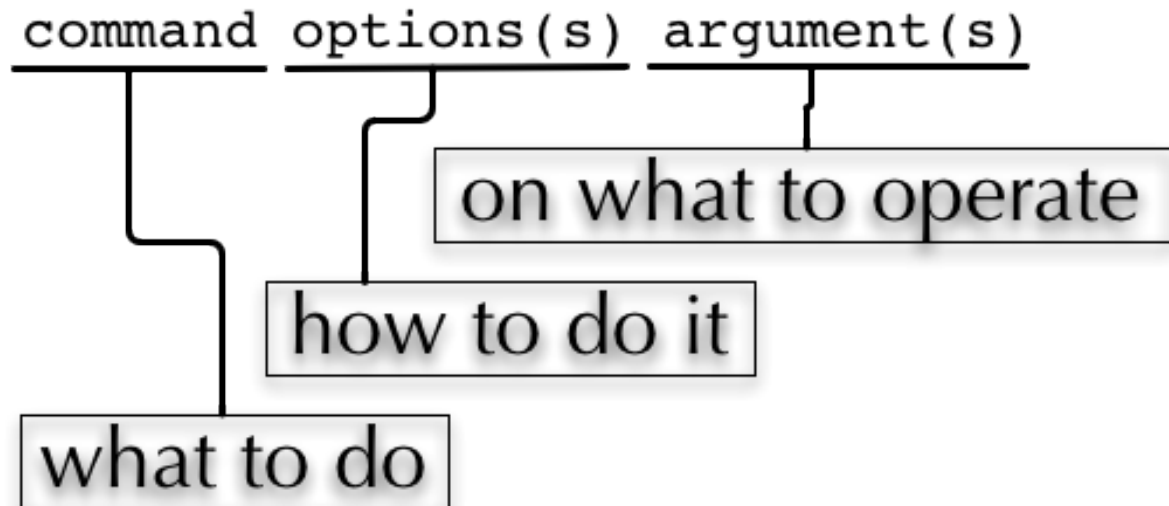

```
> ls -l -A -h
> ls -lAh
```

Some options require an additional argument, which is added with a blank to the short form and with an equal sign to the long form:

```
> ls -I "*.pdf"
> ls --ignore="*.pdf"
```

Since Linux incorporates commands from different sources, options can be available in one or both forms and you'll also encounter options with no dash at all and all kinds of mixtures:

```
> tar cf file.tar -C .. file/
> ps auxgww
```

1.3.1 A Journey Through the Commands

Please note that all examples and usage instructions below are just a glimpse of what you can do and reflect our opinion on what's important and what's not. Most of these commands support many more options and different usages. Consult the manpages to find them. Typographical conventions: Commands and examples are written in Courier. User Input is written in Courier bold and placeholders are generally written in italic.

1.4 Getting Help

`-h/--help` option, no parameters

Many commands support a "help" option, either through `-h` or through `--help`. Other commands will show a help page or at least a short usage overview if you provide wrong commandline options

Usage: man command or file

```
> man man
man(1)

NAME
  man - format and display the on-line manual pages

SYNOPSIS
  man [-acdfFhkKtwW] [--path] [-m system] [-p string] [-C config_file]
  [...]
```

For the navigation within a man-page see the chapter regarding less below.

Note: The behaviour of man is dependent of the \$PAGER environment variable

Usage: apropos keyword

```
> apropos who
[...]
> who                (1)  - show who is logged on
> who                (lp) - display who is on the system
> whoami             (1)  - print effective userid
```

Use apropos to find candidates for specific tasks

The /usr/share/doc directory in some Linux distributions contains additional documentation of installed software packages

1.5 Who am I, where am I

Usage: whoami

```
> whoami
fthommen
```

Usage: hostname

```
> hostname
pc-teach01
```

Usage: pwd

```
> pwd
/home/fthommen
```

Usage: date

```
> date
Tue Sep 25 19:57:50 CEST 2012
```

Note: The command `time` does something completely different than `date` and is not used to show the current time.

Usage: `cd [new_directory]`

```
# pwd
/home/fthommen
# cd /usr/bin
# pwd
/usr/bin
```

Special directories:

- “.”: The current working directory
 - “..”: The parent directory of the current working directory
 - “~”: Your homedirectory
-

Note: Using `cd` without a directory is equivalent to “`cd ~`” and changes into the users’s homedirectory

Note: Please note the difference between absolute pathes (starting with “/”) and relative pathes (starting with a directory name)

```
$ pwd
/usr
$ cd /bin
$ pwd
/bin
```

```
> pwd
/usr
> cd bin
> pwd
/usr/bin
```


Usage: `ls [options] [file(s) or directory/ies]`

```
> ls
/home/fthommen
> ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 24 10:59 aa.pdf
```

Useful options:

- | | |
|-----------|---|
| -l | Long listing with permissions, user, group and last modification date |
| -1 | Print listing in one column only |
-

-a	Show all files (hidden, “.” and “..”)
-A	Show almost all files (hidden, but not “.” and “..”)
-F	Show filetypes (nothing = regular file, “/” = directory, “*” = executable file, “@” = symbolic link)
-d	Show directory information instead of directory content
-t	Sort listing by modification time (most recent on top)

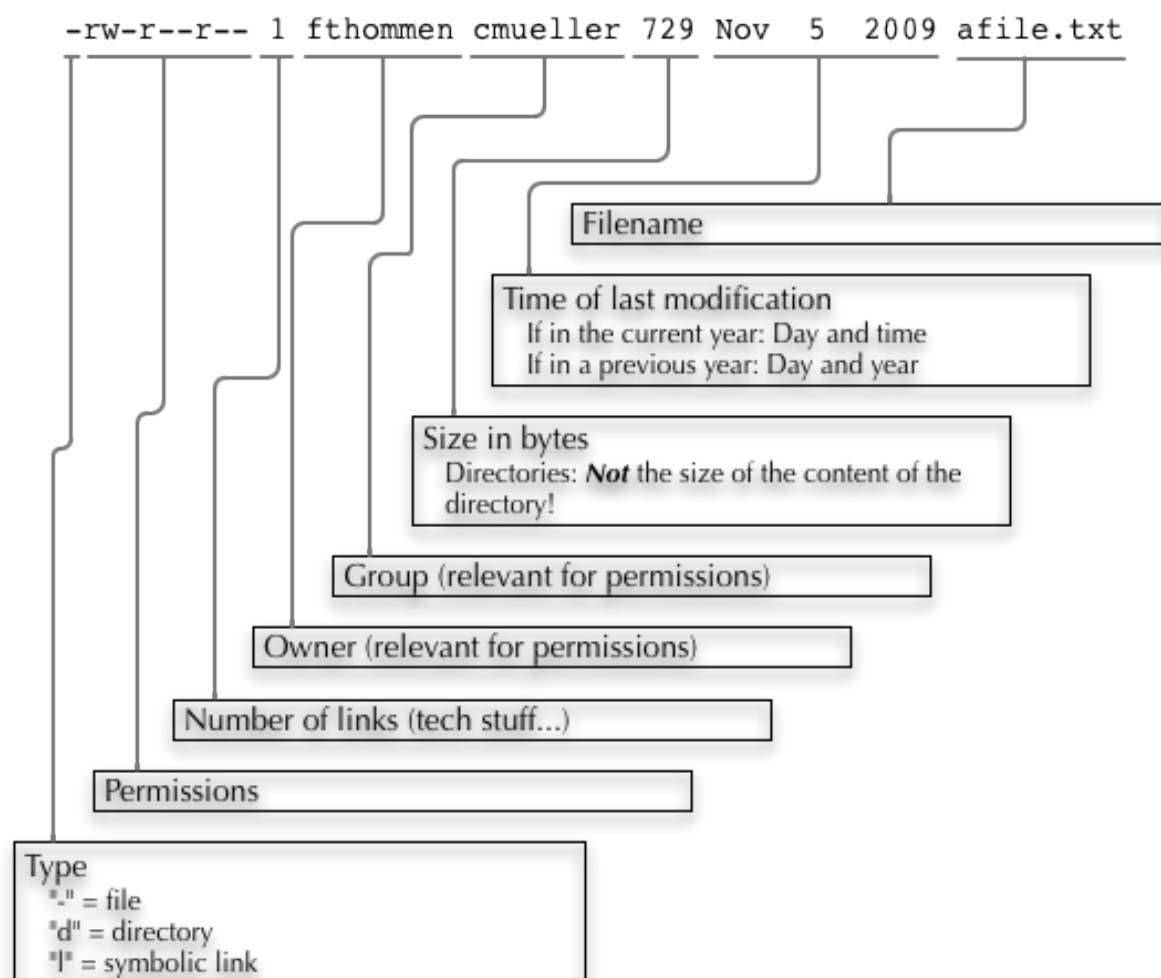

Files and folders can't only be referred to with their full name, but also with so-called “Shell Globbs”, which are a kind of simple pattern to address groups of files and folders. Instead of explicit names you can use the following placeholders:

- `?:` Any single character
- `*:` Any number of any character (including no character at all)
- `[...]:` One of the characters included in the brackets. Use “-” to define ranges of characters

Examples:

- *.pdf: All files having the extension “.pdf”
 - ?.jpg: Jpeg file consisting of only one character
 - [0-9]*.txt: All files starting with a number and having the extension “.txt”
 - *.???: All files having a three-character extension
-

Note: The special directory “~” mentioned above is a shell glob, too.

Usage: touch file(s) or directory/ies

```
> ls afile
ls: afile: No such file or directory
> touch afile
> ls afile
afile
```

```
> ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 24 10:59 aa.pdf
> touch aa.pdf
> ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 25 22:01 aa.pdf
```

Usage: rm [options] file(s)

```
rm -r [options] directory/ies
> ls afile
afile
> rm afile
> ls afile
ls: afile: No such file or directory
```

Useful options:

- | | |
|-----------|---|
| -i | Ask for confirmation of each removal |
| -r | Remove recursively |
| -f | Force the removal (no questions, no errors if a file doesn't exist) |

Note: rm without the -i option will usually not ask you if you really want to remove the file or directory

Usage: mv [options] sourcefile destinationfile

```
mv [options] sourcefile(s) destinationdirectory
> ls *.txt
a.txt
> mv a.txt b.txt
> ls *.txt
b.txt
```

Useful options:

-i Ask for confirmation of each removal

Note: You cannot overwrite an existing directory by another one with mv

Usage: mkdir [options] directory

```
> ls adir/
ls: adir/: No such file or directory
> mkdir adir
> ls adir
```

Useful options:

-p Create parent directories (when creating nested directories)

```
> mkdir adir/bdir
mkdir: cannot create directory 'adir/bdir': No such file or directory
> mkdir -p adir/bdir
```

Usage: rmdir directory

```
> rmdir adir/
```

Note: If the directory is not empty, rmdir will complain and not remove it

Usage: cp [options] sourcefile destinationfile .. note:: cp [options] sourcefile(s) destinationdirectory

```
> cp P12931.fasta backup_of_P12931.fasta
```

Useful options:

-r Copy recursively

-i Interactive operation, ask before overwriting an existing file

-p Preserve owner, permissions and timestamp

Usage: cat [options] file(s)

```
> cat P12931.fasta backup_of_P12931.fasta
[...]
```

Note: cat only makes sense for short files or for e.g. combining several files into one. See the redirection examples later

Usage: less [options] file(s)

```
> less P12931.fasta backup_of_P12931.fasta
[...]
```

Note: This is the default “pager” for manpages under Linux unless you redefine your \$PAGER environment variable

Navigation within less:

Key(s):	Effect:
up, down, right, left:	use cursor keys
top of document:	g
bottom of document:	G
search:	“/” + search-term
find next match:	n
find previous match:	N
quit:	q

Grep is a command-line utility for searching plain-text data sets for lines matching a regular expression.

Usage: grep [options] pattern file(s)

```
> grep -i ensembl P04637.txt
DR   Ensembl; ENST00000269305; ENSP00000269305; ENSG00000141510.
DR   Ensembl; ENST00000359597; ENSP00000352610; ENSG00000141510.
DR   Ensembl; ENST00000419024; ENSP00000402130; ENSG00000141510.
DR   Ensembl; ENST00000420246; ENSP00000391127; ENSG00000141510.
DR   Ensembl; ENST00000445888; ENSP00000391478; ENSG00000141510.
DR   Ensembl; ENST00000455263; ENSP00000398846; ENSG00000141510.
```

Useful options:

-v	Print lines that do not match
-i	Search case-insensitive
-l	List files with matching lines, not the lines itself
-L	List files without matches
-c	Print count of matching lines for each file

Head is a program on Unix and Unix-like systems used to display the beginning of a text file or piped data.

Usage: head [options] file(s)

```
> head /etc/passwd
root:x:0:0:root:/root:/bin/bash
bin:x:1:1:bin:/bin:/sbin/nologin
daemon:x:2:2:daemon:/sbin:/sbin/nologin
adm:x:3:4:adm:/var/adm:/sbin/nologin
lp:x:4:7:lp:/var/spool/lpd:/sbin/nologin
sync:x:5:0:sync:/sbin:/bin/sync
shutdown:x:6:0:shutdown:/sbin:/sbin/shutdown
```

```
halt:x:7:0:halt:/sbin:/sbin/halt
mail:x:8:12:mail:/var/spool/mail:/sbin/nologin
news:x:9:13:news:/etc/news:
```

Useful options:

-n num Print num lines (default is 10)

Usage: tail [options] file(s)

```
> tail -n 3 /etc/passwd
xfs:x:43:43:X Font Server:/etc/X11/fs:/sbin/nologin
gdm:x:42:42::/var/gdm:/sbin/nologin
sabayon:x:86:86:Sabayon user:/home/sabayon:/sbin/nologin
```

Useful options:

-n num Print num lines (default is 10)

-f “Follow” a file (print new lines as they are written to the file)

Usage: file [options] file(s)

```
> file /bin/date
/bin/date: ELF 32-bit LSB executable
> file /bin
/bin: directory
> file SRC_HUMAN.fasta
SRC_HUMAN.fasta: ASCII text
```

Note: The command file uses certain tests and some magic to determine the type of a file

Usage: which [options] command(s)

```
> which date
/bin/date
> which eclipse
/usr/bin/eclipse
>
```

Usage: find [starting path(es)] [search filter]

```
> find /etc
/etc
/etc/printcap
/etc/protocols
/etc/xinetd.d
/etc/xinetd.d/ktalk
[...]
>
```


`find` is a powerful command with lots of possible search filters. Refer to the manpage for a complete list.

Examples:

- Find by name:

```
> find . -name SRC_HUMAN.fasta
./SRC_HUMAN.fasta
```

- Find by size: (List those entries in the directory `/usr/bin` that are bigger than 500kBytes)

```
> find /usr/bin -size +500k
/usr/bin/oparchive
/usr/bin/kiconedit
/usr/bin/opjitconv
[...]
```

- Find by type (d=directory, f=file, l=link)

```
> find . -type d
.
./adir
```

Usage: `clear`

```
> clear
```

In case the output of the terminal/screen gets cluttered, you can use `clear` to clear the screen...

If this doesn't work, you can use `reset` to perform a re-initialization of the terminal:

Usage: `reset` [options]


```
> reset
```

using `ls -l` to view entries of current directory:

```
> ls -l
drwxr-xr-x 2 dinkel gibson 4096 Sep 17 10:46 adir
lrwxrwxrwx 1 dinkel gibson   15 Sep 17 10:45 H1.fasta -> H2.fasta
-rw-r--r-- 1 dinkel gibson  643 Sep 17 10:45 H2.fasta
```

Permissions are set using the `chmod` (change mode) command. **Usage:** `chmod` [options] mode(s) files(s)

```
> ls -l adir
drwxr-xr-x 2 dinkel gibson 4096 Sep 17 10:46 adir
> chmod u-w,o=w adir
> ls -l adir
dr-xr-x-w- 2 dinkel gibson 4096 Sep 17 10:46 adir
```

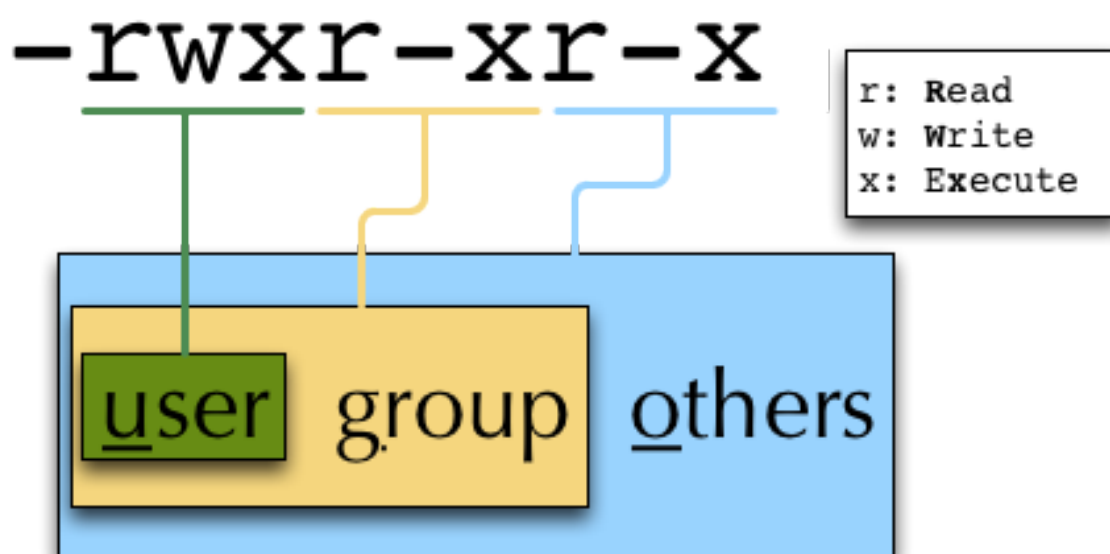

The mode is composed of

Who		What	Which permission	
u:	user/owner	+:	add this permission	r: read
g:	group	-:	remove this permission	w: write
o:	other	=:	set exactly this permission	x: execute
a:	all xx	xx		xx xx

Add executable permission to the group:

```
> chmod g+x file
```

Revoke this permission:

```
> chmod g-x file
```

Allow all to read a directory:

```
> chmod a+rx adir/
```

To execute commands at a remote machine/server, you need to log in to this machine. This is done using the `ssh` command (secure shell). In its simplest form, it takes just the machinename as parameter (assuming the username on the local machine and remote machine are identical):

```
> ssh remote_server
```

Note: Once logged in, use `hostname`, `whoami`, etc. to determine on which machine you are currently working!

To use a different username, you can use either:

```
> ssh username@remote_server
```

or

```
> ssh -l username remote_server
```

When connecting to a machine for the first time, it might display a warning:

```
> ssh sub-master
The authenticity of host 'sub-master (10.11.4.84)' can't be established.
RSA key fingerprint is 47:a4:0f:7b:c2:0f:ef:91:8e:65:fc:3c:f7:0c:53:8d.
Are you sure you want to continue connecting (yes/no)?
```

Type *yes* here. If this message appears a second time, you should contact your IT specialist...

To disconnect from the remote machine, type:

```
> exit
```

Copying files to and from remote computers can be done using `scp` (secure copy). The order of parameters is the same as in `cp`: first the name of the source, then the name of the destination. Either one can be the remote part.

```
> scp localfile server:/remotefile
> scp server:/remotefile localfile
```

An alternative username can be provided just as in `ssh`:

```
> scp username@server:/remotefile localfile
```

Redirect the output of one program into e.g. a file: (Caution: you can easily overwrite files by this!) Inserting the current date into a new file:

```
> date > file_containing_date
```

Filtering lines containing the term “src” from FASTA files and inserting them into the file `lines_with_src.txt`:

```
> cd /exercises/
> grep -i "src" *.fasta > lines_with_src.txt
```

Append something to a file (rather than overwriting it):

```
> date >> file_containing_date
```

Use the `|` pipe symbol (`|`) to feed the output of one program into the next program. Here: use `ls` to show the directory contents and then use `grep` to only show those that contain `fasta` in their name:

```
> cd /exercises
> ls | grep fasta
EPSINS.fasta
FYN_HUMAN.fasta
P12931.fasta
SRC_HUMAN.fasta
```

Environment variables are a set of dynamic named values that can affect the way running processes will behave on a computer.

Contains the location of the user's home directory. Although the current user's home directory can also be found out through the C functions `getpwuid` and `getuid`, `$HOME` is often used for convenience in various shell scripts (and other contexts).

Note: Do not change this variable unless you have a good reason and you know what you are doing!

`$PATH` contains a colon-separated list of directories that the shell searches for commands that do not contain a slash in their name (commands with slashes are interpreted as file names to execute, and the shell attempts to execute the files directly).

The `$PAGER` variable contains the path to the program used to list the contents of files through (such as `less` or `more`).

The `$PWD` variable points to the current directory. Equivalent to the output of the command `pwd` when called without arguments.

Use `echo` to display individual variables `set` or `env` to view all at once:

```
> echo $HOME
/localhome/teach01
> set
...
> env
...
```

Use `export` followed by the variable name and the value of the variable (separated by the equal sign) to set an environment variable:

```
> export PAGER=/usr/bin/less
```

Note: An environment variable is only valid for your current session. Once you logout of your current session, it is lost or reset.

EXERCISES

2.1 Misc. file tools

1. Which tool can be used to determine the type of a file?
2. Use it on the following files/directories and compare the results: a) `/usr/bin/tail`
b) `~` c) `/exercises/SRC_HUMAN.fasta`

2.2 Searching

1. Which tool can be used to search for files or directories?
2. Use it to find all directories in the `/exercises` directory
3. Search for the file `date` in the `/bin` directory
4. List those entries in the directory `/bin` that are bigger than 400kBytes

2.3 Misc. terminal

1. Which two tools can be used to redraw/empty the screen?

2.4 Permissions

1. Create a directory called `testpermissions`
2. Change your working directory to `testpermissions`
3. Create a directory called `adir`.
4. Use the command “`which date`” to find out where the `date` program is located.
5. Copy this `date` program into the directory `adir`.
6. Check the permissions of the copied program `date`
7. Change the permissions on `date` to remove the executable permissions.
8. Check the permissions of the program `date`

9. Try running it as `./date` or `adir/date` (depending on your current working directory)
10. Change the permissions back so that the file is executable.
11. Try running it as `./date` or `adir/date` (depending on your current working directory)
12. Copy a textfile from a previous exercise into `adir`, then change the permissions, so you are not allowed to write to it.
13. Then change the permissions so you can't read/cat it either.
14. Change your working directory to `testpermissions`, and then try changing the permissions on `adir`.
15. What are the minimum permissions (on the directory) necessary for you to be able to execute `adir/date`?

2.5 Remote access

1. Login to machine "sub-master.embl.de" (using your own username)
2. Use `exit` to quit the remote shell (Beware to not exit your local shell)
3. Use `clear` to empty the screen after logout from the remote server
4. Use the following commands locally as well as on the remote machine to get a feeling for the different machines: a) `hostname` b) `whoami` c) `cat /etc/hostname` d) `ls -la ~/`
5. Copy the file `/etc/motd` from machine `sub-master.embl.de` into your local home directory
6. Determine the filetype and the permissions of the file that you just copied
7. Login to your neighbor's machine (ask him for the hostname) using the username `teach01` (password will be given by teacher)

2.6 IO and Redirections

1. Use `date` in conjunction with the redirection to insert the current date into the (new) file `current_date` (in your homedirectory).
2. Inspect the file to make sure it contains (only a single line with) the date.
3. Use `date` again to append the current date into the same file.
4. Again, check that this file now contains two lines with dates.
5. Use `grep` to filter out lines containing the term "TITLE" from all PDB files in the `exercises` directory and use redirection to insert them into a new file `pdb_titles.txt`.
6. (OPTIONAL) Upon inspection of the file `pdb_titles.txt`, you see that it also contains the names of the files in which the term was found. Use either the `grep` manpage or `grep -help` to find out how you can suppress this behaviour. Redo the previous

exercise such that the output file `pdb_titles.txt` only contains lines starting with `TITLE`.

MORE COMMANDLINE TOOLS

3.1 Command-line Tools

3.1.1 GZIP

gzip is a compression/decompression tool. When used on a file (without any parameters) it will compress it and replace the file by a compressed version with the extension `.gz` attached:

```
# ls textfile*
textfile
# gzip textfile
# ls textfile*
textfile.gz
```

To revert this / to uncompress, use the parameter `-d`:

```
# ls textfile*
textfile.gz
# gzip -d textfile
# ls textfile*
textfile
```

Note: As a convenience, on most Linux systems, a shellscript named `gunzip` exists which simply calls `gzip -d`

3.1.2 TAR

tar (tape archive) is a tool to handle archives. Initially it was created to combine multiple files/directories to be written onto tape, it is now the standard tool to collect files for distribution or archiving.

tar stores the permissions of the files within an archive and also copies special files (such as symlinks etc.), which makes it an ideal tool for archiving... Usually tar is used in conjunction with a compression tool such as `gzip` to create a compressed archive:

The most common command-line switches are:

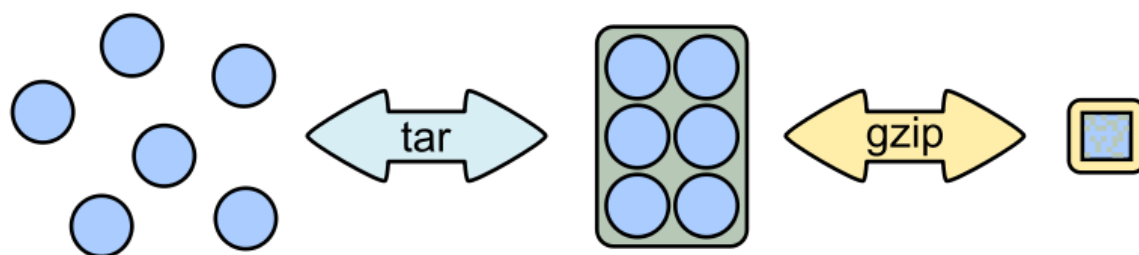


Figure 3.1: source: Th0msn80 (Wikipedia)

Option:	Effect:
-c	create an archive
-t	test an archive
-x	extract an archive
-z	use gzip compression
-f	filename filename of the archive

Note: Don't forget to specify the target filename. It needs to follow the -f parameter. Although you can combine options like such: `tar -czf archive.tar` the order matters, so `tar -cfz archive.tar` will *not* do what you want...

Creating an archive containing two files:

```
# tar -cf archive.tar textfile1 textfile2
```

Listing the contents of an archive:

```
# tar -tf archive.tar
textfile1
textfile2
```

Extracting an archive:

```
# tar -xf archive.tar
```

Creating and extracting a compressed archive containing two files:

```
# tar -czf archive.tar.gz textfile1 textfile2
# tar -xzf archive.tar.gz
```

3.1.3 GREP

Find lines matching a pattern in textfiles.

Usage: `grep [options] pattern file(s)`

```
# grep -i ensembl P04637.txt
```

```
DR Ensembl; ENST00000269305; ENSP00000269305; ENSG00000141510.
DR Ensembl; ENST00000359597; ENSP00000352610; ENSG00000141510.
DR Ensembl; ENST00000419024; ENSP00000402130; ENSG00000141510.
DR Ensembl; ENST00000420246; ENSP00000391127; ENSG00000141510.
DR Ensembl; ENST00000445888; ENSP00000391478; ENSG00000141510.
DR Ensembl; ENST00000455263; ENSP00000398846; ENSG00000141510.
```

Useful options:

Option:	Effect:
-v	Print lines that do not match
-i	Search case-insensitive
-l	List files with matching lines, not the lines itself
-L	List files without matches
-c	Print count of matching lines for each file

Count the number of fasta sequences (they start with a ">") in a file:

```
# grep -c '>' twofiles.fasta
2
```

List all files containing the term "Ensembl":

```
# grep -l Ensembl *.txt
P04062.txt
P12931.txt
```

3.1.4 SED

sed is a Stream Editor, it modifies text (text can be a file or a pipe) on the fly.

Usage: 'sed command file',

The most common usecases are:

Usecase	Command:
Substitute TEXT by REPLACEMENT:	's/TEXT/REPLACEMENT/'
Transliterate the characters x a, and y b:	'y/xy/ab/'
Print lines containing PATTERN:	'/PATTERN/p'
Delete lines containing PATTERN:	'/PATTERN/d'

```
# echo "This is text." | sed 's/text/replaced stuff/'
This is replaced stuff.
```

By default, text substitution are performed only once per line. You need to add a trailing 'g' option, to make the substitution 'global' ('s/TEXT/REPLACEMENT/g'), meaning all occurrences in a line are substituted (not just the first in each line). Note the difference:

```
# echo "ACCAAGCATTGGAGGAATATCGTAGGTAAA" | sed 's/A/_/'
_CCAAGCATTGGAGGAATATCGTAGGTAAA
```

```
# echo "ACCAAGCATTGGAGGAATATCGTAGGTAAA" | sed 's/A/_/g'
_CC__GC_TTGG_GG__T_TCGT_GGT__
```

When used on a file, sed prints the file to standard output, replacing text as it goes along:

```
# echo "This is text" > textfile
# echo "This is even more text" >> textfile
# sed 's/text/stuff/' textfile
This is stuff
This is even more stuff
```

sed can also be used to print certain lines (not replacing text) that match a pattern. For this you leave out the leading 's' and just provide a pattern: '/PATTERN/p'. The trailing letter determines, what sed should do with the text that matches the pattern ('p': print, 'd': delete)

```
# sed '/more/p' textfile
This is text
This is even more text
This is even more text
```

As sed by default prints each line, you see the line that matched the pattern, printed twice. Use option '-n' to suppress default printing of lines.

```
# sed -n '/more/p' textfile
This is even more text
```

Delete lines matching the pattern:

```
# sed '/more/d' textfile
This is text
```

Multiple sed statements can be applied to the same input stream by prepending each by option '-e' (edit):

```
# sed -e 's/text/good stuff/' -e 's/This/That/' textfile
That is good stuff
That is even more good stuff
```

Normally, sed prints the text from a file to standard output. But you can also edit files in place. Be careful - this will change the file! The '-i' (in-place editing) won't print the output. As a safety measure, this option will ask for an extension that will be used to rename the original file to. For instance, the following option '-i.bak' will edit the file and rename the original file to textfile.bak:

```
# sed -i.bak 's/text/stuff/' textfile
# cat textfile
This is stuff
This is even more stuff
# cat textfile.bak
```

```
This is text
This is even more text
```

3.1.5 AWK

awk is more than just a command, it is a complete text processing language (the name is an abbreviation of the author's names). Each line of the input (file or pipe) is treated as a record and is broken into fields. Generally, awk commands are of the form: "awk condition { action }", where:

- condition is typically an expression
- action is a series of commands

If no condition is given, the action is applied to each line, otherwise just to the lines that match the condition.

```
# awk '{print}' textfile
This is text
This is even more text

# awk '/more/ {print}' textfile
This is even more text
```

awk reads each line of input and automatically splits the line into columns. These columns can be addressed via \$1, \$2 and so on (\$0 represents the whole line). So an easy way to print or rearrange columns of text is:

```
# echo "Bob likes Sue" | awk '{print $3, $2, $1}'
Sue likes Bob

# echo "Master Obi-Wan has lost a planet" | awk '{print $4,$5,$6,$1,$2,$3}'
lost a planet Master Obi-Wan has
```

awk splits text by default on whitespace (spaces or tabs), which might not be ideal in all situations. To change the field separator (FS), use option '-F' (remember to quote the field separator):

```
# echo "field1,field2,field2" | awk -F',' '{print $2, $1}'
field2 field1
```

Note two things here: First, the field separator is not printed, and second, if you want to have space between the output fields, you actually need to separate them by a comma or they will be catenated together...

```
# echo "field1,field2,field2" | awk -F',' '{print $1 $2 $3}'
field1field2field3
```

You can also combine the pattern matching and the column selection techniques:

```
# awk '/more/ {print $3}' textfile
even
```

awk really is powerful in filtering out columns, you can for instance print only certain columns of certain lines. Here we print the third column of those lines where the fourth column is 'more':

```
# awk '$4=="more" {print $3}' textfile
even
```

Note the double equal signs "==" to check for equality and note the quotes around "more". If you want to match a field, but not exactly, you can use '~' instead of '==':

```
# awk '$4~"ore" {print $3}' textfile
even
```

3.2 Hints

3.2.1 Quoting

In Programming it is often necessary to "glue together" certain words. Usually, a program or the shell splits sentences by whitespace (space or tabulators) and treats each word individually. In order to tell the computer that certain words belong together, you need to "quote" them, using either single (') or double (") quotes. The difference between these two is generally that within double quotes, variables will be expanded, while everything within single quotes is treated as string literal. When setting a variable, it doesn't matter which quotes you use:

```
# MYVAR=This is set
-bash: is: command not found

# MYVAR='This is set'
# echo $MYVAR
This is set
# MYVAR="This is set"
# echo $MYVAR
This is set
```

However, it does matter, when using (expanding) the variable: Double quotes:

```
# export MYVAR=123
# echo "the variable is $MYVAR"
the variable is 123
# echo "the variable is set" | sed "s/set/$MYVAR/"
the variable is 123
```

Single quotes:

```
# export MYVAR=123
# echo 'the variable is $MYVAR'
```

```
the variable is $MYVAR
# echo "the variable is set" | sed 's/set/$MYVAR/'
the variable is $MYVAR
```

Weird things can happen when parsing data/text that contains quote characters:

```
# MYVAR='Don't worry. It's ok.'; echo $MYVAR
>
# you need to press Ctrl-C to abort
# MYVAR="Don't worry. It's ok."; echo $MYVAR
Don't worry. It's ok.
```

3.2.2 Expanding and Escaping

You already learned how to expand a variable such that its value is used instead of its name:

```
# export MYVAR=123
# echo "the variable is $MYVAR"
the variable is 123
```

“Escaping” a variable is the opposite, ensuring that the literal variable name is used instead of its value:

```
# export MYVAR=123

# echo "the \ $MYVAR variable is $MYVAR"
the $MYVAR variable is 123
```

Note: The “escape character” is usually the backslash “\”.

I/O REDIRECTION

Three IO “channels” are available by default:

- **Standard input (STDIN, Number: 0):** The input for your program, normally your keyboard but can be an other program (when using pipes or IO redirection)
- **Standard output (STDOUT, Number: 1):** Where your program writes its regular output to. Normally your terminal
- **Standard error (STDERR, Number: 2):** Where your programs normally write their error message to. Normally your terminal

Input, output and error messages can be redirected from their default “targets” to others. If using the file descriptor numbers (0, 1, 2) in redirections, then there must be no whitespace between the numbers and the redirection operators.

Note: Redirect to `/dev/null` to discard the output of any command

Write the output of *cmd* into *afile*. This will **overwrite** *afile*.

```
$ cmd > afile
```

Write the output of *cmd* into *afile*. This will **append** to *afile*

```
$ cmd >> *afile*
```

Discard the output of *cmd*

```
$ cmd > /dev/null
```

Write the output of *cmd* into *afile* (overwriting the file!) and write STDERR to the same place

```
$ cmd > afile 2>&1
```

Append the output and error messages of *cmd* to *afile*

```
$ cmd >> afile 2>&1
```

Same as above

```
$ cmd > afile 2> afile
```

Append the output of *cmd* to *afile* and discard error messages

```
$ cmd >> afile 2>/dev/null
```

Three times the same: Discard output and error messages completely

```
$ cmd > /dev/null 2>&1
$ cmd > /dev/null 2>/dev/null
$ cmd >& /dev/null
```

Use output of *cmd2* as standard input for *cmd1*

```
$ cmd1 < cmd2
```

See also

- [Bash One-Liners Explained, Part III: All about redirections](#) ¹
- [Bash Redirections Cheat Sheet](#) ²
- [Redirection Tutorial](#) ³

¹ <http://www.catonmat.net/blog/bash-one-liners-explained-part-three>

² <http://www.catonmat.net/blog/bash-redirections-cheat-sheet>

³ http://wiki.bash-hackers.org/howto/redirection_tutorial

VARIABLES

The shell knows two types of variables: “Local” shell variables and “global” exported environment variables. By convention, environment variables are written in upper-case letters.

Shell variables are only available to the current shell and not inherited when you start an other shell or script from the commandline. Consequently, these variables will not be available for your shellscripts.

Environment variables are inherited to shells and scripts started from your current.

5.1 Setting, Exporting and Removing Variables

Variables are set (created) by assigning them a value

```
# MYVAR=something::
```

There must be no whitespace around the equal sign. To create an environment variable, export is used. You can either export while assigning a value or in a separate step. Both of the following procedures are equivalent:

```
# export MYGLOBALVAR="something else"
```

```
# MYGLOBALVAR="something else"  
# export MYGLOBALVAR
```

Note: There is no \$ in front of the variable!

Variables are removed with unset:

```
# unset MYVAR
```

Note: Assigning a variable an empty value (MYVAR=) will *not* remove it but simply set its value to the empty string!

5.2 Listing Variables

You can list all your current environment variables with `env` and all shell variables with `set`. The list of shell variables will also contain all environment variables

5.3 Variable Inheritance

Only environment variables will be available in shells and scripts started from your current shell. However in shell commands run in subshells (i.e. commands run within round brackets) also local (shell) variables of your current shell are available.

5.4 Examples

Consider the following small shellscript *vartest.sh*:

```
#!/bin/sh
echo $MYLOCALVAR
echo $MYGLOBALVAR
echo -----
```

We will use it in the following examples to illustrate the various variable inheritances:

Set the variables and run the script i.e. in a new shell

```
# export MYGLOBALVAR="I am global"
# MYLOCALVAR="I am local"
# ./vartest.sh

I am global
-----
```

“source” the script, i.e. run it within your current shell

```
# ./vartest.sh
I am local
I am global
-----
```

Access the variables in a subshell:

```
# (echo $MYGLOBALVAR; echo $MYLOCALVAR)
I am global
I am local
```

BASIC SHELL SCRIPTING

6.1 What is a Script?

A script is nothing else than a number of shell command place together in a file. The simplest script is maybe just a complex oneliner that you don't want to type each time again. More complex scripts are seasoned with control elements (conditions and loops) which allow for a sophisticated command flow. scripts might allow for configuration and customization, thus allowing one script to be flexibly used in several different environments. Whatever you do in a script, you can also do on the commandline. This is also the first way to test your scripts step by step! Script Naming and Organization It is good practice – though not technically required – to give your scripts an extension which specifies their type. I.e. “.sh” for Bourne Shell and Bourne Again Shell scripts, “.csh” for C-Shell scripts. Sometimes “.bash” for Bourne Again Shell scripts is used. We recommend to either store all scripts in one location (e.g. ~/bin) and add this location to your \$PATH variable or to store the scripts together with the files that are processed by the script. If you use scripts to process data, then the scripts should probably be archived together with the data files Running a Script There are basically three ways to run a script: a) the location to your script is not in your \$PATH variable, then you have to specify the full path to the script:

```
/here/is/my/script.sh  
[...]
```

2. the location to the script is in the \$PATH variable, then you can simply type its name:

```
script.sh  
[...]
```

In both situations, the script will need to have execute permissions to be run. If for some reason you can only read but not execute the script, then it can still be run by c) specifying the interpreter. The full path (relative or absolute) to script has to be provided in this case, no matter whether the script location is already contained in \$PATH or not:

```
/bin/sh /here/is/my/script.sh  
[...]
```

6.1.1 Basic Structure of a Shellscript

Shellscripts have the following general structure:

1. A line starting with “#!” which defines the interpreter (i.e. the program used to run the script). This line is called the “shebang line” and must be the first line in a script
2. A section where the configuration takes place, e.g. paths, options and commands are defined and it is made sure, that all prerequisites are met
3. A section where the actual processing is done. This includes error handling
4. A controlled exit sequence, which includes cleaning up all temporary files and returning a sensible exit status

This is merely a recommendation to keep your scripts well structured. None of these sections are mandatory.

6.1.2 Readability and Documentation

Make your script easily readable. Use comments and whitespace and avoid super compact but hardly understandable commandlines. Always take into account, that not only the shell, also human beings will probably have to read and understand your script. Even if your script is very simple – document it! This helps others understand what you did, but – most important – it helps you remember what you did, when you have to reuse the script in the future.

Documentation is done either by writing comments into the script or by creating a special documentation file (README.txt or similar). Documenting in the script can be done in several ways: #. A preamble in the script, outlining the purpose, parameters and variables of the script as well as some information about authorship and perhaps changes #. Within the script as blocks of text or “End of line” comments

To write a comments use the hash sign (“#”). Everything after a “#” is ignored when executing a script.

Shebang line:

```
#!/bin/sh
#
# myscript.sh
```

Preamble with a short description, usage information, authorship etc.:

```
# myscript.sh
# General purpose script for extracting Glycine
# occurrences in a datafile.
# Usage: myscript.sh datafile
# Exit values:
#   1: No datafile given or file doesn't exist
#   2: No Glycine found
#
# Author: Me, myself and I
```

```
# Date: Heidelberg, December 12., 2012
#
```

Configuration:

```
# --- Configuration ---
GREPCMD=/bin/grep
DATAFILE=$1
```

Checking prerequisites and sane environment:

```
# --- Check prerequisites ---
# first check for $1
if [ -z $DATAFILE ]
then
    echo "No datafile given" 1>&2 # print on STDERR
    echo "USAGE: $0 datafile"
    exit 1
fi
# then check if the file exists
if [ ! -f $DATAFILE ]
then
    echo "Datafile $DATAFILE does not exist!" 1>&2
    exit
fi
```

This is what you actually wanted to do:

```
# --- Now processing---
$GREPCMD -q Glycine $DATAFILE # Where is Glycine?
# --- Exit ---
```

Ensure a valid and meaningful exit status:

```
if [ $? -eq 0 ]
then
    exit 0
else
    exit 2
fi
```

Full script:

```
1  #!/bin/sh
2  #
3  # myscript.sh
4  # General purpose script for extracting Glycine
5  # occurrences in a datafile.
6  # Usage: myscript.sh datafile
7  # Exit values:
8  #     1: No datafile given or file doesn't exist
9  #     2: No Glycine found
10 #
11 # Author: Me, myself and I
```

```
12 # Date: Heidelberg, December 12., 2012
13 #
14 # --- Configuration ---
15 GREPCMD=/bin/grep
16 DATAFILE=$1
17 # --- Check prerequisites ---
18 # first check for $1
19 if [ -z $DATAFILE ]
20 then
21     echo "No datafile given" 1>&2 # print on STDERR
22     echo "USAGE: $0 datafile"
23     exit 1
24 fi
25 # then check if the file exists
26 if [ ! -f $DATAFILE ]
27 then
28     echo "Datafile $DATAFILE does not exist!" 1>&2
29     exit
30 fi
31 # --- Now processing---
32 $GREPCMD -q Glycine $DATAFILE # Where is Glycine?
33 # --- Exit ---
34 if [ $? -eq 0 ]
35 then
36     exit 0
37 else
38     exit 2
39 fi
```

6.1.3 Reporting Success or Failure – The Exit Status

Commands report their success or failure by their exit status. An exit status of 0 (zero) indicates success, while any exit status greater than 0 indicates an error. Some commands report more than one error status. Refer to the respective manpages to see the meanings of the different exit status. The exit status of a script is usually the exit status of the last executed command, which is reported by the environment variable `$?`:

`$?`: The exit status of the last run command

See Also:

Ensuring a Sensible Exit Status about how to control the exit status of your script.

6.1.4 Command Grouping and Sequences

Execute commands in sequence: Commands can be concatenated to be executed one after the other unconditionally or based on the success of the respective previous command:

```
cmd1; cmd2
```

Example: Create a directory and change into it:


```
> pwd
/home/fthommen
> mkdir a; cd a
> pwd
/home/fthommen/a
```

Execute cmd2 only if cmd1 was successful:

```
cmd1 && cmd2
```

Example: Confirm that /etc exists::

```
> cd /etc && echo "/etc exists"
/etc/exists
```

Execute cmd3 only if cmd1 was not successful:

```
cmd1 || cmd2
```

Example: Warn if a directory doesn't exist:

```
> cd /etc || echo "/etc is missing!"
> cd /nowhere >&/dev/null || echo "/nowhere does not exist"
```

/nowhere does not exist

Group commands to create one single output stream: The commands are run in a subshell (i.e. a new shell is opened to run them)

```
( cmds )
```

Example: Change into /etc and list content. You are still in the same directory as you were before::

```
> pwd
/home/fthommen
> (cd /etc; ls)
[... directory listing here ...]
> pwd
/home/fthommen
```

Group commands to create one single output stream: The commands are run in the current (!) shell. The opening "{" must be followed by a blank and the last command must be succeeded by a ";".

```
{ cmds; }
```

Example: Change into /etc and list content. You are still in /etc after the bracketed expression (compare to the example above):

```
> pwd
/home/fthommen
> { cd /etc; ls; }
[... directory listing here ...]
> pwd
/etc
```

6.1.5 Control Structures

The following syntax elements will be described for sh/bash and for csh/tcsh. However since this course is mainly about sh/bash, examples will only be given for sh/bash. Some notes about csh/tcsh specialities might be given in the text. This is only a selection of the most useful or most common elements. There are much more in the manpages. All shells offer myriads of possibilities which cannot possibly be demonstrated in this course. Some of the described features might be specific to bash and not be available in a classical Bourne Shell on other systems.

Conditional Statements

if – then – else:

This is the most basic conditional statement: Do something depending on certain conditions. The basic syntax is:

sh/bash:

```
if condition1
then
  commands
elif condition2
  more commands
[...]
else
  even more commands
fi
```

csh/tcsh:

```
if (condition) then
  commands
else if (condition2) then
  more commands
[...]
else
  even more commands
endif
```

Conditions can be a) the exit status of a command or b) the evaluation of a logical or arithmetic expression:

1. **Evaluating the exit status of a command: Simply use the command as condition**
Example:

```
if grep -q root /etc/passwd
then
    echo root user found
else
    echo No root user found
fi
```

Note: To evaluate the exit status of a command in `cs`h/`tc`sh, it must be placed within curly brackets with blanks separating the brackets from the command:

`if ({ grep -q root /etc/passwd }) then [...]`

Note: Redirect the output of the command to be evaluated to `/dev/null` if you are only interested in the exit status and if the command doesn't have a "quiet" option.

Note: Redirection of commands in conditions does not work for `cs`h/`tc`sh

b) Evaluating of conditions or comparisons: Conditions and comparisons are evaluated using a special command `test` which is usually written as `"["` (no joke!). As `"["` is a command, it must be followed by a blank. As a speciality the `"["` command must be ended with `"]"` (note the preceding blank here)

In `cs`h/`tc`sh the `test` (or `["`) command is not needed. Conditions and comparisons are directly placed within the round braces.

SOLUTIONS TO THE EXERCISES

7.1 Commandline tools

7.1.1 TAR & GZIP

1. Use `gzip` to compress the file `P12931.txt`

```
$ gzip P12931.txt
```

2. Decompress the resulting file `P12931.txt.gz` (revert previous command)

```
$ gunzip P12931.txt.gz
```

or

```
$ gzip -d P12931.txt.gz
```

3. Use `tar` to create an archive containing all fasta files in the current directory into an archive called “`fastafiles.tar`”

```
$ tar -c -f fastafiles.tar *.fasta
```

4. Use `gzip` to compress the archive “`fastafiles.tar`”

```
$ gzip fastafiles.tar
```

5. How can you achieve the two previous steps “using `tar` to create archive” and “`gzip` the archive” in one command?

```
$ tar -c -z -f fastafiles.tar.gz *.fasta
```

Note: Note the `-z`

6. Test (list the contents of) the compressed archive “`fastafiles.tar.gz`”

```
$ tar -tf fastafiles.tar.gz
```

7. Download the compressed PDB file for entry 1Y57 from rcsb.org (eg. `wget "http://www.rcsb.org/pdb/files/1Y57.pdb.gz"`) and decompress it.

```
$ wget "http://www.rcsb.org/pdb/files/1Y57.pdb.gz"
$ gunzip 1Y57.pdb.gz
```

7.1.2 GREP

1. Which of the DNA files ENST0* contains “TATATCTAA” as part of the sequence?

```
$ grep "TATATCTAA" ENST0*

ENST00000380152.fasta:ACGGAAGAATGTGAGAAAAATAAGCAGGACACAATTACAAC TAAAAAATATATCTAA
ENST00000544455.fasta:ACGGAAGAATGTGAGAAAAATAAGCAGGACACAATTACAAC TAAAAAATATATCTAA
```

2. List only the names of the DNA files ENST0* that contain “CAACAAA” as part of the sequence.

```
$ grep "CAACAAA" ENST0*

ENST00000380152.fasta
ENST00000544455.fasta
```

3. Considering the previous example, would you consider grep a suitable tool to perform motif searches? Why not? Try to find the pattern “CAACAAA” by manual inspection of the first two lines of each sequence.

Note: Answer: When using grep as a motif searching tool, you need to keep in mind that grep (like sed and awk) is line-oriented, meaning that by default it only searches for a given motif in a single line. In the given example, upon manual inspection you will find the given motif also in the file ENST00000530893.fasta, which grep missed. You would need to think about how to do multi-line searches (eg. Removing line-breaks etc.)

4. Count the number of ATOMs (lines starting with “ATOM”) in the file 1Y57.pdb.
5. Does this number agree with the annotated number of atoms (Search the REMARKs for “protein atoms”)

```
$ grep -c "ATOM" 1Y57.pdb
3632
$ grep -i "protein atoms" 1Y57.pdb
REMARK      3      PROTEIN ATOMS                : 3600
```

This means there are 3600 atoms annotated in this PDB file, however we counted 3632. This is because grep also counted any occurrence of “ATOM” within REMARKS. We can avoid this by either filtering out the remarks:

```
$ grep -v REMARK 1Y57.pdb | grep -c ATOM
3600
```

...or by telling grep to only count those lines that start with “ATOM”:

```
$ grep -c ATOM 1Y57.pdb
3600
```

7.1.3 SED

1. Use sed to print only those lines that contain “version” in the files P05480.txt and P04062.txt

```
$ sed '/version/p' P05480.txt P04062.txt
```

2. Use sed to change the text “sequence version 3” to “sequence version 4” in the files P05480.txt and P04062.txt (without actually changing the files, just printing)

```
$ sed 's/sequence version 3/sequence version 4/' P05480.txt P04062.txt
```

3. Use sed to update the text “sequence version 3” to “sequence version 4” in the files P05480.txt and P04062.txt (this time, make the changes directly in the files)

```
$ sed -i.bak 's/sequence version 3/sequence version 4/' P05480.txt P04062.txt
```

4. Replace (transliterate) all occurrences of “r” by “l” and “l” by “r” (at the same time) in the file PROTEINS.txt (so that “structural” becomes “stluctular”)

```
$ sed 'y/rRlL/lLrR/' PROTEINS.txt
```

7.1.4 AWK

1. Use awk to print only those lines that contain “version” in the files P12931.txt and P05480.txt and think about how this procedure is different to sed.

```
$ awk '/version/ {print}' P12931.txt P05480.txt
```

This is very similar to sed, you also have to use the slashes “/” to define the search pattern. However the sed notation is a little more concise...

2. For all FASTA files that begin with “P” (“P*.fasta”) print only the second item of the header (split on “|”) eg. for “>sp|P12931|SRC_HUMAN Proto-oncogene”, print only “P12931”

```
$ awk -F'|' '/>/ {print $2}' P*.fasta
```

3. The file “P12931.csv” contains phosphorylation sites in the protein P12931. (If the file “P12931.csv” does not exist, use wget <http://phospho.elm.eu.org/byAccession/P12931.csv> to download it).

1. Column three of this file lists the amino acid position of the phosphorylation site. You are only interested in position 17 of the protein. Try to use “grep” to filter out all these lines containing “17”.

```
$ grep 17 P12931.csv
```

2. Now use awk to show all lines containing “17”.

```
$ awk '/17/ {print}' P12931.csv
```

3. Next try show only those lines where column three equals 17 (Hint: The file is semicolon-separated...).

```
$ awk -F';' '$3==17 {print}' P12931.csv
```

4. Finally print the PMIDs (column 6) of all lines that contain “17” in column 3.

```
$ awk -F';' '$3==17 {print $6}' P12931.csv
```

7.1.5 Quoting and Escaping

Familiarize yourself with quoting and escaping.

1. Run the following commands to see the difference between single and double quotes when expanding variables:

```
$ echo "$HOSTNAME"  
...  
$ echo '$HOSTNAME'
```

2. Next, use ssh to login to a different machine to run the same command there, again using both quoting methods:

```
$ ssh pc-atcteach01 'echo $HOSTNAME'  
...  
$ ssh pc-atcteach01 "echo $HOSTNAME"
```

Closely inspect the results; is that what you were expecting? Discuss this with your neighbour.

APPENDIX

8.1 Links and Further Informations

8.1.1 Links

- A full 500 page book about the Linux commandline for free(!): [LinuxCommand.org](http://linuxcommand.org) ¹
- Another nice introduction: “A beginner’s guide to UNIX/Linux” ²
- The “commandline starter” chapter of an O’Reilly book: [Learning Debian GNU/Linux - Issuing Linux Commands](http://oreilly.com/openbook/debian/book/ch04_01.html) ³
- A nice introduction to Linux/UNIX file permissions: “[chmod Tutorial](http://catcode.com/teachmod/)” ⁴
- [Linux Cheatsheets](http://www.cheat-sheets.org/#Linux) ⁵
- For the technically interested: [Linux Filesystem Hierarchy Standard](http://www.pathname.com/fhs/) ⁶ and [Linux Standard Base](http://www.linuxfoundation.org/collaborate/workgroups/lfs/) ⁷
- [Unix commands applied to bioinformatics](http://rous.mit.edu/index.php/Unix_commands_applied_to_bioinformatic) ⁸
- [BioPieces](http://code.google.com/p/biopieces) ⁹

8.1.2 Real printed paper books:

- Dietz, M., “Praxiskurs Unix-Shell”, O’Reilly (highly recommended!)
- Herold, H., “awk & sed”, Addison-Wesley
- Robbins, A., “sed & awk Pocket Reference”, O’Reilly
- Robbins, A. and Beebe, N., “Classic Shell Scripting”, O’Reilly
- Siever, E. et al., “Linux in a Nutshell”, O’Reilly

¹ <http://linuxcommand.org/>

² <http://www.mn.uio.no/astro/english/services/it/help/basic-services/linux/guide.html>

³ http://oreilly.com/openbook/debian/book/ch04_01.html

⁴ <http://catcode.com/teachmod/>

⁵ <http://www.cheat-sheets.org/#Linux>

⁶ <http://www.pathname.com/fhs/>

⁷ <http://www.linuxfoundation.org/collaborate/workgroups/lfs/>

⁸ http://rous.mit.edu/index.php/Unix_commands_applied_to_bioinformatic

⁹ <http://code.google.com/p/biopieces>

8.1.3 Live - CDs

A Live-CD is a complete bootable computer operating system which runs in the computer's memory, rather than loading from the hard disk drive. It allows users to experience and evaluate an operating system without installing it or making any changes to the existing operating system on the computer.

Just download an ISO-Image, burn it onto a CD/DVD and insert it into your DVD-Drive to boot your computer with Linux!

Fedora Live CD

This Live CD contains everything the [Fedora](#) ¹⁰ Linux operating system has to offer and it's everything you need to try out Fedora — you don't have to erase anything on your current system to try it out, and it won't put your files at risk. Take Fedora for a test drive, and if you like it, you can install Fedora directly to your hard drive straight from the Live Media desktop.

Knoppix

[Knoppix](#) ¹¹ is an operating system based on Debian designed to be run directly from a CD / DVD or a USB flash drive, one of the first of its kind for any operating system. When starting a program, it is loaded from the removable medium and decompressed into a RAM drive. The decompression is transparent and on-the-fly. More than 1000 software packages are included on the CD edition and more than 2600 are included on the DVD edition. Up to 9 gigabytes can be stored on the DVD in compressed form.

BioKnoppix

[Bioknoppix](#) ¹² is a customized distribution of Knoppix Linux Live CD. With this distribution you just boot from the CD and you have a fully functional Linux OS with open source applications targeted for the molecular biologist. Beside using RAM, Bio-knoppix doesn't touch the host computer, being ideal for demonstrations, molecular biology students, workshops, etc.

Vigyaan

[Vigyaan](#) ¹³ is an electronic workbench for bioinformatics, computational biology and computational chemistry. It has been designed to meet the needs of both beginners and experts.

¹⁰ <http://fedoraproject.org/wiki/FedoraLiveCD>

¹¹ <http://knopper.net/knoppix>

¹² <http://bioknoppix.hpcf.upr.edu>

¹³ <http://www.vigyaan.cd.org>

BioSlax

BioSLAX¹⁴ is a live CD/DVD suite of bioinformatics tools that has been released by the resource team of the BioInformatics Center (BIC), National University of Singapore (NUS).

8.2 About Bio-IT

Bio-IT is a community project aiming to develop and strengthen the bioinformatics user community at EMBL Heidelberg. It is made up of members across the different EMBL Heidelberg units and core facilities. The project works to achieve these aims, firstly, by providing a forum for discussing and sharing information and ideas on computational biology and bioinformatics, focused on the **Bio-IT portal**. Secondly, we organise and participate in a range of different networking and social activities aiming to strengthen ties across the community.

8.2.1 Resources

A list of biocomputing-related resources associated with the project, in the top-left “Resources” menu, including, for example there is help provided for installing software on Linux computers at EMBL, instructions on using the Git versions control system server provided by EMBL, and various other kinds of information.

8.2.2 Training and Outreach

The “Training and Outreach” menu, bottom left, provides information on events (courses and conferences), both internal to EMBL and organised elsewhere by other organisations, that are related to biocomputing and bioinformatics

8.2.3 Networking

Several different kinds of networking events for the Bio-IT community are being organised, including beer sessions for the EMBL community, and within-Heidelberg events for the larger Heidelberg biocomputing community.

8.2.4 Biocomputing expertise at EMBL

You can use the Bio-IT portal to search for people working at EMBL who have experience working with data or tools you might be interested in.

If you’ve not yet got a page up on the portal describing your own expertise, please do so. If you need any help doing this, you can read about this in the portal’s FAQ section, or get in touch with one of the site administrators.

¹⁴ <http://www.bioslax.com>

8.3 Acknowledgements

EMBL Logo © EMBL Heidelberg

Bio-IT Logo © Bio-IT Project. EMBL Heidelberg

Graphic of the Linux Filesystem on page 3 from the SuSE 9.2 manual © Novell Inc.

All other graphics © Frank Thommen, EMBL Heidelberg, 2012

INDEX

Symbols

\$HOME, 16

\$PAGER, 16

\$PATH, 16

\$PWD, 16

|, 15

A

append, 15

apropos, 6

C

cat, 10

cd, 7

chmod, 13

clear, 13

cp, 10

D

date, 7

disconnect, 15

E

echo, 16

env, 16, 32

environment variables, 16, 31

display, 16

set, 16

exit, 15

export, 16

F

file, 12

find, 13

G

grep, 11, 15

gzip, 21, 41

H

head, 11

hostname, 14

L

less, 16

M

man, 6

more, 16

P

pipe, 15

R

redirect, 15

S

set, 16, 32

T

tar, 21, 41

W

whoami, 14