

Introduction to the Linux Commandline

Date: September 27., 2012, EMBL Heidelberg
Authors: Holger Dinkel & Frank Thommen
Structural and Computational Biology Unit

Why Use the Commandline

- It's **fast**. Productivity is a word that gets tossed around a lot by so-called power users, but the command line can really streamline your computer use, assuming you learn to use it right.
- It's **easier to get help**. The command line may not be the easiest thing to use, but it makes life a whole lot easier for people trying to help you and for yourself when looking for help, especially over the internet. Many times it's as simple as the helper posting a few commands and some instructions and the recipient copying and pasting those commands. Anyone who has spent hours listening to someone from tech support say something like, "OK, now click this, then this, then select this menu command" knows how frustrating the GUI alternative can be.
- It's nearly **universal**. There are hundreds of Linux distros out there, each with a slightly different graphical environment. Thankfully, the various distros do have one common element: the command line. There are distro-specific commands, but the bulk of commands will work on any Linux system.
- It's **powerful**. The companies behind those other operating systems try their best to stop a user from accidentally screwing up their computer. Doing this involves hiding a lot of the components and tools that could harm a computer away from novices. Linux is more of an open book, which is due in part to its prominent use of the command line.

General Remarks Regarding Using UNIX/Linux Systems

Test before run

Anything written here has to be taken with a grain of salt. On another system – be it a different Linux distribution or another UNIXoid operating system – you might find the same command but without the support of some of the options taught here. It is even possible, that the same option has a different meaning on another system. With this in mind always make sure to test your commands (specially the "dangerous" ones which remove or modify files) when switching from one system to the other.

The Linux/UNIX environment

The behaviour of many commands is influenced or controlled by the so-called "environment". This environment is the sum of all your environment variables. Some of these environment variables will be shown towards the end of this course.

UPPERCASE, lowercase


Don't forget, that everything is case-sensitive. The only notable exception to this rule are hostnames.

The Filesystem

Linux filesystems start on top at the root directory (sic!) "/" which hierarchically broadens towards the ground:

HD 9/26/12 10:07 AM

Comment: Die Ausnahme wurde ich weglassen...

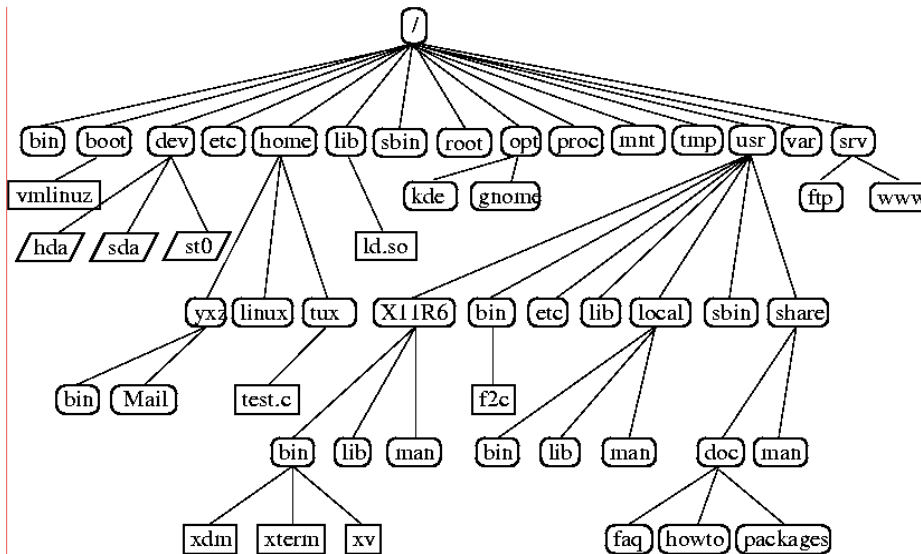

HD 9/26/12 10:07 AM

Comment: Evtl. Quellenangabe/Lizenz?

Depending on the Linux distribution you might or might not find all of above directories. Most important directories for you are `/bin` and `/usr/bin` (sometimes also `/usr/local/bin`) which contain the user software, `/home` which usually contains the users' homedirectories and `/tmp` which can be used to store temporary data (beware: Its content is regularly removed!).

Note: The terms "directory" and "folder" are used interchangeably in this document.

General Structure of Linux Commands

Linux commands have the following general structure:

command [option(s)] [argument(s)]

commandline options (sometimes called comandline switches) commonly have one of the two following forms: The short form *-character* or the long form *--string*. E.g.

```
man -h
man --help
```

Short options are usually – though not always – concatenable:

```
ls -l -A -h
ls -lAh
```

Some options require an additional argument, which is added with a blank to the short form and with an equal sign to the long form:

```
ls -I "*.pdf"
ls --ignore="*.pdf"
```

Since Linux incorporates commands from different sources, options can be available in one or both forms and you'll also encounter options with no dash at all and all kinds of mixtures:

```
tar cf file.tar -C .. file/
ps auxgww
```

A Journey Through the Commands

Please note, that all examples and usage instructions below are just a glimpse of what you can do and reflect our opinion on what's important and what's not. Most of these commands support many more options and different usages. Consult the manpages to find them.

Getting Help

-h/--help option, no parameters

Many commands support a help options, either through `-h` or through `--help`.

Other commands will show a help page or at least a short usage overview if you provide wrong commandline options

man – show the manual page of a command

Usage: `man command`

```
# man man
man(1)
man(1)

NAME
    man - format and display the on-line manual pages

SYNOPSIS
    man [-acdfFhkKtW] [--path] [-m system] [-p string] [-C
config_file]
[...]
#
```

For the navigation within a manpage see the chapter regarding less below.



The behaviour of man is dependent of the `$PAGER` environment variable

apropos – list manpages containing a keyword in their description

Usage: `apropos keyword`

```
# apropos who
[...]
who                (1)  - show who is logged on
who                (1p) - display who is on the system
whoami             (1)  - print effective userid
#
```

Use this to find candidates for specific task

/usr/share/doc

The `/usr/share/doc` directory in some Linux distributions contains additional documentation of installed software packages

Where am I, who am I

whoami – Print your username

Usage: `whoami`

```
# whoami
fthommen
#
```

hostname – Print the name of the computer

Usage: hostname

```
# hostname
pc-teach01
#
```

pwd – Print the current working directory

Usage: pwd

```
# pwd
/home/fthommen
#
```

date – Print current date and time

Usage: date

```
# date
Tue Sep 25 19:57:50 CEST 2012
#
```



The command time does something completely different and is not used to show the current time.

Moving Around

cd – Change the working directory

Usage: cd [new_directory]

```
# pwd
/home/fthommen
# cd /usr/bin
# pwd
/usr/bin
#
```

Special directories:

- " . ": The current working directory
- " .. ": The parent directory of the current working directory
- " ~ ": Your homedirectory



Using cd without a directory is equivalent to "cd ~" and changes into the users's homedirectory



Please note the difference between absolute pathes (starting with "/") and relative pathes (starting with a directory name)

```
# pwd
/usr
# cd /bin
# pwd
/bin
#
```

```
# pwd
/usr
# cd bin
# pwd
/usr/bin
#
```

See What's Around

ls – List directory contents

Usage: `ls [options] [file(s) or directory/ies]`

```
# ls
/home/fthommen
# ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 24 10:59 aa.pdf
```

Useful options:

- l: Long listing with permissions, user, group and last modification date
- 1: Print listing in one column only
- a: Show all files (hidden, "." and "..")
- A: Show almost all files (hidden, but not "." and "..")
- F: Show filetypes (nothing = regular file, "/" = directory, "*" = executable file, "@" = symbolic link)
- d: Show directory information instead of directory content
- t: Sort listing by modification time (most recent on top)

Organize Files and Folders

touch – Create a file or change last modification date of an existing file

Usage: `touch file(s) or directory/ies`

```
# ls afile
ls: afile: No such file or directory
# touch afile
# ls afile
afile
#
```

```
# ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 24 10:59 aa.pdf
# touch aa.pdf
# ls -l aa.pdf
-rw-r--r-- 1 fthommen cmueller 0 Sep 25 22:01 aa.pdf
#
```

rm – Remove files and directories

Usage: `rm [options] file(s) or directory/ies`

```
# ls afile
afile
# rm afile
# ls afile
ls: afile: No such file or directory
#
```

Useful options:

- i: Ask for confirmation of each removal
- r: remove recursively
- f: Force the removal (no questions, no errors if a file doesn't exist)

HD 9/26/12 10:13 AM

Comment: Directories nur wenn option "-r". Daher wuerde ich das hier gar nicht explizit erwahnen, sondern nur von files reden...



rm without the `-i` option will usually **not** ask you if you really want to remove the file or directory

mv – Move and rename files and folders

Usage: mv [options] sourcefile destinationfile
mv [options] sourcefile(s) destinationdirectory

```
# ls *.txt
a.txt
# mv a.txt b.txt
# ls *.txt
b.txt
#
```

Useful options:

-i: Ask for confirmation of each removal



You cannot overwrite an existing directory by another one with mv

HD 9/26/12 10:14 AM

Comment: Hmm. Haben wir "*" wildcards schon irgendwo erklärt?

mkdir – Create a new directory

Usage: mkdir [options] directory

```
# ls adir/
ls: adir/: No such file or directory
# mkdir adir
# ls adir
#
```

Useful options:

-p: Create parent directories (when creating nested directories)

```
# mkdir adir/bdir
mkdir: cannot create directory `adir/bdir': No such file or
directory
# mkdir -p adir/bdir
#
```

rmdir – Remove an empty directory

Usage: rmdir directory

```
# rmdir adir/
#
```



If the directory is empty, rmdir will complain and **not** remove it

cp – Copy files and folders

Usage: cp [options] sourcefile destinationfile
cp [options] sourcefile(s) destinationdirectory

```
# cp P12931.fasta backup_of_P12931.fasta
#
```

Useful options:

-r: Copy recursively

-i: Interactive operation, ask before overwriting an existing file

-p: Preserve owner, permissions and timestamp

View Files

cat – Print files on terminal (concatenate)

Usage: cat [options] file(s)

```
# cat P12931.fasta backup_of_P12931.fasta
[...]
```



cat only makes sense for short files or for e.g. combining several files into one. See the redirection examples later

less – View and navigate files

Usage: less [options] file(s)

```
# less P12931.fasta backup_of_P12931.fasta
[...]
```



This is the default “pager” for manpages under Linux unless you redefine your \$PAGER environment variable

Navigation within less:

up, down, right, left:	use cursor keys
top of document:	g
bottom of document:	G
search:	"/" + search term
find next match:	n
find previous match:	N
quit:	q

Extracting Informations from Files

grep – Find lines matching a pattern in textfiles

Usage: grep [options] pattern file(s)

```
# grep -i ensembl P04637.txt
DR Ensembl; ENST00000269305; ENSP00000269305; ENSG00000141510.
DR Ensembl; ENST00000359597; ENSP00000352610; ENSG00000141510.
DR Ensembl; ENST00000419024; ENSP00000402130; ENSG00000141510.
DR Ensembl; ENST00000420246; ENSP00000391127; ENSG00000141510.
DR Ensembl; ENST00000445888; ENSP00000391478; ENSG00000141510.
DR Ensembl; ENST00000455263; ENSP00000398846; ENSG00000141510.
#
```

Useful options:

- v: Print lines that do *not* match
- i: Search case-insensitive
- l: List files with matching lines, not the lines itself
- L: List files without matches
- c: Print count of matching lines for each file

head – Print first lines of a textfile

Usage: head [options] file(s)

```
# head /etc/passwd
root:x:0:0:root:/root:/bin/bash
bin:x:1:1:bin:/bin:/sbin/nologin
daemon:x:2:2:daemon:/sbin:/sbin/nologin
adm:x:3:4:adm:/var/adm:/sbin/nologin
lp:x:4:7:lp:/var/spool/lpd:/sbin/nologin
sync:x:5:0:sync:/sbin:/bin/sync
shutdown:x:6:0:shutdown:/sbin:/sbin/shutdown
halt:x:7:0:halt:/sbin:/sbin/halt
mail:x:8:12:mail:/var/spool/mail:/sbin/nologin
news:x:9:13:news:/etc/news:
#
```

Useful options:

- n num: Print num lines (default is 10)

tail – Print last lines of a textfile

Usage: tail [options] file(s)

```
# tail -n 3 /etc/passwd
xfs:x:43:43:X Font Server:/etc/X11/fs:/sbin/nologin
gdm:x:42:42::/var/gdm:/sbin/nologin
sabayon:x:86:86:Sabayon user:/home/sabayon:/sbin/nologin
#
```

Useful options:

-n num: Print *num* lines (default is 10)**-f**: "Follow" a file (print new lines as they are written to the file)**Useful Filetools****file – determine the filetype**

Usage: file [options] file(s)

```
# file /bin/date
/bin/date: ELF 32-bit LSB executable
# file /bin
/bin: directory
# file SRC_HUMAN.fasta
SRC_HUMAN.fasta: ASCII text
#
```

The command `file` uses certain tests and some magic to determine the type of a file

which – find a (executable) command

Usage: which [options] command(s)

```
# which date
/bin/date
# which eclipse
/usr/bin/eclipse
#
```

find – search/find files in any given directory

Usage: find [starting path(es)] [search filter]

```
# find /etc
/etc
/etc/printcap
/etc/protocols
/etc/xinetd.d
/etc/xinetd.d/ktalk
[...]
#
```

`find` is a powerful command with lots of possible search filters. Refer to the manpage for a complete list. Examples:

Find by name:

```
# find . -name SRC_HUMAN.fasta
./SRC_HUMAN.fasta
#
```

Find by size: List those entries in the directory `/usr/bin` that are bigger than 500kBytes:

```
# find /usr/bin -size +500k
/usr/bin/oparchive
/usr/bin/kiconedit
/usr/bin/opjitconv
[...]
#
```

Find by type (d=directory, f=file, l=link)

```
# find . -type d
.
./adir
#
```

Useful Terminal Tools

clear – Clear the “screen”

Usage: clear

```
# clear
#
```

In case the output of the terminal/screen gets cluttered, you can use `clear` to clear the screen...

If this doesn't work, you can use `reset` to perform a re-initialization of the terminal:

reset – Reset your terminal


Usage: reset [options]

```
# reset
#
```

Permissions

using `ls -l` to view entries of current directory:

```
# ls -l
drwxr-xr-x 2 dinkel gibson 4096 Sep 17 10:46 adir
lrwxrwxrwx 1 dinkel gibson 15 Sep 17 10:45 H1.fasta -> H2.fasta
-rw-r--r-- 1 dinkel gibson 643 Sep 17 10:45 H2.fasta
#
```

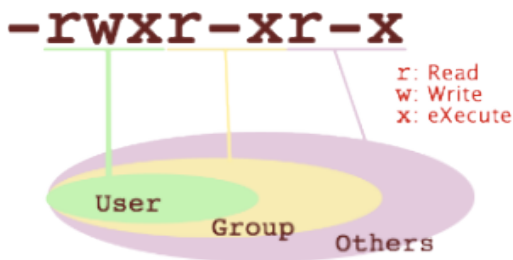

Changing Permissions

Permissions are set using the `chmod` (**change mode**) command.

Usage: `chmod [options] mode(s) file(s)`

```
# ls -l adir
drwxr-xr-x 2 dinkel gibson 4096 Sep 17 10:46 adir
# chmod u-w,o=w adir
# ls -l adir
dr-xr-x-w- 2 dinkel gibson 4096 Sep 17 10:46 adir
#
```

The mode is composed of

Who	What	Which permission
u: user/owner	+: add this permission	r: read

g: group
o: other
a: all

-: remove this permission
=: set exactly this permission

w: write
x: execute

Add executable permission to the group:

```
# chmod g+x file
```

Revoke this permission:

```
# chmod g-x file
```

Allow all to read a directory:

```
# chmod a+rx adir/
```

Remote access

To execute commands at a remote machine/server, you need to login to this machine. This is done using the **ssh** command (secure **shell**).

In its simplest form, it takes just the machinename as parameter (assuming the username on the local machine and remote machine are identical):

```
# ssh remote_server
```



Once logged in, use `hostname`, `whoami`, etc. to determine on which machine you are currently working!

To use a different username, you can use either:

```
# ssh username@remote_server
```

or

```
# ssh -l username remote_server
```

When connecting to a machine for the first time, it might display a warning:

```
# ssh sub-master
The authenticity of host 'sub-master (10.11.4.84)' can't be
established. RSA key fingerprint is
47:a4:0f:7b:c2:0f:ef:91:8e:65:fc:3c:f7:0c:53:8d. Are you sure you want
to continue connecting (yes/no)?
```

Type **yes** here.



If this message appears a second time, you should contact your IT specialist...

To **disconnect** from the remote machine, type:

```
# exit
```

IO and Redirections

Redirect

Redirect the output of one program into eg. a file: (**Caution:** you can easily overwrite files by this!)

Inserting the current date into a new file:

```
# date > file_containing_date
Filtering lines containing the term "src" from FASTA files and inserting them into
the file lines_with_src.txt:
# cd /exercises/
# grep -i "src" *.fasta > lines_with_src.txt
```

Append

Append something to a file (rather than overwriting it):

```
# date >> file_containing_date
#
```

Pipe

Use the pipe symbol (|) to feed the output of one program into the next program. Here: use `ls` to show the directory contents and then use `grep` to only show those that contain `fasta` in their name:

```
# cd /exercises
# ls | grep fasta
EPSINS.fasta
FYN_HUMAN.fasta
P12931.fasta
SRC_HUMAN.fasta
#
```

Environment Variables

Environment variables are a set of dynamic named values that can affect the way running processes will behave on a computer.

\$HOME

Contains the location of the user's home directory. Although the current user's home directory can also be found out through the C functions `getpwuid` and `getuid`, `$HOME` is often used for convenience in various shell scripts (and other contexts). Using the environment variable also gives the user the possibility to point to another directory.

\$PATH

Contains a colon-separated list of directories that the shell searches for commands that do not contain a slash in their name (commands with slashes are interpreted as file names to execute, and the shell attempts to execute the files directly).

\$PAGER

This variable contains the path to the program used to list the contents of files through (such as `less` or `more`).

\$PWD

This variable points to the current directory. Equivalent to the output of the command `"pwd"` when called without arguments.

Displaying environment variables:

Use `"echo"` to display individual variables or `"set"` or `"env"` to view all at once:

```
# echo $HOME
/localhome/teach01
# set
...
# env
...
```

Setting an environment variable:

Use “export” followed by the variable name and the value of the variable (separated by the equal sign) to set an environment variable:

```
# export PAGER=/usr/bin/less
```



An environment variable is only valid for your current session. Once you logout of your current session, it is lost or reset.

About Bio-IT

The Bio-IT project is a joint undertaking of the Research Units, the Core facilities and Central IT and provides you with a centralized information resource for bioinformatics-related data, tools and training resources which are available and maintained at the EMBL-Heidelberg. The Bio-IT Portal at <http://bio-it.embl.de/> serves as a focal point of project, providing links and background to biocomputing-related resources, training & outreach, networking and biocomputing expertise at EMBL.

Links and Further Informations

TBD.

Command Index

S

SPAGER 4, 8

|

| 12

A

Append 11

apropos 4

C

cat 7

cd 5

chmod 10

clear 10

cp 7

D

date 5

E

exit 11

F

file 9

find 9

G

grep 8

H

head 8

hostname 5

L

less 8

less, navigation 8

ls 6

M

man 4, 8

manpage 8

mkdir 7

mv 7

P

Permissions 10

Pipe 12

pwd 5

R

Redirect 11

reset 10

rm 6

rmdir 7

S

ssh 11

T

tail 9

touch 6

W

which 9

whoami 4