

# Project 1

Parker Brue<sup>1</sup>

<sup>1</sup>*Department of Physics and Astronomy, Michigan State University, East Lansing, MI 48823*

We present our Ferrari algorithm for solving linear equations. We wrote the one-dimensional Poisson equation, utilizing Dirichlet boundary conditions, as a linear set of equations and as a tridiagonal matrix. We compared a specialized algorithm for solving the tridiagonal matrix to an LU-decomposition of said matrix. Our best algorithm, the specialized solver, runs as  $4n$  FLOPS with  $n$  the dimensionality of the matrix.

## INTRODUCTION

As an introduction to the central ideas of the class, we studied the one-dimensional Poisson equation with Dirichlet boundary conditions. Namely, transforming the differential equation into a set of linear equations, and consequently, a matrix. We implemented a general algorithm, a specialized algorithm, and a LU-decomposition algorithm. In the course of this report, we introduce the theoretical model and the different algorithms we developed, then discuss the results of the different methods. Important points of comparison lie with relative error and relative speed of the calculation due to FLOPS.

## THEORY

### Theoretical solution of the one dimensional Poisson equation

In general, the one dimensional Poisson equation reads as follows:

$$-u''(x) = f(x) \quad (1)$$

Through discretized approximation of  $u$ , we can solve for  $f$  using a set of linear equations:

$$f(x) = -\frac{v_{i+1} + u_{i-1} - 2u_i}{h^2}; i = 1, \dots, n \quad (2)$$

Using Dirichlet boundary conditions,  $u_0 = u_{n+1} = 0$ , We can then rewrite this as a set of linear equations in the form of a tridiagonal matrix:

$$\hat{A} \cdot \hat{u} = \hat{f} \quad (3)$$

Consequently, we can solve these linear equations through forward and backward substitution.

### Specific Poisson equation

For our purposes of solving the Poisson equation, we assume a function

$$f(x) = 100e^{-10x} \quad (4)$$

and a closed form solution with the Dirichlet boundary conditions:

$$u(x) = 1 - (1 - e^{-10})x - e^{-10x} \quad (5)$$

### Solving a Tridiagonal Matrix

This is general tridiagonal matrix:

$$\begin{bmatrix} d_1 & e_1 & 0 & 0 \\ e_1 & d_2 & e_2 & 0 \\ 0 & e_2 & d_3 & e_{i-n} \\ 0 & 0 & e_{i-n} & d_n \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \\ u_3 \\ u_n \end{bmatrix} = \begin{bmatrix} v_1 \\ v_2 \\ v_3 \\ v_n \end{bmatrix}$$

We can reduce this generalized matrix into an upper triangular matrix from forward and backward substitution.

$$\tilde{f}_i = f_i - \frac{\tilde{f}_{i-1}e_{i-1}}{\tilde{d}_{i-1}}; \tilde{d}_i = d_i - e_{i-1}^2/\tilde{d}_{i-1} \quad (6)$$

$$u_i = (\tilde{f}_i - e_i u_{i+1} + 1)/\tilde{d}_i \quad (7)$$

where  $d_i$  are the diagonal matrix elements and  $e_i$  are the off diagonal matrix elements.

$$\begin{bmatrix} d_1 & e_1 & 0 & 0 \\ 0 & \tilde{d}_2 & e_2 & 0 \\ 0 & 0 & \tilde{d}_3 & e_{n-1} \\ 0 & 0 & 0 & \tilde{d}_n \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \\ u_3 \\ u_n \end{bmatrix} = \begin{bmatrix} v_1 \\ v_2 \\ v_3 \\ v_n \end{bmatrix}$$

We were able to create another program that performed matrix mathematics to solve for the set of linear equations. Taking a tridiagonal matrix, we can solve it using LU decomposition.

### LU-decomposition

$$\mathbf{A} = \mathbf{L}\mathbf{U} \quad (8)$$

$\mathbf{A}$ , the matrix can be decomposed into the product of  $\mathbf{U}$ , upper triangular matrix and  $\mathbf{L}$ , a lower triangular matrix

$$\mathbf{L}\mathbf{U}\mathbf{x} = \mathbf{b} \quad (9)$$

Which allows you to replace  $\mathbf{A}$  and then use either triangular matrix to solve the problem.

$$\mathbf{L}\mathbf{y} = \mathbf{b} \quad (10)$$

$$\mathbf{U}\mathbf{x} = \mathbf{x} \quad (11)$$

## ALGORITHMS

### METHODS

#### Relative error

In order to properly test the effectiveness of our algorithm, we are measuring the closeness, or relative error of our analytic solution:

$$\epsilon_i = \log_{10}\left(\left|\frac{v_i - u_i}{u_i}\right|\right); i = 1, \dots, n \quad (12)$$

$u_i$  is the analytic solution, and  $v_i$  is the numerical solution.

## RESULTS AND DISCUSSIONS

We ran the program with the step sizes of  $n = 1, 2$ , and 3, corresponding to a  $10 \times 10$ ,  $100 \times 100$ , and  $1000 \times 1000$  matrix. We also optimized our program through specialization. Diagonal matrix elements were set to 2 and off-diagonal elements were set to -1. FLOPS were reduced from 9 in the general case to 4 in the specialized case. The program was much more efficient, and faster as a consequence to the precalculation.

Analyzing step size, there is a clear difference from  $N=10^1$  and  $N=10^2$ , while  $N=10^2$  to  $N=10^3$  does not seem to superficially change as much as is demonstrated in the graphs below.

Further investigation shows that the overabundance of data points does give us the full curve, it also results in a much larger error, as shown in the table below. There seems to be a saddle point situated around  $N=10^2$ , wherein the calculation is optimized in regard to completeness of the graph and uncertainty from the numerical solution.

Step Size ( $n$ )	Max Relative Error ( $ \epsilon $ )
1	1.101
2	3.079
3	5.079
4	7.079
5	9.079
6	11.50
7	12.27

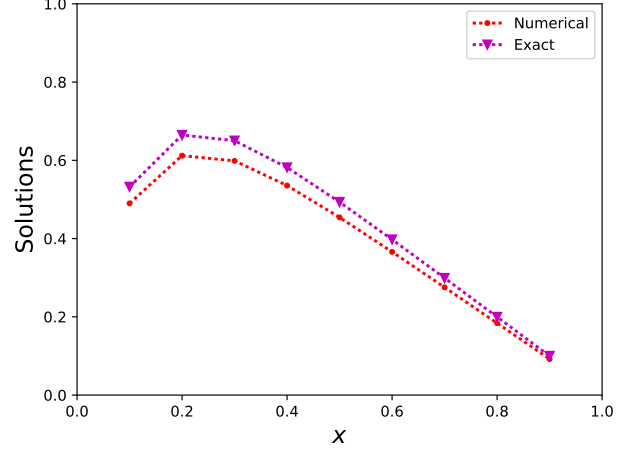


FIG. 1.  $n = 1$ . The x axis is the x values in the range  $[0,1]$  and the y axis is the resulting u values.

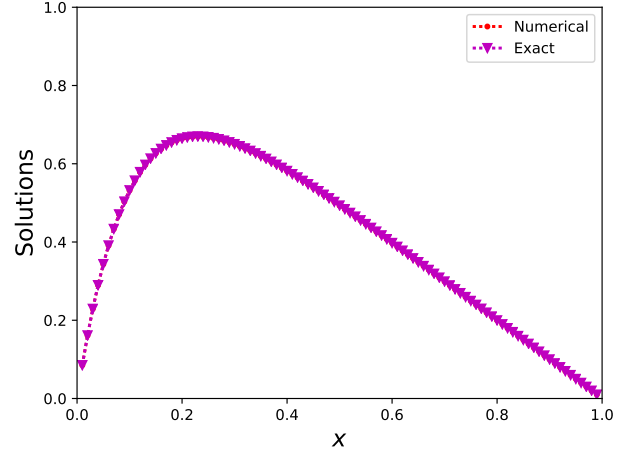


FIG. 2.  $n = 2$ . The x axis is the x values in the range  $[0,1]$  and the y axis is the resulting u values.

The above table shows us the absolute valued relative error results from varying step sizes of  $N = 10^n$  from 1 to 7. The step size error for  $n=7$  seems to be the breaking point, the error starts to widely fluctuate. Therefore, the largest step size we would recommend for an accurate result is  $n=6$ .

For further analysis, we included a timer in both the specialized program and the LU program, and compared the timing values for, for as large square matrices as either could reasonably calculate.

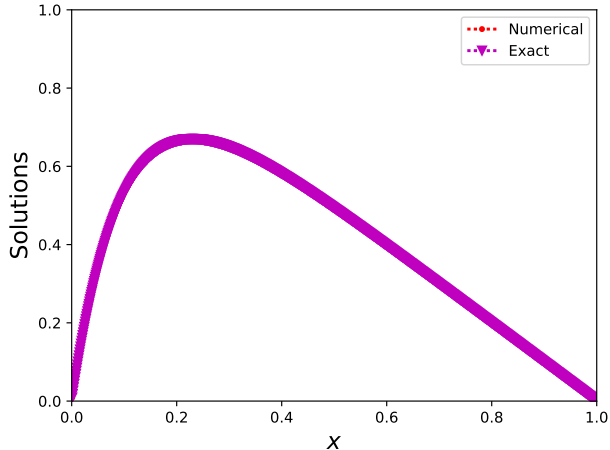


FIG. 3.  $n = 3$ . The x axis is the x values in the range  $[0,1]$  and the y axis is the resulting u values.

Column Size	Specialized Time (s)	LU Time (s)
$10^1$	0.000430	0.00127
$10^2$	0.001830	0.09897
$10^3$	0.009720	31.4228
$10^4$	0.0750	—
$10^5$	0.7340	—
$10^6$	7.820	—
$10^7$	92.2239	—

We found that specialized time was vastly more efficient over the LU time, as expected. We were unable to compute a LU matrix at  $N = 10^4$ , initializing the program with this input would immediately seize the program up. For the specialized solver,  $N = 10^7$  was the most reasonable limit, guessing at the size of the output file for  $N = 10^7$ , 400MB, we can assume that  $N = 10^8$  would not only take several hundred seconds to compute, but would result in a file size well over a GB, if not several.

## CONCLUSIONS

- 
- [1] G. A. Miller, A. K. Oppen, and E. J. Stephenson, *Annu. Rev. Nucl. Sci.* **56**, 253 (2006).