

HEAMNATH

20104028

```
In [1]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [2]: df=pd.read_csv("13_placement.csv")
df
```

```
Out[2]:
```

	cgpa	placement_exam_marks	placed
0	7.19	26.0	1
1	7.46	38.0	1
2	7.54	40.0	1
3	6.42	8.0	1
4	7.23	17.0	0
...
995	8.87	44.0	1
996	9.12	65.0	1
997	4.89	34.0	0
998	8.62	46.0	1
999	4.90	10.0	1

1000 rows × 3 columns

```
In [3]: df.head()
```

```
Out[3]:
```

	cgpa	placement_exam_marks	placed
0	7.19	26.0	1
1	7.46	38.0	1
2	7.54	40.0	1
3	6.42	8.0	1
4	7.23	17.0	0

DATA CLEANING AND DATA PREPROCESSING

In [4]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 1000 entries, 0 to 999
Data columns (total 3 columns):
#   Column                Non-Null Count  Dtype  
---  -
0   cgpa                   1000 non-null   float64
1   placement_exam_marks  1000 non-null   float64
2   placed                 1000 non-null   int64   
dtypes: float64(2), int64(1)
memory usage: 23.6 KB
```

In [5]: `df.describe()`

Out[5]:

	cgpa	placement_exam_marks	placed
count	1000.000000	1000.000000	1000.000000
mean	6.961240	32.225000	0.489000
std	0.615898	19.130822	0.500129
min	4.890000	0.000000	0.000000
25%	6.550000	17.000000	0.000000
50%	6.960000	28.000000	0.000000
75%	7.370000	44.000000	1.000000
max	9.120000	100.000000	1.000000

In [6]: `df.columns`

Out[6]: Index(['cgpa', 'placement_exam_marks', 'placed'], dtype='object')

In [7]: `df1=df.dropna(axis=1)`
`df1`

Out[7]:

	cgpa	placement_exam_marks	placed
0	7.19	26.0	1
1	7.46	38.0	1
2	7.54	40.0	1
3	6.42	8.0	1
4	7.23	17.0	0
...

	cgpa	placement_exam_marks	placed
995	8.87	44.0	1
996	9.12	65.0	1
997	4.89	34.0	0
998	8.62	46.0	1
999	4.90	10.0	1


```
In [8]: df1.columns
```

```
Out[8]: Index(['cgpa', 'placement_exam_marks', 'placed'], dtype='object')
```

EDA AND VISUALIZATION

```
In [9]: sns.pairplot(df1)
```


```
Out[9]: <seaborn.axisgrid.PairGrid at 0x235e003e7f0>
```

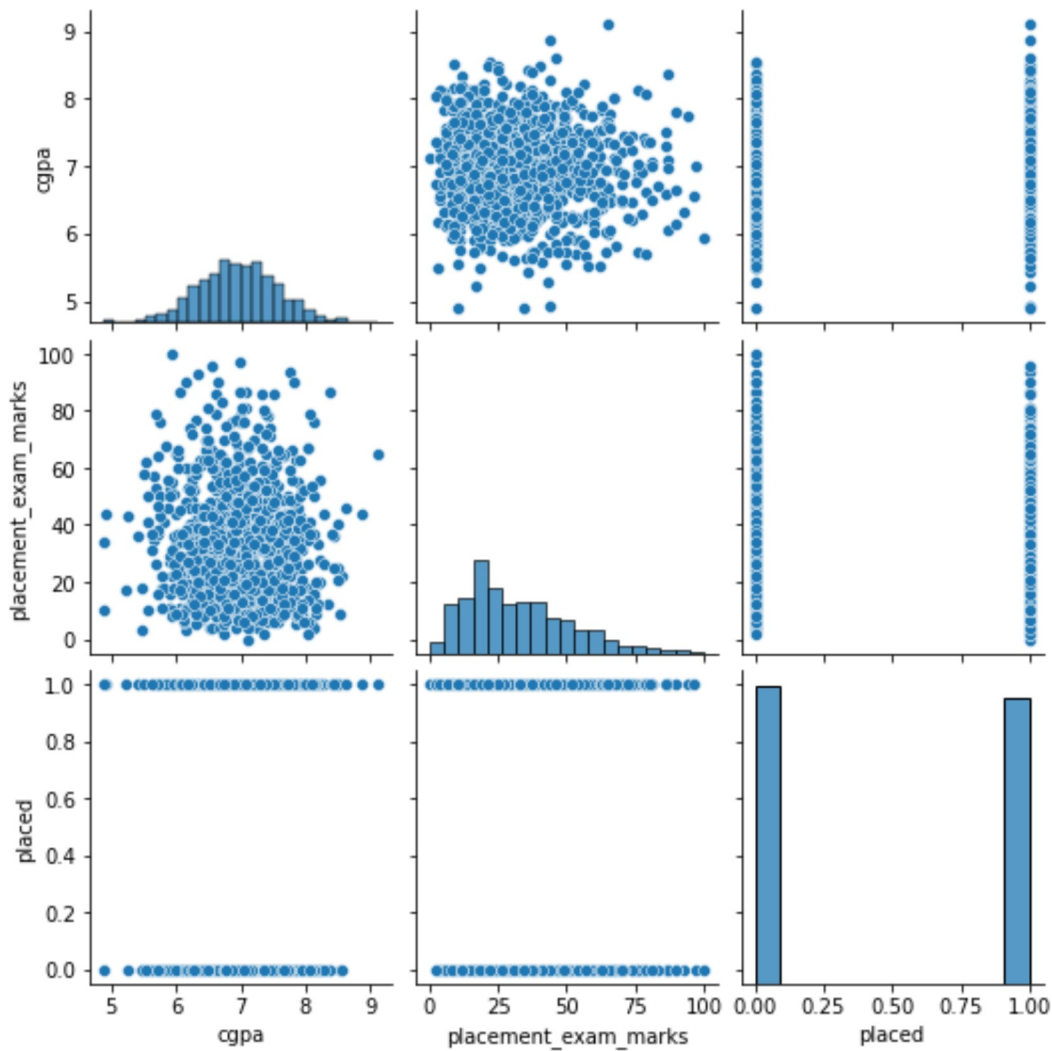

```
In [10]: sns.distplot(df1['placed'])
```


C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).
warnings.warn(msg, FutureWarning)

```
Out[10]: <AxesSubplot:xlabel='placed', ylabel='Density'>
```

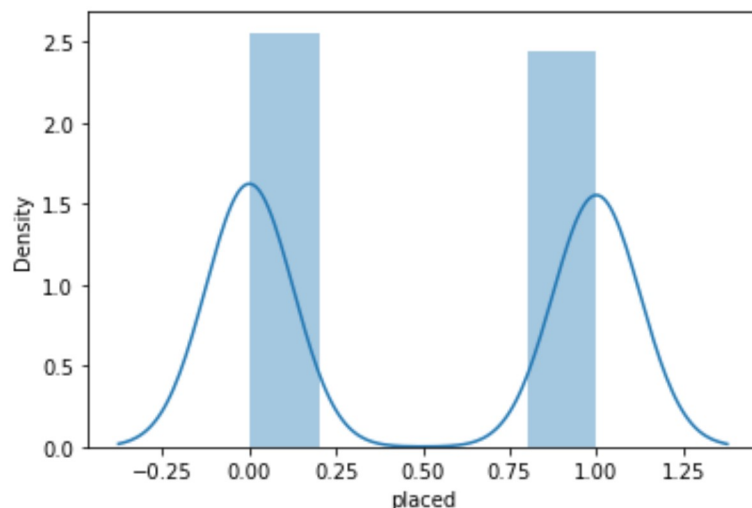

```
In [11]: sns.heatmap(df1.corr())
```

```
Out[11]: <AxesSubplot:>
```

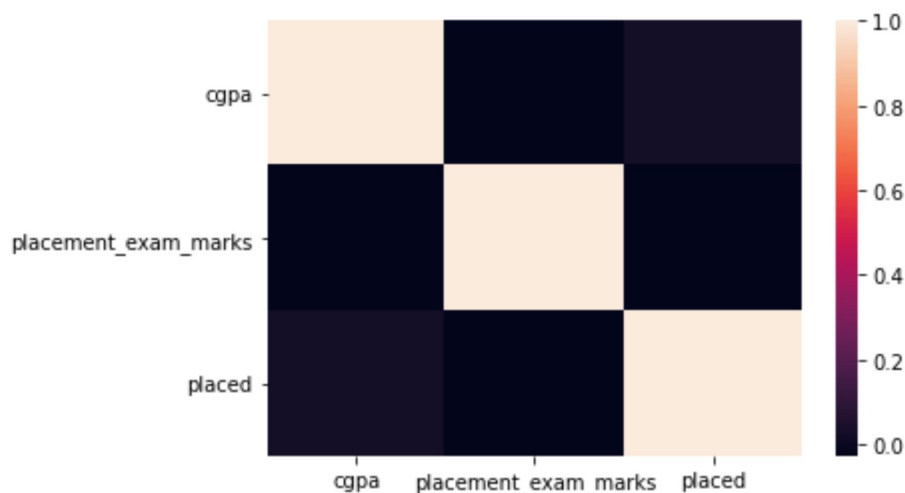

TO TRAIN THE MODEL AND MODEL BULDING

```
In [12]: x=df[['cgpa', 'placement_exam_marks']]
          y=df['placed']
```

```
In [13]: from sklearn.model_selection import train_test_split
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.3)
```

```
In [14]: from sklearn.linear_model import LinearRegression
lr=LinearRegression()
lr.fit(x_train,y_train)
```

```
Out[14]: LinearRegression()
```

```
In [15]: lr.intercept_
```

```
Out[15]: 0.14776527186288058
```


```
In [16]: coeff=pd.DataFrame(lr.coef_,x.columns,columns=['Co-efficient'])
coeff
```

```
Out[16]:
```

	Co-efficient
cgpa	0.047907
placement_exam_marks	0.000627

```
In [17]: prediction =lr.predict(x_test)
plt.scatter(y_test,prediction)
```

```
Out[17]: <matplotlib.collections.PathCollection at 0x235e6589580>
```

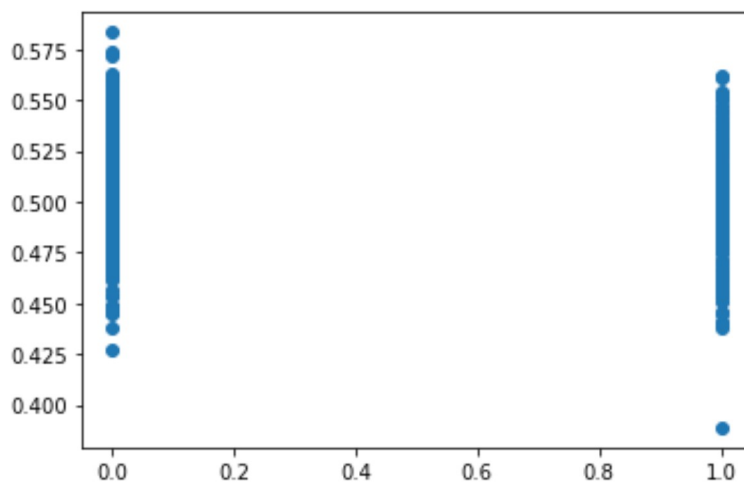

ACCURACY

```
In [18]: lr.score(x_test,y_test)
```

```
Out[18]: -0.023207387799506707
```