


Match Tracker Test Documentation

Games Default

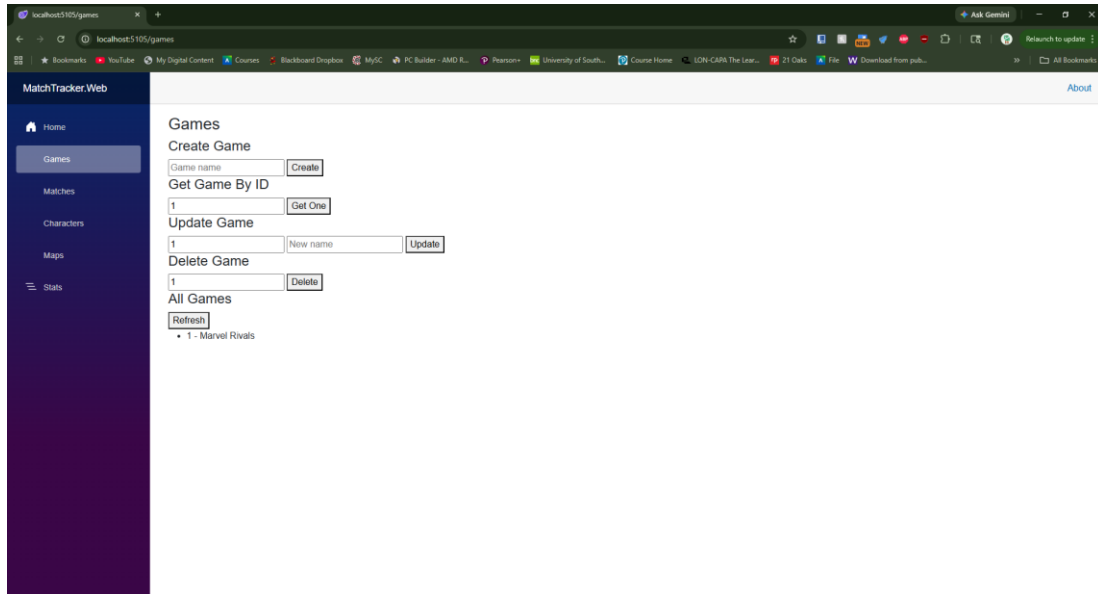


```
SQL Shell (psql)
Server [localhost]:
Database [postgres]:
Port [5432]:
Username [postgres]:
Password for user postgres:
psql (18.1)
WARNING: Console code page (437) differs from Windows code page (1252)
         8-bit characters might not work correctly. See psql reference
         page "Notes for Windows users" for details.
Type "help" for help.

postgres=# SELECT * FROM games;
 game_id |      name
-----+-----
       1 | Marvel Rivals
(1 row)

postgres=#
```

Games Create

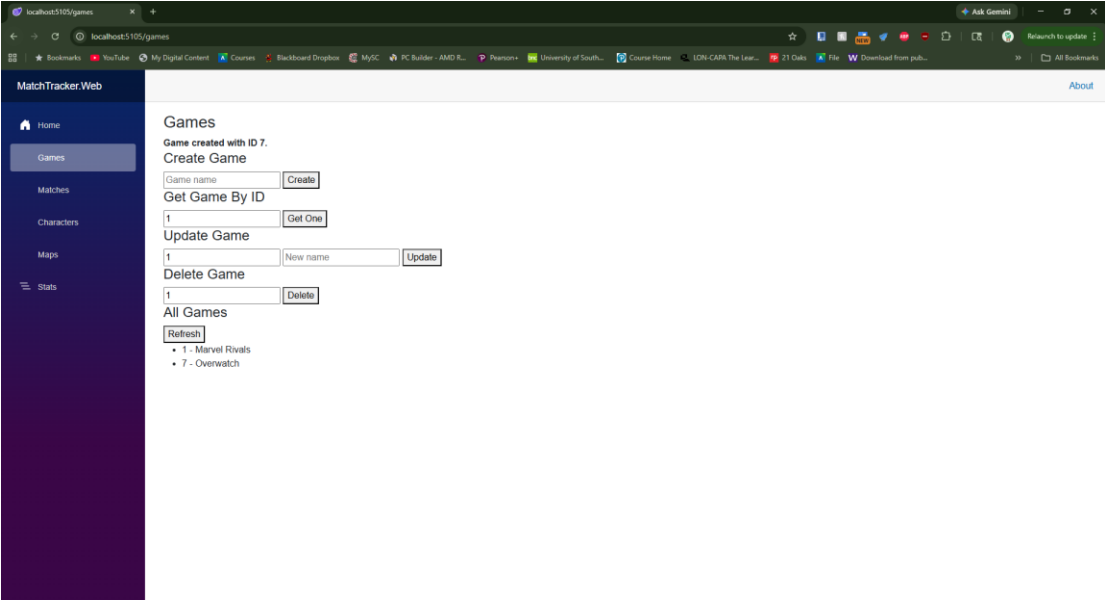


The screenshot shows a web application interface for 'MatchTracker.Web'. The left sidebar contains navigation links: Home, Games (selected), Matches, Characters, Maps, and Stats. The main content area is titled 'Games' and includes a message 'Game created with ID 7.' Below this are several forms: 'Create Game' with a 'Game name' input and a 'Create' button; 'Get Game By ID' with an input '1' and a 'Get One' button; 'Update Game' with an input '1' and a 'New name' input, followed by an 'Update' button; and 'Delete Game' with an input '1' and a 'Delete' button. At the bottom, there is an 'All Games' section with a 'Refresh' button and a list of games: '1 - Marvel Rivals' and '7 - Overwatch'.

```
postgres=# SELECT * FROM games;
 game_id |      name
-----+-----
       1 | Marvel Rivals
       7 | Overwatch
(2 rows)

postgres=#
```

Games Get One

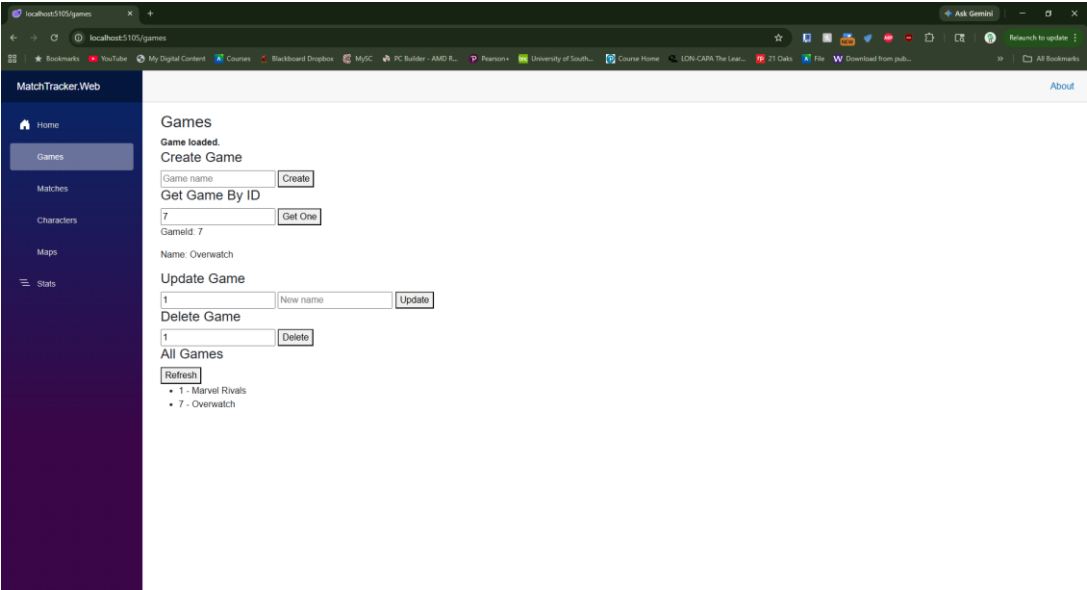


The screenshot shows the same web application interface, but the 'Get Game By ID' form is now populated with the value '7'. Below the input, the text 'Gameid: 7' and 'Name: Overwatch' is displayed. The 'All Games' section at the bottom still shows the list of games: '1 - Marvel Rivals' and '7 - Overwatch'.

```
postgres=# SELECT * FROM games WHERE game_id = 7;
 game_id |      name
-----+-----
       7 | Overwatch
(1 row)

postgres=#
```

Games Update

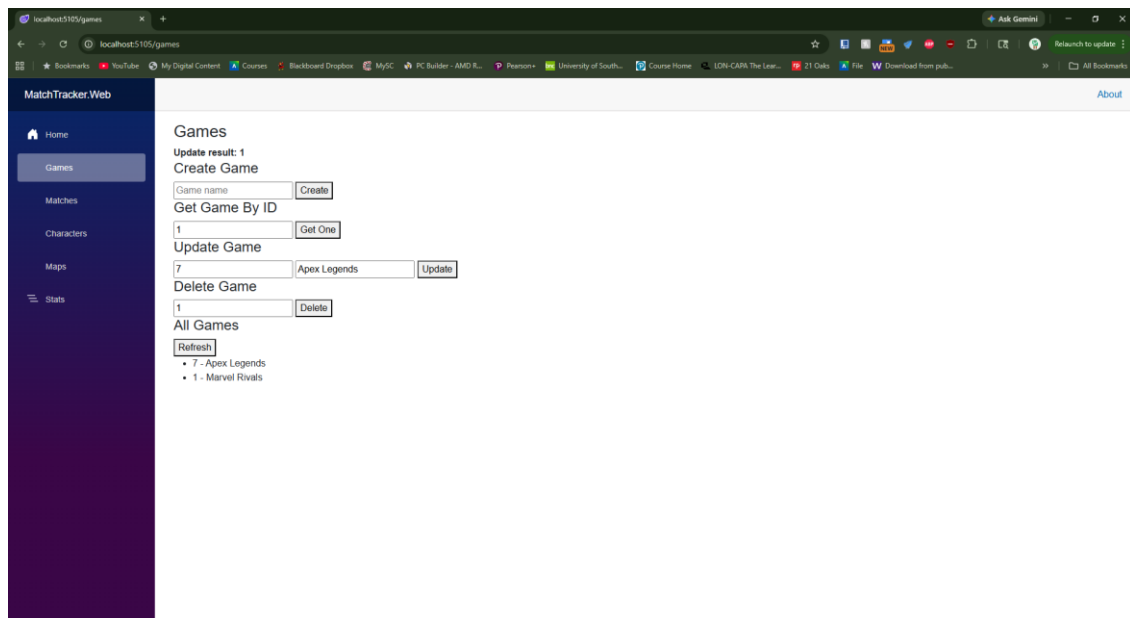


The screenshot shows the MatchTracker.Web application with the 'Games' tab selected. The page displays a sidebar with navigation links: Home, Games, Matches, Characters, Maps, and Stats. The main content area for Games includes a 'Create Game' form with a 'Game name' input and a 'Create' button. Below this is a 'Get Game By ID' section with an input field containing '1' and a 'Get One' button. The 'Update Game' section has an input field with '7', a dropdown menu set to 'Apex Legends', and an 'Update' button. The 'Delete Game' section has an input field with '1' and a 'Delete' button. At the bottom, the 'All Games' section shows a 'Refresh' button and a list of games: '7 - Apex Legends' and '1 - Marvel Rivals'.

```
postgres=# SELECT * FROM games;
 game_id |      name
-----+-----
       1 | Marvel Rivals
       7 | Apex Legends
(2 rows)
```

```
postgres=#
```

Games Delete

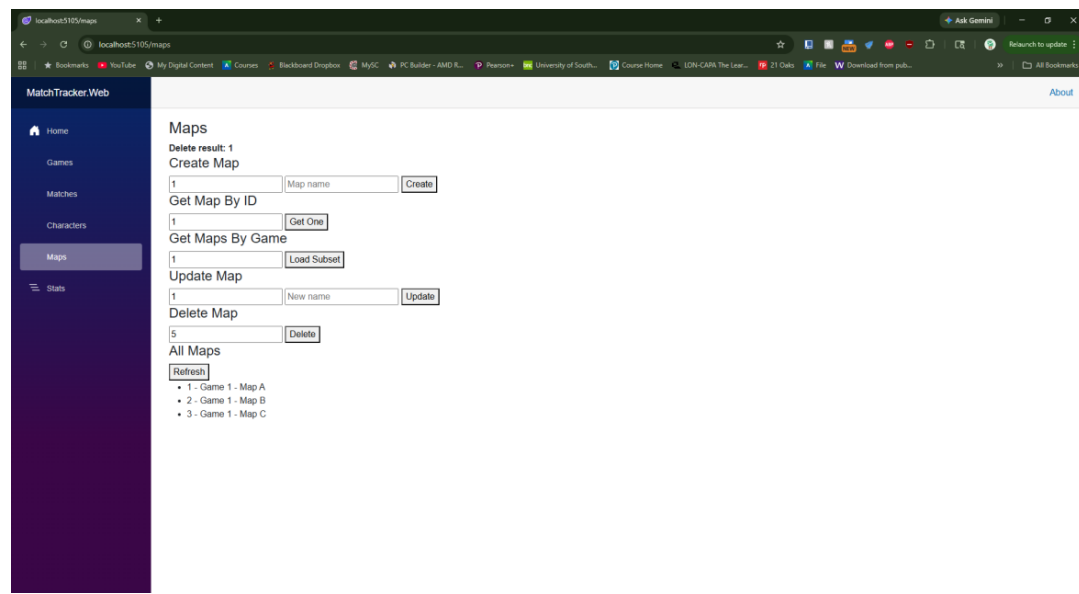

The screenshot shows the MatchTracker.Web application with the 'Maps' tab selected. The sidebar navigation is the same as the previous page. The main content area for Maps includes a 'Delete result: 1' message, a 'Create Map' form with a 'Map name' input and a 'Create' button, and a 'Get Map By ID' section with an input field containing '1' and a 'Get One' button. Below this is a 'Get Maps By Game' section with an input field containing '1' and a 'Load Subset' button. The 'Update Map' section has an input field with '1', a 'New name' input, and an 'Update' button. The 'Delete Map' section has an input field with '5' and a 'Delete' button. At the bottom, the 'All Maps' section shows a 'Refresh' button and a list of maps: '1 - Game 1 - Map A', '2 - Game 1 - Map B', and '3 - Game 1 - Map C'.

```
postgres=# SELECT * FROM maps;
 map_id | game_id | name
-----+-----+-----
       1 |       1 | Map A
       2 |       1 | Map B
       3 |       1 | Map C
(3 rows)
```

```
postgres=#
```

Matches Default

The image displays two screenshots. The top screenshot shows the MatchTracker.Web application interface, and the bottom screenshot shows the SQL Shell (psql) output of a query.

MatchTracker.Web Interface:

- Matches Section:**
 - Create Match:** Form with fields for Match ID (1), Date (03/16/2026 09:35 PM), Queue type, Map ID (optional), Result (W), DurationSec (optional), and Notes (optional). A 'Create' button is present.
 - Get Match By ID:** Form with a field for Match ID (1) and a 'Get One' button.
 - Get Matches By Game:** Form with a field for Game ID (1) and a 'Load Subset' button.
 - Update Match:** Form with fields for Match ID (1), Date (03/16/2026 09:35 PM), Queue type, Map ID (optional), Result (W), and DurationSec (optional). An 'Update' button is present.
 - Delete Match:** Form with a field for Match ID (1) and a 'Delete' button.
- All Matches:** A list of matches with a 'Refresh' button. The list shows 15 matches, each with a game ID, match ID, date, queue type, map ID, result, duration, and notes.

SQL Shell (psql) Output:

```
postgres=# SELECT * FROM matches;
match_id | game_id | match_date | queue_type | map_id | result | duration_sec | notes
-----|-----|-----|-----|-----|-----|-----|-----
1 | 1 | 2026-02-03 20:25:47.851628 | Quickplay | 2 | L | 605 | 
2 | 1 | 2026-02-02 20:25:47.851628 | Quickplay | 3 | W | 610 | 
3 | 1 | 2026-02-01 20:25:47.851628 | Ranked | 1 | L | 615 | 
4 | 1 | 2026-01-31 20:25:47.851628 | Quickplay | 2 | W | 620 | 
5 | 1 | 2026-01-30 20:25:47.851628 | Quickplay | 3 | L | 625 | 
6 | 1 | 2026-01-29 20:25:47.851628 | Ranked | 1 | W | 630 | 
7 | 1 | 2026-01-28 20:25:47.851628 | Quickplay | 2 | L | 635 | 
8 | 1 | 2026-01-27 20:25:47.851628 | Quickplay | 3 | W | 640 | 
9 | 1 | 2026-01-26 20:25:47.851628 | Ranked | 1 | L | 645 | 
10 | 1 | 2026-01-25 20:25:47.851628 | Quickplay | 2 | W | 650 | Close match
11 | 1 | 2026-01-24 20:25:47.851628 | Quickplay | 3 | L | 655 | 
12 | 1 | 2026-01-23 20:25:47.851628 | Ranked | 1 | W | 660 | 
13 | 1 | 2026-01-22 20:25:47.851628 | Quickplay | 2 | L | 665 | 
14 | 1 | 2026-01-21 20:25:47.851628 | Quickplay | 3 | W | 670 | 
15 | 1 | 2026-01-20 20:25:47.851628 | Ranked | 1 | L | 675 | 
16 | 1 | 2026-01-19 20:25:47.851628 | Quickplay | 2 | W | 680 | 
17 | 1 | 2026-01-18 20:25:47.851628 | Quickplay | 3 | L | 685 | 
18 | 1 | 2026-01-17 20:25:47.851628 | Ranked | 1 | W | 690 | 
19 | 1 | 2026-01-16 20:25:47.851628 | Quickplay | 2 | L | 695 | 
20 | 1 | 2026-01-15 20:25:47.851628 | Quickplay | 3 | W | 700 | Close match
21 | 1 | 2026-01-14 20:25:47.851628 | Ranked | 1 | L | 705 | 
22 | 1 | 2026-01-13 20:25:47.851628 | Quickplay | 2 | W | 710 | 
23 | 1 | 2026-01-12 20:25:47.851628 | Quickplay | 3 | L | 715 | 
24 | 1 | 2026-01-11 20:25:47.851628 | Ranked | 1 | W | 720 | 
25 | 1 | 2026-01-10 20:25:47.851628 | Quickplay | 2 | L | 725 |
```

Matches Create

localhost:5105/matches

MatchTracker.Web

Home Games **Matches** Characters Maps Stats

Matches

Match created with ID 51.

Create Match

1 03/16/2026 09:35 PM Ranked Map ID (optional) W DurationSec (optional) Notes (optional) Create

Get Match By ID

1 Get One

Get Matches By Game

1 Load Subset

Update Match

1 1 03/16/2026 09:35 PM Queue type Map ID (optional) W DurationSec (optional) Notes (optional) Update

Delete Match

1 Delete

All Matches

Refresh

- 51 - Game 1 - Ranked - W
- 1 - Game 1 - Quickplay - L
- 2 - Game 1 - Quickplay - W
- 3 - Game 1 - Ranked - L
- 4 - Game 1 - Quickplay - W
- 5 - Game 1 - Quickplay - L
- 6 - Game 1 - Ranked - W
- 7 - Game 1 - Quickplay - L
- 8 - Game 1 - Quickplay - W
- 9 - Game 1 - Ranked - L
- 10 - Game 1 - Quickplay - W
- 11 - Game 1 - Quickplay - L
- 12 - Game 1 - Ranked - W
- 13 - Game 1 - Quickplay - L
- 14 - Game 1 - Quickplay - W

SQL Shell (psql)

26	1	2026-01-09 20:25:47.851628	Quickplay	3	W	730	
27	1	2026-01-08 20:25:47.851628	Ranked	1	L	735	
28	1	2026-01-07 20:25:47.851628	Quickplay	2	W	740	
29	1	2026-01-06 20:25:47.851628	Quickplay	3	L	745	
30	1	2026-01-05 20:25:47.851628	Ranked	1	W	750	Close match
31	1	2026-01-04 20:25:47.851628	Quickplay	2	L	755	
32	1	2026-01-03 20:25:47.851628	Quickplay	3	W	760	
33	1	2026-01-02 20:25:47.851628	Ranked	1	L	765	
34	1	2026-01-01 20:25:47.851628	Quickplay	2	W	770	
35	1	2025-12-31 20:25:47.851628	Quickplay	3	L	775	
36	1	2025-12-30 20:25:47.851628	Ranked	1	W	780	
37	1	2025-12-29 20:25:47.851628	Quickplay	2	L	785	
38	1	2025-12-28 20:25:47.851628	Quickplay	3	W	790	
39	1	2025-12-27 20:25:47.851628	Ranked	1	L	795	
40	1	2025-12-26 20:25:47.851628	Quickplay	2	W	800	Close match
41	1	2025-12-25 20:25:47.851628	Quickplay	3	L	805	
42	1	2025-12-24 20:25:47.851628	Ranked	1	W	810	
43	1	2025-12-23 20:25:47.851628	Quickplay	2	L	815	
44	1	2025-12-22 20:25:47.851628	Quickplay	3	W	820	
45	1	2025-12-21 20:25:47.851628	Ranked	1	L	825	
46	1	2025-12-20 20:25:47.851628	Quickplay	2	W	830	
47	1	2025-12-19 20:25:47.851628	Quickplay	3	L	835	
48	1	2025-12-18 20:25:47.851628	Ranked	1	W	840	
49	1	2025-12-17 20:25:47.851628	Quickplay	2	L	845	
50	1	2025-12-16 20:25:47.851628	Quickplay	3	W	850	Close match
51	1	2026-03-16 21:35:36.672025	Ranked		W		

-- More --

Matches Get One

MatchTracker.Web

Matches

Match loaded.

Create Match

1 03/16/2026 09:35 PM Ranked Map ID (optional) W DurationSec (optional) Notes (optional) Create

Get Match By ID

51 Get One

MatchId: 51

GameId: 1

MatchDate: 3/16/2026 9:35:36 PM

QueueType: Ranked

MapId:

Result: W

DurationSec:

Notes:

Get Matches By Game

1 Load Subset

Update Match

1 1 03/16/2026 09:35 PM Queue type Map ID (optional) W DurationSec (optional)

Notes (optional) Update

Delete Match

1 Delete

All Matches

Refresh

• 51 - Game 1 - Ranked - W

```
postgres=# SELECT * FROM matches where match_id = 51;
 match_id | game_id | match_date | queue_type | map_id | result | duration_sec | notes
-----+-----+-----+-----+-----+-----+-----+-----
      51 |      1 | 2026-03-16 21:35:36.672025 | Ranked |      W |      W |      |
(1 row)
```

```
postgres=#
```

Matches Update

MatchTracker.Web

Matches

Update result: 1

Create Match

1 03/16/2026 09:35 PM Ranked Map ID (optional) W DurationSec (optional) Notes (optional) Create

Get Match By ID

51 Get One

MatchId: 51

GameId: 1

MatchDate: 3/16/2026 9:35:36 PM

QueueType: Ranked

MapId:

Result: W

DurationSec:

Notes:

Get Matches By Game

1 Load Subset

Update Match

51 1 03/16/2026 09:35 PM Quickplay Map ID (optional) L DurationSec (optional)

Notes (optional) Update

Delete Match

1 Delete

All Matches

Refresh

• 51 - Game 1 - Quickplay - L

```
postgres=# SELECT * FROM matches where match_id = 51;
 match_id | game_id | match_date | queue_type | map_id | result | duration_sec | notes
-----+-----+-----+-----+-----+-----+-----+-----
      51 |      1 | 2026-03-16 21:35:36.67203 | Quickplay |      L |      L |      |
(1 row)
```

```
postgres=#
```

Matches Delete

The screenshot displays the MatchTracker.Web application interface and a terminal window showing the deletion of matches from a database.

MatchTracker.Web Interface:

- Matches Section:** Shows a "Delete result: 1" message and a "Create Match" form. The form includes fields for Match ID (1), Date (03/16/2026 09:35 PM), Rank (Ranked), Map ID (optional), Win/Loss (W), DurationSec (optional), and Notes (optional). A "Create" button is present.
- Get Match By ID:** A form with a Match ID field (51) and a "Get One" button.
- Get Matches By Game:** A form with a Game ID field (1) and a "Load Subset" button.
- Update Match:** A form with Match ID (51), Game ID (1), Date (03/16/2026 09:35 PM), Rank (Quickplay), Map ID (optional), Win/Loss (L), DurationSec (optional), and Notes (optional). An "Update" button is present.
- Delete Match:** A form with a Match ID field (51) and a "Delete" button.
- All Matches:** A list of matches with a "Refresh" button. The list shows 15 matches, including Game 1 - Quickplay - L, Game 1 - Quickplay - W, Game 1 - Ranked - L, and Game 1 - Ranked - W.

SQL Shell (psql) Output:

```
-- More --
```

Match ID	Game ID	Date	Time	Rank	Map ID	Win/Loss	DurationSec	Notes
24	1	2026-01-11	20:25:47.851628	Ranked	1	W	720	
25	1	2026-01-10	20:25:47.851628	Quickplay	2	L	725	
26	1	2026-01-09	20:25:47.851628	Quickplay	3	W	730	
27	1	2026-01-08	20:25:47.851628	Ranked	1	L	735	
28	1	2026-01-07	20:25:47.851628	Quickplay	2	W	740	
29	1	2026-01-06	20:25:47.851628	Quickplay	3	L	745	
30	1	2026-01-05	20:25:47.851628	Ranked	1	W	750	Close match
31	1	2026-01-04	20:25:47.851628	Quickplay	2	L	755	
32	1	2026-01-03	20:25:47.851628	Quickplay	3	W	760	
33	1	2026-01-02	20:25:47.851628	Ranked	1	L	765	
34	1	2026-01-01	20:25:47.851628	Quickplay	2	W	770	
35	1	2025-12-31	20:25:47.851628	Quickplay	3	L	775	
36	1	2025-12-30	20:25:47.851628	Ranked	1	W	780	
37	1	2025-12-29	20:25:47.851628	Quickplay	2	L	785	
38	1	2025-12-28	20:25:47.851628	Quickplay	3	W	790	
39	1	2025-12-27	20:25:47.851628	Ranked	1	L	795	
40	1	2025-12-26	20:25:47.851628	Quickplay	2	W	800	Close match
41	1	2025-12-25	20:25:47.851628	Quickplay	3	L	805	
42	1	2025-12-24	20:25:47.851628	Ranked	1	W	810	
43	1	2025-12-23	20:25:47.851628	Quickplay	2	L	815	
44	1	2025-12-22	20:25:47.851628	Quickplay	3	W	820	
45	1	2025-12-21	20:25:47.851628	Ranked	1	L	825	
46	1	2025-12-20	20:25:47.851628	Quickplay	2	W	830	
47	1	2025-12-19	20:25:47.851628	Quickplay	3	L	835	
48	1	2025-12-18	20:25:47.851628	Ranked	1	W	840	
49	1	2025-12-17	20:25:47.851628	Quickplay	2	L	845	
50	1	2025-12-16	20:25:47.851628	Quickplay	3	W	850	Close match

Characters Default

MatchTracker.Web

Home Games Matches **Characters** Maps Stats

Characters

Create Character

1 Character name Role (optional)

Get Character By ID

1

Get Characters By Game

1

Update Character

1 New name New role (optional)

Delete Character

1

All Characters

- 1 - Game 1 - Character 1 - DPS
- 2 - Game 1 - Character 2 - Tank
- 3 - Game 1 - Character 3 - Support
- 4 - Game 1 - Character 4 - DPS

```
postgres=# SELECT * FROM characters;
 character_id | game_id | name           | role
-----+-----+-----+-----
          1 |        1 | Character 1    | DPS
          2 |        1 | Character 2    | Tank
          3 |        1 | Character 3    | Support
          4 |        1 | Character 4    | DPS
(4 rows)

postgres=#
```

Characters Create

MatchTracker.Web

Home Games Matches **Characters** Maps Stats

Characters

Character created with ID 5.

Create Character

1 Character name Role (optional)

Get Character By ID

1

Get Characters By Game

1

Update Character

1 New name New role (optional)

Delete Character

1


All Characters

- 1 - Game 1 - Character 1 - DPS
- 2 - Game 1 - Character 2 - Tank
- 3 - Game 1 - Character 3 - Support
- 4 - Game 1 - Character 4 - DPS
- 5 - Game 1 - Example Character - Support

```
postgres=# SELECT * FROM characters;
 character_id | game_id | name           | role
-----+-----+-----+-----
          1 |        1 | Character 1    | DPS
          2 |        1 | Character 2    | Tank
          3 |        1 | Character 3    | Support
          4 |        1 | Character 4    | DPS
          5 |        1 | Example Character | Support
(5 rows)

postgres=#
```


Characters Get One

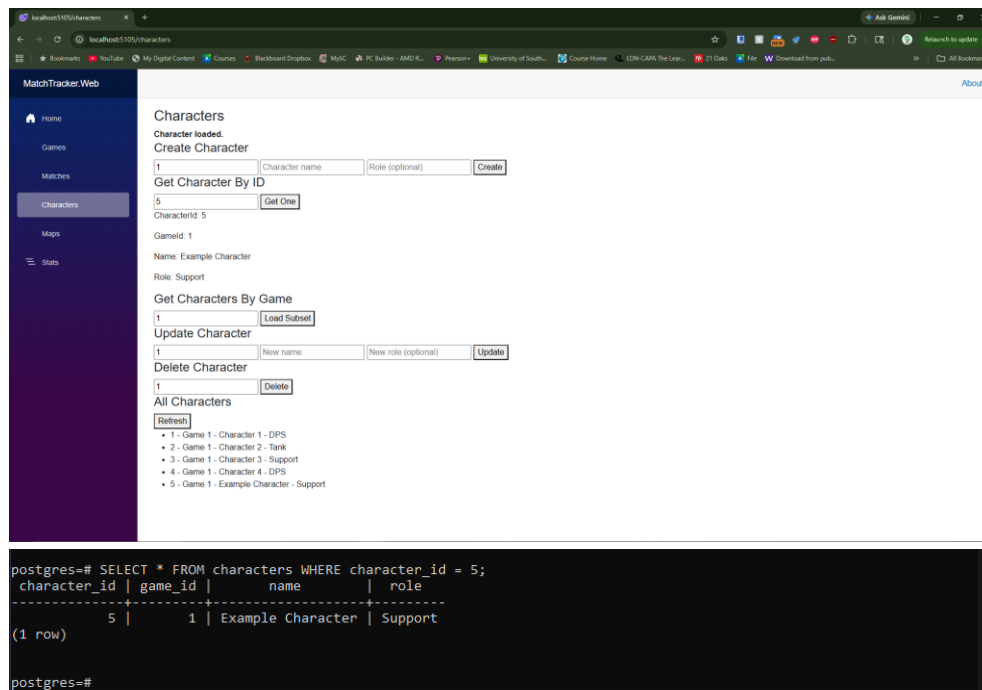

MatchTrackerWeb

Characters

Character loaded.

Create Character

1

Get Character By ID

5

CharacterId: 5

GameId: 1

Name: Example Character

Role: Support

Get Characters By Game

1

Update Character

1

Delete Character

1


All Characters

- 1 - Game 1 - Character 1 - DPS
- 2 - Game 1 - Character 2 - Tank
- 3 - Game 1 - Character 3 - Support
- 4 - Game 1 - Character 4 - DPS
- 5 - Game 1 - Example Character - Support

```
postgres=# SELECT * FROM characters WHERE character_id = 5;
 character_id | game_id |      name      | role
-----+-----+-----+-----
(1 row)      5 |        1 | Example Character | Support

postgres=#
```

Characters Update

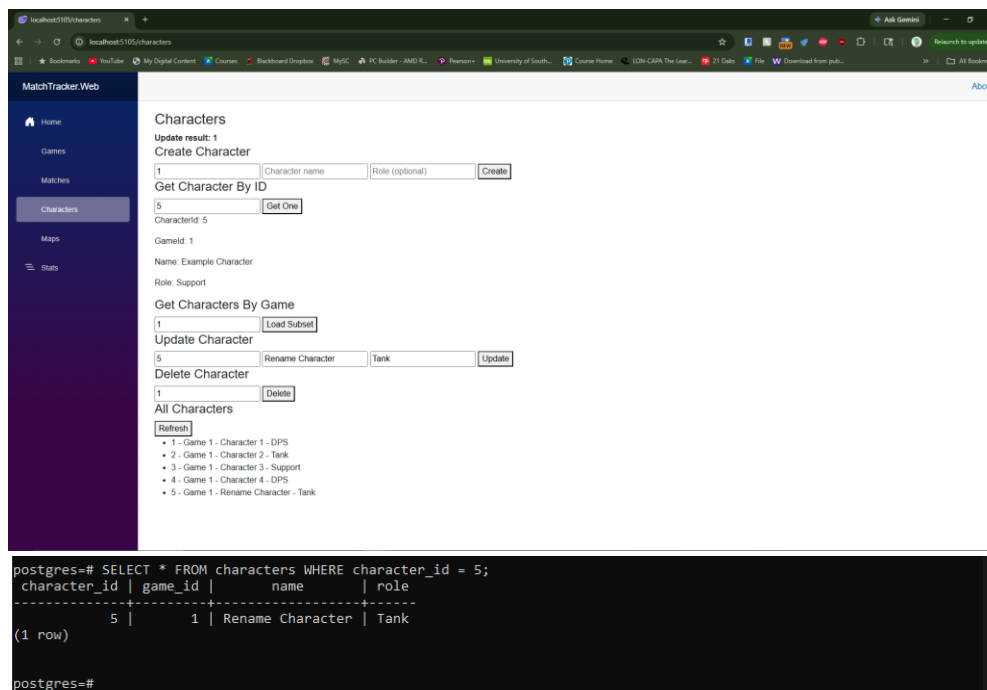

MatchTrackerWeb

Characters

Update result: 1

Create Character

1

Get Character By ID

5

CharacterId: 5

GameId: 1

Name: Example Character

Role: Support

Get Characters By Game

1

Update Character

5

Delete Character

1

All Characters

- 1 - Game 1 - Character 1 - DPS
- 2 - Game 1 - Character 2 - Tank
- 3 - Game 1 - Character 3 - Support
- 4 - Game 1 - Character 4 - DPS
- 5 - Game 1 - Rename Character - Tank

```
postgres=# SELECT * FROM characters WHERE character_id = 5;
 character_id | game_id |      name      | role
-----+-----+-----+-----
(1 row)      5 |        1 | Rename Character | Tank

postgres=#
```

Characters Delete


The screenshot displays a web application titled "MatchTracker.Web" with a sidebar menu containing links to Home, Games, Matches, Characters (selected), Maps, and Stats. The main content area is titled "Characters" and shows a "Delete result: 1" message. Below this, there are several form sections: "Create Character" with input fields for "Character name" and "Role (optional)" and a "Create" button; "Get Character By ID" with an input field for "5" and a "Get One" button; "Get Characters By Game" with an input field for "1" and a "Load Subset" button; "Update Character" with an input field for "5", a "Rename Character" button, an input field for "Tank", and an "Update" button; and "Delete Character" with an input field for "5" and a "Delete" button. At the bottom, the "All Characters" section includes a "Refresh" button and a list of four characters: "1 - Game 1 - Character 1 - DPS", "2 - Game 1 - Character 2 - Tank", "3 - Game 1 - Character 3 - Support", and "4 - Game 1 - Character 4 - DPS".

Below the web application interface, a terminal window shows a SQL query executed in PostgreSQL:

```
postgres=# SELECT * FROM characters;
 character_id | game_id | name       | role
-----
 1            | 1       | Character 1 | DPS
 2            | 1       | Character 2 | Tank
 3            | 1       | Character 3 | Support
 4            | 1       | Character 4 | DPS
(4 rows)
```

The terminal prompt is `postgres=#`.

Maps Default

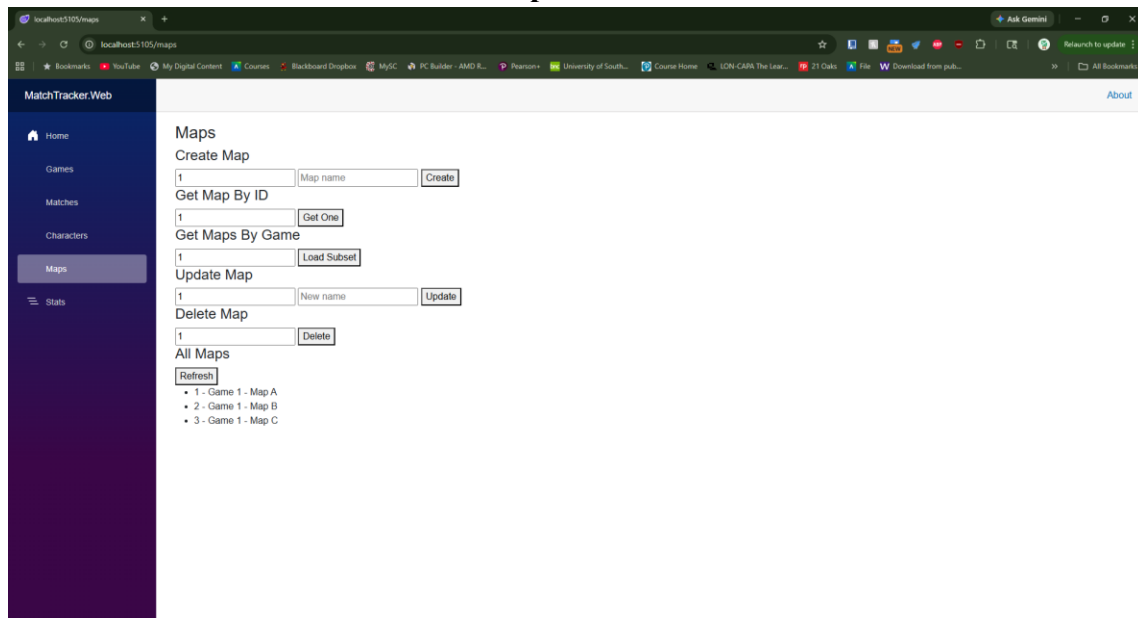

MatchTracker.Web

Maps

Create Map

1 Map name

Get Map By ID

1

Get Maps By Game

1

Update Map

1 New name

Delete Map

1


All Maps

- 1 - Game 1 - Map A
- 2 - Game 1 - Map B
- 3 - Game 1 - Map C

```
postgres=# SELECT * FROM maps;
 map_id | game_id | name
-----+-----+-----
      1 |      1 | Map A
      2 |      1 | Map B
      3 |      1 | Map C
(3 rows)
```

postgres=#

Maps Create

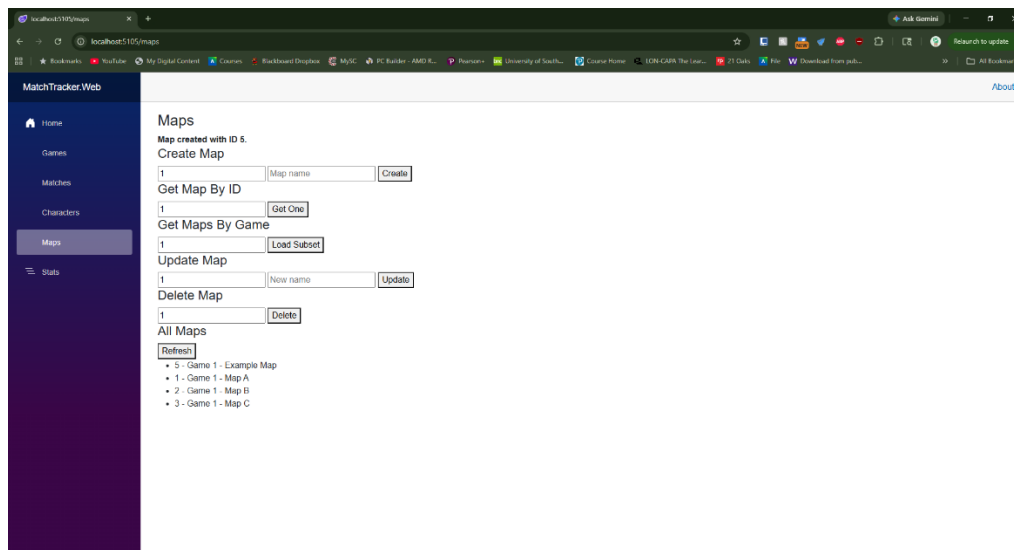

MatchTracker.Web

Maps

Map created with ID 5.

Create Map

1 Map name

Get Map By ID

1

Get Maps By Game

1

Update Map

1 New name

Delete Map

1

All Maps

- 5 - Game 1 - Example Map
- 1 - Game 1 - Map A
- 2 - Game 1 - Map B
- 3 - Game 1 - Map C

```
postgres=# SELECT * FROM maps;
 map_id | game_id | name
-----+-----+-----
      1 |      1 | Map A
      2 |      1 | Map B
      3 |      1 | Map C
      5 |      1 | Example Map
(4 rows)
```

postgres=#

Maps Get One

MatchTracker.Web

Home Games Matches Characters Maps Stats

Maps

Map loaded.
Create Map

1 Map name Create

Get Map By ID

5 Get One

Mapid: 5
Gameld: 1

Name: Example Map

Get Maps By Game

1 Load Subset

Update Map

1 New name Update

Delete Map

1 Delete

All Maps

Refresh

- 5 - Game 1 - Example Map
- 1 - Game 1 - Map A
- 2 - Game 1 - Map B
- 3 - Game 1 - Map C

```
postgres=# SELECT * FROM maps where map_id = 5;
 map_id | game_id |   name
-----+-----+-----
      5 |      1 | Example Map
(1 row)

postgres=#
```

Maps Update

MatchTracker.Web

Home Games Matches Characters Maps Stats

Maps

Update result: 1
Create Map

1 Map name Create

Get Map By ID

5 Get One

Mapid: 5
Gameld: 1

Name: Example Map

Get Maps By Game

1 Load Subset

Update Map

5 Rename Map Update

Delete Map

1 Delete

All Maps

Refresh

- 1 - Game 1 - Map A
- 2 - Game 1 - Map B
- 3 - Game 1 - Map C
- 5 - Game 1 - Rename Map

```
postgres=# SELECT * FROM maps where map_id = 5;
 map_id | game_id |   name
-----+-----+-----
      5 |      1 | Rename Map
(1 row)

postgres=#
```

Maps Delete

The screenshot shows a web application interface for MatchTracker.Web. The left sidebar contains navigation links: Home, Games, Matches, Characters, Maps (selected), and Stats. The main content area is titled "Maps" and displays a "Delete result: 1" message. Below this, there are several form sections: "Create Map" with a "Map name" input and a "Create" button; "Get Map By ID" with an input field and a "Get One" button; "Get Maps By Game" with an input field and a "Load Subset" button; "Update Map" with an input field and an "Update" button; and "Delete Map" with an input field and a "Delete" button. At the bottom, there is an "All Maps" section with a "Refresh" button and a list of three items: "1 - Game 1 - Map A", "2 - Game 1 - Map B", and "3 - Game 1 - Map C".

Below the web application, a terminal window shows the execution of a PostgreSQL query:

```
postgres=# SELECT * FROM maps;
 map_id | game_id | name
-----+-----+-----
      1 |      1 | Map A
      2 |      1 | Map B
      3 |      1 | Map C
(3 rows)
```

The terminal prompt is `postgres=#`.

MatchStats Default

The image displays two screenshots. The top screenshot shows the MatchTracker.Web application interface, and the bottom screenshot shows the output of a SQL query in a SQL Shell.

MatchTracker.Web Interface:

- MatchStats**
- Create MatchStat**
Form fields: Character ID (optional) [0], ObjectiveTimeSec (optional) [0], Damage (optional) [0], Healing (optional) [0]. Button: **Create**
- Get MatchStat By ID**
Form field: ID [1]. Button: **Get One**
- Get MatchStat By Match**
Form field: Match ID [1]. Button: **Load Subset**
- Update MatchStat**
Form fields: ID [1], Character ID (optional) [0], ObjectiveTimeSec (optional) [0], Damage (optional) [0], Healing (optional) [0]. Button: **Update**
- Delete MatchStat**
Form field: ID [1]. Button: **Delete**
- All MatchStats**
Button: **Refresh**
List of MatchStats:
 - Stat 50 - Match 1 - KDIA 1/1/1
 - Stat 49 - Match 2 - KDIA 2/2/2
 - Stat 48 - Match 3 - KDIA 3/3/3
 - Stat 47 - Match 4 - KDIA 4/4/4
 - Stat 46 - Match 5 - KDIA 5/5/5
 - Stat 45 - Match 6 - KDIA 6/6/6
 - Stat 44 - Match 7 - KDIA 7/7/7
 - Stat 43 - Match 8 - KDIA 8/8/8
 - Stat 42 - Match 9 - KDIA 9/9/9
 - Stat 41 - Match 10 - KDIA 10/10/10
 - Stat 40 - Match 11 - KDIA 11/11/11
 - Stat 39 - Match 12 - KDIA 12/12/12
 - Stat 38 - Match 13 - KDIA 13/13/13
 - Stat 37 - Match 14 - KDIA 14/14/14

SQL Shell (psql) Output:

```
postgres=# SELECT * FROM match_stats;
```

stat_id	match_id	character_id	kills	deaths	assists	damage	healing	objective_time_sec
1	50	3	10	0	5	3500	1000	80
2	49	2	9	9	4	3470	990	79
3	48	1	8	8	3	3440	980	78
4	47	4	7	7	2	3410	970	77
5	46	3	6	6	1	3380	960	76
6	45	2	5	5	0	3350	950	75
7	44	1	4	4	14	3320	940	74
8	43	4	3	3	13	3290	930	73
9	42	3	2	2	12	3260	920	72
10	41	2	1	1	11	3230	910	71
11	40	1	0	0	10	3200	900	70
12	39	4	19	9	9	3170	890	69
13	38	3	18	8	8	3140	880	68
14	37	2	17	7	7	3110	870	67
15	36	1	16	6	6	3080	860	66
16	35	4	15	5	5	3050	850	65
17	34	3	14	4	4	3020	840	64
18	33	2	13	3	3	2990	830	63
19	32	1	12	2	2	2960	820	62
20	31	4	11	1	1	2930	810	61
21	30	3	10	0	0	2900	800	60
22	29	2	9	9	14	2870	790	59
23	28	1	8	8	13	2840	780	58
24	27	4	7	7	12	2810	770	57
25	26	3	6	6	11	2780	760	56

MatchStats Create

The image shows a web application interface for MatchStats and a terminal window displaying the results of a SQL query.

MatchTracker.Web Interface:

- Create MatchStat:** A form with fields for ID (1), Character ID (optional) (2), ObjectiveTimeSec (optional) (0), Damage (optional) (1), and Healing (optional) (0). A "Create" button is present.
- Get MatchStat By ID:** A form with a field for ID (1) and a "Get One" button.
- Get MatchStat By Match:** A form with a field for Match ID (1) and a "Load Subset" button.
- Update MatchStat:** A form with fields for ID (1), Healing (optional) (0), ObjectiveTimeSec (optional) (0), Character ID (optional) (0), Damage (optional) (0), and a "Update" button.
- Delete MatchStat:** A form with a field for ID (1) and a "Delete" button.
- All MatchStats:** A list of match statistics with a "Refresh" button. The list includes items like "Stat 52 - Match 1 - K/D/A 2/0/1", "Stat 50 - Match 1 - K/D/A 1/1/1", etc.

SQL Shell (psql) Output:

24	27	4	7	7	12	2810	770	57
25	26	3	6	6	11	2780	760	56
26	25	2	5	5	10	2750	750	55
27	24	1	4	4	9	2720	740	54
28	23	4	3	3	8	2690	730	53
29	22	3	2	2	7	2660	720	52
30	21	2	1	1	6	2630	710	51
31	20	1	0	0	5	2600	700	50
32	19	4	19	9	4	2570	690	49
33	18	3	18	8	3	2540	680	48
34	17	2	17	7	2	2510	670	47
35	16	1	16	6	1	2480	660	46
36	15	4	15	5	0	2450	650	45
37	14	3	14	4	14	2420	640	44
38	13	2	13	3	13	2390	630	43
39	12	1	12	2	12	2360	620	42
40	11	4	11	1	11	2330	610	41
41	10	3	10	0	10	2300	600	40
42	9	2	9	9	9	2270	590	39
43	8	1	8	8	8	2240	580	38
44	7	4	7	7	7	2210	570	37
45	6	3	6	6	6	2180	560	36
46	5	2	5	5	5	2150	550	35
47	4	1	4	4	4	2120	540	34
48	3	4	3	3	3	2090	530	33
49	2	3	2	2	2	2060	520	32
50	1	2	1	1	1	2030	510	31
52	1	1	2	0	1			

(51 rows)

MatchStats Get One

MatchTracker.Web

MatchStats

MatchStat loaded.

Create MatchStat

1 Character ID (optional) 2 0 1 Damage (optional) Healing (optional)

ObjectiveTimeSec (optional) Create

Get MatchStat By ID

52 StatId: 52 Get One

MatchId: 1

CharacterId:

K/D/A: 2 / 0 / 1

Damage:

Healing:

ObjectiveTimeSec:

Get MatchStat By Match

1 Load Subset

Update MatchStat

1 1 Character ID (optional) 0 0 0 Damage (optional)

Healing (optional) ObjectiveTimeSec (optional) Update

Delete MatchStat

1 Delete

All MatchStats

Refresh

- Stat 52 - Match 1 - K/D/A 2/0/1
- Stat 40 - Match 1 - K/D/A 1/1/1

```
SQL Shell (psql)
postgres=# SELECT * FROM match_stats where stat_id = 52;
 stat_id | match_id | character_id | kills | deaths | assists | damage | healing | objective_time_sec
-----+-----+-----+-----+-----+-----+-----+-----+-----
      52 |         1 |             2 |      0 |       1 |        1 |        |          |
(1 row)

postgres=#
```

MatchStats Update

MatchTracker.Web

MatchStats

Update result: 1

Create MatchStat

1 Character ID (optional) 0 0 0 Damage (optional) Healing (optional)

ObjectiveTimeSec (optional) Create

Get MatchStat By ID

1 Get One

Get MatchStat By Match

1 Load Subset

Update MatchStat

52 1 Character ID (optional) 6 7 0 Damage (optional)

Healing (optional) ObjectiveTimeSec (optional) Update

Delete MatchStat

1 Delete

All MatchStats

Refresh

- Stat 52 - Match 1 - K/D/A 6/7/0
- Stat 50 - Match 1 - K/D/A 1/1/1
- Stat 49 - Match 2 - K/D/A 2/2/2
- Stat 48 - Match 3 - K/D/A 3/3/3
- Stat 47 - Match 4 - K/D/A 4/4/4
- Stat 46 - Match 5 - K/D/A 5/5/5
- Stat 45 - Match 6 - K/D/A 6/6/6
- Stat 44 - Match 7 - K/D/A 7/7/7
- Stat 43 - Match 8 - K/D/A 8/8/8
- Stat 42 - Match 9 - K/D/A 9/9/9
- Stat 41 - Match 10 - K/D/A 10/10/10
- Stat 40 - Match 11 - K/D/A 11/11/11
- Stat 39 - Match 12 - K/D/A 12/12/12

```
postgres=# SELECT * FROM match_stats where stat_id = 52;
 stat_id | match_id | character_id | kills | deaths | assists | damage | healing | objective_time_sec
-----+-----+-----+-----+-----+-----+-----+-----+-----
      52 |         1 |             6 |      7 |       0 |        0 |        |          |
(1 row)

postgres=#
```


MatchStats Delete

MatchTracker.Web

Home

Games

Matches

Characters

Maps

Stats

MatchStats

Delete result: 1

Create MatchStat

1

Character ID (optional)

0

0

0

Damage (optional)

Healing (optional)

Create

Get MatchStat By ID

1

Get One

Get MatchStat By Match

1

Load Subset

Update MatchStat

1

1

Character ID (optional)

0

0

0

Damage (optional)

Healing (optional)

ObjectiveTimeSec (option

Update

Delete MatchStat

52

Delete

All MatchStats

Refresh

Stat 50 - Match 1 - K/D/A 1/1/1

Stat 49 - Match 2 - K/D/A 2/2/2

Stat 48 - Match 3 - K/D/A 3/3/3

Stat 47 - Match 4 - K/D/A 4/4/4

Stat 46 - Match 5 - K/D/A 5/5/5

Stat 45 - Match 6 - K/D/A 6/6/6

Stat 44 - Match 7 - K/D/A 7/7/7

Stat 43 - Match 8 - K/D/A 8/8/8

Stat 42 - Match 9 - K/D/A 9/9/9

Stat 41 - Match 10 - K/D/A 10/10/10

Stat 40 - Match 11 - K/D/A 11/11/11

Stat 39 - Match 12 - K/D/A 12/2/12

Stat 38 - Match 13 - K/D/A 13/3/13

SQL Shell (psql)

22	29	2	9	9	14	2870	790	59
23	28	1	8	8	13	2840	780	58
24	27	4	7	7	12	2810	770	57
25	26	3	6	6	11	2780	760	56
26	25	2	5	5	10	2750	750	55
27	24	1	4	4	9	2720	740	54
28	23	4	3	3	8	2690	730	53
29	22	3	2	2	7	2660	720	52
30	21	2	1	1	6	2630	710	51
31	20	1	0	0	5	2600	700	50
32	19	4	19	9	4	2570	690	49
33	18	3	18	8	3	2540	680	48
34	17	2	17	7	2	2510	670	47
35	16	1	16	6	1	2480	660	46
36	15	4	15	5	0	2450	650	45
37	14	3	14	4	14	2420	640	44
38	13	2	13	3	13	2390	630	43
39	12	1	12	2	12	2360	620	42
40	11	4	11	1	11	2330	610	41
41	10	3	10	0	10	2300	600	40
42	9	2	9	9	9	2270	590	39
43	8	1	8	8	8	2240	580	38
44	7	4	7	7	7	2210	570	37
45	6	3	6	6	6	2180	560	36
46	5	2	5	5	5	2150	550	35
47	4	1	4	4	4	2120	540	34
48	3	4	3	3	3	2090	530	33
49	2	3	2	2	2	2060	520	32
50	1	2	1	1	1	2030	510	31

(50 rows)