

Heba Hesham Ayaseh

/api-category/get-categories



The screenshot shows a web browser's developer console with the 'Body' tab selected. The response is a JSON object with a status of '200 OK', a response time of '6.41 s', and a size of '358 B'. The JSON data is as follows:

```
1 {  
2   "categories": [  
3     {  
4       "id": 1,  
5       "name": "Computer System Engineering",  
6       "description": "This Category specific for programmers and developers"  
7     },  
8     {  
9       "id": 2,  
10      "name": "Hardware",  
11      "description": "This category specific for hardware engineering "  
12    }  
13  ]  
14 }
```

/api-category/get-category/:id

Path Variables

	Key		Value	Description	Bulk Edit	...
	id ✖	integer	1	Description		

Body Cookies Headers 4 Test Results

200 OK • 1.55 s • 249 B • | e.g. Save Response ...

{ } JSON Preview Visualize

```
1 {
2   "id": 1,
3   "name": "Computer System Engineering",
4   "description": "This Category specific for programmers and developers"
5 }
```

/api-category/get-category/:id

Path Variables

Key		Value	Description	Bulk Edit	...
id	*	integer3	Description		

BodyCookiesHeaders4Test Results

404 Not Found • 2.25 s • 153 B •  | e.g. Save Response ...

Raw

▼

▶ Preview

 Debug with AI

▼

 |  |  

1

No category found.

/api-category/create-category

Query Params

Key	Value	Description	Bulk Edit	...
✓	Programming Language	This Category specific for programmers and developers		
Key	Value	Description		

Body

Cookies

Headers

5

Test Results

🔄

201 Created

• 3.80 s • 194 B • 🌐

e.g. Save Response

...

{ } JSON

▶ Preview

🖼 Visualize

▼

1 {

2 | "message": "Category created successfully"

3 }

🔍

📄

🔗

/api-category/update-category/:id

200 OK • 2.06 s • 177 B • e.g. Save Response ...



```
1 {
2   "message": "Category updated successfully"
3 }
```

/api-category/delete-category/:id

Path Variables

Key		Value	Description	Bulk Edit	...
id	integer	4	Description		

Body

Cookies

Headers

4

Test Results

200 OK • 809 ms • 177 B •  | [e.g. Save Response](#) • ...

{ } JSON

Preview

Visualize

1 {

2 |

3 }

"message": "Category deleted successfully"

/api-category/delete-category/:id

Path Variables

Key	Value	Description	Bulk Edit	...
id *	integer 6	Description		

Body Cookies Headers 4 Test Results

400 Bad Request • 816 ms • 175 B • [e.g.](#) Save Response ...

{ } JSON Preview Debug with AI

```
1 {  
2   "message": "Category not found"  
3 }
```


/api-category/update-category/:id

```
1 {  
2   "name": "Hardware"  
3 }
```

Body Cookies Headers 4 Test Results ↺

400 Bad Request • 1.80 s • 407 B • 🚨 | [e.g.](#) Save Response ...

{ } JSON ▾ ▶ Preview 🔗 Debug with AI ▾

↺ | ≡ 🔍 | 📄 🔗

```
1 {  
2   "type": "https://tools.ietf.org/html/rfc9110#section-15.5.1",  
3   "title": "One or more validation errors occurred.",  
4   "status": 400,  
5   "errors": {  
6     "description": [  
7       "The description field is required."  
8     ]  
9   },  
10  "traceId": "00-62dd58c92e0ea93e36cd0b6b544e06e7-1d10c2dbdb9f9929-00"  
11 }
```

/api-category/get-categories

The screenshot displays a REST client interface with a GET request to `{{baseUrl}} /api-category/get-categories`. The **Scripts** tab is active, showing a pre-request script that tests for a 200 status code. The **Body** tab is selected, showing the JSON response. The response status is **200 OK** with a response time of 207 ms and a size of 357 B. The JSON data contains two categories: Computer System Engineering and Hardware.

Request:

```
GET {{baseUrl}} /api-category/get-categories
```

Scripts:

```
1 pm.test("Status code is 200", function () {
2   pm.response.to.have.status(200);
3 });
```

Response:

```
1 {
2   "categories": [
3     {
4       "id": 1,
5       "name": "Computer System Engineering",
6       "description": "This Category specific for programmers and developers"
7     },
8     {
9       "id": 2,
10      "name": "Hardware",
11      "description": "This Category spacific for hardware engineering"
12    }
13  ]
14 }
```

/api-category/create-category

The screenshot shows a REST client interface with the following details:

- URL:** `{{baseUrl}} /api-category/create-category?=<div data-bbox="108 228 138 248" data-label="Text">POST`
- Scripts:**

```
1 pm.test("Status code is 201", function () {
2   pm.response.to.have.status(201);
3 });
```
- Response Status:** 201 Created
- Response Time:** 2.56 s
- Response Size:** 194 B
- Response Body (JSON):**

```
1 {
2   "message": "Category created successfully"
3 }
```

/api-category/delete-category/:id

The screenshot displays a REST client interface with a dark theme. At the top, a dropdown menu is set to 'DELETE' and the URL is `{{baseUrl}} /api-category/delete-category/ :id`. A 'Send' button is on the right. Below the URL bar, tabs for 'Docs', 'Params', 'Authorization', 'Headers 6', 'Body', 'Scripts', and 'Settings' are visible. The 'Scripts' tab is active, showing a pre-request script with three lines of code:

```
1 pm.test("Status code is 204", function () {  
2 |   pm.response.to.have.status(204);  
3 | });
```

On the left, 'Pre-request' and 'Post-response' tabs are shown, with 'Post-response' selected. At the bottom, the 'Body' tab is active, showing a JSON response:

```
1 {  
2 |   "message": "Category deleted successfully"  
3 | }
```

Below the JSON, there are icons for 'Preview' and 'Visualize'. The bottom status bar indicates a '200 OK' status, a response time of '2.28 s', and a size of '177 B'. It also includes a 'Save Response' button and a menu icon.

Environment

local3

Fork

0


Share

Variable	Value	
baseUrl	https://localhost:7144	
Add variable		

Postman Link

- <https://documenter.getpostman.com/view/46907697/2sBY4VKczk>

Libraty Sestem ERD

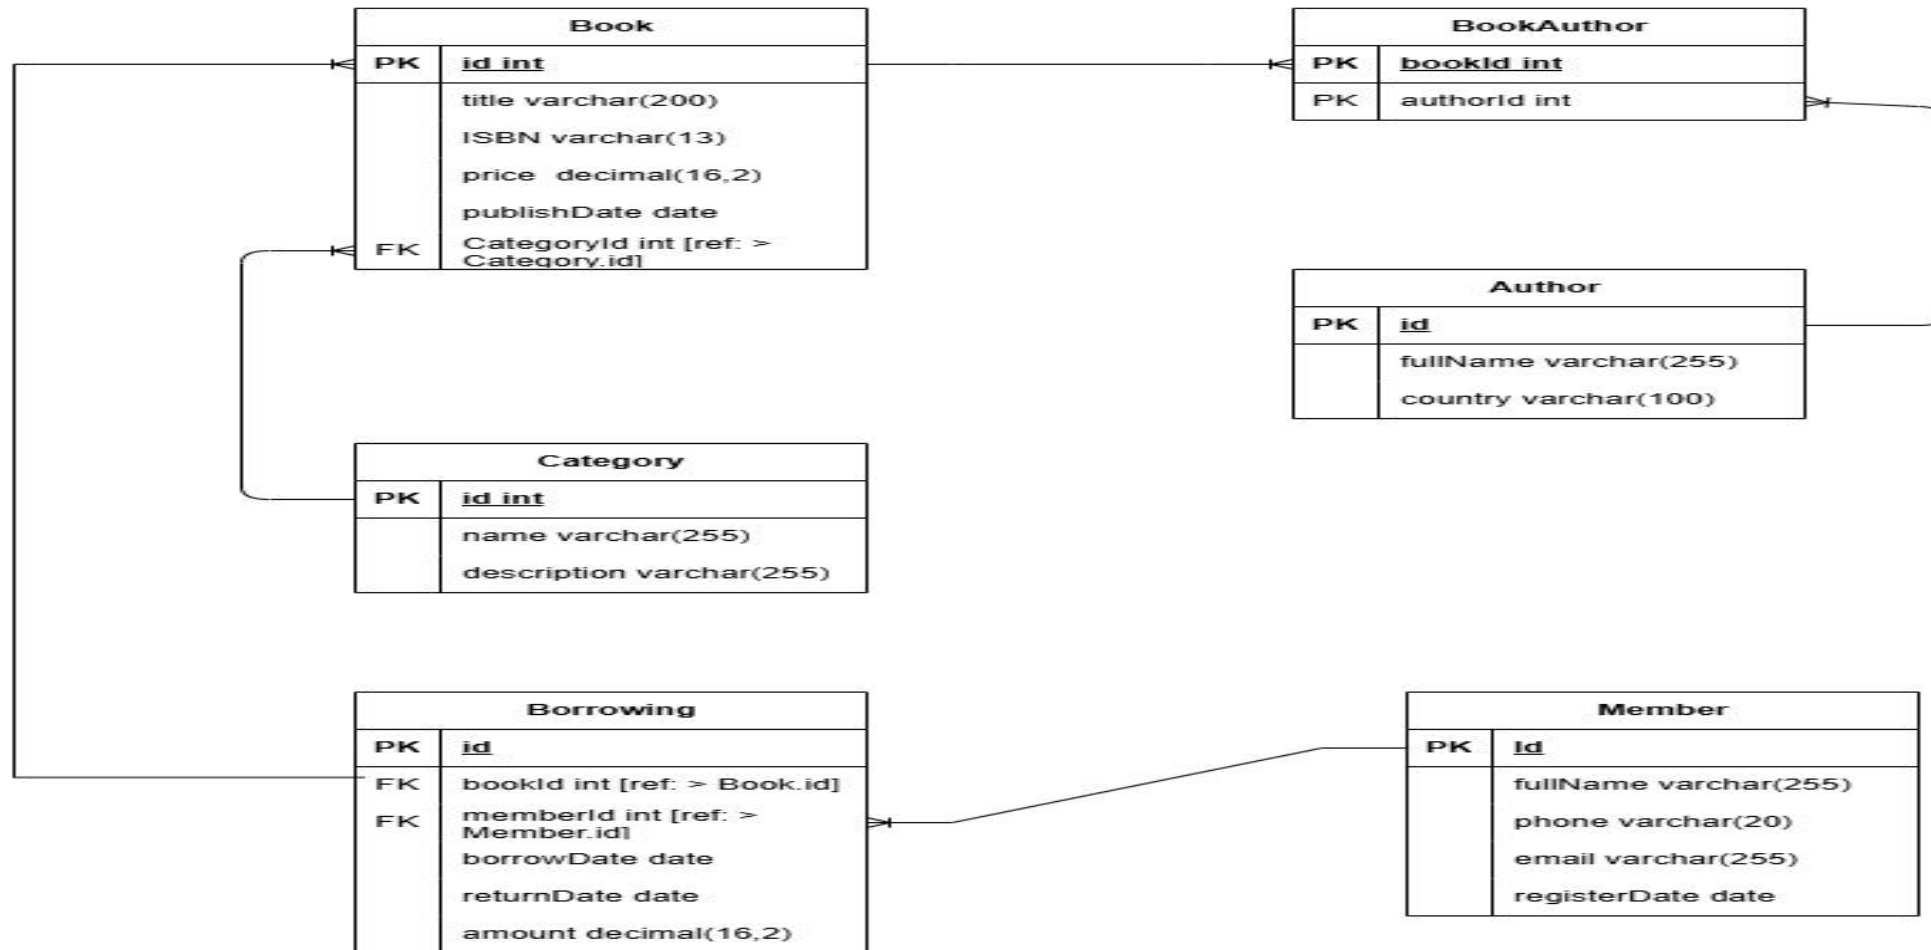

ERD Library System

Summary

- REST API Design
- Implemented a RESTful API for the Category resource following standard CRUD operations.
- Endpoints
- POST /api/categories – Create a new category.
- GET /api/categories – Retrieve all categories.
- GET /api/categories/{id} – Retrieve a category by ID.
- PUT /api/categories/{id} – Update an existing category.
- DELETE /api/categories/{id} – Delete a category.

Summary copy-1

- Postman
- The Postman collection includes:
- Happy path requests for all CRUD endpoints.
- Error-path requests (404 / 400) where applicable.
- Basic test scripts for status code validation.
- Environment with a baseUrl variable.
- Exported Postman Collection.

Summary copy-2

- logies
- ASP.NET Core Web API
- C#
- Entity Framework Core
- MySQL
- Postman