hebstr-doc

Multi-format Quarto extension

hebstr

Table of contents

1 Typography and headings

Body text is set in **Luciole**, a typeface designed for readers with low vision. Inline `code()` is set in **Fira Code**.

1.1 Level 2 heading

Headings are numbered down to level 4.

1.1.1 Level 3 heading

Paragraph with *emphasis*, **strong emphasis**, a link to the Quarto docs, and an internal reference to Section 3.

1.1.1.1 Level 4 heading

Deepest numbered level.

2 Lists

Unordered:

- First item
- Second item with a *nested* block:
    - Nested bullet one
    - Nested bullet two
- Third item

Ordered:

1. Initialise the R session
2. Load the tidyverse
3. Render the document

3 Figure

Figure 1 follows the colour scheme: the chunk produces one plot per scheme with renderings: [light, dark], on a transparent background. Switch the scheme with the toggle to see the other version.


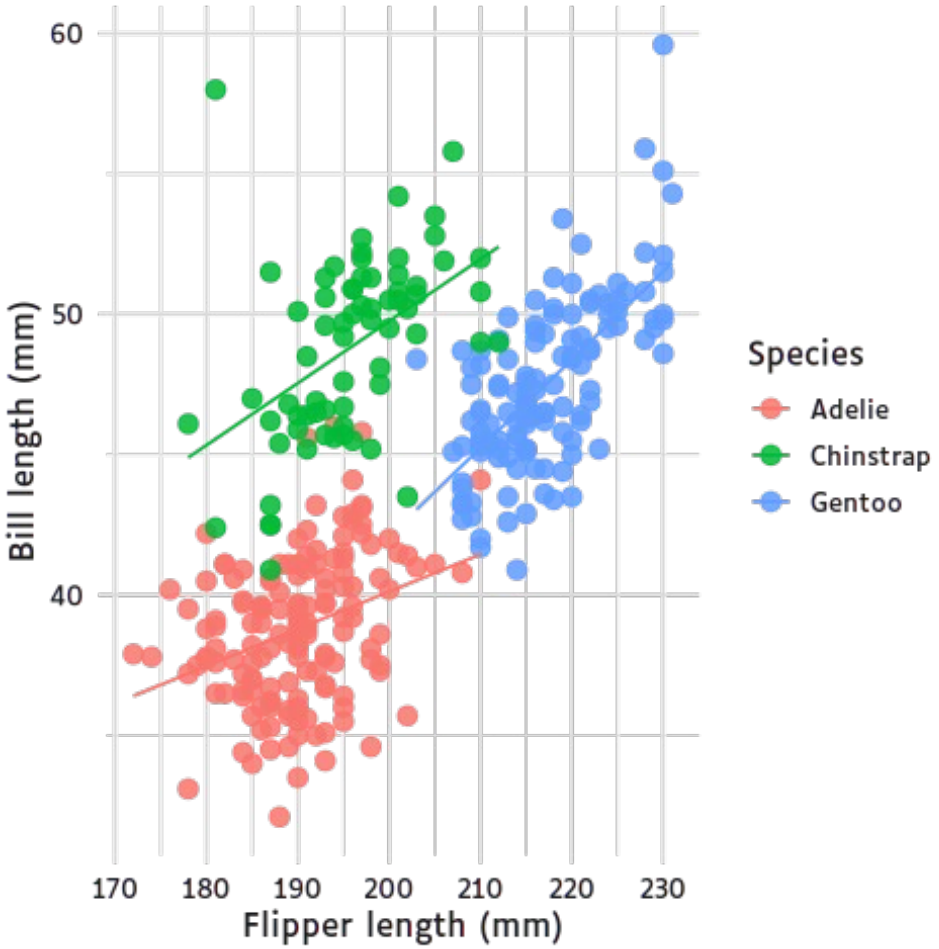


Figure 1. Bill length vs flipper length by species (palmerpenguins).

A figure without a cross-reference label keeps its caption but gets no number.

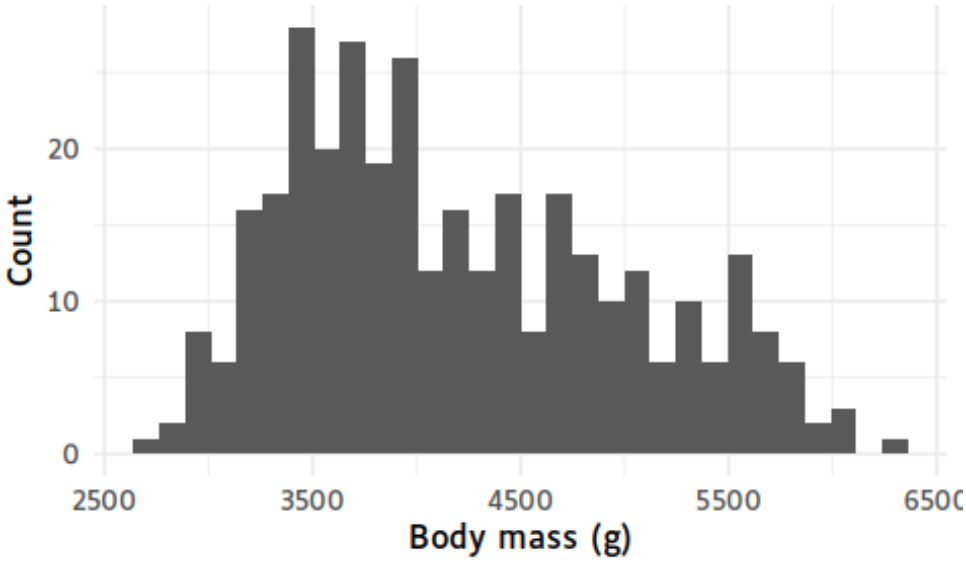

Body mass distribution (palmerpenguins).

4 Table

Table captions are placed above the table.

4.1 Markdown table

```
library(dplyr)

palmerpenguins::penguins |>
  count(species) |>
  rename(Sp = species)
#> # A tibble: 3 × 2
#>   Sp          n
#>   <fct>     <int>
#> 1 Adelie      152
#> 2 Chinstrap    68
#> 3 Gentoo      124
```

4.2 gt

Table 1 sets a light palette in R. In dark mode, the theme replaces it with its own colours.

```
palmerpenguins::penguins |>
  filter(!is.na(body_mass_g)) |>
  group_by(species, island) |>
  summarise(
    n = n(),
    bill = round(mean(bill_length_mm, na.rm = TRUE), 1),
    mass = round(mean(body_mass_g)),
    .groups = "drop"
  ) |>
  gt::gt() |>
  gt::cols_label(
    species = "Species",
    island = "Island",
    n = "n",
    bill = "Bill length (mm)",
    mass = "Body mass (g)"
  ) |>
  gt::tab_spanner(label = "Mean", columns = c(bill, mass)) |>
  gt::cols_align(align = "left", columns = c(species, island)) |>
  gt::cols_align(align = "center", columns = c(n, bill, mass)) |>
  gt::tab_source_note("palmerpenguins, records with a body mass.") |>
  gt::tab_options(
    table.width = gt::pct(80),
    table.background.color = "#F0FAFF",
    row.striping.include_table_body = TRUE,
    row.striping.background_color = "white",
    column_labels.background.color = "white",
    column_labels.font.weight = "bold",
```

```
  column_labels.border.top.style = "none",
  column_labels.border.bottom.color = "#333333",
  source_notes.background.color = "white",
  table.font.color = "#333333",
  table.border.top.style = "none",
  table.border.bottom.style = "none",
  table_body.border.top.color = "#333333",
  table_body.border.bottom.color = "#333333",
  table_body.hlines.style = "none",
  data_row.padding = gt::px(8)
)
```

Table 1. Bill length and body mass by species and island.

			Mean	
Species	Island	n	Bill length (mm)	Body mass (g)
Adelie	Biscoe	44	39.0	3710
Adelie	Dream	56	38.5	3688
Adelie	Torgersen	51	39.0	3706
Chinstrap	Dream	68	48.8	3733
Gentoo	Biscoe	123	47.5	5076

palmerpenguins, records with a body mass.

4.3 reactable

This widget uses the theme's CSS variables in reactableTheme(), so it follows the colour scheme.

A widget without a theme gets the same colours by default.

```
palmerpenguins::penguins |>
 filter(!is.na(body_mass_g)) |>
 select(species, island, bill_length_mm, body_mass_g) |>
 reactable::reactable(
  searchable = TRUE,
  filterable = TRUE,
  striped = TRUE,
  highlight = TRUE,
  defaultPageSize = 5,
  theme = reactable::reactableTheme(
   color = "var(--bs-body-color)",
   backgroundColor = "var(--primary-surface)",
   stripedColor = "var(--primary-back)",
   borderColor = "color-mix(in srgb, var(--neutral), transparent 70%)"
  )
 )
```

Search

species	island	bill_length_mm	body_mass_g
Adelie	Torgersen	39.1	3750
Adelie	Torgersen	39.5	3800
Adelie	Torgersen	40.3	3250
Adelie	Torgersen	36.7	3450
Adelie	Torgersen	39.3	3650

1–5 of 342 rows

Previous **1** 2 3 4 5 ... 69 Next

5 Code block

Code is hidden by default; this chunk sets echo: true to show it, with syntax highlighting and a copy button.

```
library(dplyr)

palmerpenguins::penguins |>
 filter(!is.na(body_mass_g)) |>
 group_by(species, island) |>
 summarise(
  n = n(),
  mean_mass_g = mean(body_mass_g),
  .groups = "drop"
 ) |>
 arrange(desc(mean_mass_g))
```

Printed output of a chunk whose code stays hidden gets a default header, since collapse: true merges it into a block with no language. With collapse: false, as in this chunk, it shows as plain output on the same dark surface.

```
#>    Min. 1st Qu.  Median    Mean 3rd Qu.    Max.    NAs
#>    2700    3550    4050    4202    4750    6300       2
```

6 Code window

Code blocks carry a header, provided by the embedded code-window extension. Without a file-name attribute, the header shows the language's icon and its name.

```
quarto add hebstr/quarto-hebstr-doc --no-prompt
quarto render example.qmd
```

```
def greet(name: str) -> str:
    return f"Hello, {name}!"
```

```
penguins |>
  dplyr::count(species)
```

```
SELECT
    species,
    island,
    COUNT(*) AS n
FROM penguins
GROUP BY species, island
ORDER BY n DESC;
```

7 Injected script

The script shortcode includes scripts/demo_penguins.R as a folded code block; click the filename to expand it.

8 Tabset

A .panel-tabset div creates the tabs.

8.1 Adelie

```
palmerpenguins::penguins |>
 dplyr::filter(species == "Adelie") |>
 dplyr::select(island, bill_length_mm, flipper_length_mm, body_mass_g) |>
 head(5)
#> # A tibble: 5 × 4
#>   island    bill_length_mm flipper_length_mm body_mass_g
#>   <fct>              <dbl>             <int>       <int>
#> 1 Torgersen           39.1               181        3750
#> 2 Torgersen           39.5               186        3800
#> 3 Torgersen           40.3               195        3250
#> 4 Torgersen           NA                  NA          NA
#> 5 Torgersen           36.7               193        3450
```

8.2 Chinstrap

```
palmerpenguins::penguins |>
 dplyr::filter(species == "Chinstrap") |>
 dplyr::select(island, bill_length_mm, flipper_length_mm, body_mass_g) |>
 head(5)
#> # A tibble: 5 × 4
#>   island bill_length_mm flipper_length_mm body_mass_g
#>   <fct>           <dbl>             <int>       <int>
#> 1 Dream            46.5               192        3500
#> 2 Dream            50                 196        3900
#> 3 Dream            51.3               193        3650
#> 4 Dream            45.4               188        3525
#> 5 Dream            52.7               197        3725
```

8.3 Gentoo

```
palmerpenguins::penguins |>
 dplyr::filter(species == "Gentoo") |>
 dplyr::select(island, bill_length_mm, flipper_length_mm, body_mass_g) |>
 head(5)
#> # A tibble: 5 × 4
#>   island bill_length_mm flipper_length_mm body_mass_g
#>   <fct>           <dbl>             <int>       <int>
#> 1 Biscoe           46.1               211        4500
#> 2 Biscoe           50                 230        5700
#> 3 Biscoe           48.7               210        4450
#> 4 Biscoe           50                 218        5700
#> 5 Biscoe           47.6               215        5400
```

9 File tree

The filetree shortcode lists this repository at render time. With mode=dynamic, folders open and close on click. Descriptions come from the filetree.yml file.

- _extensions/ *the extension itself, as quarto add installs it*
  - hebstr-doc/ *formats, filters, SCSS themes, bundled fonts and the R syntax definition*
    - …
- scripts/ *R scripts the example injects with the script shortcode*
  - build_template.py
  - check-docx.R
  - demo_penguins.R
- tests/
  - fixtures/
    - …
  - anx-float-probe.qmd
  - anx-float.sh
  - docx-cell-probe.qmd
  - docx-cell.sh
  - docx-template-assert.py
  - docx-template-probe.bib
  - docx-template-probe.qmd
  - docx-template.sh
  - fonts-svg-assert.py
  - fonts-svg.sh
  - luaunit.lua
  - python-syntax-probe.qmd
  - python-syntax-tokens.sh
  - r-syntax-probe.qmd
  - r-syntax-tokens.sh
  - run.lua
  - support.lua

    - test_add_code_files.lua
    - test_collab_comments.lua
    - test_crossref_anx.lua
    - test_docx_callout_flatten.lua
    - test_docx_caption.lua
    - test_docx_cell_paragraph.lua
    - test_docx_layout_flatten.lua
    - test_docx_list_style.lua
    - test_docx_toc_break.lua
    - test_filetree.lua
    - test_r_syntax.lua
    - thread-docx.py
- air.toml
- CHANGELOG.md *release notes*
- example.qmd *feature showcase, rendered to example.html*
- filetree.yml
- LICENSE.md *MIT, plus the licences of the bundled third-party assets*
- package-lock.json
- package.json *pinned versions of the stylesheet linter and formatter*
- prek.toml
- **README.md** *installation, shortcodes and customization*
- ruff.toml
- stylelint.config.mjs *stylesheet lint rules*
- stylua.toml

10 Equation

Inline math: $y = \beta_0 + \beta_1 x + \varepsilon$.

Display math with a cross-reference target (Equation 1):

$$\hat{\beta} = (X^\top X)^{-1} X^\top y \quad (1)$$

Display math with text (Equation 2):

$$\frac{\text{upper text}}{\text{lower text}} \text{ beside text} \quad (2)$$

11 Footnote

Footnotes are collected at the end of the document.[1]

[1] The footnote body. Markdown works here: *emphasis*, `code()`, and links.

12 Margin note

A .column-margin div places its content in the margin column, next to the paragraph it follows. Body text is justified; margin content stays left-aligned.

A margin note, written as a .column-margin div, with enough text to wrap over several lines in the narrow column.

13 Callouts

Callouts use callout-appearance: simple.

A note callout.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis sagittis posuere ligula sit amet lacinia. Duis dignissim pellentesque magna, rhoncus congue sapien finibus mollis. Ut eu sem laoreet, vehicula ipsum in, convallis erat. Vestibulum magna sem, blandit pulvinar augue sit amet, auctor malesuada sapien. Nullam faucibus leo eget eros hendrerit, non laoreet ipsum lacinia. Curabitur cursus diam elit, non tempus ante volutpat a. Quisque hendrerit blandit purus non fringilla. Integer sit amet elit viverra ante dapibus semper. Vestibulum viverra rutrum enim, at luctus enim posuere eu. Orci varius natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus.

A tip callout.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis sagittis posuere ligula sit amet lacinia. Duis dignissim pellentesque magna, rhoncus congue sapien finibus mollis. Ut eu sem laoreet, vehicula ipsum in, convallis erat. Vestibulum magna sem, blandit pulvinar augue sit amet, auctor malesuada sapien. Nullam faucibus leo eget eros hendrerit, non laoreet ipsum lacinia. Curabitur cursus diam elit, non tempus ante volutpat a. Quisque hendrerit blandit purus non fringilla. Integer sit amet elit viverra ante dapibus semper. Vestibulum viverra rutrum enim, at luctus enim posuere eu. Orci varius natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus.

A caution callout.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis sagittis posuere ligula sit amet lacinia. Duis dignissim pellentesque magna, rhoncus congue sapien finibus mollis. Ut eu sem laoreet, vehicula ipsum in, convallis erat. Vestibulum magna sem, blandit pulvinar augue sit amet, auctor malesuada sapien. Nullam faucibus leo eget eros hendrerit, non laoreet ipsum lacinia. Curabitur cursus diam elit, non tempus ante volutpat a. Quisque hendrerit blandit purus non fringilla. Integer sit amet elit viverra ante dapibus semper. Vestibulum viverra rutrum enim, at luctus enim posuere eu. Orci varius natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus.

A warning callout.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis sagittis posuere ligula sit amet lacinia. Duis dignissim pellentesque magna, rhoncus congue sapien finibus mollis. Ut eu sem laoreet, vehicula ipsum in, convallis erat. Vestibulum magna sem, blandit pulvinar augue sit amet, auctor malesuada sapien. Nullam faucibus leo eget eros hendrerit, non laoreet ipsum lacinia. Curabitur cursus diam elit, non tempus ante volutpat a. Quisque hendrerit blandit purus non fringilla. Integer sit amet elit viverra ante dapibus semper. Vestibulum viverra rutrum enim, at luctus enim posuere eu. Orci varius natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus.

An important callout.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis sagittis posuere ligula sit amet lacinia. Duis dignissim pellentesque magna, rhoncus congue sapien finibus mollis. Ut eu sem laoreet, vehicula ipsum in, convallis erat. Vestibulum magna sem, blandit pulvinar augue sit amet, auctor malesuada sapien. Nullam faucibus leo eget eros hendrerit, non laoreet ipsum lacinia. Curabitur cursus diam elit, non tempus ante volutpat a. Quisque hendrerit blandit purus non fringilla. Integer sit amet elit viverra ante dapibus semper. Vestibulum viverra rutrum enim, at luctus enim posuere eu. Orci varius natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus.

14 Block quote

> A citation.
>
> — author

15 Annexes


Annexes are numbered separately and referenced as @anx-…. A table chunk labelled tbl-anx-…, a figure chunk labelled fig-anx-… and a fenced div labelled anx-… all produce an annexe.

Annexe 1. Mean body mass by species and island.

```
palmerpenguins::penguins |>
  dplyr::group_by(species, island) |>
  dplyr::summarise(
    n = dplyr::n(),
    mean_mass_g = round(mean(body_mass_g, na.rm = TRUE)),
    .groups = "drop"
  )
#> # A tibble: 5 × 4
#>   species   island       n mean_mass_g
#>   <fct>     <fct>    <int>       <dbl>
#> 1 Adelie    Biscoe      44        3710
#> 2 Adelie    Dream       56        3688
#> 3 Adelie    Torgersen   52        3706
#> 4 Chinstrap Dream       68        3733
#> 5 Gentoo    Biscoe     124        5076
```

```
ggplot2::ggplot(
  palmerpenguins::penguins,
  ggplot2::aes(x = species, y = body_mass_g)
) +
  ggplot2::geom_boxplot(na.rm = TRUE) +
  ggplot2::theme_minimal(base_size = 12)
```

Annexe 2. Body mass spread by species.

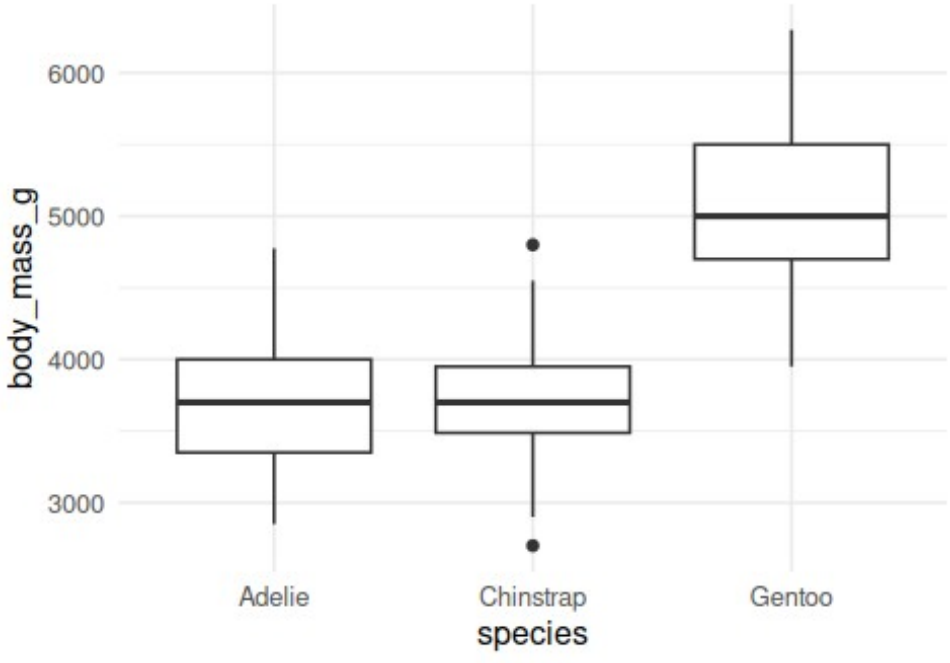

A fenced div holds content that is neither a table nor a figure.

Annexe 3. Free-form annexe written as a fenced div.

Regression diagnostics, model assumptions and other supporting material.

16 Cross-references

- Section reference: Section 3
- Figure reference: Figure 1
- Equation reference: Equation 1
- Annexe reference: Annexe 3

17 Session

```
sessioninfo::session_info(pkgs = "attached")
#> ─ Session info
─────────────────────────────────────────────────────────────────────────────
#>  setting  value
#>  version  R version 4.6.1 (2026-06-24)
#>  os       Ubuntu 24.04.5 LTS
#>  system   x86_64, linux-gnu
#>  ui       X11
#>  language (EN)
#>  collate  en_US.UTF-8
#>  ctype    en_US.UTF-8
#>  tz       Europe/Paris
#>  date     2026-11-14
#>  pandoc   3.10 @ /usr/share/positron/resources/app/quarto/bin/tools/x86_64/ (via
rmarkdown)
#>  quarto   1.11.9 @ /usr/local/bin/quarto
#>
#> ─ Packages
─────────────────────────────────────────────────────────────────────────────
#>  package * version date (UTC) lib source
#>  dplyr   * 1.2.1   2026-04-03 [1] RSPM
#>  ggplot2 * 4.0.3   2026-04-22 [1] RSPM
#>
#>  [1] /home/julien/R/x86_64-pc-linux-gnu-library/4.6
#>  [2] /opt/R/4.6.1/lib/R/library
#>  * ── Packages attached to the search path.
#>
#>
──────────────────────────────────────────────────────────────────────────────
```