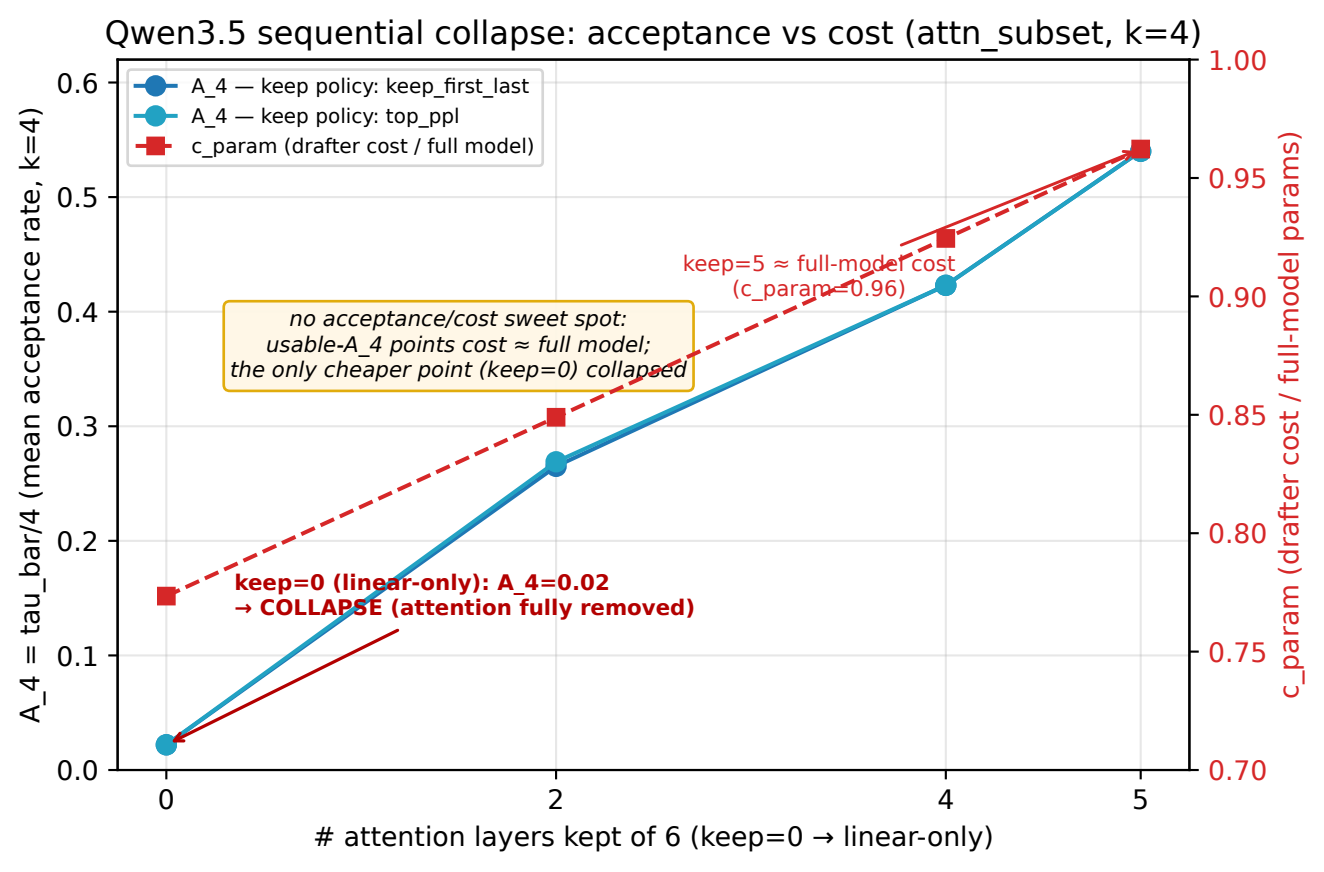

Qwen3.5 sequential collapse: acceptance vs cost (attn_subset, k=4)
A_4 — keep policy: keep_first_last
A_4 — keep policy: top_ppl
c_param (drafter cost / full model)
keep=5 ≈ full-model cost
(c_param=0.96)
no acceptance/cost sweet spot:
usable-A_4 points cost ≈ full model;
the only cheaper point (keep=0) collapsed
keep=0 (linear-only): A_4=0.02
→ COLLAPSE (attention fully removed)
A_4 = tau_bar/4 (mean acceptance rate, k=4)
c_param (drafter cost / full-model params)
attention layers kept of 6 (keep=0 → linear-only)
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.70
0.75
0.80
0.85
0.90
0.95
1.00
0
2
4
5