
COMP206 Learning Journal

Hector Barquero

Jul 14, 2026

CONTENTS:

1	Submission instructions	1
1.1	Rules for deliverables	1
1.2	Program rules	1
1.3	Program naming	2
1.4	Program test plans	2
2	Assignment instructions	3
2.1	Assignment journal overview	3
2.2	Technical requirements	3
2.3	Test plan requirements	4
3	Assignment one journal	5
3.1	Program design	6
3.2	Overview and reflections	9
3.3	Readings	10
3.4	Practice problems	21
3.5	Sources and references	28
4	Assignment two journal	29
4.1	Program design	30
4.2	Overview and reflections	33
4.3	Readings	33
4.4	Practice problems	39
4.5	Sources and references	40
5	Assignment three journal	41
6	Assignment four journal	43
7	Practice problems	45
7.1	Unit 1 practice problems	45
7.2	Unit 2 practice problems	63
7.3	Unit 3 practice problems	94
7.4	Unit 4 practice problems	119
7.5	Unit 5 practice problems	135
7.6	Unit 6 practice problems	150
8	Think C++	163
8.1	Chapter synopsis and notes	163
9	Rooks guide to C++	169

9.1	Chapter synopsis and notes	169
10	Programming fundamentals	175
10.1	Chapter synopsis and notes	175

SUBMISSION INSTRUCTIONS

 Tip

Refer to GoodDocs.cpp for a sample test plan format.

1.1 Rules for deliverables

Each assignment has multiple programs. All programs should be in a single directory. Don't nest them or make it harder to find. Remember that a human grades your work.

- Programs must run from command line
- Submit all source combined into one .zip or .gz.
- The .zip must unpack to a single working directory with all source files
- Only submit source .cpp, .h and Makefiles are optional. Include any input files. Submit only the source files. Do not submit compiled code.
- Upload through the **Assignment** tool
- Don't use .rar
- Don't submit compiled files (.obj or .exe)
- Don't submit project files generated by IDE

1.2 Program rules

1. Program must be complete, compile and run using the compiler and version specified for the course (the latest version of the GNU compiler). Failure to compile is a zero grade.
2. Program must solve problem in the assignment.
3. Site code used from the textbook or external source, if any.
4. Programs must have in-program documentation contained in comment block located at the start of the program. Name, AU student ID, and current date must be included. Include program name, program purpose in one sentence, and any special instructions to compile and execute the program. If it accepts or requires CLI arguments, it must be included in this in-program documentation.

1.3 Program naming

No matter what the program requirements, the main entry point for the program should be contained in a source file named according to the following the format:

 Note

Assignment#Question#.cpp

1.4 Program test plans

A complete test plan documentation comment block must follow the main documentation comment block.

At a minimum, you must test:

1. Normal data: Standard input and outputs. Ensure accuracy.
2. Abnormal data: How does it handle invalid input, division by zero, input files not found. Test a variety of error conditions.
3. Limiting conditions: Zero, null, large and small numbers. Find the algorithmic limits.

ASSIGNMENT INSTRUCTIONS

2.1 Assignment journal overview

Note

You can create a single journal for the whole course, or create a journal for each assignment.

1. Several pages long.
2. Cover the time you spent.
3. Document the difficulties you encountered, and how you overcame them.
4. Write down the activities you're doing ongoing to track reflections.
5. List the sources used.
6. Include the design and design decisions you made.
7. Match the learning outcomes to syllabus.

2.2 Technical requirements

1. Submit all files in a single .zip or .gz (no .rar, no proprietary compression).
2. Must unzip to one folder. Don't place each program into it's own working directory (./program1/, ./program2/).
3. Upload through the assignment tool.
4. Submit .cpp, .h. Make files are optional. Include input files.
5. Don't submit compiled files (.obj, .exe). No files generated by IDE.
6. Must execute from CLI.
7. Use the latest GNU C++ compiler.
8. In-program documentation required in a comment block at the top. See GoodDocs.cpp for an example. (Include your name, AU ID, date, program name, purpose in one sentence, instructions to run, and if it accepts CLI arguments).
9. After the comment block, include a test plan comment block. See GoodDocs.cpp.
10. Entry point for submissions are file Assignment#Question#.cpp, for example Assignment1Question1.cpp

2.3 Test plan requirements

1. Test normal data (standard inputs)
2. Test abnormal data (wrong char, types, file not found)
3. Test limit conditions (null, bytes exceed types, ttfb)

ASSIGNMENT ONE JOURNAL



Time spent	Jan 2026 to Aug 2026
Student name	Hector Barquero


Tip

How to use this journal


This journal section acts as an index, with the reading contents contained in the **Readings** chapter. You can use this to jump to the correct chapter, and it organizes the Unit 1 assignment journal components more cleanly rather than having them duplicated.


3.1 Program design

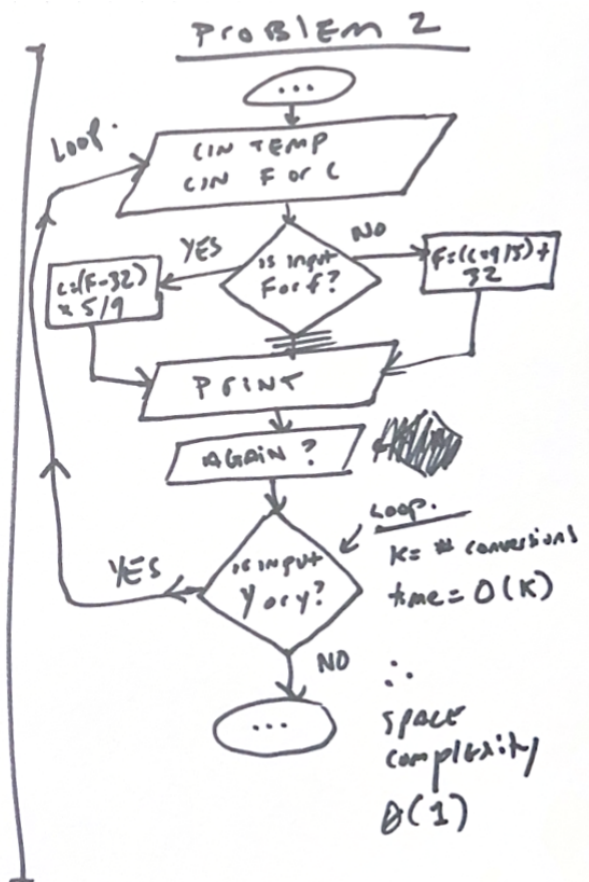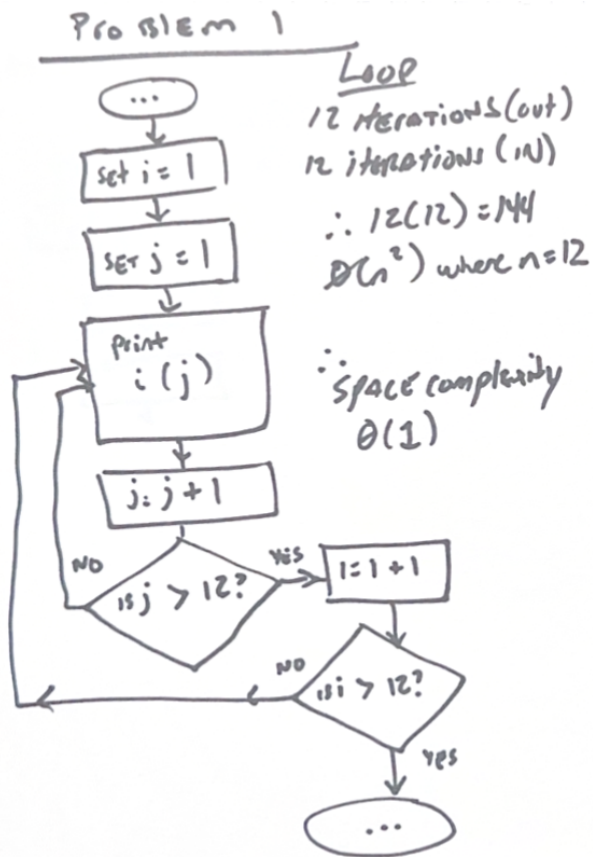

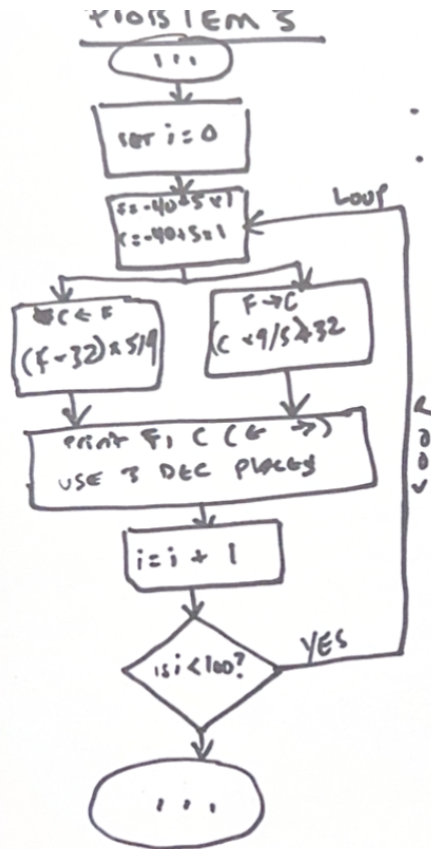

Loop
 - 100 iterations
 $O(1), O(n)$
 $\therefore$ SPACE complexity
 $O(1)$

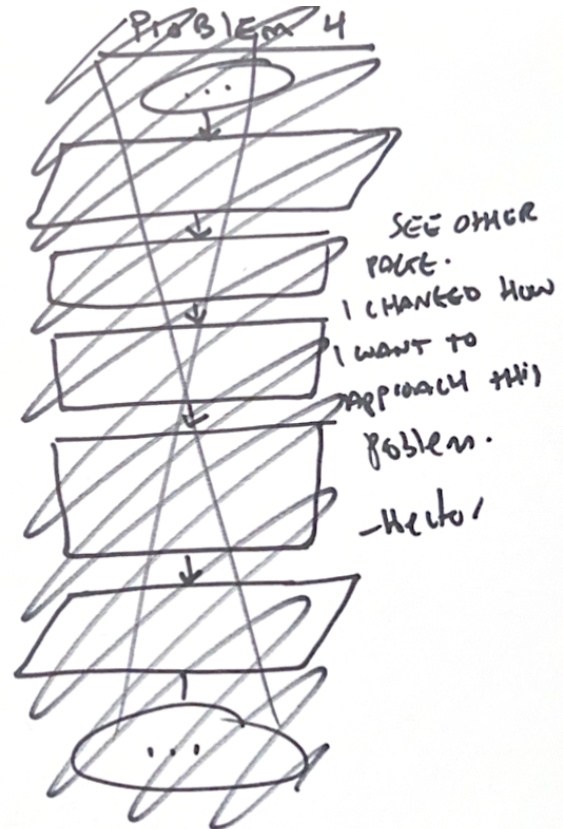

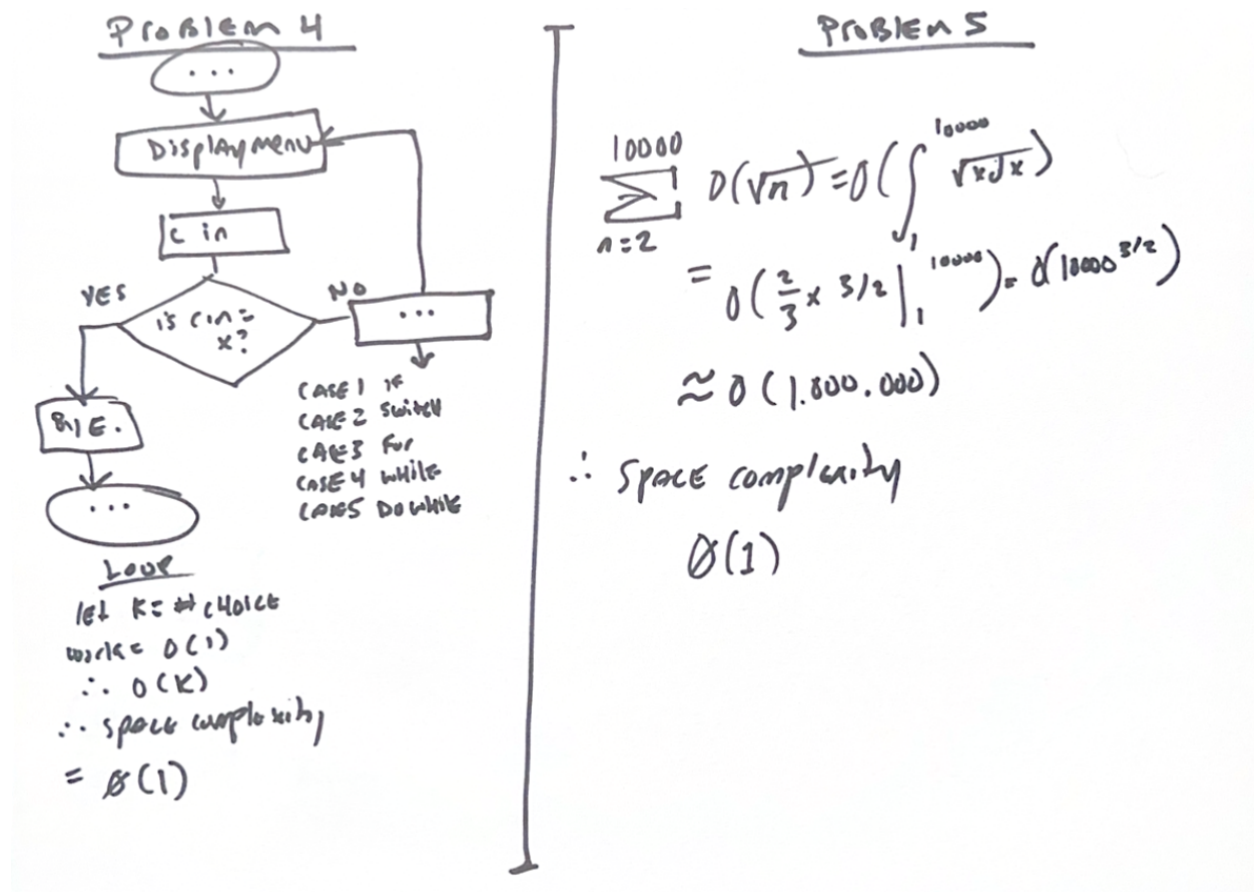

3.1.1 Multiplication table

- Added nested for loops for the row and column values. (v1.0)
- Used setw to align three-character row labels and four-character products. (v1.1-v1.5)
- Compared the generated first and final rows with the supplied table. (v1.5)
- Corrected the first-column width so the vertical bars align with the sample.(v1.5-v1.7)

3.1.2 Convert temperature from F to C

- Added a repetition loop for multiple conversions. (v1.0)
- Implemented both temperature formulas using double values. (v1.0)
- Accepted uppercase and lowercase F, C, Y and N. (v1.0)
- Added input checks for non-numeric temperatures and unsupported units. (v1.2)
- Added extra support and redesigned program a bit to handle when user enters temp as string not int or double. (v1.2)
- Verified 32 F converts to 0 C, 100 C converts to 212 F and -40 converts to -40 in either direction. (v1.2)

3.1.3 Temperature conversion table

No changelog - was able to solve this in one attempt given similarity to previous problems.

- Added static functions for Fahrenheit-to-Celsius and Celsius-to-Fahrenheit. (v1.0)
- Generated exactly 100 rows beginning at -40 and increasing by 5. (v1.0)
- Used fixed, setprecision(3) and setw for table formatting. (v1.0)
- Verified the first row, the 100-degree row and the final 455-degree row. (v1.0)

3.1.4 Interactive help system

- Added a repeating menu implemented with a do-while loop. (v1.0)
- Added switch cases for if, switch, for, while and do-while. (v1.1)
- Added invalid-selection handling and support for x or X to exit. (v1.2)
- Verified each menu option and both exit characters. (v1.3)

3.1.5 Print all prime numbers (1 to 10000)

- Added nested for loops and the modulus operator for prime detection. (v1.0)
- Began candidate testing at 2 because 1 is not prime. (v1.1)
- Limited divisor testing to divisors whose square is no greater than the candidate. (v1.2)
- Formatted the output as ten prime numbers per row. (v1.2)
- Verified that 2 is the first prime, 9973 is the final prime and 1,229 primes are produced from 1 through 10,000. (v1.3)

3.2 Overview and reflections

3.2.1 Unit 1: Points to ponder

Hector Barquero posted Feb 27, 2026 8:12 AM <https://learning.athabascau.ca/d2l/le/18658/discussions/threads/337601/View?ou=18658>

I've programmed in C, C++ a lot and reading these feels like a nice refresher.

I've been programming in javascript a lot lately, so I almost forget definitions of things and some of the differences feel jarring. I caught myself forgetting that C++ doesn't do hoisting, and I forgot how strict it is with type declaration... Reading this content again has me remembering I have some javascript habits to break.

I also appreciate that both Think C++ and The Rooks Guide especially are really short and direct. I thought at first that they were quite dated, but I guess depending where you work... the C++ standard you might be writing could be dated too. (Where I am, I think it's an archaic standard, and the job previous to that we weren't using the latest either)

3.2.2 Unit 2: Points to ponder

Hector Barquero posted Feb 27, 2026 10:19 AM <https://learning.athabascau.ca/d2l/le/18658/discussions/threads/337650/View>

Completing unit 2 was interesting because it has differences to modern c++ that I needed to refresh on. I recall learning the same traditional academic declarations when first studying c++ at Fanshawe College in 2016:

```
//academic and traditional declaration the books seems to prefer: int foo = 0;
```

but when I started working in 2018+, I used brace form since it's modern best practice with c++:

//brace form which i think is c++ v11 and on, considered best practice to protect narrowing `int foo{0};`

This might be another thing for me to remember since I'm used to protecting type narrowing when doing narrowing conversion, but I scanned ahead for other units and see that the text prefers explicit casting conversion.

This is all really good for me to read again because in javascript, everything is dynamically typed where the type belongs to the value, not the variables

3.2.3 Unit 3: Points to ponder

Hector Barquero posted Feb 27, 2026 1:27 PM <https://learning.athabasca.ca/d2l/le/18658/discussions/threads/337734/View>

This unit was a good read. I spent a lot of time between multiple books this unit (including a javascript one I read yearly; eloquent javascript). I found there was a lot of reading that I thought I knew in the c++ books, but then it became blurry as I applied it in programming practice questions and tests- mainly because the casting, conversion, implicit coercion and explicit casting/conversion.

C++ prefers very deliberate programmer directed type conversion, but unlike javascript, the coercion happens less frequently.

javascript mutates the types more freely so coercion feels like something to always watch for, and programming explicit casting (conversion in js) is something normal.

I'm not sure how often I'll need to in this course, but I'll remember to use `static_cast<var>` or various named casts in my c++ programs, since the last time I touched it we used the more archaic `int foo = (int)bar; ...` a C style cast which doesn't seem to be used or popular in the books anymore.

3.3 Readings

3.3.1 Unit 1

ThinkCScpp 1.1: What is a programming language?

- A programming language provides formal rules for expressing instructions a computer can execute.
- High-level languages like C++ must be translated into machine language before they can run.

ThinkCScpp 1.2: What is a program?

- A program is a sequence of instructions that performs computation, input, output, testing, and repetition.

ThinkCScpp 1.3: What is debugging?

- Debugging is the process of finding and correcting errors in a program.
- Errors generally fall into compile-time, run-time, and logic categories.
- Debugging requires testing assumptions rather than randomly changing code.

ThinkCScpp 1.3.1: Compile-time errors

- Compile-time errors prevent the compiler from translating the source code.
- They commonly result from invalid syntax, missing punctuation, or incorrect declarations.

ThinkCScpp 1.3.2: Run-time errors

- Run-time errors occur after compilation while the program is executing.
- A program might crash, stop unexpectedly, or perform an invalid operation.
- The compiler can't always detect conditions that only appear during execution.
- Testing different inputs helps identify when the failure occurs.

ThinkCScpp 1.3.3: Logic errors and semantics

- Logic errors produce incorrect results even though the program compiles and runs.
- Semantic errors happen when valid code doesn't express the intended meaning.

ThinkCScpp 1.3.4: Experimental debugging

- Experimental debugging uses controlled tests to confirm or reject explanations for an error.
- Debug output can reveal variable values and show which statements execute.
- Changing several things at once makes it harder to identify the actual cause.

ProgFund 1: Introduction to Programming

- Programming converts a problem-solving process into instructions a computer can follow.
- Programs typically accept input, process data, and produce output.
- Good programming requires planning, implementation, testing, and maintenance.

ProgFund 1.1: Systems Development Life Cycle

- The SDLC organizes software work into planning, analysis, design, implementation, testing, and maintenance.
- Each phase reduces uncertainty before more development effort is committed.

ProgFund 1.3: Modularization and C++ Program Layout

- Modularization divides a large problem into smaller functions with specific responsibilities.
- A C++ program normally contains directives, declarations, functions, and a `main` function.
- Smaller modules are easier to test, reuse, and understand.
- Clear layout helps readers recognize the program's structure quickly.

ProgFund 2: Program Planning & Design

- Program planning defines the problem and solution before code is written.

ProgFund 2.1: Program Design

- Program design identifies inputs, processing steps, outputs, and required decisions.
- A planned solution is easier to implement and test than an improvised one.
- Complex problems should be divided into manageable modules.

ProgFund 2.2: Pseudocode

- Pseudocode describes program logic using structured language without strict C++ syntax.
- It helps refine algorithms before implementation details become a distraction.

ProgFund 2.3: Test Data

- Test data checks whether a program handles normal, boundary, and invalid inputs correctly.
- Expected results should be decided before the program is executed.
- One successful test can't prove that every possible input works.
- Carefully selected cases can expose incorrect conditions and assumptions.
- Tests should be repeated after changes to detect regressions.

ThinkCScpp 1.4: Formal and natural languages

- Natural languages tolerate ambiguity, while formal languages require precise syntax and structure.
- C++ can't infer intended meaning when its grammatical rules aren't followed.

ThinkCScpp 1.5: The first program

- A basic C++ program defines `main` as its starting point.
- `cout` writes output through the standard output stream.
- Statements generally end with semicolons.
- Compilation and execution are separate steps.

ProgFund 5: Integrated Development Environment

- An IDE combines tools for editing, compiling, running, and debugging programs.
- It simplifies development but doesn't replace understanding the build process.

ProgFund 5.1: Integrated Development Environment

- IDEs provide features such as syntax highlighting, project management, and error navigation.
- The compiler still determines whether C++ source code is valid.
- Debuggers let programmers inspect execution without adding permanent output statements.

ProgFund 5.2: Standard Input and Output

- `cin` reads values from standard input and `cout` writes values to standard output.
- Stream operators indicate whether data moves into or out of a stream.
- Input must match the destination variable's expected type.
- Output can combine text, values, and formatting within one statement.

ProgFund 5.3: Compiler Directives

- Preprocessor directives begin with `#` and are processed before compilation.
- `#include` makes declarations from headers available to the source file.

3.3.2 Unit 2

ThinkCScpp 2.1: More output

- Multiple values can be sent to `cout` using consecutive insertion operators.
- Escape sequences represent characters such as newlines and tabs.
- Output statements don't automatically add spacing between values.

ThinkCScpp 2.2: Values

- A value is a basic piece of data such as an integer, character, or string.
- Every value has a type that determines its meaning and permitted operations.

ThinkCScpp 2.3: Variables

- A variable is a named storage location associated with a specific type.
- Variables must be declared before they can be used.
- A variable's current value can change during execution.
- Using descriptive names makes expressions easier to understand.

ProgFund 3: Data & Operators

- Data types define how values are represented and which operations are valid.
- Operators combine or modify values to produce new results.

ProgFund 3.1: Data Types in C++

- C++ includes types for integers, floating-point numbers, characters, Boolean values, and text.
- Choosing an appropriate type affects memory use, precision, range, and available operations.
- C++ won't treat every type as interchangeable without a conversion.

ProgFund 3.2: Identifier Names

- Identifiers name variables, functions, types, and other program elements.
- An identifier can't begin with a digit or match a reserved keyword.
- Consistent naming conventions make related identifiers easier to recognize.

ProgFund 3.3: Constants and Variables

- Variables may change, while constants prevent reassignment after initialization.
- Constants communicate that a value isn't expected to change.
- `const` lets the compiler enforce that intention.
- Both constants and variables require suitable types.

ProgFund 3.4: Data Manipulation

- Expressions manipulate data through operators, variables, constants, and function calls.

ThinkCScpp 2.4: Assignment

- Assignment stores the right-hand value in the variable on the left.
- Assignment replaces the variable's previous value.
- The assignment operator doesn't mean mathematical equality.

ThinkCScpp 2.5: Outputting variables

- Variables can be inserted into an output stream alongside literal text.
- Output reflects the variable's value at the time the statement executes.

ThinkCScpp 2.6: Keywords

- Keywords have predefined meanings in C++ and can't be used as identifiers.
- Examples include `int`, `return`, `if`, and `while`.
- Editors often highlight keywords, but the compiler enforces their meaning.
- Keyword spelling and capitalization must be exact.

ProgFund 3.5: Assignment Operator

- The assignment operator evaluates the right-hand expression before storing its result.
- The left side must refer to a writable storage location.

ProgFund 3.6: Arithmetic Operators

- C++ supports addition, subtraction, multiplication, division, and remainder operations.
- The operand types affect how an arithmetic expression is evaluated.
- Division between integers discards the fractional part.
- Parentheses can make the intended grouping explicit.
- Invalid arithmetic, such as integer division by zero, can't produce a useful result.

ProgFund 3.7: Data Type Conversions

- Conversions change a value from one type to another.
- Implicit conversions happen automatically, while casts request a conversion explicitly.
- Narrowing conversions can lose range or precision.

ProgFund 4: Often Used Data Types

- Frequently used C++ types include integers, floating-point values, characters, strings, and Booleans.

ProgFund 4.1: Integer Data Type

- Integer types represent whole numbers without fractional components.
- Their supported range depends on the type and implementation.
- Signed types support negative values, while unsigned types don't.
- Overflow can produce incorrect or implementation-dependent behaviour.

ProgFund 4.2: Floating-Point Data Type

- Floating-point types represent values with fractional components and wide ranges.
- Many decimal fractions can't be represented exactly in binary.
- `double` generally offers more precision than `float`.

ProgFund 4.3: String Data Type

- `std::string` stores and manipulates sequences of characters.
- Strings support operations such as concatenation, comparison, indexing, and length checks.

RooksGuide 2: Variables

- Variables associate names with typed storage that a program can read and modify.
- C++ variables must be declared because their types are determined before execution.
- Initialization gives a variable its first value.
- Uninitialized local variables can contain indeterminate data.

RooksGuide 2.1: How do I decide which data type I need?

- Choose a type based on the required values, precision, operations, and range.
- The smallest possible type isn't always the clearest or safest choice.

RooksGuide 2.2: Identifiers

- Identifiers should describe their purpose without conflicting with C++ naming rules.
- Meaningful names reduce the need for explanatory comments.
- C++ identifiers are case-sensitive.

RooksGuide 2.3: Declaring a Variable

- A declaration introduces a variable's name and type to the compiler.

RooksGuide 2.4: Initializing Variables

- Initialization assigns a value when a variable is created.
- Brace initialization can reject some conversions that would lose information.
- Initializing variables early prevents accidental use of unknown values.

ThinkCScpp 2.7: Operators

- Operators perform computations using one or more operands.
- The same operator may behave differently with different types.
- Some operators modify values, while others only calculate results.
- Operator misuse can still compile when the expression is syntactically valid.

ThinkCScpp 2.8: Order of operations

- Operator precedence determines which parts of an expression are evaluated first.
- Parentheses should be used when the intended order isn't immediately clear.

ThinkCScpp 2.9: Operators for characters

- Character values can be compared and manipulated using their numeric encodings.
- Arithmetic on characters usually produces an integer result.
- Character ordering depends on the encoding used by the implementation.

ProgFund 4.4: Arithmetic Assignment Operators

- Operators such as `+=` and `*=` combine arithmetic with assignment.
- `x += 2` is generally equivalent to `x = x + 2`.
- Compound assignment avoids repeating the variable name.
- The usual type conversion rules still apply.

ProgFund 4.5: Lvalue and Rvalue

- An lvalue identifies an object or storage location that may appear on an assignment's left side.
- An rvalue is commonly a temporary value or expression result.
- Assignment requires a modifiable lvalue as its destination.

ProgFund 4.6: Integer Division and Modulus

- Integer division removes the fractional portion of the result.
- The modulus operator returns the remainder from integer division.
- Modulus is useful for checking divisibility and extracting digits.
- Negative operands can make remainder results less intuitive.

RooksGuide 2.5: Assignment Statements

- Assignment changes an existing variable's value after it has been declared.
- The source expression is evaluated before the destination is updated.

RooksGuide 3: Literals and Constants

- Literals write fixed values directly in source code, while named constants give those values meaning.
- Constants prevent values from being changed accidentally.
- Replacing unexplained literals with named constants improves maintainability.

RooksGuide 3.1: Literals

- A literal represents a value directly, such as `42`, `3.14`, `'A'`, or `"text"`.
- Literal syntax helps determine the value's type.

RooksGuide 3.2: Declared Constants

- A declared constant associates an immutable value with a descriptive identifier.
- Constants should usually be initialized when declared.
- `const` allows the compiler to reject later assignments.
- Named constants avoid repeating unexplained values.
- Changing one declaration can update every expression that uses the constant.

RooksGuide 4: Assignments

- Assignment stores an expression's result in an existing object.
- Chained assignments are possible but can reduce readability.
- Assignment isn't interchangeable with initialization in every context.

ThinkCScpp 2.10: Composition

- Composition combines variables, literals, operators, and function calls into larger expressions.
- Complex expressions should remain readable and avoid repeating unnecessary calculations.

3.3.3 Unit 3**ThinkCScpp 3.1: Floating-point**

- Floating-point values approximate real numbers using limited binary precision.
- `double` is commonly preferred when fractional calculations need reasonable precision.
- Equality comparisons can fail when rounding produces slightly different results.

ThinkCScpp 3.2: Converting from double to int

- Converting a `double` to `int` discards the fractional part rather than rounding it.
- Values outside the integer type's range can't be represented safely.
- An explicit cast makes the conversion visible to readers.
- Rounding functions should be used when truncation isn't intended.

ThinkCScpp 3.3: Math functions

- The `<cmath>` header provides functions for roots, powers, rounding, and trigonometry.
- Math functions accept arguments and return calculated results.

ThinkCScpp 3.4: Composition

- Function calls can be nested inside expressions and passed directly as arguments.
- Composition can remove temporary variables but shouldn't make code difficult to read.
- Each inner expression is evaluated before its result is used by the outer expression.

ThinkCScpp 3.5: Adding new functions

- Functions package a named sequence of statements into a reusable operation.
- A function definition specifies its return type, name, parameters, and body.
- Decomposing code into functions reduces duplication.
- Function names should describe the operation being performed.
- `main` can call functions that were declared before the call.

ThinkCScpp 3.6: Definitions and uses

- A function must be declared or defined before the compiler encounters a call to it.
- A declaration describes the function's interface without providing its implementation.

ThinkCScpp 3.7: Programs with multiple functions

- Multiple functions divide a program into smaller units with separate responsibilities.
- Execution begins in `main` and moves into other functions when they're called.
- Functions can call other functions when their declarations are visible.

ThinkCScpp 3.8: Parameters and arguments

- Parameters are variables declared by a function, while arguments are values supplied by the caller.
- Arguments are matched to parameters by position and compatible type.
- Passing by value gives the function its own copy of the argument.

ThinkCScpp 3.9: Parameters and variables are local

- Parameters and variables declared inside a function are local to that function.
- Separate functions can use the same local name without sharing storage.
- Local variables stop existing when their scope ends.
- A function can't directly access another function's local variables.

ThinkCScpp 3.10: Functions with multiple parameters

- Functions can accept multiple parameters separated by commas.
- Each parameter requires its own declared type.
- Arguments must be supplied in the expected order.

ThinkCScpp 3.11: Functions with results

- A non-void function returns a value using a `return` statement.
- The returned value's type must be compatible with the declared return type.
- Returned results can be stored, printed, or used inside larger expressions.
- Every reachable path should return a value when the function isn't `void`.
- Returning a result often makes a function easier to reuse than printing internally.

ProgFund 6: Program Control Functions

- Program control functions organize execution by separating tasks into callable modules.
- Functions can receive data, perform processing, and return results.

ProgFund 6.1: Pseudocode Examples for Functions

- Function pseudocode describes parameters, processing steps, and returned values without C++ syntax.
- It helps define responsibilities before implementation.
- Calls in the main algorithm show how individual modules interact.

ProgFund 6.2: Hierarchy or Structure Chart

- A structure chart shows which functions call other functions.
- It represents program organization without describing every statement.
- Higher-level functions coordinate work performed by lower-level modules.
- The chart can expose modules that are too large or tightly connected.

ProgFund 6.3: Program Control Functions

- Control functions coordinate other functions rather than performing every task directly.

ProgFund 6.4: Void Data Type

- A void function performs an action without returning a value.
- void can also indicate that a function doesn't accept parameters in some declarations.
- A void function may use return without an expression to exit early.

ProgFund 6.5: Documentation and Making Source Code Readable

- Readable code uses meaningful names, consistent formatting, and focused functions.
- Comments should explain intent or unusual decisions rather than repeat the code.
- Excessive comments can become inaccurate when the implementation changes.
- Documentation should describe interfaces, assumptions, and important constraints.
- Consistent style makes errors and structural problems easier to notice.

RooksGuide 5: Output

- Output streams send formatted values to destinations such as the console.
- `std::cout` uses `<<` to insert data into the standard output stream.

RooksGuide 6: Input

- `std::cin` uses `>>` to extract typed values from standard input.
- Failed input leaves the stream in an error state until it's handled.
- Whitespace-delimited extraction won't read an entire line containing spaces.
- `std::getline` is better suited to full-line text input.

RooksGuide 7: Arithmetic

- Arithmetic expressions follow C++ precedence and type-conversion rules.
- Integer and floating-point operands can produce different results.
- Parentheses clarify calculations and reduce reliance on remembered precedence.

RooksGuide 8: Comments

- Comments document intent and are ignored during compilation.
- Line comments begin with `//`, while block comments use `/*` and `*/`.
- Good names and structure should carry most of the explanation.
- Comments shouldn't preserve obsolete code that version control already stores.
- Misleading comments are worse than missing comments.

RooksGuide 9: Data Types and Conversion

- Data types define representation, range, precision, and supported operations.
- Conversions allow expressions to combine different types.
- Some conversions are safe, while others can lose information.

RooksGuide 9.1: Floating-point types

- `float`, `double`, and `long double` offer different minimum precision and range.
- Floating-point arithmetic is approximate and subject to rounding.
- `double` is generally the default type for decimal literals.
- More precision doesn't make every decimal value exact.

RooksGuide 9.2: Other types introduced by C++11

- C++11 added features such as fixed-width integers, `nullptr`, and improved type inference.
- Fixed-width integer types are useful when an exact bit width is required.

RooksGuide 9.3: Conversion Between Types

- Implicit conversions occur when C++ automatically changes a value's type.
- Promotions usually preserve information, while narrowing conversions might not.
- Mixed-type expressions convert operands to a common type.
- Conversion behaviour should be considered before assigning the result.

RooksGuide 9.4: Coercion & Casting

- Coercion is an automatic conversion performed by the language.
- Casting explicitly requests that a value be treated as another type.
- `static_cast` clearly expresses many ordinary compile-time conversions.

RooksGuide 9.5: Automatic Types in C++11

- auto asks the compiler to infer a variable's type from its initializer.
- The inferred type remains static and can't later change like a JavaScript variable.
- auto can reduce repetition when the initializer already makes the type clear.
- It shouldn't hide information that readers need to understand the code.
- An auto variable normally requires an initializer.

3.4 Practice problems

Tip

Below are only five of my favourite problems I solved for each unit. A comprehensive problemset is solved over the course of COMP206 and you can view my answers at :doc: *Practice Problems* <PracticeProblems.rst>

3.4.1 Unit 1 practice problems

Fizz Buzz (Easy)

Return numbers as strings, replacing multiples of 3 and 5 with the required words.

```
class Solution {
public:
    vector<string> fizzBuzz(int n) {
        vector<string> answer;

        for (int i = 1; i <= n; ++i) {
            if (i % 15 == 0) {
                answer.push_back("FizzBuzz");
            } else if (i % 3 == 0) {
                answer.push_back("Fizz");
            } else if (i % 5 == 0) {
                answer.push_back("Buzz");
            } else {
                answer.push_back(to_string(i));
            }
        }

        return answer;
    }
};
```

Number of Steps to Reduce a Number to Zero (Easy)

Count how many divisions and subtractions are required to reduce a number to zero.

```
class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;
```

(continues on next page)

(continued from previous page)

```
    while (num > 0) {
        if (num % 2 == 0) {
            num /= 2;
        } else {
            --num;
        }

        ++steps;
    }

    return steps;
}
};
```

Richest Customer Wealth (Easy)

Find the greatest sum among the rows of a two-dimensional integer array.

```
class Solution {
public:
    int maximumWealth(vector<vector<int>>& accounts) {
        int maximum = 0;

        for (const vector<int>& customer : accounts) {
            int total = 0;

            for (int account : customer) {
                total += account;
            }

            maximum = max(maximum, total);
        }

        return maximum;
    }
};
```

Valid Palindrome (Easy)

Determine whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = static_cast<int>(s.size()) - 1;

        while (left < right) {
            while (left < right && !isalnum(s[left])) {
                ++left;
            }
        }
    }
};
```

(continues on next page)

(continued from previous page)

```

        while (left < right && !isalnum(s[right])) {
            --right;
        }

        if (tolower(s[left]) != tolower(s[right])) {
            return false;
        }

        ++left;
        --right;
    }

    return true;
}
};

```

Two Sum (Easy)

Return the indexes of two array values whose sum equals the target.

```

class Solution {
public:
    vector<int> twoSum(vector<int>& nums, int target) {
        unordered_map<int, int> indexes;

        for (int i = 0; i < nums.size(); ++i) {
            int required = target - nums[i];

            if (indexes.count(required)) {
                return {indexes[required], i};
            }

            indexes[nums[i]] = i;
        }

        return {};
    }
};

```

3.4.2 Unit 2 practice problems

Final Value of Variable After Performing Operations (Easy)

Apply a sequence of increment and decrement operations to an integer variable.

```

class Solution {
public:
    int finalValueAfterOperations(vector<string>& operations) {
        int value = 0;

        for (const string& operation : operations) {

```

(continues on next page)

(continued from previous page)

```
        if (operation[1] == '+') {
            ++value;
        } else {
            --value;
        }
    }

    return value;
}
};
```

Subtract the Product and Sum of Digits of an Integer (Easy)

Return the product of an integer's digits minus their sum.

```
class Solution {
public:
    int subtractProductAndSum(int n) {
        int product = 1;
        int sum = 0;

        while (n > 0) {
            int digit = n % 10;
            product *= digit;
            sum += digit;
            n /= 10;
        }

        return product - sum;
    }
};
```

Count the Digits That Divide a Number (Easy)

Count how many digits divide the original integer without a remainder.

```
class Solution {
public:
    int countDigits(int num) {
        int count = 0;

        for (int remaining = num; remaining > 0; remaining /= 10) {
            int digit = remaining % 10;

            if (digit != 0 && num % digit == 0) {
                ++count;
            }
        }

        return count;
    }
};
```

Plus One (Easy)

Increment a large integer represented as an array of decimal digits.

```
class Solution {
public:
    vector<int> plusOne(vector<int>& digits) {
        for (int i = static_cast<int>(digits.size()) - 1; i >= 0; --i) {
            if (digits[i] < 9) {
                ++digits[i];
                return digits;
            }

            digits[i] = 0;
        }

        digits.insert(digits.begin(), 1);
        return digits;
    }
};
```

Valid Anagram (Easy)

Determine whether two strings contain identical character counts.

```
class Solution {
public:
    bool isAnagram(string s, string t) {
        if (s.size() != t.size()) {
            return false;
        }

        array<int, 26> counts{};

        for (char character : s) {
            ++counts[character - 'a'];
        }

        for (char character : t) {
            --counts[character - 'a'];
        }

        for (int count : counts) {
            if (count != 0) {
                return false;
            }
        }

        return true;
    }
};
```

3.4.3 Unit 3 practice problems

Fibonacci Number (Easy)

Return the requested Fibonacci number using a function with a result.

```
class Solution {
public:
    int fib(int n) {
        if (n < 2) {
            return n;
        }

        int previous = 0;
        int current = 1;

        for (int i = 2; i <= n; ++i) {
            int next = previous + current;
            previous = current;
            current = next;
        }

        return current;
    }
};
```

Sqrt(x) (Easy)

Return the truncated integer square root of a non-negative integer.

```
class Solution {
public:
    int mySqrt(int x) {
        int left = 0;
        int right = x;
        int result = 0;

        while (left <= right) {
            int middle = left + (right - left) / 2;
            long long square = static_cast<long long>(middle) * middle;

            if (square <= x) {
                result = middle;
                left = middle + 1;
            } else {
                right = middle - 1;
            }
        }

        return result;
    }
};
```

Power of Two (Easy)

Determine whether an integer is an exact power of two.

```
class Solution {
public:
    bool isPowerOfTwo(int n) {
        if (n <= 0) {
            return false;
        }

        while (n % 2 == 0) {
            n /= 2;
        }

        return n == 1;
    }
};
```

Reverse Integer (Medium)

Reverse an integer's digits while returning zero when the result would overflow.

```
class Solution {
public:
    int reverse(int x) {
        int result = 0;

        while (x != 0) {
            int digit = x % 10;
            x /= 10;

            if (result > INT_MAX / 10 ||
                (result == INT_MAX / 10 && digit > 7)) {
                return 0;
            }

            if (result < INT_MIN / 10 ||
                (result == INT_MIN / 10 && digit < -8)) {
                return 0;
            }

            result = result * 10 + digit;
        }

        return result;
    }
};
```

Pow(x, n) (Medium)

Calculate a floating-point base raised to an integer exponent.

```
class Solution {
public:
    double myPow(double x, int n) {
        long long exponent = n;

        if (exponent < 0) {
            x = 1.0 / x;
            exponent = -exponent;
        }

        double result = 1.0;

        while (exponent > 0) {
            if (exponent % 2 == 1) {
                result *= x;
            }

            x *= x;
            exponent /= 2;
        }

        return result;
    }
};
```

3.5 Sources and references

1. cppreference.com. (n.d.). C++ reference. Retrieved Jan 2026 - Aug 2026, from <https://cppreference.com/cpp>
2. Braunschweig, D., & Busbee, K. L. (2018). Programming fundamentals: A modular structured approach (2nd ed.). Rebus Community. <https://press.rebus.community/programmingfundamentals/>
3. Hansen, J. A. (2013). The Rook's guide to C++. Rook's Guide Press. <https://rooksguide.org/>
4. Downey, A. B. (1999). Think C++ (Version 1.1.0). Green Tea Press. <https://www.greenteapress.com/thinkcpp/>
5. leetcode.com. (n.d.). *LeetCode*. Retrieved Jan 2025 - Aug 2026, from <https://leetcode.com/>

ASSIGNMENT TWO JOURNAL


Time spent	Jan 2026 to Aug 2026
Student name	Hector Barquero


Tip

How to use this journal

This journal section acts as an index, with the reading contents contained in the **Readings** chapter. You can use this to jump to the correct chapter, and it organizes the Unit 1 assignment journal components more cleanly rather than having them duplicated.

4.1 Program design

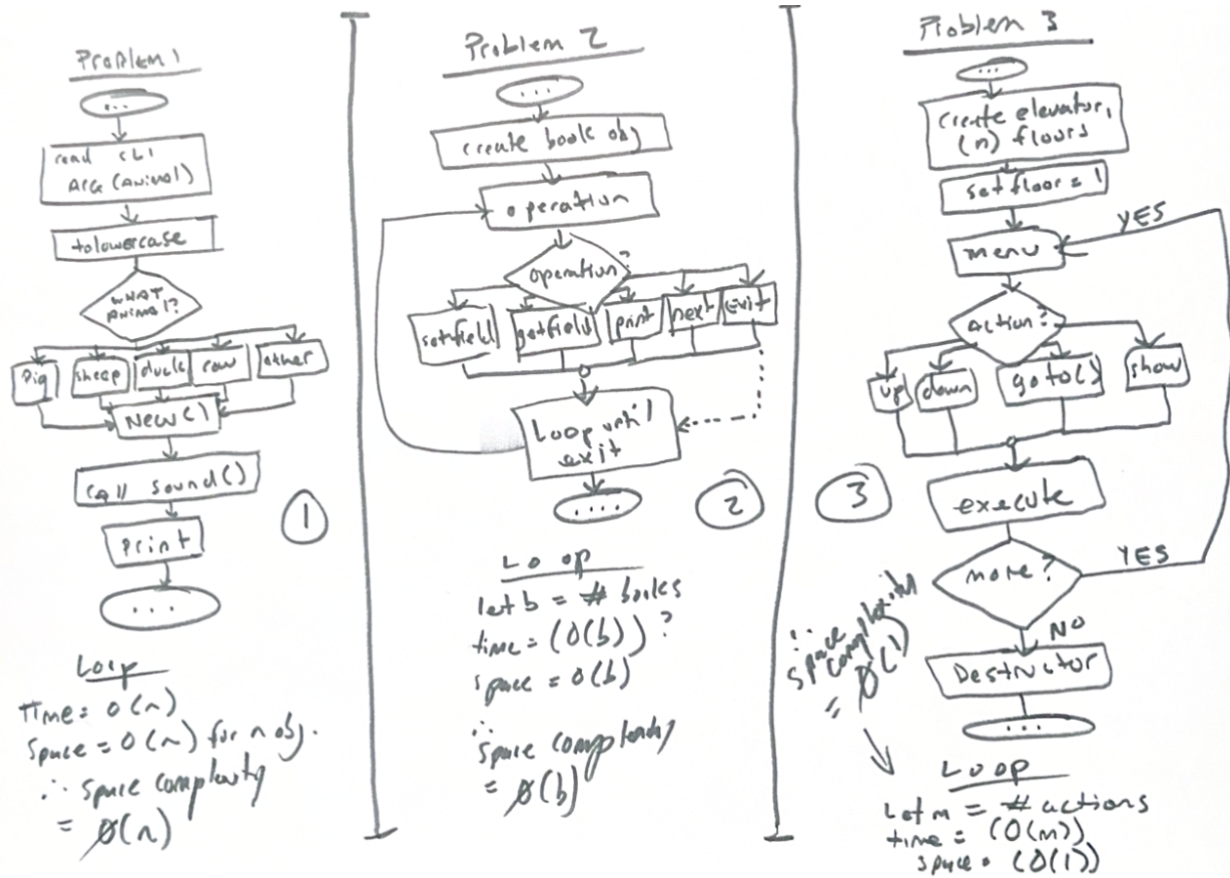

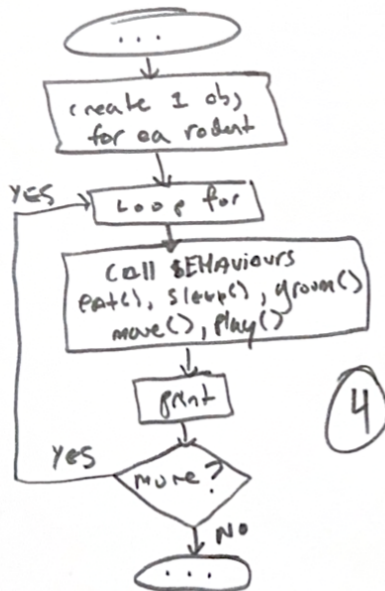Problem 4

Loop
 Time $O(r.b) = O(1)$ const.
 Space $O(1) = O(1)$ const.
 $\therefore$ space complexity = $O(1)$

Problem 5

USE HERON'S FORMULA TO SOLVE?
 Circle: $Area = \pi r^2$, $circumf = 2\pi r$
 Rect: $Area = w \times h$, $circ = 2(w+h)$
 is sq $\Rightarrow w = 4$ ($\Leftarrow \Rightarrow$)

HERON

$$a = |p_1 - p_2|, b = |p_2 - p_3|, c = |p_3 - p_1|$$

$$s = \frac{(a+b+c)}{2}$$

$$Area = \sqrt{s(s-a)(s-b)(s-c)}$$

$$circumf = a + b + c$$

$\therefore \min X = \min(\text{all } x), \max X = \max(\text{all } x)$
 SAME FOR $\min Y$.

Loop

let $n = \#$ SHAPES created.
 $\Leftarrow$ EACH = $O(1)$, time = $O(n)$
 Space...

$\therefore$ space complexity ~
 $= O(n)$

4.1.1 Animal inheritance and sounds

- Added an Animal base class with a default constructor and generic sound() method. (v1.0)
- Added Pig, Sheep, Duck and Cow child classes with animal-specific constructors and overridden sound() methods. (v1.0-v1.2)
- Created several instances of each animal and verified oink, baah, quack and moo output. (v1.2)
- Made sound() virtual so child sounds can be called through an Animal pointer. (v1.3)
- Added an AnimalTest class that creates the correct child object from command-line input. (v1.3-v1.5)
- Added support for mixed-case animal names and error handling for unknown animals or extra arguments. (v1.5-v1.7)
- Used `unique_ptr<Animal>` so the selected child object is cleaned up automatically. (v1.7)

4.1.2 Book class and private attributes

- Added a Book class with private title, ISBN, author, edition, publisher and publication-year attributes. (v1.0)
- Added public getter and setter methods for each private attribute. (v1.0-v1.2)
- Added a default constructor and a parameterized constructor for initializing Book objects. (v1.2-v1.3)
- Added display() to print all stored book information in a consistent format. (v1.3)
- Created three Book objects using both constructors and setter methods. (v1.3-v1.5)

- Verified that each object keeps its own values and that every getter returns the value assigned by its setter. (v1.5-v1.6)

4.1.3 Elevator construction, movement and cleanup

- Added an Elevator class that stores the total number of floors and the current floor. (v1.0)
- Added a default constructor for a five-storey building and a parameterized constructor for custom building sizes. (v1.0-v1.2)
- Added moveTo() to move between floors and reject destinations outside the building range. (v1.2-v1.4)
- Added handling for requests to move to the elevator's current floor. (v1.4)
- Added a destructor that returns the elevator to floor one and prints the required cleanup message. (v1.4-v1.5)
- Tested default construction, upward movement, downward movement, invalid movement and repeated movement. (v1.5-v1.7)
- Used unique_ptr::reset() to demonstrate when a dynamically created Elevator object is destroyed in C++. (v1.7)

4.1.4 Rodent inheritance and behaviours

- Added a Rodent base class with common eat(), sleep(), groom() and move() behaviours. (v1.0)
- Added Mouse, Gerbil, Hamster and GuineaPig child classes. (v1.0-v1.2)
- Overrode only behaviours that differ for each rodent, while leaving common behaviours inherited from Rodent. (v1.2-v1.4)
- Added type() and demonstrateBehaviours() methods to identify each rodent and run all of its behaviours. (v1.4-v1.5)
- Stored the child objects in a vector of unique_ptr<Rodent> objects. (v1.5)
- Called each behaviour through Rodent pointers to verify runtime polymorphism. (v1.5-v1.7)
- Verified that inherited methods still run when a child class does not override a behaviour. (v1.7)

4.1.5 Points and shape hierarchy

- Added a Point class with separate x and y values and show(), add() and subtract() methods. (v1.0)
- Added a Shape base class with virtual area(), circumference(), boundingBox() and display() methods. (v1.0-v1.2)
- Added Circle, Rectangle and Triangle child classes with default and parameterized constructors. (v1.2-v1.4)
- Implemented area and circumference calculations for each valid shape. (v1.4-v1.5)
- Added axis-aligned bounding-box calculations using minimum and maximum x and y coordinates. (v1.5)
- Added constructor validation for positive circle radii, non-collinear triangles and four-sided shapes that satisfy rectangle rules. (v1.5-v1.7)
- Added floating-point tolerance checks so calculated lengths and angles are not compared using exact equality. (v1.7)
- Added square detection when all four rectangle sides have equal length. (v1.7-v1.8)
- Tested valid circles, rectangles and triangles, along with an invalid circle, a non-rectangle quadrilateral, a square and a collinear triangle. (v1.8-v2.0)

4.2 Overview and reflections

4.2.1 Unit 4: Points to ponder

Hector Barquero posted Mar 4, 2026 3:41 PM <https://learning.athabascau.ca/d2l/le/18658/discussions/threads/341404/View>

This unit goes over some fundamentals that were covered in depth within COMP200. If you read the COMP200 text then you'd be pretty prepared to go through this unit with little difficulty.

Control flow and conditions are very familiar to whichever language you may already know, since the history of structured programming and C-based adoption

4.2.2 Unit 5: Points to ponder

Hector Barquero posted Mar 4, 2026 4:18 PM <https://learning.athabascau.ca/d2l/le/18658/discussions/threads/341427/View>

This unit went further into recursion. One of the most interesting things this unit was remembering overloading.

Javascript doesn't do this conventionally. You can write a design pattern to simulate overloading, but ultimately it's run-time evaluation whereas C++ is compile time. You can overload in C++ which is really handy, and something I almost forgot.

This will let me enjoy similar js-like flexibility when writing functions, since multiple functions can share the same name but with different parameters.

4.2.3 Unit 6: Points to ponder

Hector Barquero posted Mar 21, 2026 7:13 AM <https://learning.athabascau.ca/d2l/le/18658/discussions/threads/350429/View>

This unit was a lot of reading, especially the additional and further reading. One of the most interesting parts I learned from reading it all was that loop choice encodes intent, and not capability. I've been selecting the wrong control flow all this time and now see that even though it expresses the same logic, maintenance and readability suffers.

I should be using bounded iteration (for) where it makes sense, not by default. Condition driven control (while), and once executed (do while) make a lot more sense for state transitions when I go back to read my code, but I must have picked up a habit of using bounded iteration primarily.

It also helps because the cognitive load of reading it is a bit worse when choosing the wrong control flow design. You can get earlier returns with the right one.

4.3 Readings

4.3.1 Unit 4

ThinkCScpp 4.1: The modulus operator

- The modulus operator % returns the remainder from integer division.
- It is useful for divisibility tests, digit extraction, and repeating numeric patterns.

ThinkCScpp 4.2: Conditional execution

- An if statement runs a block only when its condition evaluates to true.
- Conditions usually use comparison or logical operators.
- Conditional execution lets a program choose whether an action should occur.

ThinkCScpp 4.3: Alternative execution

- An `if` and `else` statement selects exactly one of two possible paths.
- The `else` block runs only when the original condition is false.

ThinkCScpp 4.4: Chained conditionals

- An `if` followed by `else if` branches can test several mutually exclusive cases.
- Conditions are checked from top to bottom until one succeeds.
- The final `else` can handle all remaining cases.
- Ordering matters when conditions overlap.

ThinkCScpp 4.5: Nested conditionals

- A nested conditional places one decision inside another.
- Nesting is useful when a second test only matters after the first succeeds.
- Deep nesting can usually be simplified with combined conditions or early returns.

ThinkCScpp 4.6: The return statement

- A `return` statement immediately ends the current function.
- A value-returning function uses `return` to send a result back to its caller.

ThinkCScpp 4.7: Recursion

- Recursion occurs when a function calls itself to solve a smaller version of a problem.
- Every recursive function needs a base case that stops further calls.
- The recursive case must move toward the base case.
- Recursive solutions often mirror mathematical definitions or nested structures.

ThinkCScpp 4.8: Infinite recursion

- Infinite recursion happens when recursive calls never reach a stopping condition.
- It eventually exhausts the call stack and causes the program to fail.
- Common causes include missing base cases and arguments that don't move toward termination.

ThinkCScpp 4.9: Stack diagrams for recursive functions

- A stack diagram shows each active function call and its local variables.
- Every recursive call receives its own separate parameters and local storage.
- Calls are removed from the stack in reverse order when they return.
- Stack diagrams help trace how recursive results are assembled.

RooksGuide 10: Conditionals

- Conditionals control which statements execute based on Boolean expressions.
- They allow programs to react differently to different data.
- Clear conditionals avoid duplicated logic and unnecessary nesting.

RooksGuide 10.1: if, else, and else if

- `if` handles the first condition, `else if` checks alternatives, and `else` handles the remainder.
- Only the first matching branch in a chain executes.
- Braces make each branch's scope explicit.
- Conditions should be ordered from most specific to most general.

RooksGuide 10.1.1: A small digression on expressions

- An expression combines values, variables, operators, and function calls to produce a result.
- Conditional expressions are converted to Boolean values.
- Nonzero numeric values act as true, while zero acts as false.

RooksGuide 10.1.2: Using else

- `else` provides a fallback path when its matching `if` condition is false.
- An `else` belongs to the nearest unmatched `if`.
- Braces prevent ambiguity in nested conditions.
- A final `else` can document that all possible cases were considered.

RooksGuide 10.2: switch statements

- A `switch` selects a branch by comparing one expression against constant case values.
- `break` usually prevents execution from falling through into the next case.
- `default` handles values that don't match any listed case.
- `switch` is useful for discrete choices but can't directly express arbitrary ranges.
- Duplicate case values aren't allowed.

4.3.2 Unit 5**ThinkCScpp 5.1: Return values**

- A function's return value is the result supplied to its caller.
- The returned expression must be compatible with the declared return type.
- Return values can be stored, printed, compared, or passed into other functions.

ThinkCScpp 5.2: Program development

- Incremental development builds and tests a program in small working steps.
- Each step should add one limited piece of behaviour.
- Frequent testing makes errors easier to locate.
- Temporary output can verify intermediate values.

ThinkCScpp 5.3: Composition

- Composition uses one expression or function result as part of another operation.
- Small functions can be combined to solve larger problems.

ThinkCScpp 5.4: Overloading

- Function overloading allows several functions to share a name when their parameter lists differ.
- The compiler selects the best matching overload from the supplied arguments.
- Return type alone can't distinguish overloads.
- Ambiguous calls produce compile-time errors.

ThinkCScpp 5.5: Boolean values

- The `bool` type stores either `true` or `false`.
- Comparisons produce Boolean results.
- Boolean values directly represent conditions instead of using numeric substitutes.

ThinkCScpp 5.6: Boolean variables

- Boolean variables store the result of a condition for later use.
- Descriptive names such as `isValid` make decision logic easier to read.
- They can simplify repeated or complex expressions.

ThinkCScpp 5.7: Logical operators

- `&&` requires both operands to be true, while `||` requires at least one.
- `!` reverses a Boolean value.
- Logical operators use short-circuit evaluation.
- Parentheses can clarify how several conditions are grouped.
- Operator precedence can affect results when logical expressions are combined.

ThinkCScpp 5.8: Bool functions

- A Boolean function returns `true` or `false` to describe a condition.
- Predicate names usually read like questions, such as `isEven` or `hasAccess`.
- Returning a comparison directly is often clearer than using an unnecessary `if` statement.
- Boolean functions make complex conditions reusable.

ThinkCScpp 5.9: Returning from main

- Returning `0` from `main` conventionally indicates successful execution.
- A nonzero return value can indicate that the program ended because of an error.

ThinkCScpp 5.10: More recursion

- Recursive functions can return values that depend on smaller recursive results.
- Each call pauses until the next call returns.
- Correct recursion requires both a valid base case and measurable progress.
- Repeated work can make some recursive solutions inefficient.

ThinkCScpp 5.11: Leap of faith

- The recursive leap of faith assumes the smaller recursive call already works correctly.
- The current call then only needs to combine that smaller result into the full solution.
- This approach avoids tracing every recursive level while designing the function.

ThinkCScpp 5.12: One more example

- A complete recursive example combines a base case, a smaller subproblem, and a returned result.
- Tracing several inputs helps confirm that each call moves toward termination.
- Comparing recursive and iterative versions can reveal differences in clarity and cost.
- Edge cases should be tested separately from typical inputs.

4.3.3 Unit 6**ThinkCScpp 6.1: Multiple assignment**

- Reassigning variables updates their stored values during execution.
- The right-hand expression is evaluated before the destination changes.
- Temporary variables may be needed when swapping values.
- Sequential assignments aren't simultaneous.

ThinkCScpp 6.2: Iteration

- Iteration repeatedly executes statements while a condition remains true.
- Loops replace duplicated code when the same operation must occur many times.
- A loop usually needs initialization, a condition, and an update.

ThinkCScpp 6.3: The while statement

- A `while` loop checks its condition before each iteration.
- Its body might not execute at all when the condition starts false.
- The loop body must eventually change something that affects the condition.
- Missing progress can create an infinite loop.
- `while` is useful when the number of iterations isn't known in advance.

ThinkCScpp 6.4: Tables

- A table can be generated by repeating a calculation for a sequence of input values.
- Loops make the range and spacing of table entries easy to control.
- Formatted output keeps columns aligned and readable.

ThinkCScpp 6.5: Two-dimensional tables

- Nested loops generate rows and columns in a two-dimensional table.
- The outer loop usually controls rows while the inner loop controls columns.
- The total work is approximately the product of the two loop counts.
- Each table cell can be calculated from its row and column values.

ThinkCScpp 6.6: Encapsulation and generalization

- Encapsulation moves a repeated block of logic into a named function.
- Generalization replaces fixed values with parameters.
- Together they turn one specific solution into reusable code.
- A generalized function should still have one clear responsibility.

ThinkCScpp 6.7: Functions

- Functions divide a program into named operations with defined inputs and outputs.
- Parameters allow callers to supply data.
- Return values let functions produce reusable results.

ThinkCScpp 6.8: More encapsulation

- Additional encapsulation can separate loop control from the work performed in each iteration.
- Smaller functions reduce duplication and make testing more focused.
- Extracting code is useful when a block has a meaningful independent purpose.
- Excessive fragmentation can make simple logic harder to follow.

ThinkCScpp 6.9: Local variables

- Local variables exist only within the block or function where they're declared.
- Each function call receives its own local variables.
- Limiting scope prevents unrelated code from modifying temporary state.
- A local variable can hide another variable with the same name in an outer scope.
- Variables should be declared near their first use.

ThinkCScpp 6.10: More generalization

- Further generalization identifies additional values or behaviours that can become parameters.
- A generalized function can handle a wider range of inputs without duplicating code.
- Generalization should preserve readability rather than create unnecessary abstraction.

4.4 Practice problems

A full comprehensive list of practice problems can be found in :doc: Practice Problems <PracticeProblems.rst>

4.4.1 Unit 4 practice problems

Fizz Buzz (Easy)

Return each number as text, replacing multiples of three and five with the required words.

```
class Solution {
public:
    vector<string> fizzBuzz(int n) {
        vector<string> answer;

        for (int i = 1; i <= n; ++i) {
            if (i % 15 == 0) {
                answer.push_back("FizzBuzz");
            } else if (i % 3 == 0) {
                answer.push_back("Fizz");
            } else if (i % 5 == 0) {
                answer.push_back("Buzz");
            } else {
                answer.push_back(to_string(i));
            }
        }

        return answer;
    }
};
```

4.4.2 Unit 5 practice problems

Pow(x, n) (Medium)

Calculate a floating-point base raised to an integer exponent using recursion.

```
class Solution {
public:
    double myPow(double x, int n) {
        return power(x, static_cast<long long>(n));
    }

private:
    double power(double x, long long n) {
        if (n == 0) {
            return 1.0;
        }

        if (n < 0) {
            return 1.0 / power(x, -n);
        }

        double half = power(x, n / 2);
```

(continues on next page)

(continued from previous page)

```
        if (n % 2 == 0) {
            return half * half;
        }

        return half * half * x;
    }
};
```

4.4.3 Unit 6 practice problems

Pascal's Triangle (Easy)

Generate the requested number of rows from Pascal's triangle using nested loops.

```
class Solution {
public:
    vector<vector<int>> generate(int numRows) {
        vector<vector<int>> triangle;

        for (int row = 0; row < numRows; ++row) {
            triangle.push_back(vector<int>(row + 1, 1));

            for (int column = 1; column < row; ++column) {
                triangle[row][column] =
                    triangle[row - 1][column - 1] +
                    triangle[row - 1][column];
            }
        }

        return triangle;
    }
};
```

4.5 Sources and references

1. cppreference.com. (n.d.). C++ reference. Retrieved Jan 2026 - Aug 2026, from <https://cppreference.com/cpp>
2. Braunschweig, D., & Busbee, K. L. (2018). Programming fundamentals: A modular structured approach (2nd ed.). Rebus Community. <https://press.rebus.community/programmingfundamentals/>
3. Hansen, J. A. (2013). The Rook's guide to C++. Rook's Guide Press. <https://rooksguide.org/>
4. Downey, A. B. (1999). Think C++ (Version 1.1.0). Green Tea Press. <https://www.greenteapress.com/thinkcpp/>
5. leetcode.com. (n.d.). *LeetCode*. Retrieved Jan 2025 - Aug 2026, from <https://leetcode.com/>

ASSIGNMENT THREE JOURNAL

 Warning

Check back soon. Assignments are now being completed.

ASSIGNMENT FOUR JOURNAL

 Warning

Check back soon. Assignments are now being completed.

PRACTICE PROBLEMS

7.1 Unit 1 practice problems

ThinkCScpp 1.1: What is a programming language?

7.1.1 Richest Customer Wealth (Easy)

Find the largest row sum in a two-dimensional integer array.

```
class Solution {
public:
    int maximumWealth(vector<vector<int>>& accounts) {
        int maximum = 0;
        for (const auto& customer : accounts) {
            int total = 0;
            for (int value : customer) total += value;
            maximum = max(maximum, total);
        }
        return maximum;
    }
};
```

ThinkCScpp 1.2: What is a program?

7.1.2 Two Sum (Easy)

Return the indexes of two values whose sum equals a target.

```
class Solution {
public:
    vector<int> twoSum(vector<int>& nums, int target) {
        unordered_map<int, int> seen;
        for (int i = 0; i < nums.size(); ++i) {
            int needed = target - nums[i];
            if (seen.count(needed)) return {seen[needed], i};
            seen[nums[i]] = i;
        }
        return {};
    }
};
```

7.1.3 Fibonacci Number (Easy)

Return the nth Fibonacci value using an iterative function.

```
class Solution {
public:
    int fib(int n) {
        if (n < 2) return n;
        int first = 0;
        int second = 1;
        for (int i = 2; i <= n; ++i) {
            int next = first + second;
            first = second;
            second = next;
        }
        return second;
    }
};
```

7.1.4 Valid Anagram (Easy)

Determine whether two strings contain the same character counts.

```
class Solution {
public:
    bool isAnagram(string s, string t) {
        if (s.size() != t.size()) return false;
        array<int, 26> counts{};
        for (char c : s) ++counts[c - 'a'];
        for (char c : t) --counts[c - 'a'];
        return all_of(counts.begin(), counts.end(), [](int n) { return n == 0; });
    }
};
```

ThinkCScpp 1.3: What is debugging?

7.1.5 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```
class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;
        while (num > 0) {
            num = num % 2 == 0 ? num / 2 : num - 1;
            ++steps;
        }
        return steps;
    }
};
```

ThinkCScpp 1.3.1: Compile-time errors

7.1.6 Valid Palindrome (Easy)

Check whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            while (left < right && !isalnum(s[left])) ++left;
            while (left < right && !isalnum(s[right])) --right;
            if (tolower(s[left]) != tolower(s[right])) return false;
            ++left;
            --right;
        }
        return true;
    }
};
```

7.1.7 Plus One (Easy)

Increment a large integer stored as an array of decimal digits.

```
class Solution {
public:
    vector<int> plusOne(vector<int>& digits) {
        for (int i = digits.size() - 1; i >= 0; --i) {
            if (digits[i] < 9) {
                ++digits[i];
                return digits;
            }
            digits[i] = 0;
        }
        digits.insert(digits.begin(), 1);
        return digits;
    }
};
```

7.1.8 Count the Digits That Divide a Number (Easy)

Count the digits that divide the original number without a remainder.

```
class Solution {
public:
    int countDigits(int num) {
        int count = 0;
        for (int value = num; value > 0; value /= 10) {
            int digit = value % 10;
            if (digit != 0 && num % digit == 0) {
                ++count;
            }
        }
    }
};
```

(continues on next page)

(continued from previous page)

```
    }  
    return count;  
}  
};
```

7.1.9 Final Value of Variable After Performing Operations (Easy)

Apply increment and decrement strings to a single integer variable.

```
class Solution {  
public:  
    int finalValueAfterOperations(vector<string>& operations) {  
        int value = 0;  
        for (const string& operation : operations) {  
            value += operation[1] == '+' ? 1 : -1;  
        }  
        return value;  
    }  
};
```

ThinkCScpp 1.3.2: Run-time errors

7.1.10 Fizz Buzz (Easy)

Build strings based on whether each number is divisible by 3, 5, or both.

```
class Solution {  
public:  
    vector<string> fizzBuzz(int n) {  
        vector<string> answer;  
        for (int i = 1; i <= n; ++i) {  
            if (i % 15 == 0) answer.push_back("FizzBuzz");  
            else if (i % 3 == 0) answer.push_back("Fizz");  
            else if (i % 5 == 0) answer.push_back("Buzz");  
            else answer.push_back(to_string(i));  
        }  
        return answer;  
    }  
};
```

7.1.11 Missing Number (Easy)

Find the absent value from the integer range zero through n.

```
class Solution {  
public:  
    int missingNumber(vector<int>& nums) {  
        int result = nums.size();  
        for (int i = 0; i < nums.size(); ++i) {  
            result ^= i ^ nums[i];  
        }  
        return result;  
    }  
};
```

(continues on next page)

(continued from previous page)

```

    }
};

```

7.1.12 Plus One (Easy)

Increment a large integer stored as an array of decimal digits.

```

class Solution {
public:
    vector<int> plusOne(vector<int>& digits) {
        for (int i = digits.size() - 1; i >= 0; --i) {
            if (digits[i] < 9) {
                ++digits[i];
                return digits;
            }
            digits[i] = 0;
        }
        digits.insert(digits.begin(), 1);
        return digits;
    }
};

```

7.1.13 First Unique Character in a String (Easy)

Return the first index containing a character that occurs once.

```

class Solution {
public:
    int firstUniqChar(string s) {
        array<int, 26> counts{};
        for (char c : s) ++counts[c - 'a'];
        for (int i = 0; i < s.size(); ++i) {
            if (counts[s[i] - 'a'] == 1) return i;
        }
        return -1;
    }
};

```

ThinkCScpp 1.3.3: Logic errors and semantics

7.1.14 Ugly Number (Easy)

Determine whether a positive integer has no prime factors other than 2, 3, and 5.

```

class Solution {
public:
    bool isUgly(int n) {
        if (n <= 0) return false;
        for (int factor : {2, 3, 5}) {
            while (n % factor == 0) n /= factor;
        }
        return n == 1;
    }
};

```

(continues on next page)

(continued from previous page)

```
    }  
};
```

ThinkCScpp 1.3.4: Experimental debugging

7.1.15 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```
class Solution {  
public:  
    int numberOfSteps(int num) {  
        int steps = 0;  
        while (num > 0) {  
            num = num % 2 == 0 ? num / 2 : num - 1;  
            ++steps;  
        }  
        return steps;  
    }  
};
```

7.1.16 Remove Duplicates from Sorted Array (Easy)

Compress a sorted array in place so each value appears once.

```
class Solution {  
public:  
    int removeDuplicates(vector<int>& nums) {  
        if (nums.empty()) return 0;  
        int write = 1;  
        for (int read = 1; read < nums.size(); ++read) {  
            if (nums[read] != nums[read - 1]) nums[write++] = nums[read];  
        }  
        return write;  
    }  
};
```

7.1.17 Count the Digits That Divide a Number (Easy)

Count the digits that divide the original number without a remainder.

```
class Solution {  
public:  
    int countDigits(int num) {  
        int count = 0;  
        for (int value = num; value > 0; value /= 10) {  
            int digit = value % 10;  
            if (digit != 0 && num % digit == 0) {  
                ++count;  
            }  
        }  
        return count;  
    }  
};
```

(continues on next page)

(continued from previous page)

```

    }
};

```

ProgFund 1: Introduction to Programming

7.1.18 Happy Number (Easy)

Repeatedly replace a number with the sum of its squared digits and detect whether it reaches one.

```

class Solution {
    int next(int n) {
        int total = 0;
        while (n > 0) {
            int digit = n % 10;
            total += digit * digit;
            n /= 10;
        }
        return total;
    }
public:
    bool isHappy(int n) {
        unordered_set<int> seen;
        while (n != 1 && !seen.count(n)) {
            seen.insert(n);
            n = next(n);
        }
        return n == 1;
    }
};

```

ProgFund 1.1: Systems Development Life Cycle

7.1.19 Remove Element (Easy)

Remove matching values in place and return the remaining length.

```

class Solution {
public:
    int removeElement(vector<int>& nums, int val) {
        int write = 0;
        for (int value : nums) {
            if (value != val) nums[write++] = value;
        }
        return write;
    }
};

```

7.1.20 Single Number (Easy)

Find the only value that doesn't appear twice.

```

class Solution {
public:

```

(continues on next page)

(continued from previous page)

```
int singleNumber(vector<int>& nums) {  
    int result = 0;  
    for (int value : nums) result ^= value;  
    return result;  
}  
};
```

ProgFund 1.3: Modularization and C++ Program Layout

7.1.21 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```
class Solution {  
public:  
    vector<int> getConcatenation(vector<int>& nums) {  
        vector<int> answer = nums;  
        answer.insert(answer.end(), nums.begin(), nums.end());  
        return answer;  
    }  
};
```

7.1.22 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```
class Solution {  
public:  
    int climbStairs(int n) {  
        if (n <= 2) return n;  
        int previous = 1;  
        int current = 2;  
        for (int step = 3; step <= n; ++step) {  
            int next = previous + current;  
            previous = current;  
            current = next;  
        }  
        return current;  
    }  
};
```

7.1.23 Find the Index of the First Occurrence in a String (Easy)

Return the first position where one string appears inside another.

```
class Solution {  
public:  
    int strStr(string haystack, string needle) {  
        size_t position = haystack.find(needle);  
        return position == string::npos ? -1 : static_cast<int>(position);  
    }  
};
```


7.1.24 Happy Number (Easy)

Repeatedly replace a number with the sum of its squared digits and detect whether it reaches one.

```
class Solution {
    int next(int n) {
        int total = 0;
        while (n > 0) {
            int digit = n % 10;
            total += digit * digit;
            n /= 10;
        }
        return total;
    }
public:
    bool isHappy(int n) {
        unordered_set<int> seen;
        while (n != 1 && !seen.count(n)) {
            seen.insert(n);
            n = next(n);
        }
        return n == 1;
    }
};
```

ProgFund 2: Program Planning & Design

7.1.25 Add Digits (Easy)

Reduce an integer to one digit by repeatedly summing its digits.

```
class Solution {
public:
    int addDigits(int num) {
        return num == 0 ? 0 : 1 + (num - 1) % 9;
    }
};
```

7.1.26 Merge Sorted Array (Easy)

Merge two sorted integer arrays into the first array in place.

```
class Solution {
public:
    void merge(vector<int>& nums1, int m, vector<int>& nums2, int n) {
        int write = m + n - 1;
        --m;
        --n;
        while (n >= 0) {
            if (m >= 0 && nums1[m] > nums2[n]) nums1[write--] = nums1[m--];
            else nums1[write--] = nums2[n--];
        }
    }
};
```

7.1.27 Ransom Note (Easy)

Determine whether one string can be assembled from the characters of another.

```
class Solution {
public:
    bool canConstruct(string ransomNote, string magazine) {
        array<int, 26> counts{};
        for (char c : magazine) ++counts[c - 'a'];
        for (char c : ransomNote) {
            if (--counts[c - 'a'] < 0) return false;
        }
        return true;
    }
};
```

7.1.28 Convert the Temperature (Easy)

Convert a Celsius value to Kelvin and Fahrenheit.

```
class Solution {
public:
    vector<double> convertTemperature(double celsius) {
        return {celsius + 273.15, celsius * 1.80 + 32.00};
    }
};
```

7.1.29 Add Two Integers (Easy)

Return the sum of two integer parameters.

```
class Solution {
public:
    int sum(int num1, int num2) {
        return num1 + num2;
    }
};
```

ProgFund 2.1: Program Design

7.1.30 Remove Element (Easy)

Remove matching values in place and return the remaining length.

```
class Solution {
public:
    int removeElement(vector<int>& nums, int val) {
        int write = 0;
        for (int value : nums) {
            if (value != val) nums[write++] = value;
        }
        return write;
    }
};
```

7.1.31 Build Array from Permutation (Easy)

Construct an array whose values are selected through the input array's indexes.

```
class Solution {
public:
    vector<int> buildArray(vector<int>& nums) {
        vector<int> answer(nums.size());
        for (int i = 0; i < nums.size(); ++i) {
            answer[i] = nums[nums[i]];
        }
        return answer;
    }
};
```

7.1.32 Roman to Integer (Easy)

Convert a Roman numeral string into an integer.

```
class Solution {
public:
    int romanToInt(string s) {
        unordered_map<char, int> value{{'I',1},{'V',5},{'X',10},{'L',50},{'C',100},{'D',
→500},{'M',1000}};
        int total = 0;
        for (int i = 0; i < s.size(); ++i) {
            if (i + 1 < s.size() && value[s[i]] < value[s[i + 1]]) total -= value[s[i]];
            else total += value[s[i]];
        }
        return total;
    }
};
```

ProgFund 2.2: Pseudocode

7.1.33 Two Sum (Easy)

Return the indexes of two values whose sum equals a target.

```
class Solution {
public:
    vector<int> twoSum(vector<int>& nums, int target) {
        unordered_map<int, int> seen;
        for (int i = 0; i < nums.size(); ++i) {
            int needed = target - nums[i];
            if (seen.count(needed)) return {seen[needed], i};
            seen[nums[i]] = i;
        }
        return {};
    }
};
```

7.1.34 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```
class Solution {
public:
    int climbStairs(int n) {
        if (n <= 2) return n;
        int previous = 1;
        int current = 2;
        for (int step = 3; step <= n; ++step) {
            int next = previous + current;
            previous = current;
            current = next;
        }
        return current;
    }
};
```

ProgFund 2.3: Test Data

7.1.35 Palindrome Number (Easy)

Determine whether an integer reads the same in both directions.

```
class Solution {
public:
    bool isPalindrome(int x) {
        if (x < 0) return false;
        long reversed = 0;
        int original = x;
        while (x > 0) {
            reversed = reversed * 10 + x % 10;
            x /= 10;
        }
        return reversed == original;
    }
};
```

7.1.36 Count the Digits That Divide a Number (Easy)

Count the digits that divide the original number without a remainder.

```
class Solution {
public:
    int countDigits(int num) {
        int count = 0;
        for (int value = num; value > 0; value /= 10) {
            int digit = value % 10;
            if (digit != 0 && num % digit == 0) {
                ++count;
            }
        }
        return count;
    }
};
```

(continues on next page)

(continued from previous page)

```

    }
};

```

ThinkCScpp 1.4: Formal and natural languages

7.1.37 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```

class Solution {
public:
    int climbStairs(int n) {
        if (n <= 2) return n;
        int previous = 1;
        int current = 2;
        for (int step = 3; step <= n; ++step) {
            int next = previous + current;
            previous = current;
            current = next;
        }
        return current;
    }
};

```

7.1.38 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```

class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;
        while (num > 0) {
            num = num % 2 == 0 ? num / 2 : num - 1;
            ++steps;
        }
        return steps;
    }
};

```

7.1.39 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```

class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};

```

7.1.40 Final Value of Variable After Performing Operations (Easy)

Apply increment and decrement strings to a single integer variable.

```
class Solution {
public:
    int finalValueAfterOperations(vector<string>& operations) {
        int value = 0;
        for (const string& operation : operations) {
            value += operation[1] == '+' ? 1 : -1;
        }
        return value;
    }
};
```

ThinkCScpp 1.5: The first program

7.1.41 N-th Tribonacci Number (Easy)

Return a sequence value where each term is the sum of the previous three.

```
class Solution {
public:
    int tribonacci(int n) {
        if (n == 0) return 0;
        if (n < 3) return 1;
        int a = 0, b = 1, c = 1;
        for (int i = 3; i <= n; ++i) {
            int next = a + b + c;
            a = b;
            b = c;
            c = next;
        }
        return c;
    }
};
```

7.1.42 To Lower Case (Easy)

Convert every uppercase letter in a string to lowercase.

```
class Solution {
public:
    string toLowerCase(string s) {
        for (char& c : s) {
            if (c >= 'A' && c <= 'Z') c += 'a' - 'A';
        }
        return s;
    }
};
```

7.1.43 Length of Last Word (Easy)

Return the number of characters in the final word of a string.

```
class Solution {
public:
    int lengthOfLastWord(string s) {
        int i = s.size() - 1;
        while (i >= 0 && s[i] == ' ') --i;
        int length = 0;
        while (i >= 0 && s[i] != ' ') {
            ++length;
            --i;
        }
        return length;
    }
};
```

ProgFund 5: Integrated Development Environment

7.1.44 Number of Good Pairs (Easy)

Count index pairs containing equal integer values.

```
class Solution {
public:
    int numIdenticalPairs(vector<int>& nums) {
        unordered_map<int, int> counts;
        int pairs = 0;
        for (int value : nums) {
            pairs += counts[value]++;
        }
        return pairs;
    }
};
```

7.1.45 Intersection of Two Arrays (Easy)

Return the distinct values appearing in both arrays.

```
class Solution {
public:
    vector<int> intersection(vector<int>& nums1, vector<int>& nums2) {
        unordered_set<int> first(nums1.begin(), nums1.end());
        unordered_set<int> common;
        for (int value : nums2) {
            if (first.count(value)) common.insert(value);
        }
        return vector<int>(common.begin(), common.end());
    }
};
```

7.1.46 Running Sum of 1d Array (Easy)

Replace each array value with the sum of values up to that position.

```
class Solution {
public:
    vector<int> runningSum(vector<int>& nums) {
        for (int i = 1; i < nums.size(); ++i) {
            nums[i] += nums[i - 1];
        }
        return nums;
    }
};
```

ProgFund 5.1: Integrated Development Environment

7.1.47 Palindrome Number (Easy)

Determine whether an integer reads the same in both directions.

```
class Solution {
public:
    bool isPalindrome(int x) {
        if (x < 0) return false;
        long reversed = 0;
        int original = x;
        while (x > 0) {
            reversed = reversed * 10 + x % 10;
            x /= 10;
        }
        return reversed == original;
    }
};
```

ProgFund 5.2: Standard Input and Output

7.1.48 Ugly Number (Easy)

Determine whether a positive integer has no prime factors other than 2, 3, and 5.

```
class Solution {
public:
    bool isUgly(int n) {
        if (n <= 0) return false;
        for (int factor : {2, 3, 5}) {
            while (n % factor == 0) n /= factor;
        }
        return n == 1;
    }
};
```


7.1.49 Shuffle the Array (Easy)

Interleave the first and second halves of an array.

```
class Solution {
public:
    vector<int> shuffle(vector<int>& nums, int n) {
        vector<int> answer;
        answer.reserve(nums.size());
        for (int i = 0; i < n; ++i) {
            answer.push_back(nums[i]);
            answer.push_back(nums[i + n]);
        }
        return answer;
    }
};
```

ProgFund 5.3: Compiler Directives

7.1.50 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```
class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};
```

7.1.51 Score of a String (Easy)

Sum the absolute differences between adjacent character codes.

```
class Solution {
public:
    int scoreOfString(string s) {
        int score = 0;
        for (int i = 1; i < s.size(); ++i) {
            score += abs(s[i] - s[i - 1]);
        }
        return score;
    }
};
```

7.1.52 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```
class Solution {
public:
    int climbStairs(int n) {
```

(continues on next page)

(continued from previous page)

```
    if (n <= 2) return n;
    int previous = 1;
    int current = 2;
    for (int step = 3; step <= n; ++step) {
        int next = previous + current;
        previous = current;
        current = next;
    }
    return current;
}
};
```

7.1.53 Valid Anagram (Easy)

Determine whether two strings contain the same character counts.

```
class Solution {
public:
    bool isAnagram(string s, string t) {
        if (s.size() != t.size()) return false;
        array<int, 26> counts{};
        for (char c : s) ++counts[c - 'a'];
        for (char c : t) --counts[c - 'a'];
        return all_of(counts.begin(), counts.end(), [](int n) { return n == 0; });
    }
};
```

7.1.54 Sqrt(x) (Easy)

Return the integer part of a non-negative number's square root.

```
class Solution {
public:
    int mySqrt(int x) {
        long left = 0;
        long right = x;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;
            if (square == x) return static_cast<int>(middle);
            if (square < x) left = middle + 1;
            else right = middle - 1;
        }
        return static_cast<int>(right);
    }
};
```

7.2 Unit 2 practice problems

ThinkCScpp 2.1: More output

7.2.1 Final Value of Variable After Performing Operations (Easy)

Apply increment and decrement strings to a single integer variable.

```
class Solution {
public:
    int finalValueAfterOperations(vector<string>& operations) {
        int value = 0;
        for (const string& operation : operations) {
            value += operation[1] == '+' ? 1 : -1;
        }
        return value;
    }
};
```

ThinkCScpp 2.2: Values

7.2.2 Power of Two (Easy)

Determine whether an integer is an exact power of two.

```
class Solution {
public:
    bool isPowerOfTwo(int n) {
        return n > 0 && (n & (n - 1)) == 0;
    }
};
```

7.2.3 Sqrt(x) (Easy)

Return the integer part of a non-negative number's square root.

```
class Solution {
public:
    int mySqrt(int x) {
        long left = 0;
        long right = x;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;
            if (square == x) return static_cast<int>(middle);
            if (square < x) left = middle + 1;
            else right = middle - 1;
        }
        return static_cast<int>(right);
    }
};
```

7.2.4 Convert the Temperature (Easy)

Convert a Celsius value to Kelvin and Fahrenheit.

```
class Solution {
public:
    vector<double> convertTemperature(double celsius) {
        return {celsius + 273.15, celsius * 1.80 + 32.00};
    }
};
```

7.2.5 Jewels and Stones (Easy)

Count how many characters in one string belong to a specified set.

```
class Solution {
public:
    int numJewelsInStones(string jewels, string stones) {
        unordered_set<char> types(jewels.begin(), jewels.end());
        int count = 0;
        for (char stone : stones) count += types.count(stone);
        return count;
    }
};
```

ThinkCScpp 2.3: Variables

7.2.6 Contains Duplicate (Easy)

Return whether any integer occurs more than once.

```
class Solution {
public:
    bool containsDuplicate(vector<int>& nums) {
        unordered_set<int> seen;
        for (int value : nums) {
            if (!seen.insert(value).second) return true;
        }
        return false;
    }
};
```

7.2.7 Length of Last Word (Easy)

Return the number of characters in the final word of a string.

```
class Solution {
public:
    int lengthOfLastWord(string s) {
        int i = s.size() - 1;
        while (i >= 0 && s[i] == ' ') --i;
        int length = 0;
        while (i >= 0 && s[i] != ' ') {
            ++length;
        }
    }
};
```

(continues on next page)

(continued from previous page)

```
        --i;
    }
    return length;
}
};
```

7.2.8 Add Two Integers (Easy)

Return the sum of two integer parameters.

```
class Solution {
public:
    int sum(int num1, int num2) {
        return num1 + num2;
    }
};
```

ProgFund 3: Data & Operators

7.2.9 Single Number (Easy)

Find the only value that doesn't appear twice.

```
class Solution {
public:
    int singleNumber(vector<int>& nums) {
        int result = 0;
        for (int value : nums) result ^= value;
        return result;
    }
};
```

7.2.10 Number of Good Pairs (Easy)

Count index pairs containing equal integer values.

```
class Solution {
public:
    int numIdenticalPairs(vector<int>& nums) {
        unordered_map<int, int> counts;
        int pairs = 0;
        for (int value : nums) {
            pairs += counts[value]++;
        }
        return pairs;
    }
};
```

7.2.11 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```
class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;
        while (num > 0) {
            num = num % 2 == 0 ? num / 2 : num - 1;
            ++steps;
        }
        return steps;
    }
};
```

ProgFund 3.1: Data Types in C++

7.2.12 Sqrt(x) (Easy)

Return the integer part of a non-negative number's square root.

```
class Solution {
public:
    int mySqrt(int x) {
        long left = 0;
        long right = x;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;
            if (square == x) return static_cast<int>(middle);
            if (square < x) left = middle + 1;
            else right = middle - 1;
        }
        return static_cast<int>(right);
    }
};
```

ProgFund 3.2: Identifier Names

7.2.13 Final Value of Variable After Performing Operations (Easy)

Apply increment and decrement strings to a single integer variable.

```
class Solution {
public:
    int finalValueAfterOperations(vector<string>& operations) {
        int value = 0;
        for (const string& operation : operations) {
            value += operation[1] == '+' ? 1 : -1;
        }
        return value;
    }
};
```

7.2.14 To Lower Case (Easy)

Convert every uppercase letter in a string to lowercase.

```
class Solution {
public:
    string toLowerCase(string s) {
        for (char& c : s) {
            if (c >= 'A' && c <= 'Z') c += 'a' - 'A';
        }
        return s;
    }
};
```

ProgFund 3.3: Constants and Variables

7.2.15 Fibonacci Number (Easy)

Return the nth Fibonacci value using an iterative function.

```
class Solution {
public:
    int fib(int n) {
        if (n < 2) return n;
        int first = 0;
        int second = 1;
        for (int i = 2; i <= n; ++i) {
            int next = first + second;
            first = second;
            second = next;
        }
        return second;
    }
};
```

ProgFund 3.4: Data Manipulation

7.2.16 Smallest Even Multiple (Easy)

Return the smallest positive value divisible by both 2 and n.

```
class Solution {
public:
    int smallestEvenMultiple(int n) {
        return n % 2 == 0 ? n : n * 2;
    }
};
```

7.2.17 Ugly Number (Easy)

Determine whether a positive integer has no prime factors other than 2, 3, and 5.

```
class Solution {
public:
```

(continues on next page)

(continued from previous page)

```
bool isUgly(int n) {
    if (n <= 0) return false;
    for (int factor : {2, 3, 5}) {
        while (n % factor == 0) n /= factor;
    }
    return n == 1;
}
};
```

7.2.18 Power of Two (Easy)

Determine whether an integer is an exact power of two.

```
class Solution {
public:
    bool isPowerOfTwo(int n) {
        return n > 0 && (n & (n - 1)) == 0;
    }
};
```

7.2.19 Plus One (Easy)

Increment a large integer stored as an array of decimal digits.

```
class Solution {
public:
    vector<int> plusOne(vector<int>& digits) {
        for (int i = digits.size() - 1; i >= 0; --i) {
            if (digits[i] < 9) {
                ++digits[i];
                return digits;
            }
            digits[i] = 0;
        }
        digits.insert(digits.begin(), 1);
        return digits;
    }
};
```

7.2.20 Missing Number (Easy)

Find the absent value from the integer range zero through n.

```
class Solution {
public:
    int missingNumber(vector<int>& nums) {
        int result = nums.size();
        for (int i = 0; i < nums.size(); ++i) {
            result ^= i ^ nums[i];
        }
        return result;
    }
};
```

(continues on next page)

(continued from previous page)

```
    }
};
```

ThinkCScpp 2.4: Assignment

7.2.21 Running Sum of 1d Array (Easy)

Replace each array value with the sum of values up to that position.

```
class Solution {
public:
    vector<int> runningSum(vector<int>& nums) {
        for (int i = 1; i < nums.size(); ++i) {
            nums[i] += nums[i - 1];
        }
        return nums;
    }
};
```

7.2.22 Shuffle the Array (Easy)

Interleave the first and second halves of an array.

```
class Solution {
public:
    vector<int> shuffle(vector<int>& nums, int n) {
        vector<int> answer;
        answer.reserve(nums.size());
        for (int i = 0; i < n; ++i) {
            answer.push_back(nums[i]);
            answer.push_back(nums[i + n]);
        }
        return answer;
    }
};
```

7.2.23 Two Sum (Easy)

Return the indexes of two values whose sum equals a target.

```
class Solution {
public:
    vector<int> twoSum(vector<int>& nums, int target) {
        unordered_map<int, int> seen;
        for (int i = 0; i < nums.size(); ++i) {
            int needed = target - nums[i];
            if (seen.count(needed)) return {seen[needed], i};
            seen[nums[i]] = i;
        }
        return {};
    }
};
```

ThinkCScpp 2.5: Outputting variables

7.2.24 Number of Good Pairs (Easy)

Count index pairs containing equal integer values.

```
class Solution {
public:
    int numIdenticalPairs(vector<int>& nums) {
        unordered_map<int, int> counts;
        int pairs = 0;
        for (int value : nums) {
            pairs += counts[value]++;
        }
        return pairs;
    }
};
```

ThinkCScpp 2.6: Keywords

7.2.25 Count the Digits That Divide a Number (Easy)

Count the digits that divide the original number without a remainder.

```
class Solution {
public:
    int countDigits(int num) {
        int count = 0;
        for (int value = num; value > 0; value /= 10) {
            int digit = value % 10;
            if (digit != 0 && num % digit == 0) {
                ++count;
            }
        }
        return count;
    }
};
```

7.2.26 Subtract the Product and Sum of Digits of an Integer (Easy)

Compute the product of an integer's digits minus their sum.

```
class Solution {
public:
    int subtractProductAndSum(int n) {
        int product = 1;
        int sum = 0;
        while (n > 0) {
            int digit = n % 10;
            product *= digit;
            sum += digit;
            n /= 10;
        }
        return product - sum;
    }
};
```

(continues on next page)

(continued from previous page)

```

    }
};

```

ProgFund 3.5: Assignment Operator

7.2.27 Contains Duplicate (Easy)

Return whether any integer occurs more than once.

```

class Solution {
public:
    bool containsDuplicate(vector<int>& nums) {
        unordered_set<int> seen;
        for (int value : nums) {
            if (!seen.insert(value).second) return true;
        }
        return false;
    }
};

```

7.2.28 Richest Customer Wealth (Easy)

Find the largest row sum in a two-dimensional integer array.

```

class Solution {
public:
    int maximumWealth(vector<vector<int>>& accounts) {
        int maximum = 0;
        for (const auto& customer : accounts) {
            int total = 0;
            for (int value : customer) total += value;
            maximum = max(maximum, total);
        }
        return maximum;
    }
};

```

ProgFund 3.6: Arithmetic Operators

7.2.29 Convert the Temperature (Easy)

Convert a Celsius value to Kelvin and Fahrenheit.

```

class Solution {
public:
    vector<double> convertTemperature(double celsius) {
        return {celsius + 273.15, celsius * 1.80 + 32.00};
    }
};

```

7.2.30 Fibonacci Number (Easy)

Return the nth Fibonacci value using an iterative function.

```
class Solution {
public:
    int fib(int n) {
        if (n < 2) return n;
        int first = 0;
        int second = 1;
        for (int i = 2; i <= n; ++i) {
            int next = first + second;
            first = second;
            second = next;
        }
        return second;
    }
};
```

ProgFund 3.7: Data Type Conversions

7.2.31 Roman to Integer (Easy)

Convert a Roman numeral string into an integer.

```
class Solution {
public:
    int romanToInt(string s) {
        unordered_map<char, int> value{{'I',1},{'V',5},{'X',10},{'L',50},{'C',100},{'D',
→500},{'M',1000}};
        int total = 0;
        for (int i = 0; i < s.size(); ++i) {
            if (i + 1 < s.size() && value[s[i]] < value[s[i + 1]]) total -= value[s[i]];
            else total += value[s[i]];
        }
        return total;
    }
};
```

ProgFund 4: Often Used Data Types

7.2.32 Convert the Temperature (Easy)

Convert a Celsius value to Kelvin and Fahrenheit.

```
class Solution {
public:
    vector<double> convertTemperature(double celsius) {
        return {celsius + 273.15, celsius * 1.80 + 32.00};
    }
};
```

7.2.33 Richest Customer Wealth (Easy)

Find the largest row sum in a two-dimensional integer array.

```
class Solution {
public:
    int maximumWealth(vector<vector<int>>& accounts) {
        int maximum = 0;
        for (const auto& customer : accounts) {
            int total = 0;
            for (int value : customer) total += value;
            maximum = max(maximum, total);
        }
        return maximum;
    }
};
```

ProgFund 4.1: Integer Data Type

7.2.34 Intersection of Two Arrays (Easy)

Return the distinct values appearing in both arrays.

```
class Solution {
public:
    vector<int> intersection(vector<int>& nums1, vector<int>& nums2) {
        unordered_set<int> first(nums1.begin(), nums1.end());
        unordered_set<int> common;
        for (int value : nums2) {
            if (first.count(value)) common.insert(value);
        }
        return vector<int>(common.begin(), common.end());
    }
};
```

7.2.35 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```
class Solution {
public:
    int climbStairs(int n) {
        if (n <= 2) return n;
        int previous = 1;
        int current = 2;
        for (int step = 3; step <= n; ++step) {
            int next = previous + current;
            previous = current;
            current = next;
        }
        return current;
    }
};
```

ProgFund 4.2: Floating-Point Data Type

7.2.36 Richest Customer Wealth (Easy)

Find the largest row sum in a two-dimensional integer array.

```
class Solution {
public:
    int maximumWealth(vector<vector<int>>& accounts) {
        int maximum = 0;
        for (const auto& customer : accounts) {
            int total = 0;
            for (int value : customer) total += value;
            maximum = max(maximum, total);
        }
        return maximum;
    }
};
```

7.2.37 Roman to Integer (Easy)

Convert a Roman numeral string into an integer.

```
class Solution {
public:
    int romanToInt(string s) {
        unordered_map<char, int> value{{'I',1},{'V',5},{'X',10},{'L',50},{'C',100},{'D',
↪500},{'M',1000}};
        int total = 0;
        for (int i = 0; i < s.size(); ++i) {
            if (i + 1 < s.size() && value[s[i]] < value[s[i + 1]]) total -= value[s[i]];
            else total += value[s[i]];
        }
        return total;
    }
};
```

ProgFund 4.3: String Data Type

7.2.38 Intersection of Two Arrays (Easy)

Return the distinct values appearing in both arrays.

```
class Solution {
public:
    vector<int> intersection(vector<int>& nums1, vector<int>& nums2) {
        unordered_set<int> first(nums1.begin(), nums1.end());
        unordered_set<int> common;
        for (int value : nums2) {
            if (first.count(value)) common.insert(value);
        }
        return vector<int>(common.begin(), common.end());
    }
};
```

7.2.39 Reverse String (Easy)

Reverse a character array in place.

```
class Solution {
public:
    void reverseString(vector<char>& s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            swap(s[left++], s[right--]);
        }
    }
};
```

7.2.40 Power of Two (Easy)

Determine whether an integer is an exact power of two.

```
class Solution {
public:
    bool isPowerOfTwo(int n) {
        return n > 0 && (n & (n - 1)) == 0;
    }
};
```

7.2.41 Ransom Note (Easy)

Determine whether one string can be assembled from the characters of another.

```
class Solution {
public:
    bool canConstruct(string ransomNote, string magazine) {
        array<int, 26> counts{};
        for (char c : magazine) ++counts[c - 'a'];
        for (char c : ransomNote) {
            if (--counts[c - 'a'] < 0) return false;
        }
        return true;
    }
};
```

RooksGuide 2: Variables

7.2.42 Intersection of Two Arrays (Easy)

Return the distinct values appearing in both arrays.

```
class Solution {
public:
    vector<int> intersection(vector<int>& nums1, vector<int>& nums2) {
        unordered_set<int> first(nums1.begin(), nums1.end());
        unordered_set<int> common;
        for (int value : nums2) {
```

(continues on next page)

(continued from previous page)

```

        if (first.count(value)) common.insert(value);
    }
    return vector<int>(common.begin(), common.end());
}
};

```

7.2.43 Roman to Integer (Easy)

Convert a Roman numeral string into an integer.

```

class Solution {
public:
    int romanToInt(string s) {
        unordered_map<char, int> value{{'I',1},{'V',5},{'X',10},{'L',50},{'C',100},{'D',
→500},{'M',1000}};
        int total = 0;
        for (int i = 0; i < s.size(); ++i) {
            if (i + 1 < s.size() && value[s[i]] < value[s[i + 1]]) total -= value[s[i]];
            else total += value[s[i]];
        }
        return total;
    }
};

```

7.2.44 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```

class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;
        while (num > 0) {
            num = num % 2 == 0 ? num / 2 : num - 1;
            ++steps;
        }
        return steps;
    }
};

```

7.2.45 Build Array from Permutation (Easy)

Construct an array whose values are selected through the input array's indexes.

```

class Solution {
public:
    vector<int> buildArray(vector<int>& nums) {
        vector<int> answer(nums.size());
        for (int i = 0; i < nums.size(); ++i) {
            answer[i] = nums[nums[i]];
        }
        return answer;
    }
};

```

(continues on next page)

(continued from previous page)

```

    }
};

```

7.2.46 Remove Duplicates from Sorted Array (Easy)

Compress a sorted array in place so each value appears once.

```

class Solution {
public:
    int removeDuplicates(vector<int>& nums) {
        if (nums.empty()) return 0;
        int write = 1;
        for (int read = 1; read < nums.size(); ++read) {
            if (nums[read] != nums[read - 1]) nums[write++] = nums[read];
        }
        return write;
    }
};

```

RooksGuide 2.1: How do I decide which data type I need?

7.2.47 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```

class Solution {
public:
    int climbStairs(int n) {
        if (n <= 2) return n;
        int previous = 1;
        int current = 2;
        for (int step = 3; step <= n; ++step) {
            int next = previous + current;
            previous = current;
            current = next;
        }
        return current;
    }
};

```

7.2.48 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```

class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};

```

RooksGuide 2.2: Identifiers

7.2.49 Jewels and Stones (Easy)

Count how many characters in one string belong to a specified set.

```
class Solution {
public:
    int numJewelsInStones(string jewels, string stones) {
        unordered_set<char> types(jewels.begin(), jewels.end());
        int count = 0;
        for (char stone : stones) count += types.count(stone);
        return count;
    }
};
```

RooksGuide 2.3: Declaring a Variable

7.2.50 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```
class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;
        while (num > 0) {
            num = num % 2 == 0 ? num / 2 : num - 1;
            ++steps;
        }
        return steps;
    }
};
```

7.2.51 Plus One (Easy)

Increment a large integer stored as an array of decimal digits.

```
class Solution {
public:
    vector<int> plusOne(vector<int>& digits) {
        for (int i = digits.size() - 1; i >= 0; --i) {
            if (digits[i] < 9) {
                ++digits[i];
                return digits;
            }
            digits[i] = 0;
        }
        digits.insert(digits.begin(), 1);
        return digits;
    }
};
```

7.2.52 Palindrome Number (Easy)

Determine whether an integer reads the same in both directions.

```
class Solution {
public:
    bool isPalindrome(int x) {
        if (x < 0) return false;
        long reversed = 0;
        int original = x;
        while (x > 0) {
            reversed = reversed * 10 + x % 10;
            x /= 10;
        }
        return reversed == original;
    }
};
```

7.2.53 Count the Digits That Divide a Number (Easy)

Count the digits that divide the original number without a remainder.

```
class Solution {
public:
    int countDigits(int num) {
        int count = 0;
        for (int value = num; value > 0; value /= 10) {
            int digit = value % 10;
            if (digit != 0 && num % digit == 0) {
                ++count;
            }
        }
        return count;
    }
};
```

7.2.54 Shuffle the Array (Easy)

Interleave the first and second halves of an array.

```
class Solution {
public:
    vector<int> shuffle(vector<int>& nums, int n) {
        vector<int> answer;
        answer.reserve(nums.size());
        for (int i = 0; i < n; ++i) {
            answer.push_back(nums[i]);
            answer.push_back(nums[i + n]);
        }
        return answer;
    }
};
```

RooksGuide 2.4: Initializing Variables

7.2.55 Subtract the Product and Sum of Digits of an Integer (Easy)

Compute the product of an integer's digits minus their sum.

```
class Solution {
public:
    int subtractProductAndSum(int n) {
        int product = 1;
        int sum = 0;
        while (n > 0) {
            int digit = n % 10;
            product *= digit;
            sum += digit;
            n /= 10;
        }
        return product - sum;
    }
};
```

7.2.56 Length of Last Word (Easy)

Return the number of characters in the final word of a string.

```
class Solution {
public:
    int lengthOfLastWord(string s) {
        int i = s.size() - 1;
        while (i >= 0 && s[i] == ' ') --i;
        int length = 0;
        while (i >= 0 && s[i] != ' ') {
            ++length;
            --i;
        }
        return length;
    }
};
```

ThinkCScpp 2.7: Operators

7.2.57 Valid Palindrome (Easy)

Check whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            while (left < right && !isalnum(s[left])) ++left;
            while (left < right && !isalnum(s[right])) --right;
            if (tolower(s[left]) != tolower(s[right])) return false;
        }
    }
};
```

(continues on next page)

(continued from previous page)

```

        ++left;
        --right;
    }
    return true;
}
};

```

7.2.58 Find the Index of the First Occurrence in a String (Easy)

Return the first position where one string appears inside another.

```

class Solution {
public:
    int strStr(string haystack, string needle) {
        size_t position = haystack.find(needle);
        return position == string::npos ? -1 : static_cast<int>(position);
    }
};

```

7.2.59 Add Digits (Easy)

Reduce an integer to one digit by repeatedly summing its digits.

```

class Solution {
public:
    int addDigits(int num) {
        return num == 0 ? 0 : 1 + (num - 1) % 9;
    }
};

```

7.2.60 Smallest Even Multiple (Easy)

Return the smallest positive value divisible by both 2 and n.

```

class Solution {
public:
    int smallestEvenMultiple(int n) {
        return n % 2 == 0 ? n : n * 2;
    }
};

```

7.2.61 Score of a String (Easy)

Sum the absolute differences between adjacent character codes.

```

class Solution {
public:
    int scoreOfString(string s) {
        int score = 0;
        for (int i = 1; i < s.size(); ++i) {
            score += abs(s[i] - s[i - 1]);
        }
    }
};

```

(continues on next page)

(continued from previous page)

```
    }  
    return score;  
}  
};
```

ThinkCScpp 2.8: Order of operations

7.2.62 Fibonacci Number (Easy)

Return the nth Fibonacci value using an iterative function.

```
class Solution {  
public:  
    int fib(int n) {  
        if (n < 2) return n;  
        int first = 0;  
        int second = 1;  
        for (int i = 2; i <= n; ++i) {  
            int next = first + second;  
            first = second;  
            second = next;  
        }  
        return second;  
    }  
};
```

7.2.63 Number of Good Pairs (Easy)

Count index pairs containing equal integer values.

```
class Solution {  
public:  
    int numIdenticalPairs(vector<int>& nums) {  
        unordered_map<int, int> counts;  
        int pairs = 0;  
        for (int value : nums) {  
            pairs += counts[value]++;  
        }  
        return pairs;  
    }  
};
```

ThinkCScpp 2.9: Operators for characters

7.2.64 Single Number (Easy)

Find the only value that doesn't appear twice.

```
class Solution {  
public:  
    int singleNumber(vector<int>& nums) {  
        int result = 0;  

```

(continues on next page)

(continued from previous page)

```

        for (int value : nums) result ^= value;
        return result;
    }
};

```

ProgFund 4.4: Arithmetic Assignment Operators

7.2.65 Merge Strings Alternately (Easy)

Build one string by alternating characters from two inputs.

```

class Solution {
public:
    string mergeAlternately(string word1, string word2) {
        string result;
        int length = max(word1.size(), word2.size());
        for (int i = 0; i < length; ++i) {
            if (i < word1.size()) result += word1[i];
            if (i < word2.size()) result += word2[i];
        }
        return result;
    }
};

```

7.2.66 Valid Perfect Square (Easy)

Use integer arithmetic to decide whether a number has an exact square root.

```

class Solution {
public:
    bool isPerfectSquare(int num) {
        long left = 1;
        long right = num;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;
            if (square == num) return true;
            if (square < num) left = middle + 1;
            else right = middle - 1;
        }
        return false;
    }
};

```

ProgFund 4.5: Lvalue and Rvalue

7.2.67 Build Array from Permutation (Easy)

Construct an array whose values are selected through the input array's indexes.

```

class Solution {
public:

```

(continues on next page)

(continued from previous page)

```

vector<int> buildArray(vector<int>& nums) {
    vector<int> answer(nums.size());
    for (int i = 0; i < nums.size(); ++i) {
        answer[i] = nums[nums[i]];
    }
    return answer;
}
};

```

7.2.68 Jewels and Stones (Easy)

Count how many characters in one string belong to a specified set.

```

class Solution {
public:
    int numJewelsInStones(string jewels, string stones) {
        unordered_set<char> types(jewels.begin(), jewels.end());
        int count = 0;
        for (char stone : stones) count += types.count(stone);
        return count;
    }
};

```

7.2.69 Shuffle the Array (Easy)

Interleave the first and second halves of an array.

```

class Solution {
public:
    vector<int> shuffle(vector<int>& nums, int n) {
        vector<int> answer;
        answer.reserve(nums.size());
        for (int i = 0; i < n; ++i) {
            answer.push_back(nums[i]);
            answer.push_back(nums[i + n]);
        }
        return answer;
    }
};

```

7.2.70 Roman to Integer (Easy)

Convert a Roman numeral string into an integer.

```

class Solution {
public:
    int romanToInt(string s) {
        unordered_map<char, int> value{{'I',1},{'V',5},{'X',10},{'L',50},{'C',100},{'D',
→500},{'M',1000}};
        int total = 0;
        for (int i = 0; i < s.size(); ++i) {
            if (i + 1 < s.size() && value[s[i]] < value[s[i + 1]]) total -= value[s[i]];

```

(continues on next page)

(continued from previous page)

```

        else total += value[s[i]];
    }
    return total;
}
};

```

ProgFund 4.6: Integer Division and Modulus

7.2.71 Add Two Integers (Easy)

Return the sum of two integer parameters.

```

class Solution {
public:
    int sum(int num1, int num2) {
        return num1 + num2;
    }
};

```

7.2.72 N-th Tribonacci Number (Easy)

Return a sequence value where each term is the sum of the previous three.

```

class Solution {
public:
    int tribonacci(int n) {
        if (n == 0) return 0;
        if (n < 3) return 1;
        int a = 0, b = 1, c = 1;
        for (int i = 3; i <= n; ++i) {
            int next = a + b + c;
            a = b;
            b = c;
            c = next;
        }
        return c;
    }
};

```

7.2.73 Valid Palindrome (Easy)

Check whether normalized text reads the same forward and backward.

```

class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            while (left < right && !isalnum(s[left])) ++left;
            while (left < right && !isalnum(s[right])) --right;
            if (tolower(s[left]) != tolower(s[right])) return false;
        }
    }
};

```

(continues on next page)

(continued from previous page)

```
        ++left;
        --right;
    }
    return true;
}
};
```

7.2.74 Subtract the Product and Sum of Digits of an Integer (Easy)

Compute the product of an integer's digits minus their sum.

```
class Solution {
public:
    int subtractProductAndSum(int n) {
        int product = 1;
        int sum = 0;
        while (n > 0) {
            int digit = n % 10;
            product *= digit;
            sum += digit;
            n /= 10;
        }
        return product - sum;
    }
};
```

RooksGuide 2.5: Assignment Statements

7.2.75 Valid Palindrome (Easy)

Check whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            while (left < right && !isalnum(s[left])) ++left;
            while (left < right && !isalnum(s[right])) --right;
            if (tolower(s[left]) != tolower(s[right])) return false;
            ++left;
            --right;
        }
        return true;
    }
};
```

7.2.76 N-th Tribonacci Number (Easy)

Return a sequence value where each term is the sum of the previous three.

```
class Solution {
public:
    int tribonacci(int n) {
        if (n == 0) return 0;
        if (n < 3) return 1;
        int a = 0, b = 1, c = 1;
        for (int i = 3; i <= n; ++i) {
            int next = a + b + c;
            a = b;
            b = c;
            c = next;
        }
        return c;
    }
};
```

7.2.77 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```
class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;
        while (num > 0) {
            num = num % 2 == 0 ? num / 2 : num - 1;
            ++steps;
        }
        return steps;
    }
};
```

7.2.78 Final Value of Variable After Performing Operations (Easy)

Apply increment and decrement strings to a single integer variable.

```
class Solution {
public:
    int finalValueAfterOperations(vector<string>& operations) {
        int value = 0;
        for (const string& operation : operations) {
            value += operation[1] == '+' ? 1 : -1;
        }
        return value;
    }
};
```

RooksGuide 3: Literals and Constants

7.2.79 Number of Good Pairs (Easy)

Count index pairs containing equal integer values.

```
class Solution {
public:
    int numIdenticalPairs(vector<int>& nums) {
        unordered_map<int, int> counts;
        int pairs = 0;
        for (int value : nums) {
            pairs += counts[value]++;
        }
        return pairs;
    }
};
```

7.2.80 Happy Number (Easy)

Repeatedly replace a number with the sum of its squared digits and detect whether it reaches one.

```
class Solution {
    int next(int n) {
        int total = 0;
        while (n > 0) {
            int digit = n % 10;
            total += digit * digit;
            n /= 10;
        }
        return total;
    }
public:
    bool isHappy(int n) {
        unordered_set<int> seen;
        while (n != 1 && !seen.count(n)) {
            seen.insert(n);
            n = next(n);
        }
        return n == 1;
    }
};
```

7.2.81 Majority Element (Easy)

Return the value occurring more than half the time.

```
class Solution {
public:
    int majorityElement(vector<int>& nums) {
        int candidate = 0;
        int count = 0;
        for (int value : nums) {
            if (count == 0) candidate = value;
```

(continues on next page)

(continued from previous page)

```

        count += value == candidate ? 1 : -1;
    }
    return candidate;
}
};

```

7.2.82 N-th Tribonacci Number (Easy)

Return a sequence value where each term is the sum of the previous three.

```

class Solution {
public:
    int tribonacci(int n) {
        if (n == 0) return 0;
        if (n < 3) return 1;
        int a = 0, b = 1, c = 1;
        for (int i = 3; i <= n; ++i) {
            int next = a + b + c;
            a = b;
            b = c;
            c = next;
        }
        return c;
    }
};

```

7.2.83 Merge Sorted Array (Easy)

Merge two sorted integer arrays into the first array in place.

```

class Solution {
public:
    void merge(vector<int>& nums1, int m, vector<int>& nums2, int n) {
        int write = m + n - 1;
        --m;
        --n;
        while (n >= 0) {
            if (m >= 0 && nums1[m] > nums2[n]) nums1[write--] = nums1[m--];
            else nums1[write--] = nums2[n--];
        }
    }
};

```

RooksGuide 3.1: Literals

7.2.84 Move Zeroes (Easy)

Move all zero values to the end while preserving other values' order.

```

class Solution {
public:
    void moveZeroes(vector<int>& nums) {

```

(continues on next page)

(continued from previous page)

```
int write = 0;
for (int value : nums) {
    if (value != 0) nums[write++] = value;
}
while (write < nums.size()) nums[write++] = 0;
}
};
```

7.2.85 Richest Customer Wealth (Easy)

Find the largest row sum in a two-dimensional integer array.

```
class Solution {
public:
    int maximumWealth(vector<vector<int>>& accounts) {
        int maximum = 0;
        for (const auto& customer : accounts) {
            int total = 0;
            for (int value : customer) total += value;
            maximum = max(maximum, total);
        }
        return maximum;
    }
};
```

7.2.86 Length of Last Word (Easy)

Return the number of characters in the final word of a string.

```
class Solution {
public:
    int lengthOfLastWord(string s) {
        int i = s.size() - 1;
        while (i >= 0 && s[i] == ' ') --i;
        int length = 0;
        while (i >= 0 && s[i] != ' ') {
            ++length;
            --i;
        }
        return length;
    }
};
```

7.2.87 Majority Element (Easy)

Return the value occurring more than half the time.

```
class Solution {
public:
    int majorityElement(vector<int>& nums) {
        int candidate = 0;
        int count = 0;
```

(continues on next page)

(continued from previous page)

```

    for (int value : nums) {
        if (count == 0) candidate = value;
        count += value == candidate ? 1 : -1;
    }
    return candidate;
}
};

```

RooksGuide 3.2: Declared Constants

7.2.88 Valid Perfect Square (Easy)

Use integer arithmetic to decide whether a number has an exact square root.

```

class Solution {
public:
    bool isPerfectSquare(int num) {
        long left = 1;
        long right = num;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;
            if (square == num) return true;
            if (square < num) left = middle + 1;
            else right = middle - 1;
        }
        return false;
    }
};

```

7.2.89 N-th Tribonacci Number (Easy)

Return a sequence value where each term is the sum of the previous three.

```

class Solution {
public:
    int tribonacci(int n) {
        if (n == 0) return 0;
        if (n < 3) return 1;
        int a = 0, b = 1, c = 1;
        for (int i = 3; i <= n; ++i) {
            int next = a + b + c;
            a = b;
            b = c;
            c = next;
        }
        return c;
    }
};

```

7.2.90 Count the Digits That Divide a Number (Easy)

Count the digits that divide the original number without a remainder.

```
class Solution {
public:
    int countDigits(int num) {
        int count = 0;
        for (int value = num; value > 0; value /= 10) {
            int digit = value % 10;
            if (digit != 0 && num % digit == 0) {
                ++count;
            }
        }
        return count;
    }
};
```

7.2.91 Happy Number (Easy)

Repeatedly replace a number with the sum of its squared digits and detect whether it reaches one.

```
class Solution {
    int next(int n) {
        int total = 0;
        while (n > 0) {
            int digit = n % 10;
            total += digit * digit;
            n /= 10;
        }
        return total;
    }
public:
    bool isHappy(int n) {
        unordered_set<int> seen;
        while (n != 1 && !seen.count(n)) {
            seen.insert(n);
            n = next(n);
        }
        return n == 1;
    }
};
```

RooksGuide 4: Assignments

7.2.92 Number of Good Pairs (Easy)

Count index pairs containing equal integer values.

```
class Solution {
public:
    int numIdenticalPairs(vector<int>& nums) {
        unordered_map<int, int> counts;
        int pairs = 0;
```

(continues on next page)

(continued from previous page)

```

    for (int value : nums) {
        pairs += counts[value]++;
    }
    return pairs;
}
};

```

7.2.93 Missing Number (Easy)

Find the absent value from the integer range zero through n.

```

class Solution {
public:
    int missingNumber(vector<int>& nums) {
        int result = nums.size();
        for (int i = 0; i < nums.size(); ++i) {
            result ^= i ^ nums[i];
        }
        return result;
    }
};

```

7.2.94 Length of Last Word (Easy)

Return the number of characters in the final word of a string.

```

class Solution {
public:
    int lengthOfLastWord(string s) {
        int i = s.size() - 1;
        while (i >= 0 && s[i] == ' ') --i;
        int length = 0;
        while (i >= 0 && s[i] != ' ') {
            ++length;
            --i;
        }
        return length;
    }
};

```

ThinkCScpp 2.10: Composition

7.2.95 Palindrome Number (Easy)

Determine whether an integer reads the same in both directions.

```

class Solution {
public:
    bool isPalindrome(int x) {
        if (x < 0) return false;
        long reversed = 0;
        int original = x;

```

(continues on next page)

(continued from previous page)

```
while (x > 0) {
    reversed = reversed * 10 + x % 10;
    x /= 10;
}
return reversed == original;
}
};
```

7.2.96 Running Sum of 1d Array (Easy)

Replace each array value with the sum of values up to that position.

```
class Solution {
public:
    vector<int> runningSum(vector<int>& nums) {
        for (int i = 1; i < nums.size(); ++i) {
            nums[i] += nums[i - 1];
        }
        return nums;
    }
};
```

7.2.97 Build Array from Permutation (Easy)

Construct an array whose values are selected through the input array's indexes.

```
class Solution {
public:
    vector<int> buildArray(vector<int>& nums) {
        vector<int> answer(nums.size());
        for (int i = 0; i < nums.size(); ++i) {
            answer[i] = nums[nums[i]];
        }
        return answer;
    }
};
```

7.3 Unit 3 practice problems

ThinkCScpp 3.1: Floating-point

7.3.1 Score of a String (Easy)

Sum the absolute differences between adjacent character codes.

```
class Solution {
public:
    int scoreOfString(string s) {
        int score = 0;
        for (int i = 1; i < s.size(); ++i) {
            score += abs(s[i] - s[i - 1]);
        }
    }
};
```

(continues on next page)

(continued from previous page)

```

    }
    return score;
}
};

```

7.3.2 Sqrt(x) (Easy)

Return the integer part of a non-negative number's square root.

```

class Solution {
public:
    int mySqrt(int x) {
        long left = 0;
        long right = x;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;
            if (square == x) return static_cast<int>(middle);
            if (square < x) left = middle + 1;
            else right = middle - 1;
        }
        return static_cast<int>(right);
    }
};

```

7.3.3 Convert the Temperature (Easy)

Convert a Celsius value to Kelvin and Fahrenheit.

```

class Solution {
public:
    vector<double> convertTemperature(double celsius) {
        return {celsius + 273.15, celsius * 1.80 + 32.00};
    }
};

```

7.3.4 Find the Index of the First Occurrence in a String (Easy)

Return the first position where one string appears inside another.

```

class Solution {
public:
    int strStr(string haystack, string needle) {
        size_t position = haystack.find(needle);
        return position == string::npos ? -1 : static_cast<int>(position);
    }
};

```

7.3.5 Roman to Integer (Easy)

Convert a Roman numeral string into an integer.

```
class Solution {
public:
    int romanToInt(string s) {
        unordered_map<char, int> value{{'I',1},{'V',5},{'X',10},{'L',50},{'C',100},{'D',
→500},{'M',1000}};
        int total = 0;
        for (int i = 0; i < s.size(); ++i) {
            if (i + 1 < s.size() && value[s[i]] < value[s[i + 1]]) total -= value[s[i]];
            else total += value[s[i]];
        }
        return total;
    }
};
```

ThinkCScpp 3.2: Converting from double to int

7.3.6 Jewels and Stones (Easy)

Count how many characters in one string belong to a specified set.

```
class Solution {
public:
    int numJewelsInStones(string jewels, string stones) {
        unordered_set<char> types(jewels.begin(), jewels.end());
        int count = 0;
        for (char stone : stones) count += types.count(stone);
        return count;
    }
};
```

7.3.7 Valid Perfect Square (Easy)

Use integer arithmetic to decide whether a number has an exact square root.

```
class Solution {
public:
    bool isPerfectSquare(int num) {
        long left = 1;
        long right = num;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;
            if (square == num) return true;
            if (square < num) left = middle + 1;
            else right = middle - 1;
        }
        return false;
    }
};
```

7.3.8 Intersection of Two Arrays (Easy)

Return the distinct values appearing in both arrays.

```
class Solution {
public:
    vector<int> intersection(vector<int>& nums1, vector<int>& nums2) {
        unordered_set<int> first(nums1.begin(), nums1.end());
        unordered_set<int> common;
        for (int value : nums2) {
            if (first.count(value)) common.insert(value);
        }
        return vector<int>(common.begin(), common.end());
    }
};
```

7.3.9 Score of a String (Easy)

Sum the absolute differences between adjacent character codes.

```
class Solution {
public:
    int scoreOfString(string s) {
        int score = 0;
        for (int i = 1; i < s.size(); ++i) {
            score += abs(s[i] - s[i - 1]);
        }
        return score;
    }
};
```

ThinkCScpp 3.3: Math functions

7.3.10 Majority Element (Easy)

Return the value occurring more than half the time.

```
class Solution {
public:
    int majorityElement(vector<int>& nums) {
        int candidate = 0;
        int count = 0;
        for (int value : nums) {
            if (count == 0) candidate = value;
            count += value == candidate ? 1 : -1;
        }
        return candidate;
    }
};
```

7.3.11 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```
class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};
```

7.3.12 Shuffle the Array (Easy)

Interleave the first and second halves of an array.

```
class Solution {
public:
    vector<int> shuffle(vector<int>& nums, int n) {
        vector<int> answer;
        answer.reserve(nums.size());
        for (int i = 0; i < n; ++i) {
            answer.push_back(nums[i]);
            answer.push_back(nums[i + n]);
        }
        return answer;
    }
};
```

ThinkCScpp 3.4: Composition

7.3.13 Add Digits (Easy)

Reduce an integer to one digit by repeatedly summing its digits.

```
class Solution {
public:
    int addDigits(int num) {
        return num == 0 ? 0 : 1 + (num - 1) % 9;
    }
};
```

7.3.14 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```
class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;
        while (num > 0) {
            num = num % 2 == 0 ? num / 2 : num - 1;
            ++steps;
        }
    }
};
```

(continues on next page)

(continued from previous page)

```

    }
    return steps;
}
};

```

ThinkCScpp 3.5: Adding new functions

7.3.15 Find the Index of the First Occurrence in a String (Easy)

Return the first position where one string appears inside another.

```

class Solution {
public:
    int strStr(string haystack, string needle) {
        size_t position = haystack.find(needle);
        return position == string::npos ? -1 : static_cast<int>(position);
    }
};

```

7.3.16 Two Sum (Easy)

Return the indexes of two values whose sum equals a target.

```

class Solution {
public:
    vector<int> twoSum(vector<int>& nums, int target) {
        unordered_map<int, int> seen;
        for (int i = 0; i < nums.size(); ++i) {
            int needed = target - nums[i];
            if (seen.count(needed)) return {seen[needed], i};
            seen[nums[i]] = i;
        }
        return {};
    }
};

```

7.3.17 Move Zeroes (Easy)

Move all zero values to the end while preserving other values' order.

```

class Solution {
public:
    void moveZeroes(vector<int>& nums) {
        int write = 0;
        for (int value : nums) {
            if (value != 0) nums[write++] = value;
        }
        while (write < nums.size()) nums[write++] = 0;
    }
};

```

7.3.18 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```
class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};
```

7.3.19 First Unique Character in a String (Easy)

Return the first index containing a character that occurs once.

```
class Solution {
public:
    int firstUniqChar(string s) {
        array<int, 26> counts{};
        for (char c : s) ++counts[c - 'a'];
        for (int i = 0; i < s.size(); ++i) {
            if (counts[s[i] - 'a'] == 1) return i;
        }
        return -1;
    }
};
```

ThinkCScpp 3.6: Definitions and uses

7.3.20 Reverse String (Easy)

Reverse a character array in place.

```
class Solution {
public:
    void reverseString(vector<char>& s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            swap(s[left++], s[right--]);
        }
    }
};
```

7.3.21 Richest Customer Wealth (Easy)

Find the largest row sum in a two-dimensional integer array.

```
class Solution {
public:
    int maximumWealth(vector<vector<int>>& accounts) {
        int maximum = 0;
```

(continues on next page)

(continued from previous page)

```

    for (const auto& customer : accounts) {
        int total = 0;
        for (int value : customer) total += value;
        maximum = max(maximum, total);
    }
    return maximum;
}
};

```

7.3.22 Two Sum (Easy)

Return the indexes of two values whose sum equals a target.

```

class Solution {
public:
    vector<int> twoSum(vector<int>& nums, int target) {
        unordered_map<int, int> seen;
        for (int i = 0; i < nums.size(); ++i) {
            int needed = target - nums[i];
            if (seen.count(needed)) return {seen[needed], i};
            seen[nums[i]] = i;
        }
        return {};
    }
};

```

7.3.23 Find the Index of the First Occurrence in a String (Easy)

Return the first position where one string appears inside another.

```

class Solution {
public:
    int strStr(string haystack, string needle) {
        size_t position = haystack.find(needle);
        return position == string::npos ? -1 : static_cast<int>(position);
    }
};

```

ThinkCScpp 3.7: Programs with multiple functions

7.3.24 Valid Perfect Square (Easy)

Use integer arithmetic to decide whether a number has an exact square root.

```

class Solution {
public:
    bool isPerfectSquare(int num) {
        long left = 1;
        long right = num;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;

```

(continues on next page)

(continued from previous page)

```
        if (square == num) return true;
        if (square < num) left = middle + 1;
        else right = middle - 1;
    }
    return false;
}
};
```

7.3.25 Palindrome Number (Easy)

Determine whether an integer reads the same in both directions.

```
class Solution {
public:
    bool isPalindrome(int x) {
        if (x < 0) return false;
        long reversed = 0;
        int original = x;
        while (x > 0) {
            reversed = reversed * 10 + x % 10;
            x /= 10;
        }
        return reversed == original;
    }
};
```

7.3.26 Merge Strings Alternately (Easy)

Build one string by alternating characters from two inputs.

```
class Solution {
public:
    string mergeAlternately(string word1, string word2) {
        string result;
        int length = max(word1.size(), word2.size());
        for (int i = 0; i < length; ++i) {
            if (i < word1.size()) result += word1[i];
            if (i < word2.size()) result += word2[i];
        }
        return result;
    }
};
```

7.3.27 Jewels and Stones (Easy)

Count how many characters in one string belong to a specified set.

```
class Solution {
public:
    int numJewelsInStones(string jewels, string stones) {
        unordered_set<char> types(jewels.begin(), jewels.end());
        int count = 0;
```

(continues on next page)

(continued from previous page)

```
    for (char stone : stones) count += types.count(stone);  
    return count;  
}  
};
```

ThinkCScpp 3.8: Parameters and arguments

7.3.28 Richest Customer Wealth (Easy)

Find the largest row sum in a two-dimensional integer array.

```
class Solution {  
public:  
    int maximumWealth(vector<vector<int>>& accounts) {  
        int maximum = 0;  
        for (const auto& customer : accounts) {  
            int total = 0;  
            for (int value : customer) total += value;  
            maximum = max(maximum, total);  
        }  
        return maximum;  
}  
};
```

7.3.29 Convert the Temperature (Easy)

Convert a Celsius value to Kelvin and Fahrenheit.

```
class Solution {  
public:  
    vector<double> convertTemperature(double celsius) {  
        return {celsius + 273.15, celsius * 1.80 + 32.00};  
    }  
};
```

7.3.30 Shuffle the Array (Easy)

Interleave the first and second halves of an array.

```
class Solution {  
public:  
    vector<int> shuffle(vector<int>& nums, int n) {  
        vector<int> answer;  
        answer.reserve(nums.size());  
        for (int i = 0; i < n; ++i) {  
            answer.push_back(nums[i]);  
            answer.push_back(nums[i + n]);  
        }  
        return answer;  
    }  
};
```

ThinkCScpp 3.9: Parameters and variables are local

7.3.31 To Lower Case (Easy)

Convert every uppercase letter in a string to lowercase.

```
class Solution {
public:
    string toLowerCase(string s) {
        for (char& c : s) {
            if (c >= 'A' && c <= 'Z') c += 'a' - 'A';
        }
        return s;
    }
};
```

7.3.32 Final Value of Variable After Performing Operations (Easy)

Apply increment and decrement strings to a single integer variable.

```
class Solution {
public:
    int finalValueAfterOperations(vector<string>& operations) {
        int value = 0;
        for (const string& operation : operations) {
            value += operation[1] == '+' ? 1 : -1;
        }
        return value;
    }
};
```

7.3.33 Plus One (Easy)

Increment a large integer stored as an array of decimal digits.

```
class Solution {
public:
    vector<int> plusOne(vector<int>& digits) {
        for (int i = digits.size() - 1; i >= 0; --i) {
            if (digits[i] < 9) {
                ++digits[i];
                return digits;
            }
            digits[i] = 0;
        }
        digits.insert(digits.begin(), 1);
        return digits;
    }
};
```

7.3.34 Valid Palindrome (Easy)

Check whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            while (left < right && !isalnum(s[left])) ++left;
            while (left < right && !isalnum(s[right])) --right;
            if (tolower(s[left]) != tolower(s[right])) return false;
            ++left;
            --right;
        }
        return true;
    }
};
```

ThinkCScpp 3.10: Functions with multiple parameters

7.3.35 Smallest Even Multiple (Easy)

Return the smallest positive value divisible by both 2 and n.

```
class Solution {
public:
    int smallestEvenMultiple(int n) {
        return n % 2 == 0 ? n : n * 2;
    }
};
```

7.3.36 Valid Palindrome (Easy)

Check whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            while (left < right && !isalnum(s[left])) ++left;
            while (left < right && !isalnum(s[right])) --right;
            if (tolower(s[left]) != tolower(s[right])) return false;
            ++left;
            --right;
        }
        return true;
    }
};
```

7.3.37 Build Array from Permutation (Easy)

Construct an array whose values are selected through the input array's indexes.

```
class Solution {
public:
    vector<int> buildArray(vector<int>& nums) {
        vector<int> answer(nums.size());
        for (int i = 0; i < nums.size(); ++i) {
            answer[i] = nums[nums[i]];
        }
        return answer;
    }
};
```

ThinkCScpp 3.11: Functions with results

7.3.38 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```
class Solution {
public:
    int climbStairs(int n) {
        if (n <= 2) return n;
        int previous = 1;
        int current = 2;
        for (int step = 3; step <= n; ++step) {
            int next = previous + current;
            previous = current;
            current = next;
        }
        return current;
    }
};
```

ProgFund 6: Program Control Functions

7.3.39 To Lower Case (Easy)

Convert every uppercase letter in a string to lowercase.

```
class Solution {
public:
    string toLowerCase(string s) {
        for (char& c : s) {
            if (c >= 'A' && c <= 'Z') c += 'a' - 'A';
        }
        return s;
    }
};
```

ProgFund 6.1: Pseudocode Examples for Functions

7.3.40 Fibonacci Number (Easy)

Return the n th Fibonacci value using an iterative function.

```
class Solution {
public:
    int fib(int n) {
        if (n < 2) return n;
        int first = 0;
        int second = 1;
        for (int i = 2; i <= n; ++i) {
            int next = first + second;
            first = second;
            second = next;
        }
        return second;
    }
};
```

ProgFund 6.2: Hierarchy or Structure Chart

7.3.41 Add Digits (Easy)

Reduce an integer to one digit by repeatedly summing its digits.

```
class Solution {
public:
    int addDigits(int num) {
        return num == 0 ? 0 : 1 + (num - 1) % 9;
    }
};
```

ProgFund 6.3: Program Control Functions

7.3.42 Add Digits (Easy)

Reduce an integer to one digit by repeatedly summing its digits.

```
class Solution {
public:
    int addDigits(int num) {
        return num == 0 ? 0 : 1 + (num - 1) % 9;
    }
};
```

7.3.43 Ugly Number (Easy)

Determine whether a positive integer has no prime factors other than 2, 3, and 5.

```
class Solution {
public:
    bool isUgly(int n) {
        if (n <= 0) return false;
```

(continues on next page)

(continued from previous page)

```
    for (int factor : {2, 3, 5}) {
        while (n % factor == 0) n /= factor;
    }
    return n == 1;
}
};
```

7.3.44 Single Number (Easy)

Find the only value that doesn't appear twice.

```
class Solution {
public:
    int singleNumber(vector<int>& nums) {
        int result = 0;
        for (int value : nums) result ^= value;
        return result;
    }
};
```

7.3.45 Running Sum of 1d Array (Easy)

Replace each array value with the sum of values up to that position.

```
class Solution {
public:
    vector<int> runningSum(vector<int>& nums) {
        for (int i = 1; i < nums.size(); ++i) {
            nums[i] += nums[i - 1];
        }
        return nums;
    }
};
```

7.3.46 Happy Number (Easy)

Repeatedly replace a number with the sum of its squared digits and detect whether it reaches one.

```
class Solution {
    int next(int n) {
        int total = 0;
        while (n > 0) {
            int digit = n % 10;
            total += digit * digit;
            n /= 10;
        }
        return total;
    }
public:
    bool isHappy(int n) {
        unordered_set<int> seen;
        while (n != 1 && !seen.count(n)) {
```

(continues on next page)

(continued from previous page)

```

        seen.insert(n);
        n = next(n);
    }
    return n == 1;
}
};

```

ProgFund 6.4: Void Data Type

7.3.47 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```

class Solution {
public:
    int climbStairs(int n) {
        if (n <= 2) return n;
        int previous = 1;
        int current = 2;
        for (int step = 3; step <= n; ++step) {
            int next = previous + current;
            previous = current;
            current = next;
        }
        return current;
    }
};

```

7.3.48 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```

class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};

```

7.3.49 Intersection of Two Arrays (Easy)

Return the distinct values appearing in both arrays.

```

class Solution {
public:
    vector<int> intersection(vector<int>& nums1, vector<int>& nums2) {
        unordered_set<int> first(nums1.begin(), nums1.end());
        unordered_set<int> common;
        for (int value : nums2) {
            if (first.count(value)) common.insert(value);
        }
    }
};

```

(continues on next page)

(continued from previous page)

```
    }  
    return vector<int>(common.begin(), common.end());  
}  
};
```

7.3.50 Reverse String (Easy)

Reverse a character array in place.

```
class Solution {  
public:  
    void reverseString(vector<char>& s) {  
        int left = 0;  
        int right = s.size() - 1;  
        while (left < right) {  
            swap(s[left++], s[right--]);  
        }  
    }  
};
```

ProgFund 6.5: Documentation and Making Source Code Readable

7.3.51 Number of Steps to Reduce a Number to Zero (Easy)

Count how many even divisions and odd subtractions reduce a number to zero.

```
class Solution {  
public:  
    int numberOfSteps(int num) {  
        int steps = 0;  
        while (num > 0) {  
            num = num % 2 == 0 ? num / 2 : num - 1;  
            ++steps;  
        }  
        return steps;  
    }  
};
```

7.3.52 Valid Anagram (Easy)

Determine whether two strings contain the same character counts.

```
class Solution {  
public:  
    bool isAnagram(string s, string t) {  
        if (s.size() != t.size()) return false;  
        array<int, 26> counts{};  
        for (char c : s) ++counts[c - 'a'];  
        for (char c : t) --counts[c - 'a'];  
        return all_of(counts.begin(), counts.end(), [](int n) { return n == 0; });  
    }  
};
```

7.3.53 Majority Element (Easy)

Return the value occurring more than half the time.

```
class Solution {
public:
    int majorityElement(vector<int>& nums) {
        int candidate = 0;
        int count = 0;
        for (int value : nums) {
            if (count == 0) candidate = value;
            count += value == candidate ? 1 : -1;
        }
        return candidate;
    }
};
```

RooksGuide 5: Output

7.3.54 Convert the Temperature (Easy)

Convert a Celsius value to Kelvin and Fahrenheit.

```
class Solution {
public:
    vector<double> convertTemperature(double celsius) {
        return {celsius + 273.15, celsius * 1.80 + 32.00};
    }
};
```

RooksGuide 6: Input

7.3.55 Add Two Integers (Easy)

Return the sum of two integer parameters.

```
class Solution {
public:
    int sum(int num1, int num2) {
        return num1 + num2;
    }
};
```

7.3.56 Valid Anagram (Easy)

Determine whether two strings contain the same character counts.

```
class Solution {
public:
    bool isAnagram(string s, string t) {
        if (s.size() != t.size()) return false;
        array<int, 26> counts{};
        for (char c : s) ++counts[c - 'a'];
        for (char c : t) --counts[c - 'a'];
    }
};
```

(continues on next page)

(continued from previous page)

```
        return all_of(counts.begin(), counts.end(), [](int n) { return n == 0; });
    }
};
```

7.3.57 Length of Last Word (Easy)

Return the number of characters in the final word of a string.

```
class Solution {
public:
    int lengthOfLastWord(string s) {
        int i = s.size() - 1;
        while (i >= 0 && s[i] == ' ') --i;
        int length = 0;
        while (i >= 0 && s[i] != ' ') {
            ++length;
            --i;
        }
        return length;
    }
};
```

7.3.58 Roman to Integer (Easy)

Convert a Roman numeral string into an integer.

```
class Solution {
public:
    int romanToInt(string s) {
        unordered_map<char, int> value{{'I',1},{'V',5},{'X',10},{'L',50},{'C',100},{'D',
→500},{'M',1000}};
        int total = 0;
        for (int i = 0; i < s.size(); ++i) {
            if (i + 1 < s.size() && value[s[i]] < value[s[i + 1]]) total -= value[s[i]];
            else total += value[s[i]];
        }
        return total;
    }
};
```

7.3.59 Score of a String (Easy)

Sum the absolute differences between adjacent character codes.

```
class Solution {
public:
    int scoreOfString(string s) {
        int score = 0;
        for (int i = 1; i < s.size(); ++i) {
            score += abs(s[i] - s[i - 1]);
        }
        return score;
    }
};
```

(continues on next page)

(continued from previous page)

```

    }
};

```

RooksGuide 7: Arithmetic

7.3.60 Ugly Number (Easy)

Determine whether a positive integer has no prime factors other than 2, 3, and 5.

```

class Solution {
public:
    bool isUgly(int n) {
        if (n <= 0) return false;
        for (int factor : {2, 3, 5}) {
            while (n % factor == 0) n /= factor;
        }
        return n == 1;
    }
};

```

7.3.61 Convert the Temperature (Easy)

Convert a Celsius value to Kelvin and Fahrenheit.

```

class Solution {
public:
    vector<double> convertTemperature(double celsius) {
        return {celsius + 273.15, celsius * 1.80 + 32.00};
    }
};

```

7.3.62 Add Two Integers (Easy)

Return the sum of two integer parameters.

```

class Solution {
public:
    int sum(int num1, int num2) {
        return num1 + num2;
    }
};

```

RooksGuide 8: Comments

7.3.63 Power of Two (Easy)

Determine whether an integer is an exact power of two.

```

class Solution {
public:
    bool isPowerOfTwo(int n) {
        return n > 0 && (n & (n - 1)) == 0;
    }
};

```

(continues on next page)

(continued from previous page)

```
    }  
};
```

7.3.64 Contains Duplicate (Easy)

Return whether any integer occurs more than once.

```
class Solution {  
public:  
    bool containsDuplicate(vector<int>& nums) {  
        unordered_set<int> seen;  
        for (int value : nums) {  
            if (!seen.insert(value).second) return true;  
        }  
        return false;  
    }  
};
```

7.3.65 Palindrome Number (Easy)

Determine whether an integer reads the same in both directions.

```
class Solution {  
public:  
    bool isPalindrome(int x) {  
        if (x < 0) return false;  
        long reversed = 0;  
        int original = x;  
        while (x > 0) {  
            reversed = reversed * 10 + x % 10;  
            x /= 10;  
        }  
        return reversed == original;  
    }  
};
```

7.3.66 Shuffle the Array (Easy)

Interleave the first and second halves of an array.

```
class Solution {  
public:  
    vector<int> shuffle(vector<int>& nums, int n) {  
        vector<int> answer;  
        answer.reserve(nums.size());  
        for (int i = 0; i < n; ++i) {  
            answer.push_back(nums[i]);  
            answer.push_back(nums[i + n]);  
        }  
        return answer;  
    }  
};
```

7.3.67 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```
class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};
```

RooksGuide 9: Data Types and Conversion

7.3.68 Sqrt(x) (Easy)

Return the integer part of a non-negative number's square root.

```
class Solution {
public:
    int mySqrt(int x) {
        long left = 0;
        long right = x;
        while (left <= right) {
            long middle = left + (right - left) / 2;
            long square = middle * middle;
            if (square == x) return static_cast<int>(middle);
            if (square < x) left = middle + 1;
            else right = middle - 1;
        }
        return static_cast<int>(right);
    }
};
```

7.3.69 Jewels and Stones (Easy)

Count how many characters in one string belong to a specified set.

```
class Solution {
public:
    int numJewelsInStones(string jewels, string stones) {
        unordered_set<char> types(jewels.begin(), jewels.end());
        int count = 0;
        for (char stone : stones) count += types.count(stone);
        return count;
    }
};
```

RooksGuide 9.1: Floating-point types

7.3.70 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```
class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};
```

7.3.71 Climbing Stairs (Easy)

Count the distinct ways to reach a step using moves of one or two.

```
class Solution {
public:
    int climbStairs(int n) {
        if (n <= 2) return n;
        int previous = 1;
        int current = 2;
        for (int step = 3; step <= n; ++step) {
            int next = previous + current;
            previous = current;
            current = next;
        }
        return current;
    }
};
```

RooksGuide 9.2: Other types introduced by C++11

7.3.72 Ugly Number (Easy)

Determine whether a positive integer has no prime factors other than 2, 3, and 5.

```
class Solution {
public:
    bool isUgly(int n) {
        if (n <= 0) return false;
        for (int factor : {2, 3, 5}) {
            while (n % factor == 0) n /= factor;
        }
        return n == 1;
    }
};
```

7.3.73 To Lower Case (Easy)

Convert every uppercase letter in a string to lowercase.

```
class Solution {
public:
    string toLowerCase(string s) {
        for (char& c : s) {
```

(continues on next page)

(continued from previous page)

```

        if (c >= 'A' && c <= 'Z') c += 'a' - 'A';
    }
    return s;
}
};

```

RooksGuide 9.3: Conversion Between Types

7.3.74 Ugly Number (Easy)

Determine whether a positive integer has no prime factors other than 2, 3, and 5.

```

class Solution {
public:
    bool isUgly(int n) {
        if (n <= 0) return false;
        for (int factor : {2, 3, 5}) {
            while (n % factor == 0) n /= factor;
        }
        return n == 1;
    }
};

```

7.3.75 Ransom Note (Easy)

Determine whether one string can be assembled from the characters of another.

```

class Solution {
public:
    bool canConstruct(string ransomNote, string magazine) {
        array<int, 26> counts{};
        for (char c : magazine) ++counts[c - 'a'];
        for (char c : ransomNote) {
            if (--counts[c - 'a'] < 0) return false;
        }
        return true;
    }
};

```

RooksGuide 9.4: Coercion & Casting

7.3.76 Valid Palindrome (Easy)

Check whether normalized text reads the same forward and backward.

```

class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = s.size() - 1;
        while (left < right) {
            while (left < right && !isalnum(s[left])) ++left;

```

(continues on next page)

(continued from previous page)

```

        while (left < right && !isalnum(s[right])) --right;
        if (tolower(s[left]) != tolower(s[right])) return false;
        ++left;
        --right;
    }
    return true;
}
};

```

7.3.77 Roman to Integer (Easy)

Convert a Roman numeral string into an integer.

```

class Solution {
public:
    int romanToInt(string s) {
        unordered_map<char, int> value{{'I',1},{'V',5},{'X',10},{'L',50},{'C',100},{'D',
→500},{'M',1000}};
        int total = 0;
        for (int i = 0; i < s.size(); ++i) {
            if (i + 1 < s.size() && value[s[i]] < value[s[i + 1]]) total -= value[s[i]];
            else total += value[s[i]];
        }
        return total;
    }
};

```

7.3.78 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```

class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};

```

RooksGuide 9.5: Automatic Types in C++11

7.3.79 First Unique Character in a String (Easy)

Return the first index containing a character that occurs once.

```

class Solution {
public:
    int firstUniqChar(string s) {
        array<int, 26> counts{};
        for (char c : s) ++counts[c - 'a'];
        for (int i = 0; i < s.size(); ++i) {

```

(continues on next page)

(continued from previous page)

```

        if (counts[s[i] - 'a'] == 1) return i;
    }
    return -1;
}
};

```

7.3.80 Concatenation of Array (Easy)

Create an output array containing the input sequence twice.

```

class Solution {
public:
    vector<int> getConcatenation(vector<int>& nums) {
        vector<int> answer = nums;
        answer.insert(answer.end(), nums.begin(), nums.end());
        return answer;
    }
};

```

7.4 Unit 4 practice problems

ThinkCScpp 4.1: The modulus operator

7.4.1 Subtract the Product and Sum of Digits of an Integer (Easy)

Return the product of an integer's digits minus their sum.

```

class Solution {
public:
    int subtractProductAndSum(int n) {
        int product = 1;
        int sum = 0;

        while (n > 0) {
            int digit = n % 10;
            product *= digit;
            sum += digit;
            n /= 10;
        }

        return product - sum;
    }
};

```

7.4.2 Count the Digits That Divide a Number (Easy)

Count how many digits divide the original number without a remainder.

```

class Solution {
public:
    int countDigits(int num) {

```

(continues on next page)

(continued from previous page)

```
int count = 0;

for (int remaining = num; remaining > 0; remaining /= 10) {
    int digit = remaining % 10;

    if (digit != 0 && num % digit == 0) {
        ++count;
    }
}

return count;
}
```

7.4.3 Fizz Buzz (Easy)

Return each number as text, replacing multiples of three and five with the required words.

```
class Solution {
public:
    vector<string> fizzBuzz(int n) {
        vector<string> answer;

        for (int i = 1; i <= n; ++i) {
            if (i % 15 == 0) {
                answer.push_back("FizzBuzz");
            } else if (i % 3 == 0) {
                answer.push_back("Fizz");
            } else if (i % 5 == 0) {
                answer.push_back("Buzz");
            } else {
                answer.push_back(to_string(i));
            }
        }

        return answer;
    }
};
```

ThinkCScpp 4.2: Conditional execution

7.4.4 Number of Steps to Reduce a Number to Zero (Easy)

Count the divisions and subtractions required to reduce an integer to zero.

```
class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;

        while (num > 0) {
            if (num % 2 == 0) {
```

(continues on next page)

(continued from previous page)

```

        num /= 2;
    } else {
        --num;
    }

    ++steps;
}

return steps;
}
};

```

7.4.5 Maximum 69 Number (Easy)

Change at most one digit from six to nine to produce the greatest value.

```

class Solution {
public:
    int maximum69Number(int num) {
        string digits = to_string(num);

        for (char& digit : digits) {
            if (digit == '6') {
                digit = '9';
                break;
            }
        }

        return stoi(digits);
    }
};

```

ThinkCScpp 4.3: Alternative execution

7.4.6 Power of Two (Easy)

Return whether an integer is an exact power of two.

```

class Solution {
public:
    bool isPowerOfTwo(int n) {
        return n > 0 && (n & (n - 1)) == 0;
    }
};

```

ThinkCScpp 4.4: Chained conditionals

7.4.7 Fizz Buzz (Easy)

Return each number as text, replacing multiples of three and five with the required words.

```

class Solution {
public:

```

(continues on next page)

(continued from previous page)

```
vector<string> fizzBuzz(int n) {
    vector<string> answer;

    for (int i = 1; i <= n; ++i) {
        if (i % 15 == 0) {
            answer.push_back("FizzBuzz");
        } else if (i % 3 == 0) {
            answer.push_back("Fizz");
        } else if (i % 5 == 0) {
            answer.push_back("Buzz");
        } else {
            answer.push_back(to_string(i));
        }
    }

    return answer;
}

};
```

7.4.8 Lemonade Change (Easy)

Determine whether correct change can be given to every customer in order.

```
class Solution {
public:
    bool lemonadeChange(vector<int>& bills) {
        int fives = 0;
        int tens = 0;

        for (int bill : bills) {
            if (bill == 5) {
                ++fives;
            } else if (bill == 10) {
                if (fives == 0) {
                    return false;
                }

                --fives;
                ++tens;
            } else {
                if (tens > 0 && fives > 0) {
                    --tens;
                    --fives;
                } else if (fives >= 3) {
                    fives -= 3;
                } else {
                    return false;
                }
            }
        }

        return true;
    }
};
```

(continues on next page)

(continued from previous page)

```

    }
};

```

7.4.9 Roman to Integer (Easy)

Convert a Roman numeral into its integer value.

```

class Solution {
public:
    int romanToInt(string s) {
        int total = 0;

        for (int i = 0; i < static_cast<int>(s.size()); ++i) {
            int value = romanValue(s[i]);

            if (i + 1 < static_cast<int>(s.size()) &&
                value < romanValue(s[i + 1])) {
                total -= value;
            } else {
                total += value;
            }
        }

        return total;
    }

private:
    int romanValue(char symbol) {
        switch (symbol) {
            case 'I': return 1;
            case 'V': return 5;
            case 'X': return 10;
            case 'L': return 50;
            case 'C': return 100;
            case 'D': return 500;
            case 'M': return 1000;
            default: return 0;
        }
    }
};

```

7.4.10 Maximum 69 Number (Easy)

Change at most one digit from six to nine to produce the greatest value.

```

class Solution {
public:
    int maximum69Number(int num) {
        string digits = to_string(num);

        for (char& digit : digits) {
            if (digit == '6') {

```

(continues on next page)

(continued from previous page)

```
        digit = '9';
        break;
    }
}

return stoi(digits);
}
};
```

ThinkCScpp 4.5: Nested conditionals

7.4.11 Valid Palindrome (Easy)

Determine whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = static_cast<int>(s.size()) - 1;

        while (left < right) {
            while (left < right &&
                !isalnum(static_cast<unsigned char>(s[left]))) {
                ++left;
            }

            while (left < right &&
                !isalnum(static_cast<unsigned char>(s[right]))) {
                --right;
            }

            if (tolower(static_cast<unsigned char>(s[left])) !=
                tolower(static_cast<unsigned char>(s[right]))) {
                return false;
            }

            ++left;
            --right;
        }

        return true;
    }
};
```

7.4.12 Happy Number (Easy)

Determine whether repeatedly summing squared digits eventually reaches one.

```
class Solution {
public:
    bool isHappy(int n) {
```

(continues on next page)

(continued from previous page)

```

unordered_set<int> seen;

while (n != 1 && !seen.count(n)) {
    seen.insert(n);
    n = digitSquareSum(n);
}

return n == 1;
}

private:
int digitSquareSum(int n) {
    int sum = 0;

    while (n > 0) {
        int digit = n % 10;
        sum += digit * digit;
        n /= 10;
    }

    return sum;
}
};

```

ThinkCScpp 4.6: The return statement

7.4.13 Binary Search (Easy)

Return the index of a target in a sorted array or negative one when absent.

```

class Solution {
public:
    int search(vector<int>& nums, int target) {
        int left = 0;
        int right = static_cast<int>(nums.size()) - 1;

        while (left <= right) {
            int middle = left + (right - left) / 2;

            if (nums[middle] == target) {
                return middle;
            }

            if (nums[middle] < target) {
                left = middle + 1;
            } else {
                right = middle - 1;
            }
        }

        return -1;
    }
};

```

7.4.14 Sqrt(x) (Easy)

Return the truncated integer square root of a non-negative integer.

```
class Solution {
public:
    int mySqrt(int x) {
        int left = 0;
        int right = x;
        int answer = 0;

        while (left <= right) {
            int middle = left + (right - left) / 2;
            long long square = static_cast<long long>(middle) * middle;

            if (square <= x) {
                answer = middle;
                left = middle + 1;
            } else {
                right = middle - 1;
            }
        }

        return answer;
    }
};
```

7.4.15 Search Insert Position (Easy)

Return a target's index or the position where it should be inserted.

```
class Solution {
public:
    int searchInsert(vector<int>& nums, int target) {
        int left = 0;
        int right = static_cast<int>(nums.size());

        while (left < right) {
            int middle = left + (right - left) / 2;

            if (nums[middle] < target) {
                left = middle + 1;
            } else {
                right = middle;
            }
        }

        return left;
    }
};
```

ThinkCScpp 4.7: Recursion

7.4.16 Fibonacci Number (Easy)

Return the requested Fibonacci number using a recursive function.

```
class Solution {
public:
    int fib(int n) {
        if (n < 2) {
            return n;
        }

        return fib(n - 1) + fib(n - 2);
    }
};
```

7.4.17 Power of Three (Easy)

Return whether an integer can be reduced to one by repeated division by three.

```
class Solution {
public:
    bool isPowerOfThree(int n) {
        if (n == 1) {
            return true;
        }

        if (n <= 0 || n % 3 != 0) {
            return false;
        }

        return isPowerOfThree(n / 3);
    }
};
```

7.4.18 Reverse String (Easy)

Reverse a character array in place.

```
class Solution {
public:
    void reverseString(vector<char>& s) {
        reverseRange(s, 0, static_cast<int>(s.size()) - 1);
    }

private:
    void reverseRange(vector<char>& s, int left, int right) {
        if (left >= right) {
            return;
        }

        swap(s[left], s[right]);
        reverseRange(s, left + 1, right - 1);
    }
};
```

(continues on next page)

(continued from previous page)

```
    }  
};
```

7.4.19 Climbing Stairs (Easy)

Count the distinct ways to reach the top using one-step and two-step moves.

```
class Solution {  
public:  
    int climbStairs(int n) {  
        vector<int> memo(n + 1, -1);  
        return countWays(n, memo);  
    }  
  
private:  
    int countWays(int n, vector<int>& memo) {  
        if (n <= 2) {  
            return n;  
        }  
  
        if (memo[n] != -1) {  
            return memo[n];  
        }  
  
        memo[n] = countWays(n - 1, memo) +  
                 countWays(n - 2, memo);  
        return memo[n];  
    }  
};
```

ThinkCScpp 4.8: Infinite recursion

7.4.20 Fibonacci Number (Easy)

Return the requested Fibonacci number using a recursive function.

```
class Solution {  
public:  
    int fib(int n) {  
        if (n < 2) {  
            return n;  
        }  
  
        return fib(n - 1) + fib(n - 2);  
    }  
};
```

ThinkCScpp 4.9: Stack diagrams for recursive functions

7.4.21 Fibonacci Number (Easy)

Return the requested Fibonacci number using a recursive function.

```

class Solution {
public:
    int fib(int n) {
        if (n < 2) {
            return n;
        }

        return fib(n - 1) + fib(n - 2);
    }
};

```

7.4.22 Merge Two Sorted Lists (Easy)

Recursively merge two sorted linked lists into one sorted list.

```

class Solution {
public:
    ListNode* mergeTwoLists(ListNode* list1, ListNode* list2) {
        if (list1 == nullptr) {
            return list2;
        }

        if (list2 == nullptr) {
            return list1;
        }

        if (list1->val <= list2->val) {
            list1->next = mergeTwoLists(list1->next, list2);
            return list1;
        }

        list2->next = mergeTwoLists(list1, list2->next);
        return list2;
    }
};

```

7.4.23 Same Tree (Easy)

Determine recursively whether two binary trees have identical structure and values.

```

class Solution {
public:
    bool isSameTree(TreeNode* p, TreeNode* q) {
        if (p == nullptr || q == nullptr) {
            return p == q;
        }

        return p->val == q->val &&
            isSameTree(p->left, q->left) &&
            isSameTree(p->right, q->right);
    }
};

```

RooksGuide 10: Conditionals

7.4.24 Valid Parentheses (Easy)

Determine whether every bracket is closed in the correct order.

```
class Solution {
public:
    bool isValid(string s) {
        stack<char> open;

        for (char symbol : s) {
            if (symbol == '(' || symbol == '[' || symbol == '{') {
                open.push(symbol);
            } else {
                if (open.empty() || !matches(open.top(), symbol)) {
                    return false;
                }

                open.pop();
            }
        }

        return open.empty();
    }

private:
    bool matches(char left, char right) {
        return (left == '(' && right == ')') ||
            (left == '[' && right == ']') ||
            (left == '{' && right == '}');
    }
};
```

7.4.25 Best Time to Buy and Sell Stock (Easy)

Find the greatest profit from one purchase followed by one sale.

```
class Solution {
public:
    int maxProfit(vector<int>& prices) {
        int lowest = prices[0];
        int best = 0;

        for (int price : prices) {
            lowest = min(lowest, price);
            best = max(best, price - lowest);
        }

        return best;
    }
};
```

RooksGuide 10.1: if, else, and else if

7.4.26 Fizz Buzz (Easy)

Return each number as text, replacing multiples of three and five with the required words.

```
class Solution {
public:
    vector<string> fizzBuzz(int n) {
        vector<string> answer;

        for (int i = 1; i <= n; ++i) {
            if (i % 15 == 0) {
                answer.push_back("FizzBuzz");
            } else if (i % 3 == 0) {
                answer.push_back("Fizz");
            } else if (i % 5 == 0) {
                answer.push_back("Buzz");
            } else {
                answer.push_back(to_string(i));
            }
        }

        return answer;
    }
};
```

7.4.27 Lemonade Change (Easy)

Determine whether correct change can be given to every customer in order.

```
class Solution {
public:
    bool lemonadeChange(vector<int>& bills) {
        int fives = 0;
        int tens = 0;

        for (int bill : bills) {
            if (bill == 5) {
                ++fives;
            } else if (bill == 10) {
                if (fives == 0) {
                    return false;
                }

                --fives;
                ++tens;
            } else {
                if (tens > 0 && fives > 0) {
                    --tens;
                    --fives;
                } else if (fives >= 3) {
                    fives -= 3;
                } else {

```

(continues on next page)

(continued from previous page)

```
        return false;
    }
}

return true;
}
};
```

7.4.28 Maximum 69 Number (Easy)

Change at most one digit from six to nine to produce the greatest value.

```
class Solution {
public:
    int maximum69Number(int num) {
        string digits = to_string(num);

        for (char& digit : digits) {
            if (digit == '6') {
                digit = '9';
                break;
            }
        }

        return stoi(digits);
    }
};
```

7.4.29 Number of Steps to Reduce a Number to Zero (Easy)

Count the divisions and subtractions required to reduce an integer to zero.

```
class Solution {
public:
    int numberOfSteps(int num) {
        int steps = 0;

        while (num > 0) {
            if (num % 2 == 0) {
                num /= 2;
            } else {
                --num;
            }

            ++steps;
        }

        return steps;
    }
};
```


RooksGuide 10.1.1: A small digression on expressions

7.4.30 Add Digits (Easy)

Repeatedly sum an integer's digits until only one digit remains.

```
class Solution {
public:
    int addDigits(int num) {
        while (num >= 10) {
            int sum = 0;

            while (num > 0) {
                sum += num % 10;
                num /= 10;
            }

            num = sum;
        }

        return num;
    }
};
```

7.4.31 Palindrome Number (Easy)

Return whether an integer reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(int x) {
        if (x < 0 || (x % 10 == 0 && x != 0)) {
            return false;
        }

        int reversedHalf = 0;

        while (x > reversedHalf) {
            reversedHalf = reversedHalf * 10 + x % 10;
            x /= 10;
        }

        return x == reversedHalf || x == reversedHalf / 10;
    }
};
```

RooksGuide 10.1.2: Using else

7.4.32 Number of Steps to Reduce a Number to Zero (Easy)

Count the divisions and subtractions required to reduce an integer to zero.

```
class Solution {
public:
```

(continues on next page)

(continued from previous page)

```
int numberOfSteps(int num) {  
    int steps = 0;  
  
    while (num > 0) {  
        if (num % 2 == 0) {  
            num /= 2;  
        } else {  
            --num;  
        }  
  
        ++steps;  
    }  
  
    return steps;  
}  
};
```

RooksGuide 10.2: switch statements

7.4.33 Roman to Integer (Easy)

Convert a Roman numeral into its integer value.

```
class Solution {  
public:  
    int romanToInt(string s) {  
        int total = 0;  
  
        for (int i = 0; i < static_cast<int>(s.size()); ++i) {  
            int value = romanValue(s[i]);  
  
            if (i + 1 < static_cast<int>(s.size()) &&  
                value < romanValue(s[i + 1])) {  
                total -= value;  
            } else {  
                total += value;  
            }  
        }  
  
        return total;  
    }  
  
private:  
    int romanValue(char symbol) {  
        switch (symbol) {  
            case 'I': return 1;  
            case 'V': return 5;  
            case 'X': return 10;  
            case 'L': return 50;  
            case 'C': return 100;  
            case 'D': return 500;  
            case 'M': return 1000;  
        }  
    }  
};
```

(continues on next page)

(continued from previous page)

```
        default: return 0;
    }
}
};
```

7.5 Unit 5 practice problems

ThinkCScpp 5.1: Return values

7.5.1 Sqrt(x) (Easy)

Return the truncated integer square root of a non-negative integer.

```
class Solution {
public:
    int mySqrt(int x) {
        int left = 0;
        int right = x;
        int answer = 0;

        while (left <= right) {
            int middle = left + (right - left) / 2;
            long long square = static_cast<long long>(middle) * middle;

            if (square <= x) {
                answer = middle;
                left = middle + 1;
            } else {
                right = middle - 1;
            }
        }

        return answer;
    }
};
```

7.5.2 Add Digits (Easy)

Repeatedly sum an integer's digits until only one digit remains.

```
class Solution {
public:
    int addDigits(int num) {
        while (num >= 10) {
            int sum = 0;

            while (num > 0) {
                sum += num % 10;
                num /= 10;
            }

            num = sum;
        }
    }
};
```

(continues on next page)

(continued from previous page)

```
    }  
  
    return num;  
}  
};
```

ThinkCScpp 5.2: Program development

7.5.3 Two Sum (Easy)

Return the indexes of two array values whose sum equals the target.

```
class Solution {  
public:  
    vector<int> twoSum(vector<int>& nums, int target) {  
        unordered_map<int, int> indexes;  
  
        for (int i = 0; i < static_cast<int>(nums.size()); ++i) {  
            int required = target - nums[i];  
  
            if (indexes.count(required)) {  
                return {indexes[required], i};  
            }  
  
            indexes[nums[i]] = i;  
        }  
  
        return {};  
    }  
};
```

7.5.4 Valid Palindrome (Easy)

Determine whether normalized text reads the same forward and backward.

```
class Solution {  
public:  
    bool isPalindrome(string s) {  
        int left = 0;  
        int right = static_cast<int>(s.size()) - 1;  
  
        while (left < right) {  
            while (left < right &&  
                !isalnum(static_cast<unsigned char>(s[left]))) {  
                ++left;  
            }  
  
            while (left < right &&  
                !isalnum(static_cast<unsigned char>(s[right]))) {  
                --right;  
            }  
        }  
    }  
};
```

(continues on next page)

(continued from previous page)

```

        if (tolower(static_cast<unsigned char>(s[left])) !=
            tolower(static_cast<unsigned char>(s[right]))) {
            return false;
        }

        ++left;
        --right;
    }

    return true;
}
};

```

7.5.5 Best Time to Buy and Sell Stock (Easy)

Find the greatest profit from one purchase followed by one sale.

```

class Solution {
public:
    int maxProfit(vector<int>& prices) {
        int lowest = prices[0];
        int best = 0;

        for (int price : prices) {
            lowest = min(lowest, price);
            best = max(best, price - lowest);
        }

        return best;
    }
};

```

7.5.6 Valid Anagram (Easy)

Determine whether two strings contain identical character counts.

```

class Solution {
public:
    bool isAnagram(string s, string t) {
        if (s.size() != t.size()) {
            return false;
        }

        array<int, 26> counts{};

        for (char character : s) {
            ++counts[character - 'a'];
        }

        for (char character : t) {
            --counts[character - 'a'];
        }
    }
};

```

(continues on next page)

(continued from previous page)

```
    for (int count : counts) {
        if (count != 0) {
            return false;
        }
    }

    return true;
}
};
```

ThinkCScpp 5.3: Composition

7.5.7 Happy Number (Easy)

Determine whether repeatedly summing squared digits eventually reaches one.

```
class Solution {
public:
    bool isHappy(int n) {
        unordered_set<int> seen;

        while (n != 1 && !seen.count(n)) {
            seen.insert(n);
            n = digitSquareSum(n);
        }

        return n == 1;
    }

private:
    int digitSquareSum(int n) {
        int sum = 0;

        while (n > 0) {
            int digit = n % 10;
            sum += digit * digit;
            n /= 10;
        }

        return sum;
    }
};
```

7.5.8 Palindrome Number (Easy)

Return whether an integer reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(int x) {
        if (x < 0 || (x % 10 == 0 && x != 0)) {
```

(continues on next page)

(continued from previous page)

```

        return false;
    }

    int reversedHalf = 0;

    while (x > reversedHalf) {
        reversedHalf = reversedHalf * 10 + x % 10;
        x /= 10;
    }

    return x == reversedHalf || x == reversedHalf / 10;
}
};

```

ThinkCScpp 5.4: Overloading**7.5.9 Pow(x, n) (Medium)**

Calculate a floating-point base raised to an integer exponent.

```

class Solution {
public:
    double myPow(double x, int n) {
        return power(x, static_cast<long long>(n));
    }

private:
    double power(double x, long long n) {
        if (n == 0) {
            return 1.0;
        }

        if (n < 0) {
            return 1.0 / power(x, -n);
        }

        double half = power(x, n / 2);

        if (n % 2 == 0) {
            return half * half;
        }

        return half * half * x;
    }
};

```

ThinkCScpp 5.5: Boolean values**7.5.10 Power of Four (Easy)**

Return whether an integer is an exact power of four.

```
class Solution {
public:
    bool isPowerOfFour(int n) {
        if (n <= 0) {
            return false;
        }

        while (n % 4 == 0) {
            n /= 4;
        }

        return n == 1;
    }
};
```

7.5.11 Valid Anagram (Easy)

Determine whether two strings contain identical character counts.

```
class Solution {
public:
    bool isAnagram(string s, string t) {
        if (s.size() != t.size()) {
            return false;
        }

        array<int, 26> counts{};

        for (char character : s) {
            ++counts[character - 'a'];
        }

        for (char character : t) {
            --counts[character - 'a'];
        }

        for (int count : counts) {
            if (count != 0) {
                return false;
            }
        }

        return true;
    }
};
```

7.5.12 Contains Duplicate (Easy)

Return whether any integer appears more than once in an array.

```
class Solution {
public:
```

(continues on next page)

(continued from previous page)

```

bool containsDuplicate(vector<int>& nums) {
    unordered_set<int> seen;

    for (int value : nums) {
        if (!seen.insert(value).second) {
            return true;
        }
    }

    return false;
}
};

```

ThinkCScpp 5.6: Boolean variables**7.5.13 Happy Number (Easy)**

Determine whether repeatedly summing squared digits eventually reaches one.

```

class Solution {
public:
    bool isHappy(int n) {
        unordered_set<int> seen;

        while (n != 1 && !seen.count(n)) {
            seen.insert(n);
            n = digitSquareSum(n);
        }

        return n == 1;
    }

private:
    int digitSquareSum(int n) {
        int sum = 0;

        while (n > 0) {
            int digit = n % 10;
            sum += digit * digit;
            n /= 10;
        }

        return sum;
    }
};

```

7.5.14 Valid Parentheses (Easy)

Determine whether every bracket is closed in the correct order.

```

class Solution {
public:

```

(continues on next page)

(continued from previous page)

```
bool isValid(string s) {
    stack<char> open;

    for (char symbol : s) {
        if (symbol == '(' || symbol == '[' || symbol == '{') {
            open.push(symbol);
        } else {
            if (open.empty() || !matches(open.top(), symbol)) {
                return false;
            }

            open.pop();
        }
    }

    return open.empty();
}

private:
bool matches(char left, char right) {
    return (left == '(' && right == ')') ||
           (left == '[' && right == ']') ||
           (left == '{' && right == '}');
}
};
```

ThinkCScpp 5.7: Logical operators

7.5.15 Check if One String Swap Can Make Strings Equal (Easy)

Determine whether two strings can match after at most one swap.

```
class Solution {
public:
    bool areAlmostEqual(string s1, string s2) {
        vector<int> differences;

        for (int i = 0; i < static_cast<int>(s1.size()); ++i) {
            if (s1[i] != s2[i]) {
                differences.push_back(i);
            }
        }

        return differences.empty() ||
               (differences.size() == 2 &&
                s1[differences[0]] == s2[differences[1]] &&
                s1[differences[1]] == s2[differences[0]]);
    }
};
```

7.5.16 Valid Palindrome (Easy)

Determine whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
        int right = static_cast<int>(s.size()) - 1;

        while (left < right) {
            while (left < right &&
                !isalnum(static_cast<unsigned char>(s[left]))) {
                ++left;
            }

            while (left < right &&
                !isalnum(static_cast<unsigned char>(s[right]))) {
                --right;
            }

            if (tolower(static_cast<unsigned char>(s[left])) !=
                tolower(static_cast<unsigned char>(s[right]))) {
                return false;
            }

            ++left;
            --right;
        }

        return true;
    }
};
```

7.5.17 Valid Perfect Square (Easy)

Return whether an integer is the square of another integer.

```
class Solution {
public:
    bool isPerfectSquare(int num) {
        long long left = 1;
        long long right = num;

        while (left <= right) {
            long long middle = left + (right - left) / 2;
            long long square = middle * middle;

            if (square == num) {
                return true;
            }

            if (square < num) {
                left = middle + 1;
            }
        }
    }
};
```

(continues on next page)

(continued from previous page)

```
        } else {
            right = middle - 1;
        }
    }

    return false;
}
};
```

7.5.18 Is Subsequence (Easy)

Determine whether one string's characters appear in another in the same order.

```
class Solution {
public:
    bool isSubsequence(string s, string t) {
        int matched = 0;

        for (char character : t) {
            if (matched < static_cast<int>(s.size()) &&
                s[matched] == character) {
                ++matched;
            }
        }

        return matched == static_cast<int>(s.size());
    }
};
```

ThinkCScpp 5.8: Bool functions

7.5.19 Power of Two (Easy)

Return whether an integer is an exact power of two.

```
class Solution {
public:
    bool isPowerOfTwo(int n) {
        return n > 0 && (n & (n - 1)) == 0;
    }
};
```

7.5.20 Is Subsequence (Easy)

Determine whether one string's characters appear in another in the same order.

```
class Solution {
public:
    bool isSubsequence(string s, string t) {
        int matched = 0;

        for (char character : t) {
```

(continues on next page)

(continued from previous page)

```

        if (matched < static_cast<int>(s.size()) &&
            s[matched] == character) {
            ++matched;
        }
    }

    return matched == static_cast<int>(s.size());
}
};

```

7.5.21 Valid Perfect Square (Easy)

Return whether an integer is the square of another integer.

```

class Solution {
public:
    bool isPerfectSquare(int num) {
        long long left = 1;
        long long right = num;

        while (left <= right) {
            long long middle = left + (right - left) / 2;
            long long square = middle * middle;

            if (square == num) {
                return true;
            }

            if (square < num) {
                left = middle + 1;
            } else {
                right = middle - 1;
            }
        }

        return false;
    }
};

```

ThinkCScpp 5.9: Returning from main

7.5.22 Find the Difference (Easy)

Return the extra character added to the second string.

```

class Solution {
public:
    char findTheDifference(string s, string t) {
        char difference = 0;

        for (char character : s) {
            difference ^= character;
        }
    }
};

```

(continues on next page)

(continued from previous page)

```
    }

    for (char character : t) {
        difference ^= character;
    }

    return difference;
}
};
```

ThinkCScpp 5.10: More recursion

7.5.23 Climbing Stairs (Easy)

Count the distinct ways to reach the top using one-step and two-step moves.

```
class Solution {
public:
    int climbStairs(int n) {
        vector<int> memo(n + 1, -1);
        return countWays(n, memo);
    }

private:
    int countWays(int n, vector<int>& memo) {
        if (n <= 2) {
            return n;
        }

        if (memo[n] != -1) {
            return memo[n];
        }

        memo[n] = countWays(n - 1, memo) +
                  countWays(n - 2, memo);
        return memo[n];
    }
};
```

7.5.24 Pow(x, n) (Medium)

Calculate a floating-point base raised to an integer exponent.

```
class Solution {
public:
    double myPow(double x, int n) {
        return power(x, static_cast<long long>(n));
    }

private:
    double power(double x, long long n) {
        if (n == 0) {
```

(continues on next page)

(continued from previous page)

```

        return 1.0;
    }

    if (n < 0) {
        return 1.0 / power(x, -n);
    }

    double half = power(x, n / 2);

    if (n % 2 == 0) {
        return half * half;
    }

    return half * half * x;
}
};

```

7.5.25 Merge Two Sorted Lists (Easy)

Recursively merge two sorted linked lists into one sorted list.

```

class Solution {
public:
    ListNode* mergeTwoLists(ListNode* list1, ListNode* list2) {
        if (list1 == nullptr) {
            return list2;
        }

        if (list2 == nullptr) {
            return list1;
        }

        if (list1->val <= list2->val) {
            list1->next = mergeTwoLists(list1->next, list2);
            return list1;
        }

        list2->next = mergeTwoLists(list1, list2->next);
        return list2;
    }
};

```

ThinkCScpp 5.11: Leap of faith

7.5.26 Same Tree (Easy)

Determine recursively whether two binary trees have identical structure and values.

```

class Solution {
public:
    bool isSameTree(TreeNode* p, TreeNode* q) {
        if (p == nullptr || q == nullptr) {

```

(continues on next page)

(continued from previous page)

```
        return p == q;
    }

    return p->val == q->val &&
        isSameTree(p->left, q->left) &&
        isSameTree(p->right, q->right);
}
};
```

7.5.27 Invert Binary Tree (Easy)

Recursively swap the left and right children of every tree node.

```
class Solution {
public:
    TreeNode* invertTree(TreeNode* root) {
        if (root == nullptr) {
            return nullptr;
        }

        TreeNode* left = invertTree(root->left);
        TreeNode* right = invertTree(root->right);
        root->left = right;
        root->right = left;

        return root;
    }
};
```

ThinkCScpp 5.12: One more example

7.5.28 Pascal's Triangle II (Easy)

Return a selected row from Pascal's triangle.

```
class Solution {
public:
    vector<int> getRow(int rowIndex) {
        vector<int> row(rowIndex + 1, 1);

        for (int i = 1; i < rowIndex; ++i) {
            for (int j = i; j > 0; --j) {
                row[j] += row[j - 1];
            }
        }

        return row;
    }
};
```


7.5.29 Reverse Linked List (Easy)

Reverse a singly linked list and return its new head.

```
class Solution {
public:
    ListNode* reverseList(ListNode* head) {
        if (head == nullptr || head->next == nullptr) {
            return head;
        }

        ListNode* newHead = reverseList(head->next);
        head->next->next = head;
        head->next = nullptr;

        return newHead;
    }
};
```

7.5.30 Fibonacci Number (Easy)

Return the requested Fibonacci number using a recursive function.

```
class Solution {
public:
    int fib(int n) {
        if (n < 2) {
            return n;
        }

        return fib(n - 1) + fib(n - 2);
    }
};
```

7.5.31 Power of Three (Easy)

Return whether an integer can be reduced to one by repeated division by three.

```
class Solution {
public:
    bool isPowerOfThree(int n) {
        if (n == 1) {
            return true;
        }

        if (n <= 0 || n % 3 != 0) {
            return false;
        }

        return isPowerOfThree(n / 3);
    }
};
```

7.6 Unit 6 practice problems

ThinkCScpp 6.1: Multiple assignment

7.6.1 Reverse String (Easy)

Reverse a character array in place.

```
class Solution {
public:
    void reverseString(vector<char>& s) {
        reverseRange(s, 0, static_cast<int>(s.size()) - 1);
    }

private:
    void reverseRange(vector<char>& s, int left, int right) {
        if (left >= right) {
            return;
        }

        swap(s[left], s[right]);
        reverseRange(s, left + 1, right - 1);
    }
};
```

7.6.2 Move Zeroes (Easy)

Move all zero values to the end while preserving other values' order.

```
class Solution {
public:
    void moveZeroes(vector<int>& nums) {
        int nextNonZero = 0;

        for (int i = 0; i < static_cast<int>(nums.size()); ++i) {
            if (nums[i] != 0) {
                swap(nums[nextNonZero], nums[i]);
                ++nextNonZero;
            }
        }
    }
};
```

ThinkCScpp 6.2: Iteration

7.6.3 Running Sum of 1d Array (Easy)

Replace each array element with the sum of itself and all earlier elements.

```
class Solution {
public:
    vector<int> runningSum(vector<int>& nums) {
        for (int i = 1; i < static_cast<int>(nums.size()); ++i) {
            nums[i] += nums[i - 1];
        }
    }
};
```

(continues on next page)

(continued from previous page)

```

    }

    return nums;
}
};

```

7.6.4 Best Time to Buy and Sell Stock (Easy)

Find the greatest profit from one purchase followed by one sale.

```

class Solution {
public:
    int maxProfit(vector<int>& prices) {
        int lowest = prices[0];
        int best = 0;

        for (int price : prices) {
            lowest = min(lowest, price);
            best = max(best, price - lowest);
        }

        return best;
    }
};

```

7.6.5 Contains Duplicate (Easy)

Return whether any integer appears more than once in an array.

```

class Solution {
public:
    bool containsDuplicate(vector<int>& nums) {
        unordered_set<int> seen;

        for (int value : nums) {
            if (!seen.insert(value).second) {
                return true;
            }
        }

        return false;
    }
};

```

7.6.6 Maximum Subarray (Medium)

Return the greatest sum among all contiguous subarrays.

```

class Solution {
public:
    int maxSubArray(vector<int>& nums) {
        int current = nums[0];

```

(continues on next page)

(continued from previous page)

```
int best = nums[0];

for (int i = 1; i < static_cast<int>(nums.size()); ++i) {
    current = max(nums[i], current + nums[i]);
    best = max(best, current);
}

return best;
}
};
```

ThinkCScpp 6.3: The while statement

7.6.7 Binary Search (Easy)

Return the index of a target in a sorted array or negative one when absent.

```
class Solution {
public:
    int search(vector<int>& nums, int target) {
        int left = 0;
        int right = static_cast<int>(nums.size()) - 1;

        while (left <= right) {
            int middle = left + (right - left) / 2;

            if (nums[middle] == target) {
                return middle;
            }

            if (nums[middle] < target) {
                left = middle + 1;
            } else {
                right = middle - 1;
            }
        }

        return -1;
    }
};
```

7.6.8 Palindrome Number (Easy)

Return whether an integer reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(int x) {
        if (x < 0 || (x % 10 == 0 && x != 0)) {
            return false;
        }
    }
};
```

(continues on next page)

(continued from previous page)

```

    int reversedHalf = 0;

    while (x > reversedHalf) {
        reversedHalf = reversedHalf * 10 + x % 10;
        x /= 10;
    }

    return x == reversedHalf || x == reversedHalf / 10;
}
};

```

7.6.9 Sqrt(x) (Easy)

Return the truncated integer square root of a non-negative integer.

```

class Solution {
public:
    int mySqrt(int x) {
        int left = 0;
        int right = x;
        int answer = 0;

        while (left <= right) {
            int middle = left + (right - left) / 2;
            long long square = static_cast<long long>(middle) * middle;

            if (square <= x) {
                answer = middle;
                left = middle + 1;
            } else {
                right = middle - 1;
            }
        }

        return answer;
    }
};

```

7.6.10 Happy Number (Easy)

Determine whether repeatedly summing squared digits eventually reaches one.

```

class Solution {
public:
    bool isHappy(int n) {
        unordered_set<int> seen;

        while (n != 1 && !seen.count(n)) {
            seen.insert(n);
            n = digitSquareSum(n);
        }
    }
};

```

(continues on next page)

(continued from previous page)

```
        return n == 1;
    }

private:
    int digitSquareSum(int n) {
        int sum = 0;

        while (n > 0) {
            int digit = n % 10;
            sum += digit * digit;
            n /= 10;
        }

        return sum;
    }
};
```

ThinkCScpp 6.4: Tables

7.6.11 Fizz Buzz (Easy)

Return each number as text, replacing multiples of three and five with the required words.

```
class Solution {
public:
    vector<string> fizzBuzz(int n) {
        vector<string> answer;

        for (int i = 1; i <= n; ++i) {
            if (i % 15 == 0) {
                answer.push_back("FizzBuzz");
            } else if (i % 3 == 0) {
                answer.push_back("Fizz");
            } else if (i % 5 == 0) {
                answer.push_back("Buzz");
            } else {
                answer.push_back(to_string(i));
            }
        }

        return answer;
    }
};
```

7.6.12 Pascal's Triangle (Easy)

Generate the requested number of rows from Pascal's triangle.

```
class Solution {
public:
    vector<vector<int>> generate(int numRows) {
        vector<vector<int>> triangle;
```

(continues on next page)

(continued from previous page)

```

    for (int row = 0; row < numRows; ++row) {
        triangle.push_back(vector<int>(row + 1, 1));

        for (int column = 1; column < row; ++column) {
            triangle[row][column] =
                triangle[row - 1][column - 1] +
                triangle[row - 1][column];
        }
    }

    return triangle;
}
};

```

ThinkCScpp 6.5: Two-dimensional tables

7.6.13 Richest Customer Wealth (Easy)

Find the greatest row sum in a two-dimensional integer array.

```

class Solution {
public:
    int maximumWealth(vector<vector<int>>& accounts) {
        int richest = 0;

        for (const vector<int>& customer : accounts) {
            int wealth = 0;

            for (int account : customer) {
                wealth += account;
            }

            richest = max(richest, wealth);
        }

        return richest;
    }
};

```

7.6.14 Matrix Diagonal Sum (Easy)

Sum both diagonals of a square matrix without counting the centre twice.

```

class Solution {
public:
    int diagonalSum(vector<vector<int>>& mat) {
        int total = 0;
        int size = static_cast<int>(mat.size());

        for (int row = 0; row < size; ++row) {
            total += mat[row][row];

```

(continues on next page)

(continued from previous page)

```
        int opposite = size - row - 1;
        if (opposite != row) {
            total += mat[row][opposite];
        }
    }

    return total;
}
};
```

7.6.15 Transpose Matrix (Easy)

Return a matrix with its rows and columns exchanged.

```
class Solution {
public:
    vector<vector<int>> transpose(vector<vector<int>>& matrix) {
        int rows = static_cast<int>(matrix.size());
        int columns = static_cast<int>(matrix[0].size());
        vector<vector<int>> result(columns, vector<int>(rows));

        for (int row = 0; row < rows; ++row) {
            for (int column = 0; column < columns; ++column) {
                result[column][row] = matrix[row][column];
            }
        }

        return result;
    }
};
```

ThinkCScpp 6.6: Encapsulation and generalization

7.6.16 Merge Sorted Array (Easy)

Merge two sorted arrays into the first array without using extra output storage.

```
class Solution {
public:
    void merge(vector<int>& nums1, int m,
               vector<int>& nums2, int n) {
        int first = m - 1;
        int second = n - 1;
        int destination = m + n - 1;

        while (second >= 0) {
            if (first >= 0 && nums1[first] > nums2[second]) {
                nums1[destination--] = nums1[first--];
            } else {
                nums1[destination--] = nums2[second--];
            }
        }
    }
};
```

(continues on next page)

(continued from previous page)

```

    }
}
};

```

7.6.17 Two Sum (Easy)

Return the indexes of two array values whose sum equals the target.

```

class Solution {
public:
    vector<int> twoSum(vector<int>& nums, int target) {
        unordered_map<int, int> indexes;

        for (int i = 0; i < static_cast<int>(nums.size()); ++i) {
            int required = target - nums[i];

            if (indexes.count(required)) {
                return {indexes[required], i};
            }

            indexes[nums[i]] = i;
        }

        return {};
    }
};

```

ThinkCScpp 6.7: Functions

7.6.18 Design Parking System (Easy)

Implement methods that track whether each parking-space type has capacity.

```

class ParkingSystem {
public:
    ParkingSystem(int big, int medium, int small)
        : spaces{0, big, medium, small} {}

    bool addCar(int carType) {
        if (spaces[carType] == 0) {
            return false;
        }

        --spaces[carType];
        return true;
    }

private:
    array<int, 4> spaces;
};

```

7.6.19 Min Cost Climbing Stairs (Easy)

Return the minimum cost required to move beyond the top stair.

```
class Solution {
public:
    int minCostClimbingStairs(vector<int>& cost) {
        int twoBack = 0;
        int oneBack = 0;

        for (int value : cost) {
            int current = value + min(oneBack, twoBack);
            twoBack = oneBack;
            oneBack = current;
        }

        return min(oneBack, twoBack);
    }
};
```

7.6.20 Search Insert Position (Easy)

Return a target's index or the position where it should be inserted.

```
class Solution {
public:
    int searchInsert(vector<int>& nums, int target) {
        int left = 0;
        int right = static_cast<int>(nums.size());

        while (left < right) {
            int middle = left + (right - left) / 2;

            if (nums[middle] < target) {
                left = middle + 1;
            } else {
                right = middle;
            }
        }

        return left;
    }
};
```

ThinkCScpp 6.8: More encapsulation

7.6.21 Valid Palindrome (Easy)

Determine whether normalized text reads the same forward and backward.

```
class Solution {
public:
    bool isPalindrome(string s) {
        int left = 0;
```

(continues on next page)

(continued from previous page)

```

    int right = static_cast<int>(s.size()) - 1;

    while (left < right) {
        while (left < right &&
            !isalnum(static_cast<unsigned char>(s[left]))) {
            ++left;
        }

        while (left < right &&
            !isalnum(static_cast<unsigned char>(s[right]))) {
            --right;
        }

        if (tolower(static_cast<unsigned char>(s[left])) !=
            tolower(static_cast<unsigned char>(s[right]))) {
            return false;
        }

        ++left;
        --right;
    }

    return true;
}
};

```

7.6.22 Is Subsequence (Easy)

Determine whether one string's characters appear in another in the same order.

```

class Solution {
public:
    bool isSubsequence(string s, string t) {
        int matched = 0;

        for (char character : t) {
            if (matched < static_cast<int>(s.size()) &&
                s[matched] == character) {
                ++matched;
            }
        }

        return matched == static_cast<int>(s.size());
    }
};

```

ThinkCScpp 6.9: Local variables

7.6.23 Running Sum of 1d Array (Easy)

Replace each array element with the sum of itself and all earlier elements.

```
class Solution {
public:
    vector<int> runningSum(vector<int>& nums) {
        for (int i = 1; i < static_cast<int>(nums.size()); ++i) {
            nums[i] += nums[i - 1];
        }

        return nums;
    }
};
```

ThinkCScpp 6.10: More generalization

7.6.24 Search Insert Position (Easy)

Return a target's index or the position where it should be inserted.

```
class Solution {
public:
    int searchInsert(vector<int>& nums, int target) {
        int left = 0;
        int right = static_cast<int>(nums.size());

        while (left < right) {
            int middle = left + (right - left) / 2;

            if (nums[middle] < target) {
                left = middle + 1;
            } else {
                right = middle;
            }
        }

        return left;
    }
};
```

7.6.25 Maximum Subarray (Medium)

Return the greatest sum among all contiguous subarrays.

```
class Solution {
public:
    int maxSubArray(vector<int>& nums) {
        int current = nums[0];
        int best = nums[0];

        for (int i = 1; i < static_cast<int>(nums.size()); ++i) {
            current = max(nums[i], current + nums[i]);
            best = max(best, current);
        }

        return best;
    }
};
```

(continues on next page)

(continued from previous page)

```
    }  
};
```

7.6.26 Move Zeroes (Easy)

Move all zero values to the end while preserving other values' order.

```
class Solution {  
public:  
    void moveZeroes(vector<int>& nums) {  
        int nextNonZero = 0;  
  
        for (int i = 0; i < static_cast<int>(nums.size()); ++i) {  
            if (nums[i] != 0) {  
                swap(nums[nextNonZero], nums[i]);  
                ++nextNonZero;  
            }  
        }  
    }  
};
```

7.6.27 Reference

LeetCode. (n.d.). *LeetCode*. Retrieved Jan 2025 - Aug 2026, from <https://leetcode.com/>

THINK C++

I wrapped up this book in December 2025. It was an easy read, but I took down some of the most interesting “refresher” type notes. It’s probably useful if you understand another language.

Total pages	191
Currently on	191

8.1 Chapter synopsis and notes

8.1.1 The way of the program

This chapter introduces what programming is and how C++ fits as a formal, compiled language. It defines programs as precise instructions, explains why errors are unavoidable, and frames debugging as a systematic, experimental activity. It contrasts formal and natural languages to set expectations about precision and walks through a minimal first program to establish structure.

- Programming demands precision; computers do exactly what is written.
- Debugging is a core activity, not a failure state.
- Compile-time, run-time, and logic errors are fundamentally different.
- Effective debugging is experimental and methodical.
- Formal languages eliminate ambiguity.

8.1.2 Variables and types

This chapter explains how programs store and manipulate data. It covers values, variables, assignment, output, keywords, operators, and precedence rules, including how characters are treated numerically. The core idea is building complexity by composing simple expressions under strict rules.

- Assignment changes state; it is not mathematical equality.
- Types constrain behavior and catch errors early.
- Operator precedence can silently change results.
- Characters are numeric under the hood.
- Expression composition is foundational.

8.1.3 Function

This chapter introduces functions as the primary tool for decomposition. It covers floating-point behavior, type conversion, math functions, defining and using functions, parameters, locality, and returning results to control data flow in multi-function programs.

- Functions manage complexity more than they save typing.
- Floating-point arithmetic is approximate.
- Parameters and local variables are scope-limited.
- Returning values is the main data flow mechanism.
- Programs are built from many small functions.

8.1.4 Conditionals and recursion

This chapter focuses on control flow through conditionals and recursion. It explains selective execution, chaining and nesting, the role of *return*, and how recursion works via the call stack, including common failure modes.

- Control flow determines execution paths.
- *return* exits a function immediately.
- Recursion depends on correct base cases.
- Infinite recursion usually means a missing stop condition.
- Stack diagrams clarify recursive execution.

8.1.5 Fruitful functions

This chapter deepens the use of functions that return values. It emphasizes incremental development, composition, overloading, boolean logic, and more advanced recursion patterns that rely on trusting correct function design.

- Functions with return values are easier to test and reuse.
- Boolean logic underpins decision-making.
- Overloading can reduce clarity if misused.
- Correct recursion relies on trusting contracts.
- Programs evolve incrementally.

8.1.6 Iteration

This chapter introduces repetition with loops. It covers multiple assignment, *while* and *for* loops, common looping patterns, nested iteration, and how encapsulation and generalization turn repeated logic into reusable functions.

- Loops express controlled repetition.
- *while* expresses logic; *for* expresses counting.
- Nested loops increase complexity quickly.
- Encapsulation turns patterns into tools.
- Generalization extends solutions beyond examples.

8.1.7 Strings and things

This chapter treats strings as containers of characters. It covers storage, indexing, length, traversal, searching, counting, concatenation, mutability, comparison, and character classification, emphasizing safe and repeatable patterns.

- Strings must be traversed carefully.
- Indexing errors are common bugs.
- Searching and counting follow standard patterns.
- Strings are mutable in C++.
- Character utilities avoid hard-coded logic.

8.1.8 Structures

This chapter introduces *struct* for grouping related data. It explains defining structures, accessing fields, passing them to functions, call-by-value vs call-by-reference, returning structures, and basic input handling.

- Structures model related data.
- Passing by reference enables efficiency and mutation.
- Returning structures is safe and common.
- Value vs reference affects behavior.
- Input handling requires defensive coding.

8.1.9 More structures

This chapter refines structured programming by focusing on design choices. It introduces pure functions, *const* correctness, modifiers, incremental development, and thinking in terms of reusable algorithms.

- Pure functions simplify reasoning.
- *const* communicates intent and safety.
- Modifiers change state; pure functions do not.
- Incremental development reduces risk.
- Algorithms are reusable problem-solving ideas.

8.1.10 Vectors

This chapter introduces vectors as dynamic sequences. It covers access, copying, iteration, size management, randomness, statistics, counting, histograms, and efficient single-pass algorithms.

- Vectors manage dynamic storage safely.
- Size must always be queried, never assumed.
- Single-pass algorithms are usually preferable.
- Randomness requires explicit seeding.
- Histograms reveal data distribution.

8.1.11 Member functions

This chapter moves behavior closer to data by introducing member functions. It explains implicit access to instance variables, constructors, header files, and separating interface from implementation.

- Behavior belongs with the data it operates on.
- Member functions implicitly know their object.
- Constructors enforce valid initial state.
- Header files define interfaces.
- Structure matters as programs grow.

8.1.12 Vectors of Objects

This chapter combines vectors with user-defined types. Using cards and decks, it introduces comparison, searching, sub-collections, and bisection search for efficiency.

- Collections of objects need comparison logic.
- Equality and ordering must be explicit.
- Search efficiency depends on organization.
- Sorted data enables faster algorithms.
- Decomposition applies to data structures.

8.1.13 Objects of Vectors

This chapter focuses on objects that contain vectors. It introduces enums, *switch*, shuffling, sorting, dealing, and mergesort, emphasizing composition and algorithmic thinking.

- Composition scales better than flat designs.
- Enumerations clarify state.
- Sorting and shuffling expose tradeoffs.
- Mergesort shows divide-and-conquer.
- Algorithms depend on structure, not content.

8.1.14 Classes and invariants

This chapter formalizes classes as a safer evolution of structures. It covers private data, accessors, invariants, preconditions, and encapsulation, using complex numbers as an example.

- Classes protect correctness.
- Private data enforces invariants.
- Accessors expose intent safely.
- Preconditions document assumptions.
- Invariants define valid states.

8.1.15 File Input/Output and *apmatrixes*

This chapter introduces streams and file I/O. It covers parsing text and numbers, simple data structures, matrices, and validating structured data from external sources.

- Files introduce persistence and failure modes.
- Parsing must be defensive.
- Data structures often mirror file layout.
- Matrices formalize 2D data.
- Correctness outweighs performance in I/O.

8.1.16 Appendix: AP class reference

Provides reference material for *apstring*, *apvector*, and *apmatrix*, used throughout the book to simplify learning.

- AP classes simplify learning.
- They abstract away STL complexity.
- Used consistently throughout the book.

ROOKS GUIDE TO C++

I took a short break as work got busy and returned to finish this book in March 2026.

This book was shorter, but somehow felt a bit longer. I think because I read *Think C++* first, then this one didn't feel as enjoyable as it had repeat content. I should have read them side by side, but instead went one before the other.

The content in the later half of this book was more enjoyable than the content in the first half, especially the arithmetic and dynamic data.

Total pages	160
Currently on	160

9.1 Chapter synopsis and notes

9.1.1 History

Sets context for why C++ exists and what problems it was built to solve, plus the rough evolution from C to “C with classes” to modern C++. The point is to understand the tradeoffs C++ keeps: performance, control over memory, and a large language surface area.

- C++ keeps low-level control and high-level abstraction in the same language.
- A lot of “weirdness” is historical baggage, not design elegance.
- You'll see multiple ways to do the same thing because the language evolved over decades.

9.1.2 Variables

Introduces naming values so programs can keep state. Focus is on declaration, initialization, scope basics, and how the compiler uses types to reason about what operations are allowed.

- Prefer initializing at declaration to avoid garbage state.
- Name things for meaning, not for the type.
- Most beginner bugs are “wrong variable, wrong scope, wrong value”.

9.1.3 Literals and constants

Covers literal values (numbers, chars, strings) and making values non-changeable using constants. The goal is to reduce accidental mutation and encode assumptions in code.

- Constants make intent explicit and prevent accidental reassignment.
- Literal types matter (e.g., integer vs floating literal) because conversions can change results.

- Use constants to replace “magic numbers”.

9.1.4 Assignments

Explains how variables get new values using assignment, and how assignment differs from equality. Also covers compound assignment and common assignment patterns.

- Assignment mutates state; equality compares state.
- Compound assignments (`+=`, `-=`, etc.) are shorthand but still mutation.
- Watch for accidental assignment in conditions in languages that allow it.

9.1.5 Output

Introduces writing to the console and basic formatting. Emphasis is on building confidence by observing program state and results.

- Output is a debugging tool, not just user-facing UI.
- Formatting matters when humans must read the results.
- Separate “compute” from “print” when code starts to grow.

9.1.6 Input

Introduces reading from the user and dealing with the messiness of real input. Focus is on parsing, validation, and handling failure states.

- Input is adversarial by default; validate.
- Distinguish between reading tokens vs full lines.
- Always handle stream failure and leftover newline issues.

9.1.7 Arithmetic

Covers numeric operators and the difference between integer arithmetic and floating-point arithmetic. Includes precedence and common pitfalls (division, truncation).

- Integer division truncates; this is a frequent bug source.
- Modulus is for integers and is useful for digit extraction and periodic behavior.
- Overflow exists; don’t assume “big enough”.

9.1.8 Comments

Explains using comments to communicate intent, constraints, and non-obvious decisions. The goal is maintainability, not narrating every line.

- Comment “why”, not “what”.
- Outdated comments are worse than no comments.
- Prefer expressive code; comments are a supplement.

9.1.9 Data types and conversion

Covers built-in types, signedness, ranges, and converting between types. Emphasis is on loss of information, implicit conversions, and when to be explicit.

- Conversions can be narrowing (lose data) without being obvious.

- Signed/unsigned mixing creates surprising comparisons.
- Be explicit when precision or range matters.

9.1.10 Conditionals

Introduces branching (*if*, *else if*, *else*) and boolean logic. Focus is on writing correct conditions and avoiding deeply nested logic.

- Most bugs are wrong conditions, not wrong bodies.
- Prefer clear boolean expressions over cleverness.
- Short-circuit logic matters for safety (guard checks).

9.1.11 Strings

Covers strings as sequences of characters and common operations (length, indexing, concatenation, comparison). Emphasis is on boundary safety and input interaction.

- Indexing is where most string bugs live (off-by-one, bounds).
- Choose token input vs line input deliberately.
- Comparing strings is semantic; comparing pointers is not.

9.1.12 Loops

Introduces repetition (*while*, *do-while*, *for*) and loop control. Focus is on invariants, termination conditions, and common iteration patterns.

- Always know what makes the loop stop.
- Off-by-one errors are the default failure mode.
- Prefer *for* when counting and *while* when condition-driven.

9.1.13 Arrays

Introduces fixed-size contiguous storage and indexing. Emphasis is on bounds, lifetime, and why arrays are error-prone compared to safer containers.

- Arrays don't track their own size.
- Bounds violations can silently corrupt memory.
- Use safer containers when available, but understand arrays for fundamentals.

9.1.14 Blocks, functions, and scope

Explains `{ }` blocks, variable lifetime, function decomposition, parameters, return values, and scope rules. Focus is on controlling visibility and reducing complexity.

- Scope is a tool to prevent misuse, not a nuisance.
- Functions should do one job and have clear inputs/outputs.
- Returning values beats global mutation for testability.

9.1.15 Problem solving & troubleshooting

Gives a workflow for breaking problems down and debugging systematically: reproduce, isolate, test assumptions, and verify fixes. Focus is on process over guessing.

- Reduce the problem until it's obvious.
- Add observability (prints, assertions) to test hypotheses.
- Fix the cause, not the symptom.

9.1.16 The preprocessor

Introduces `#include`, `#define`, and conditional compilation. Emphasis is on understanding that preprocessing happens before compilation and can create hard-to-debug behavior.

- Macros are text substitution, not typed functions.
- Prefer constants and inline functions over macros when possible.
- Header inclusion order and guards matter.

9.1.17 Advanced arithmetic

Expands into topics like numeric limits, precision, rounding, overflow behavior, and bitwise operations. The goal is to reason about correctness when numbers get tricky.

- Floating-point equality is usually wrong; compare with tolerance when needed.
- Bitwise ops are common in systems-level tasks, but easy to misuse.
- Know the numeric limits of your types.

9.1.18 File I/O

Introduces reading and writing files, stream state, and parsing structured text. Emphasis is on error handling and data validation.

- Always handle “file didn’t open” and partial reads.
- Parsing needs a plan: format assumptions, separators, failure modes.
- Keep I/O separate from computation for cleaner code.

9.1.19 Pointers

Introduces addresses, dereferencing, and pointer semantics. Focus is on when indirection is needed, and how misuse leads to crashes or corruption.

- Uninitialized and dangling pointers are catastrophic.
- Pointer arithmetic is powerful and dangerous.
- Prefer references and safer abstractions unless pointers are required.

9.1.20 Dynamic data

Covers allocating data at runtime and managing lifetime. Emphasis is on ownership, leaks, and avoiding manual memory management where possible.

- Leaks happen when ownership isn't clear.
- Double-free and use-after-free are common failure modes.

- Prefer RAII-style ownership patterns rather than raw *new/delete*.

9.1.21 Classes and abstraction

Introduces building types that combine data and behavior with encapsulation. Focus is on invariants, interfaces, constructors, and keeping representations private.

- A class should protect its invariants by construction.
- Public API should be minimal and coherent.
- Encapsulation is about controlling mutation and coupling.

9.1.22 Separate compilation

Explains splitting programs into multiple files, headers vs source, declarations vs definitions, and linking. Focus is on build structure and avoiding multiple-definition errors.

- Headers declare; source files define.
- Include guards (or equivalents) prevent redefinition.
- Linker errors are usually “declared but not defined” or “defined twice”.

9.1.23 STL

Introduces standard library containers, algorithms, and iterators as the idiomatic way to write safer and more expressive C++. Focus is on choosing the right container and leveraging algorithms.

- Prefer *std::vector*, *std::string*, and standard algorithms by default.
- Algorithms reduce bugs compared to hand-rolled loops.
- Iterators unify containers but can be confusing without practice.

PROGRAMMING FUNDAMENTALS

Supplementary reading, I took my time reviewing the entirety of the book with extra focus to the chapters called out during the reading curriculum for COMP206.

Total pages	342
Currently on	342

10.1 Chapter synopsis and notes

10.1.1 Chapter 1: Introduction to programming

Introduces the systems development life cycle, basic C++ tooling, modularization, functions, and the normal layout of a C++ program. The chapter treats programming as a process of planning, coding, compiling, testing, and maintaining rather than only writing syntax.

- A program should be divided into manageable modules instead of written as one large block.
- `main` acts as the program control function and coordinates the program's execution.
- Compiler and IDE details can change, but the edit-build-run-debug cycle stays the same.

10.1.2 Chapter 2: Program planning and design

Explains how to understand a problem before coding it. It introduces design tools, pseudocode, test data, model checking, and code checking so that the planned solution can be verified before and after implementation.

- Pseudocode describes program logic without depending on exact C++ syntax.
- Test data should include normal, boundary, and invalid cases.
- Design errors are cheaper to fix before they become code.

10.1.3 Chapter 3: Data and operators

Introduces C++ data types, identifier rules, constants, variables, assignment, arithmetic operators, and type conversion. The focus is on how values are represented, named, changed, and combined in expressions.

- A variable has a type, identifier, storage location, and current value.
- Assignment stores a value; it does not test equality.
- Conversions can change precision or range, especially between floating-point and integer types.

10.1.4 Chapter 4: Often-used data types

Expands on integer, floating-point, and string data, along with compound assignment, lvalues, rvalues, integer division, and modulus. It connects common types to the operators that can validly be used with them.

- Integer division discards the fractional portion of the result.
- Modulus returns the remainder and is useful for divisibility and digit extraction.
- An lvalue identifies a storage location, while an rvalue represents a value used in an expression.

10.1.5 Chapter 5: Integrated development environment

Covers the role of an IDE, common compile and runtime errors, standard input and output, and compiler directives. The chapter shows how source code moves through preprocessing, compilation, linking, and execution.

- `cin` and `cout` use stream extraction and insertion operators.
- Compiler errors should be fixed from the first reported error downward.
- Directives such as `#include` are handled before normal compilation.

10.1.6 Chapter 6: Program control functions

Introduces function-oriented program structure using pseudocode, hierarchy charts, control functions, `void`, and source-code documentation. The goal is to make program flow visible and keep the top-level control logic simple.

- A hierarchy chart shows which functions call other functions.
- A `void` function performs work without returning a value.
- Readable indentation, names, and function comments reduce maintenance cost.

10.1.7 Chapter 7: Specific task functions

Explains how functions can be created to perform one focused task. It covers local and global storage, declarations, definitions, parameters, return values, and placing user-defined functions in header files.

- Local variables limit accidental coupling between functions.
- Global variables make data widely accessible but harder to reason about.
- Function interfaces should clearly define what data enters and what result leaves.

10.1.8 Chapter 8: Standard libraries

Introduces C++ standard libraries and the reusable functions, types, and constants they provide. The chapter emphasizes using existing library facilities instead of rewriting common operations.

- Header files expose declarations needed by the compiler.
- Library documentation is part of normal programming work.
- Reusing tested library code is usually safer than creating an equivalent from scratch.

10.1.9 Chapter 9: Character data, `sizeof`, `typedef`, and sequence

Covers the `char` type, character codes, the `sizeof` operator, type aliases with `typedef`, and the sequence or comma operator. These topics connect source-level syntax to storage size and expression evaluation.

- A character is stored as a numeric code even when written as a quoted symbol.
- `sizeof` reports how many bytes a type or object occupies.

- `typedef` creates another name for an existing type; it does not create a distinct type.

10.1.10 Chapter 10: Introduction to structured programming

Introduces structured programming through sequence, selection, and iteration. It uses pseudocode and flowcharts to model control flow and replace unstructured jumps with predictable control structures.

- Most program logic can be expressed using sequence, selection, and repetition.
- Flowcharts visualize decisions, loops, input, output, and function calls.
- Structured control flow is easier to test and trace than arbitrary jumps.

10.1.11 Chapter 11: Two-way selection

Introduces `if`, `else`, Boolean values, relational operators, and compound statements. It focuses on choosing between two execution paths based on a true-or-false condition.

- Relational operators produce Boolean results.
- Braces group multiple statements into one compound statement.
- Conditions should describe the decision clearly rather than rely on clever side effects.

10.1.12 Chapter 12: Multiway selection

Expands selection using nested `if` statements, logical operators, truth tables, and the `switch` structure. It also discusses branching statements and the limits of each selection method.

- `&&`, `||`, and `!` combine or reverse Boolean conditions.
- `switch` works best when comparing one expression against discrete constant choices.
- Nested conditions should be ordered so the most specific or restrictive cases are handled correctly.

10.1.13 Chapter 13: Test-after loops

Introduces the `do-while` loop, flag-controlled repetition, assignment versus equality, and the pseudocode concept of repeat-until. A test-after loop always executes its body at least once.

- Use `do-while` when the action must occur before the continuation test.
- A flag is a Boolean or sentinel value used to control repetition.
- `=` changes a value, while `==` compares two values.

10.1.14 Chapter 14: Test-before loops

Introduces prefix and postfix increment and decrement, the `while` loop, counting patterns, and infinite-loop risks. A test-before loop may execute zero times when its condition starts false.

- The loop body must eventually change something used by the condition.
- Prefix and postfix forms differ when their resulting value is used inside a larger expression.
- `while` is appropriate when repetition is driven mainly by a condition rather than a fixed count.

10.1.15 Chapter 15: Counting loops

Introduces `for` loops, integer wraparound, formatted output, and nested loops. It shows how initialization, testing, and updating can be placed together for count-controlled repetition.

- `for` makes the counter lifecycle visible in one statement.

- Integer types have finite ranges and can wrap when their limits are exceeded.
- Nested loops are useful for tables, grids, combinations, and repeated row-column processing.

10.1.16 Chapter 16: String class and unary operators

Introduces the C++ `string` class and common operations such as assignment, comparison, concatenation, and length. It also distinguishes unary positive and unary negative from addition and subtraction.

- `string` provides a safer abstraction than manually managing character arrays.
- Unary negative changes the sign of the value produced by an expression, not the stored variable.
- Unary positive usually has no practical effect.

10.1.17 Chapter 17: Conditional operator and recursion

Covers the conditional `?:` operator and compares recursive solutions with iterative ones. It explains how recursion repeatedly calls the same function until a base condition ends the process.

- The conditional operator produces one of two values from a Boolean condition.
- Every recursive solution needs a reachable base case.
- Iteration is often simpler and uses less call-stack space, while recursion can mirror naturally recursive problems.

10.1.18 Chapter 18: Introduction to arrays

Introduces arrays as fixed-size collections of same-type elements. It covers array declaration, indexing, initialization, and displaying members using loops.

- Array indexing begins at zero.
- Valid indexes run from zero through one less than the array size.
- C++ built-in arrays do not automatically protect against out-of-bounds access.

10.1.19 Chapter 19: File I/O and array functions

Combines file streams with arrays and functions. It covers opening files, loading array values, passing arrays to functions, and calculating statistics such as totals and averages.

- Always verify that a file opened successfully before reading or writing.
- Arrays passed to functions normally decay to pointers, so size information must be supplied separately.
- Separate file handling from calculations to make both parts easier to test.

10.1.20 Chapter 20: More array functions

Builds reusable array-processing functions for finding a specific value and sorting array members. The chapter introduces basic searching and sorting as common data-processing operations.

- A linear search checks elements until the target is found or the array ends.
- Sorting changes the arrangement of data and can make later searching or reporting easier.
- Search and sort functions should clearly define how failure or duplicate values are handled.

10.1.21 Chapter 21: More on typedef

Uses `typedef` to make array-processing code easier to modify for different data types. The chapter distinguishes flexible code, which adapts to array size, from versatile code, which adapts to different types.

- A type alias can centralize a type choice used throughout a program.
- `sizeof` can help calculate a built-in array's element count in the same scope.
- Modern C++ generally uses `using` aliases instead of `typedef` for new code.

10.1.22 Chapter 22: Pointers

Introduces memory addresses, the address operator, references, pointer variables, and the indirection operator. It connects pointers to parameter passing, arrays, and direct access to stored objects.

- `&value` obtains an object's address, while `*pointer` accesses the pointed-to object.
- Pass-by-reference lets a function modify the caller's original object.
- Uninitialized, null, and dangling pointers must not be dereferenced.

10.1.23 Chapter 23: More arrays and compiler directives

Introduces multidimensional arrays and conditional compilation. It shows how arrays can represent rows and columns and how preprocessor conditions can include or exclude source code.

- A two-dimensional array is commonly processed with nested loops.
- Dimensions and index order must remain consistent across declarations and function parameters.
- Conditional compilation is useful for platform differences and optional debugging code, but can make builds harder to reason about.

10.1.24 Chapter 24: OOP and high-performance computing

Provides a transition from modular structured programming to object-oriented programming, where data and related functions are encapsulated together. It also introduces high-performance computing, parallel work, sequential limits, multiple processors, and FLOPS as a performance measure.

- C++ supports both procedural and object-oriented program design.
- Parallel processing helps only when a task can be divided into independent or coordinated parts.
- More processors do not guarantee proportional speedup because some work remains sequential or requires coordination.

10.1.25 Chapter 25: Review materials

Organizes the book's material into foundation, modular programming, structured programming, intermediate, and advanced topic groups. It is intended as a consolidated review before assignments or exams.

- Review should connect concepts across chapters rather than memorize isolated syntax.
- Weak fundamentals in data, expressions, functions, or control flow affect every later topic.
- Rewriting small programs is more useful than only rereading completed examples.

10.1.26 Chapter 26: Appendix

Provides reference material including operator precedence, reserved C++ keywords, the ASCII character set, file-extension settings, and academic-integrity guidance.

- Parentheses are clearer than relying heavily on memorized precedence.
- Reserved keywords cannot be used as identifiers.
- File extensions should remain visible so source files and compiled files are not confused.