



Deploying





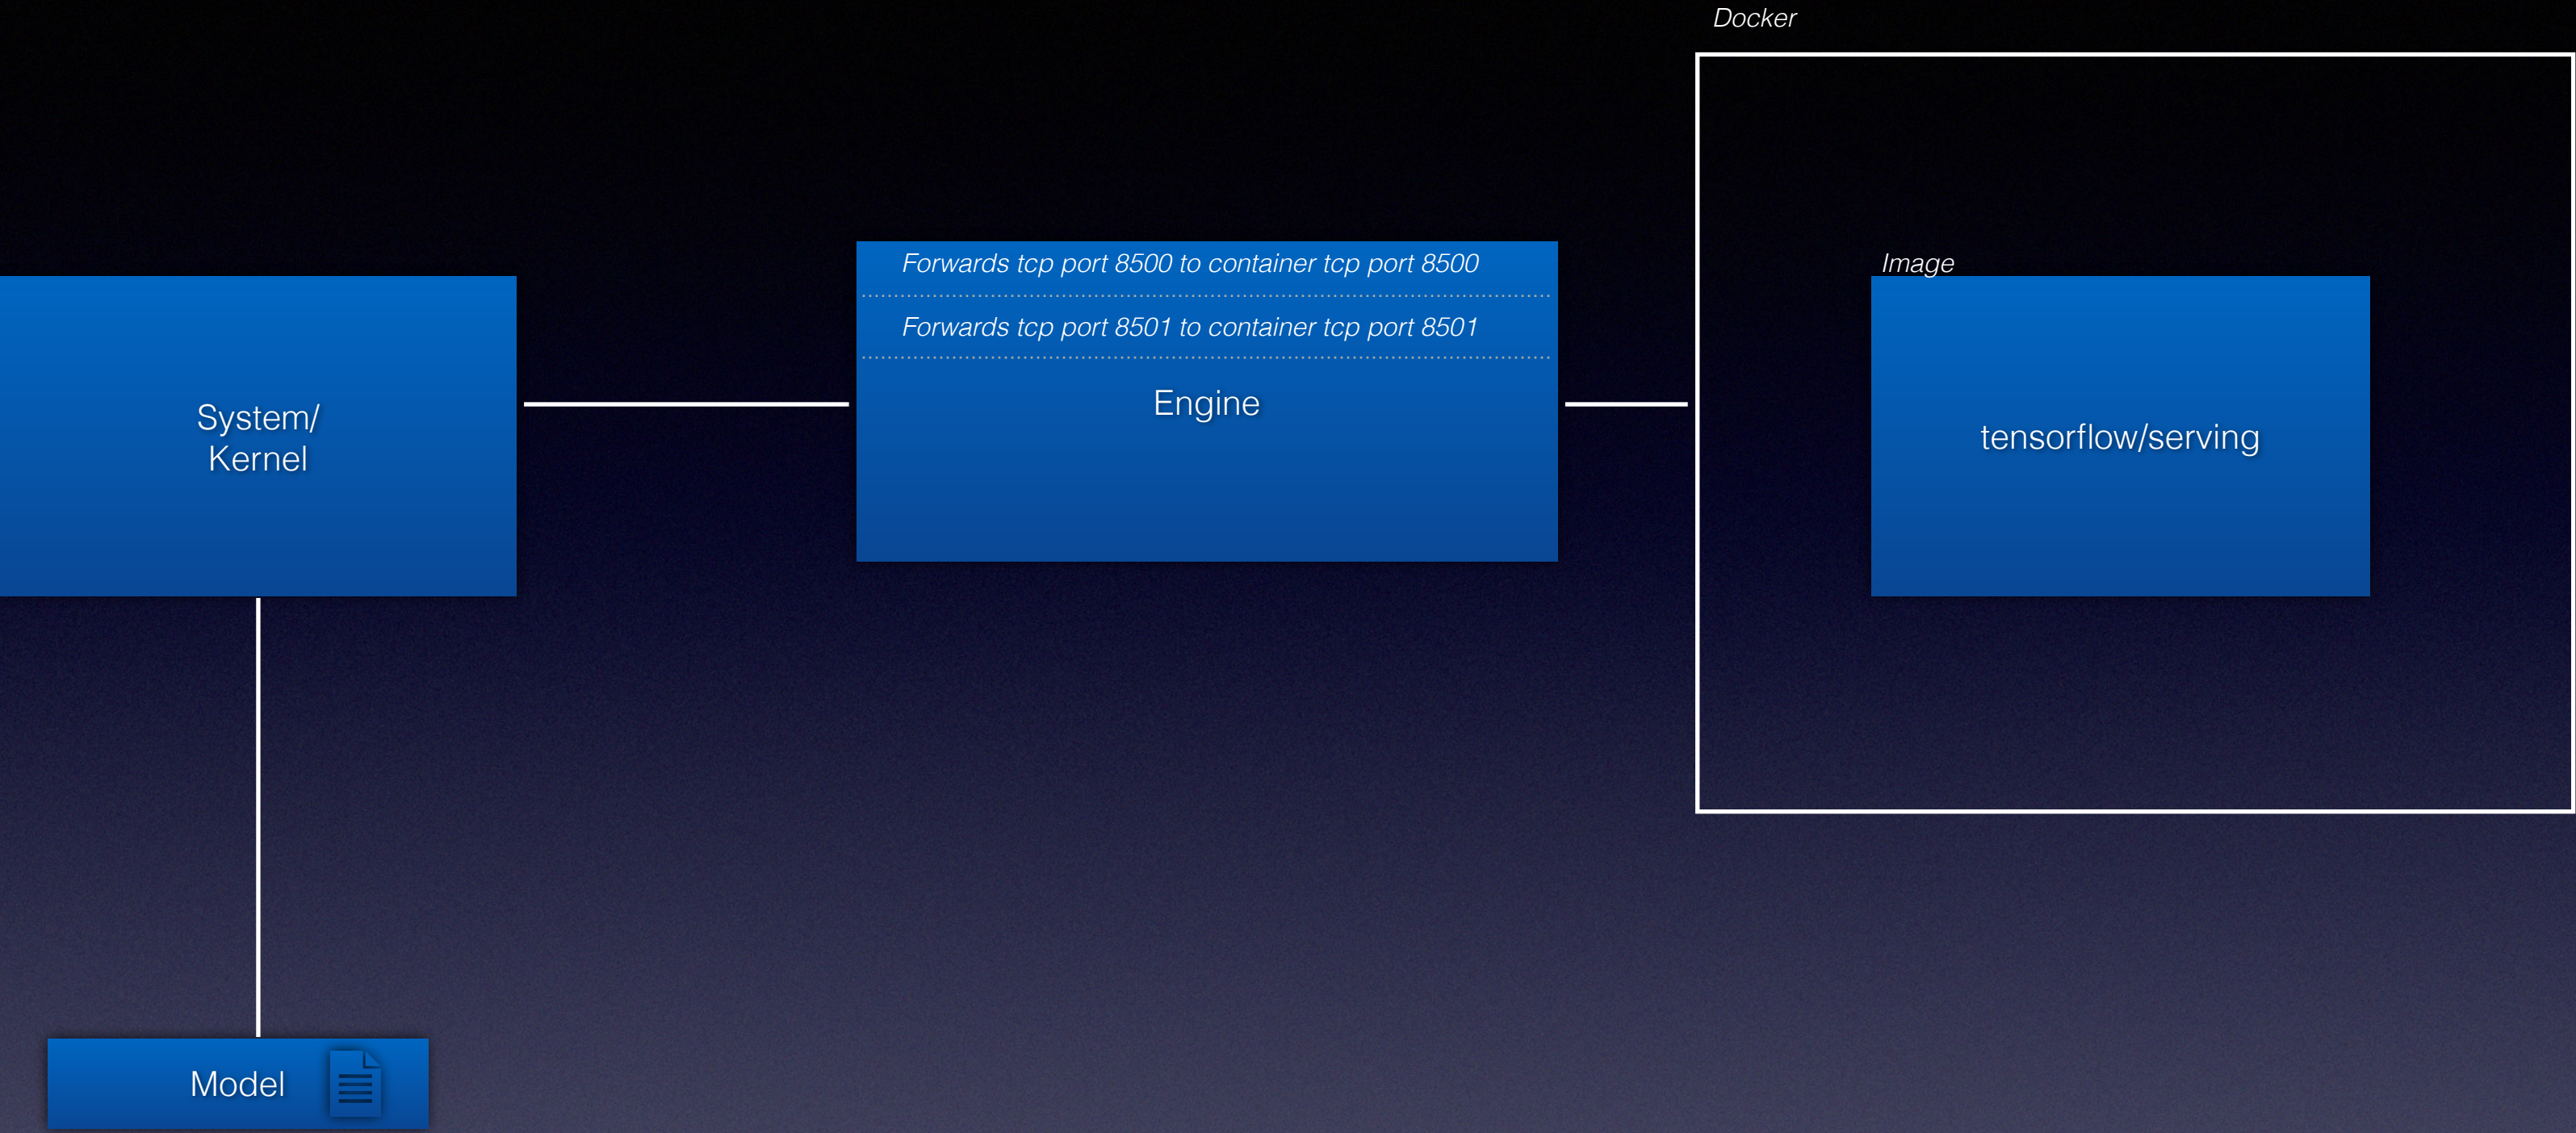

Run a new container

tensorflow/serving:latest

Optional settings

Container name

A random name is generated if you do not provide one.

Ports

Enter "0" to assign randomly generated host ports.

Host port

8500

:8500/tcp

Host port

8501

:8501/tcp

Volumes

Host path

/Users/hectorwilliams/Dev/n

...

Container path

/models/lunar_lander_model

+

Environment variables

Variable

MODEL_NAME

Value

lunar_lander_model

+

Cancel

Run

Path to host available to container host at container path /models/...


Serving container knows which model to service

/Users/hectorwilliams/Dev/machina_learn/review/hands_on_learning/chapter19/lunar_lander_model

/models/lunar_lander_model

MODEL_NAME

lunar_lander_model

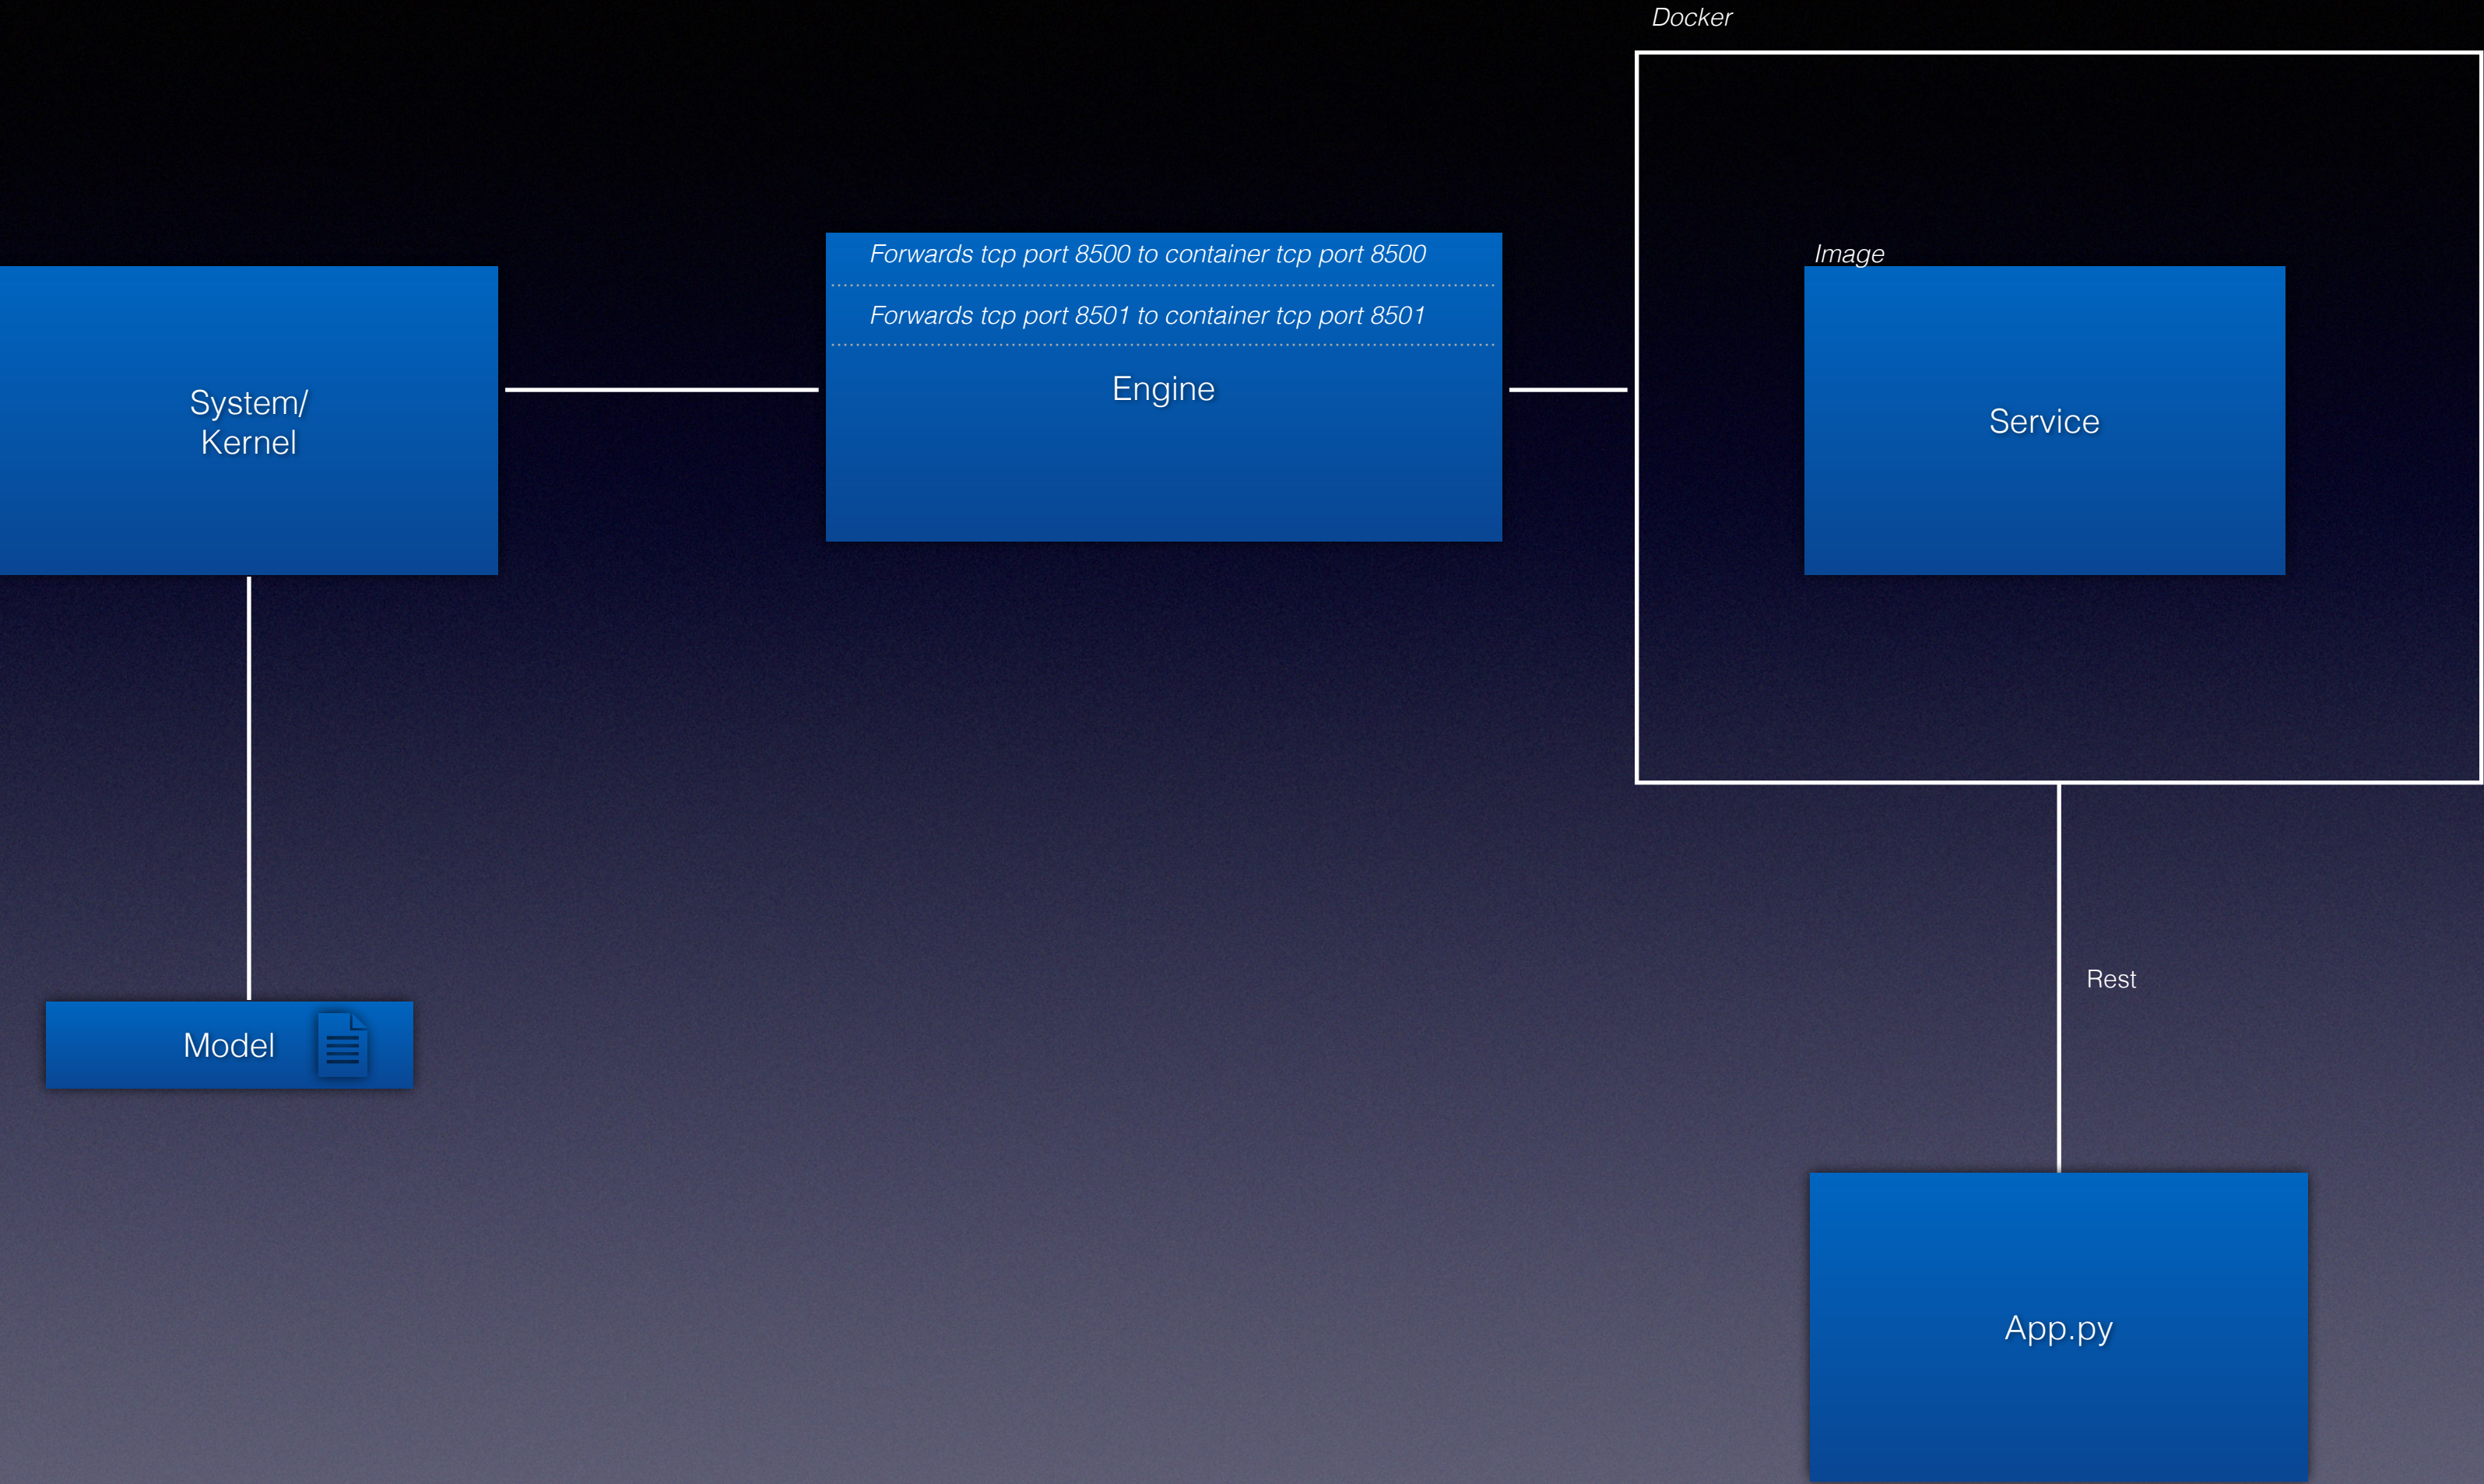



Async Reader

