

Getting Started NBA App

Hectron

August 4, 2026

Contents

1	Description	2
2	Run Application	2
3	Figures	2

1 Description

Document informs the user how to start the application residing in the `nba_app` directory of repository `ReactApps`. Applications were developed on MacOS *Sonoma*. The following programming languages were used throughout fullstack development.

- **FrontEnd:**
Typescript - imperative
- **Backend:**
Postgres - declarative
- **Script:**
Bash - imperative

2 Run Application

- Open Docker. If Docker is not installed, please download at <https://www.docker.com/products/docker-desktop/>
- Start/Configure Postgres Database (Docker Container Instance)
 - Change directory to `nba_app/database`
 - run `run.sh`
- Start Monitor Service.
The highest priority service. All request are handled by the monitor service. The start monitor must be running for proper operation of the application.
 - Change directory to `nba_app`
 - run `server/main.sh` *Monitor service is now running*
- Open web browser; request application at address and port `http://127.0.0.1:50214/`

3 Figures

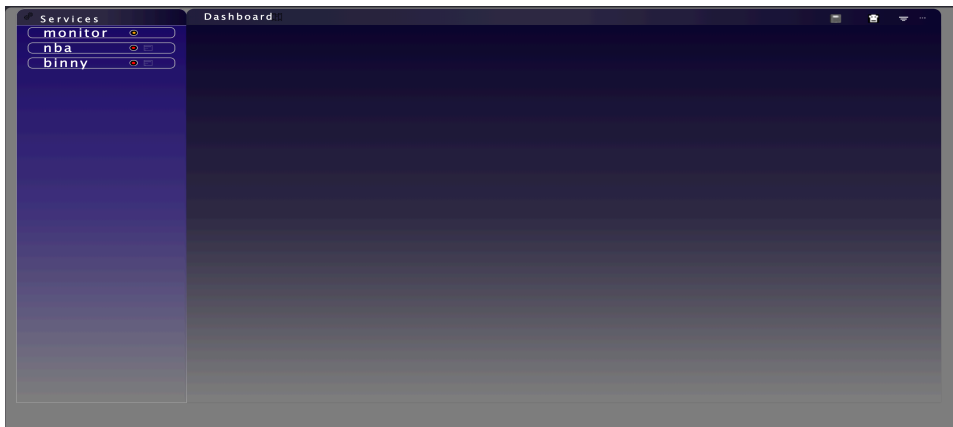


Figure 1: Home Page



Figure 2: GET NBA Service