




## READ() 'SELECT ALL and/or FILTER'

The user has access to all fields based on a read request and can opt out to receive a partial result of the available data by providing 2 timestamps (until the current timestamp) as additional parameters to the request

## CREATE()

The create action will be the default action that will be attempted for each user class including CSV projects. It will result either in populating a new table or appending to an existing

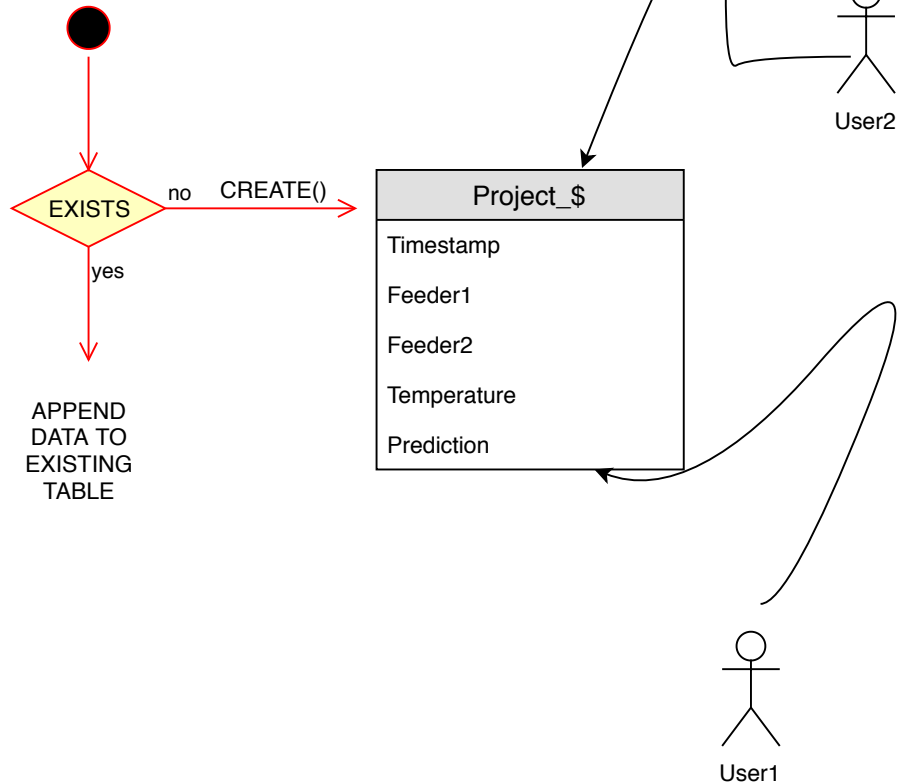

## UPDATE()

The prediction value will be updated when the user makes an update request, that will result in adding a negative sign (-) to the existing value.