sion Dinion for SIVU ke kho SIUUU Sivuvuica Ingraphino 3. Whole I did (diet berely, E obstraction of the Board Spann Spann of the Color of the Desklo 1. Vbille = truci oid button3_dicklobject soulor

Exp3D.CS name space RichTexTBOX public partial class form 1: For m public form 1 () Initialize (omponent (); }
Private Void richTextbox 1-TextChanged (object Sender,
Event Args e)[richTescTBox1. MaxLength = 50; private void button 1 dick (object Sender, EventArgs e) &
string text=richTextbox1. Text;

String [] lines=richTextbox1.tines;

foreach (string line in lines) {
 MessageBox.show (line);
}

Nune space Buchles Lives first Name! [min] Address: Silver lost Name: [] Demot slidy Possword: [] Derogno scillist

thronfirm Possword: [] All progno scillist

throng progno scill

throng progno scillist

throng progno scillist

throng progno selec Gender LXXX Tox Thir O Male 1 and O female has plante string [] lines Trictox bex 1. Line for each (string line in thirdus) t

```
Exp3E, cs
name space Form 1
     public partial dass Form 1: Form
     public form 1 () {
    Initialize(onponent (); }
    private void button1_click(object Sender, Event Arg
  string pass 1 = text Box 2. Text;

string pass 2 = text Box 2. Text;

string pass 3 = text Box 3. Text;

string pass 4 = text Box 4. Text;

string pass 6 = Arradio Button 1. Text;

string pass 1 = radio Button 2. Text;

if (pass 3 = = pass 4 & & radio Button 1. checked)
message Box. 5 - string. (oncot (pass 1+"" + pass 2+"


Gender: "+ pass 6);

Message Box. 5 how (pass 5); }

else if cpass 3 = pass 4 && radioButton 2. checked) {

string pass 5 - string. (oncat (pass 1+"" + pass 2+" Gender

+ pass 7);
        Message Book . Show (pass 5);
     private void button 2 click(object sender, Event Args if C pass 3 = pass 4) { form 2 Frm = new form 2(); Frm . show(); this . Hide(); } else { Message Box . show ("Pls fill defails")} FOR EDUCATIONAL USE
```

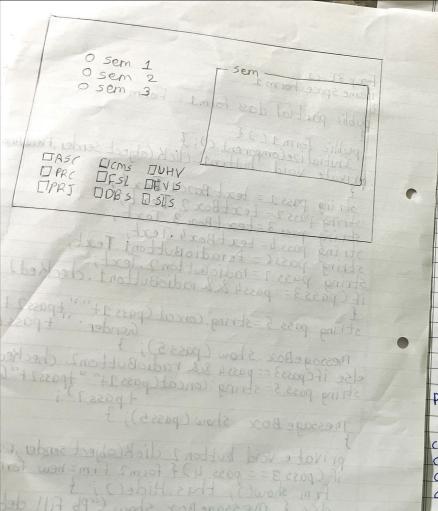

```
checkbox 4. Enabled = False;
 checkbox 5 Enabled - false, checkbox 6. Enabled false, checkbox 8. Enabled false, checkbox 8. Enabled false, checkbox 9. Enabled false, checkbox 1. Enabled true,
  checkbox 2. Enabled = true; checkbox 3. Enabled = true;
 label 1. text = "sem 1"; label 3. Text = "; label 4. Text = "; private void radio Button 2 - checked changed (object Sender)
   checkBox1. Enabled=False; checkBox 2. Frabled = false;
                                                           EventArgs e) {
 checkBox3. Frabled - false, checkBox1. Enabled = false;
 checkBox8. Enabled=false; checkBox9 Enabled=false;
 checkBox4. Enabled=true, checkBox5. Enabled=true;
 checkBox6. Frabled = true; tabel1.text = "Sem 2"; Jabel 2.Text = "; label 3. Text = "; label 4. Text = "; ]
private void radiobutton3-Kecheckedchanged (object sender,
 CheckBox 1. Eng Enabled - false, checkBox 2. Enabled = false,
check Box 3. Enabled=false; checkBox4. Enabled=false;
checkBox5. Frabled = false; sheckBox6. Enabled = false;
checkBox7. Frabled = true; checkBox 8. Fnabled = true;
checkBox 9 Frabled= true; label1 text="sem 3";

Tabel 2 . Text=""; label 3 . Text=""; label 4 . Text=""

FOR EDUCATIONAL USE
```

public form 2 () {
 Initialize (omponent (); }
 private void radioButton1-checked (hanged (object sender,

Event Args e){

Form 2. CS

public partial class form 2: form

private void checkBox1 checked changed (object sender, IF (checkbox1 checked) ? EventArgs e) ? if (checkbox 1. checked) {

label 2. Text = "Asc"; } else { label 2. Text="";}
} private Void checkBosc2_checkedchanged Cobject Sender, if(checkbox2_checked) { EventArgs e) { if(checkbox2.checked){
|abe|3.Text="";}
|abe|3.Text="";} private void checkBox3-checkedchanged (object Sender, EventArgs e) ? if (checkbox3. checked){
label4. Text = "UHV"; } else { label4. Text = ""; }
} private void checkBox4_checketchanged(object Sender, EventArgs e) { if (checkbox4, checked);{

label2. Text="PRc"; Jelse { label2. Text=""; }
} private void checkBox5_checkedchanged (object Sender, EventArgs e) { if (checkbox5.checked) {
label3.Tesct="F51"; } else { label3.Tesct=""; } private void checkBox6 (heckedchanged (object Sender, EventArgs e) { if (checkBox 6. checked) {
label4. Text="EVs"; } else { label 4. Text="";} FOR EDUCATIONAL USE Sundaram

private void checkBox7_checkedchanged (object sender, EventArgs e) { if (checkbox 7. checked) {
label 2. Text = "PRJ"; } else { label 2. Text = "; } private void checkBook8_checkedchanged Cobject Sender, EventArgs e) { if (checkboxs.checked) {
label 3. Text="pbs"; } else { label 3. Text=""; } private void checkBox 9_checkedchanged (object serder, EventArgs e) ? if (checkbox9 checked) {
label4. Text="sLs"; } else { label4. Text="";} FOR EDUCATIONAL USE

Sundaram