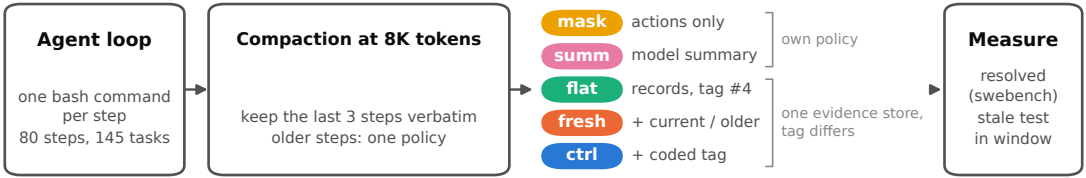

One test record, as rendered in each evidence arm

an older test record from an earlier code state

flat `[#4] test: pytest tests/test_forms.py ... 1 failed`

fresh `[#4 older code state, not validated on current] test: pytest tests/test_forms.py ... 1 failed`

ctrl `[#4 seq-b, no validity claim made here] test: pytest tests/test_forms.py ... 1 failed`

the same record when it is current

flat `[#4] test: pytest tests/test_forms.py ... 1 failed`

fresh `[#4 current] test: pytest tests/test_forms.py ... 1 failed`

ctrl `[#4 seq-a, no validity claim made here] test: pytest tests/test_forms.py ... 1 failed`

Compared by paired bootstrap over tasks (two seeds for flat, fresh, ctrl); a same-arm rerun gives the noise reference.