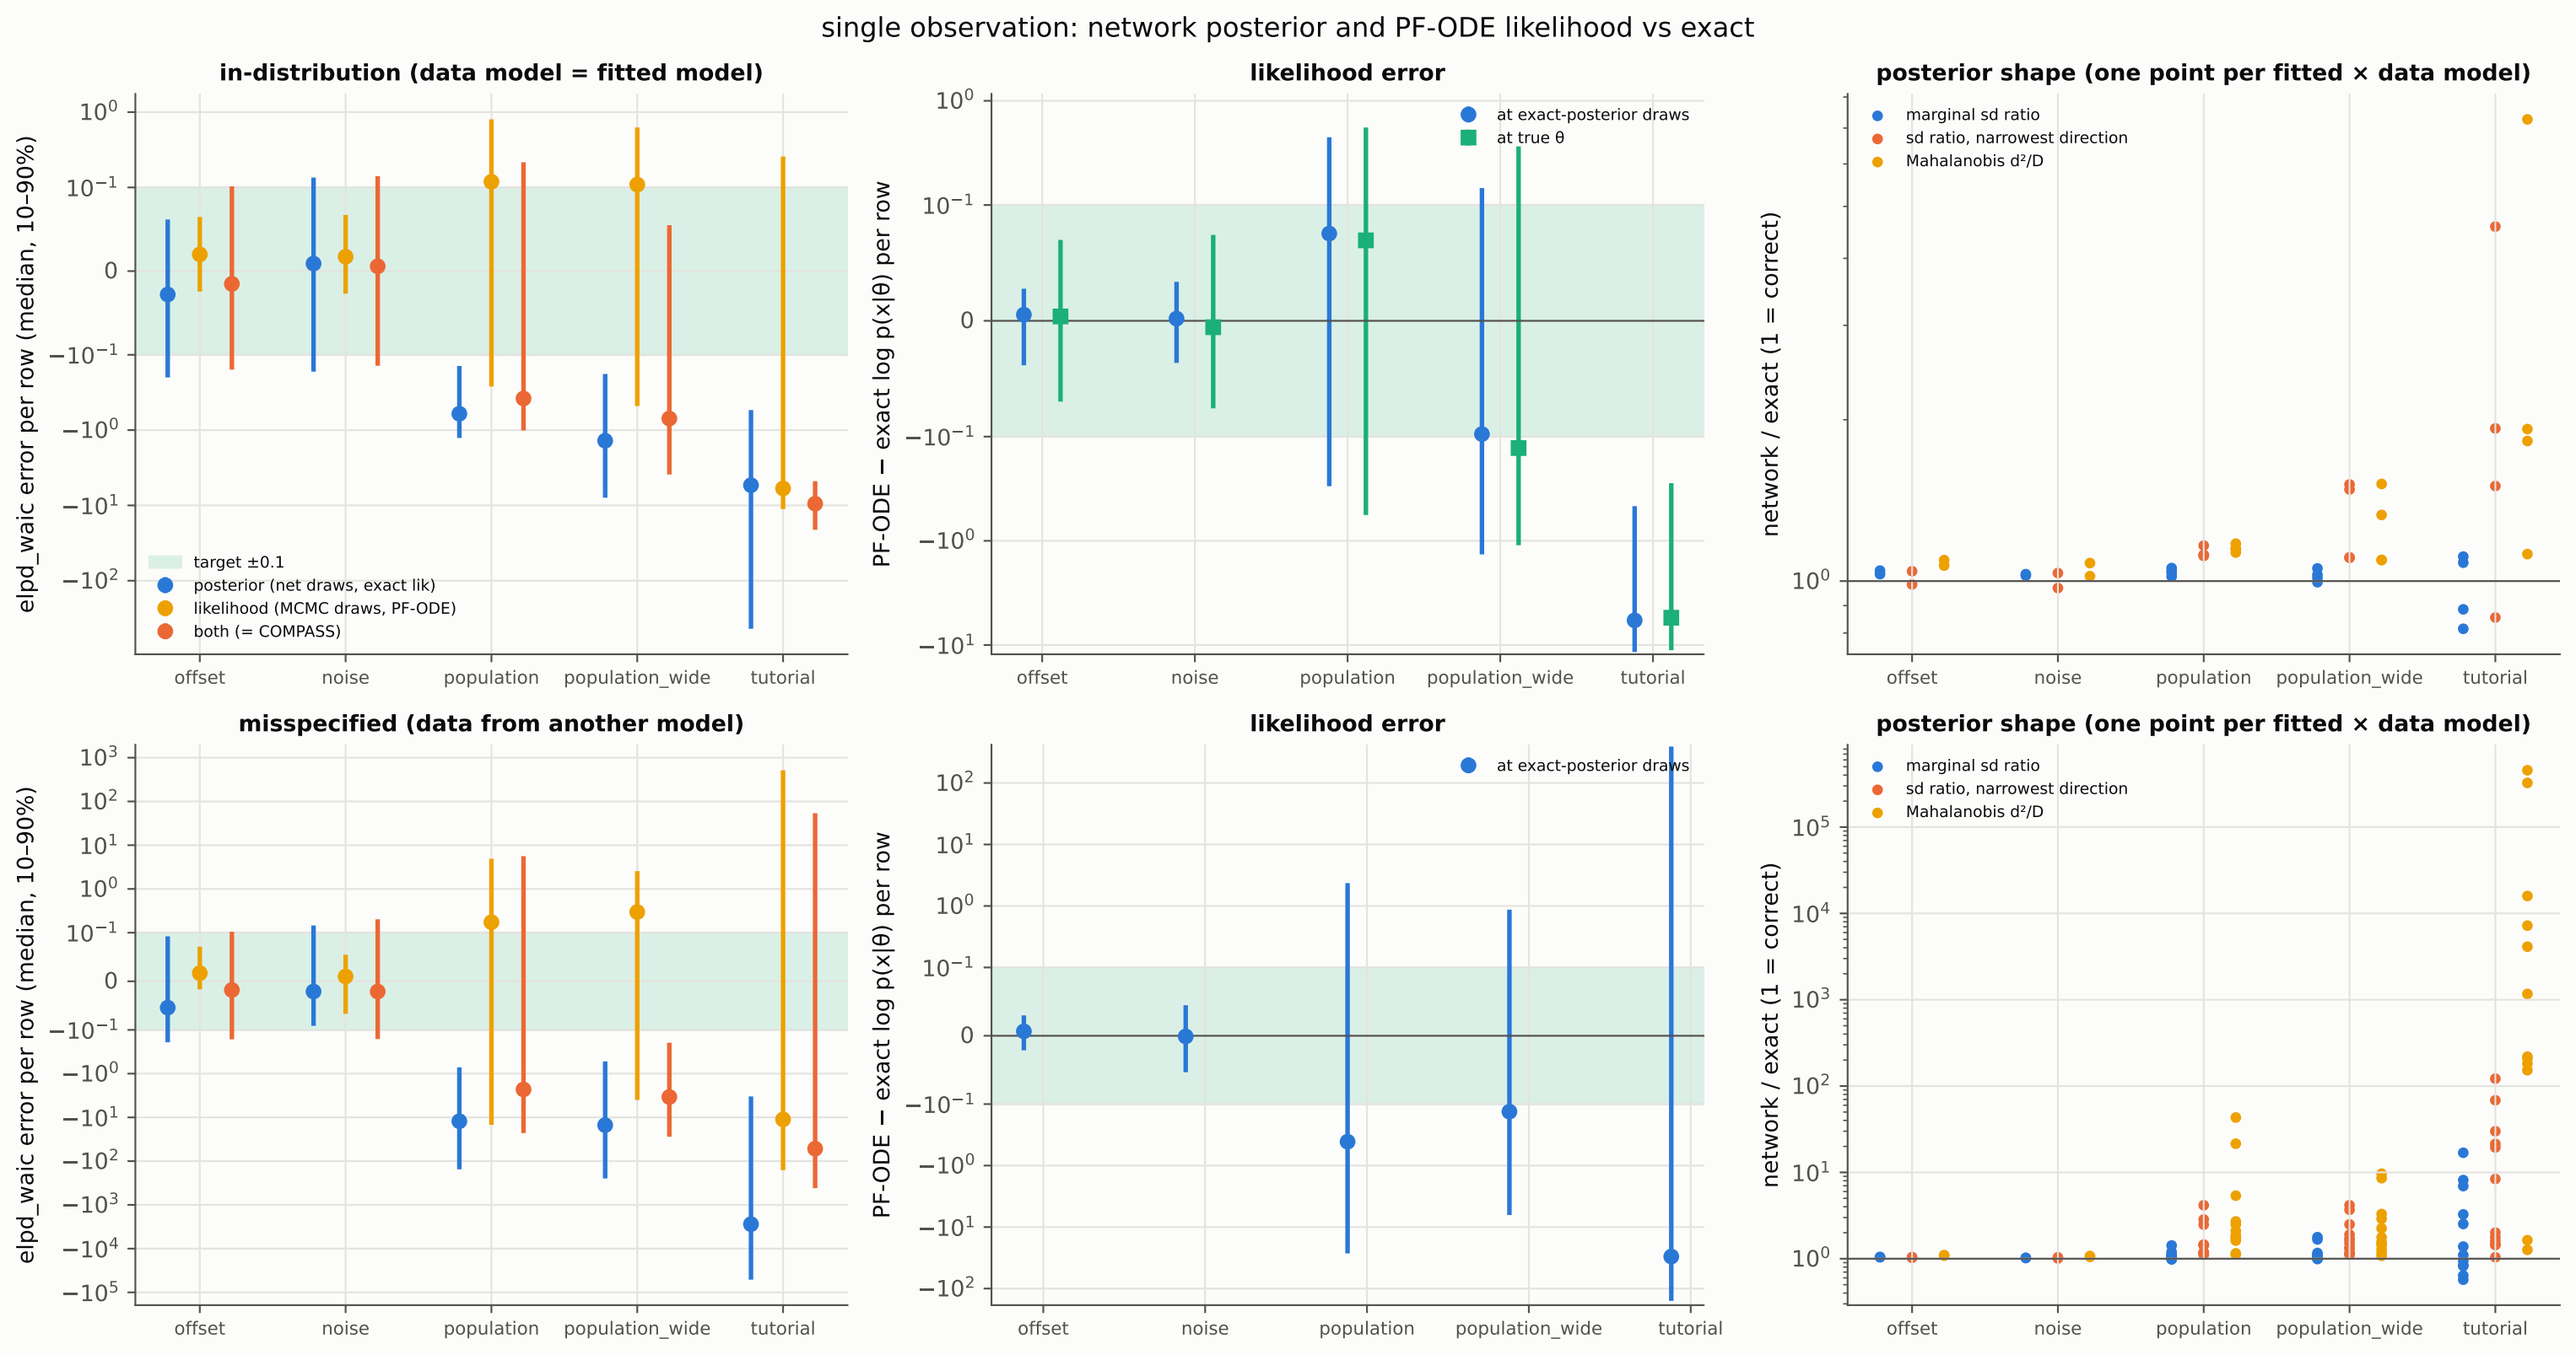
single observation: network posterior and PF-ODE likelihood vs exact
in-distribution (data model = fitted model)
likelihood error
posterior shape (one point per fitted × data model)
misspecified (data from another model)
likelihood error
posterior shape (one point per fitted × data model)
elpd_waic error per row (median, 10–90%)
PF-ODE − exact log p(x|θ) per row
network / exact (1 = correct)
target ±0.1
posterior (net draws, exact lik)
likelihood (MCMC draws, PF-ODE)
both (= COMPASS)
at exact-posterior draws
at true θ
marginal sd ratio
sd ratio, narrowest direction
Mahalanobis d²/D
offset
noise
population
population_wide
tutorial