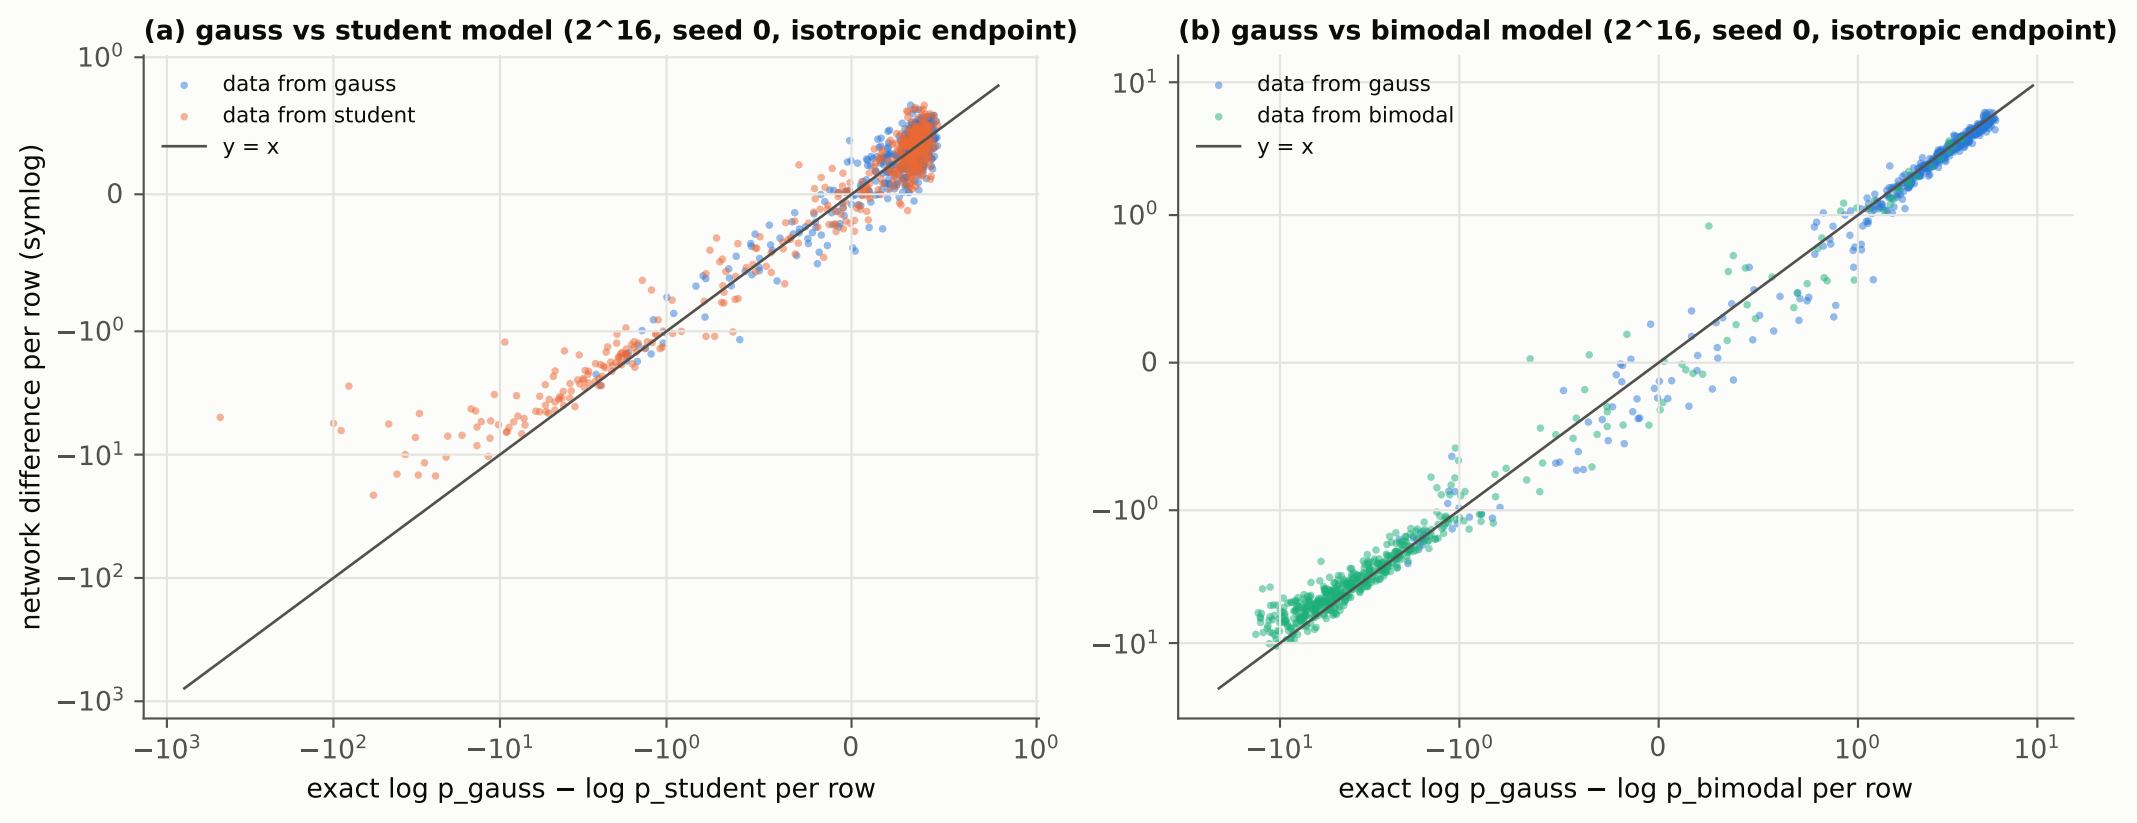

(a) gauss vs student model (2^16, seed 0, isotropic endpoint)
data from gauss
data from student
y = x
network difference per row (symlog)
exact log p_gauss − log p_student per row
(b) gauss vs bimodal model (2^16, seed 0, isotropic endpoint)
data from gauss
data from bimodal
y = x
exact log p_gauss − log p_bimodal per row