


Atividade 30/09/2026 Aula-006

André Perin Geraldo - RA: 24017529-2

Heitor Henrique Scramim de Freitas - RA: 24190382-2

1)

a)

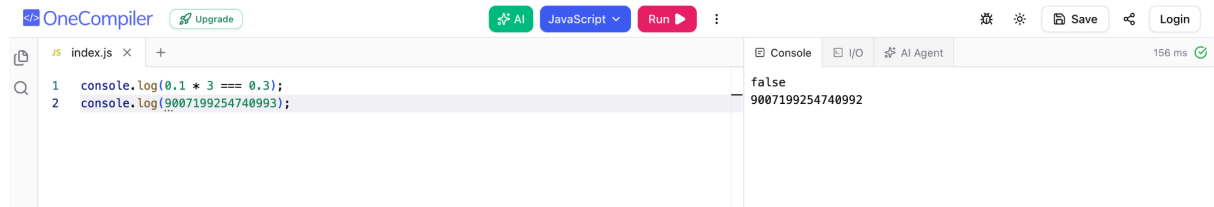

The screenshot shows the OneCompiler JavaScript console. The code in the editor is:


```
1 console.log(0.1 * 3 === 0.3);
2 console.log(9007199254740993);
```

The console output shows:

```
false
9007199254740992
```

b) Nunca

Corrigido

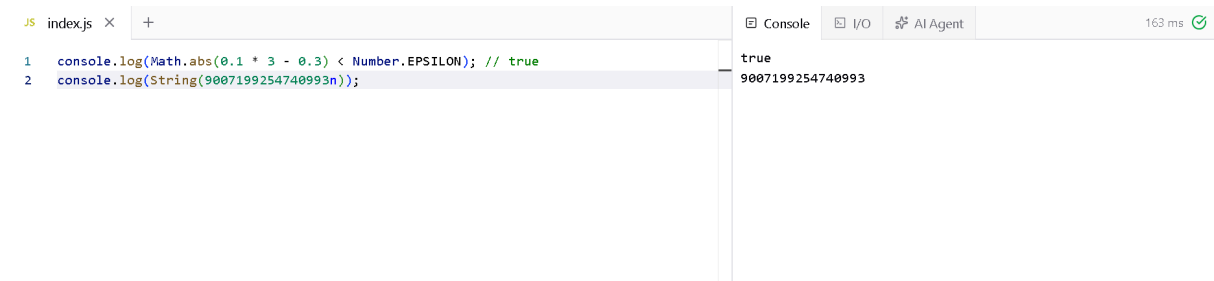

The screenshot shows the OneCompiler JavaScript console with the corrected code:


```
1 console.log(Math.abs(0.1 * 3 - 0.3) < Number.EPSILON); // true
2 console.log(String(9007199254740993n));
```

The console output shows:

```
true
9007199254740993
```

2)

a)

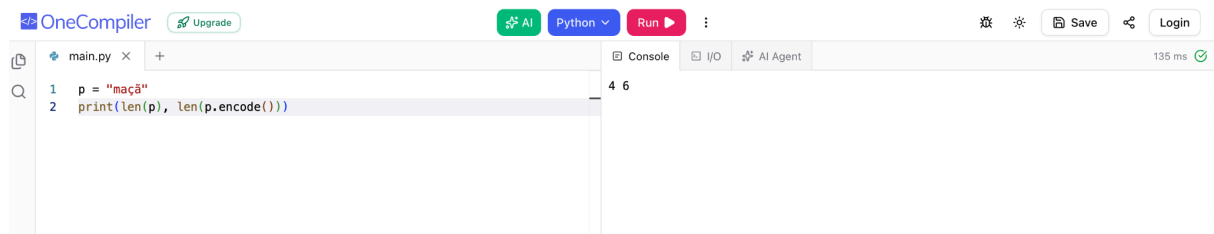

The screenshot shows the OneCompiler Python console. The code in the editor is:

```
1 p = "maçã"
2 print(len(p), len(p.encode()))
```


The console output shows:

```
4 6
```

b) Nunca

3)

a)

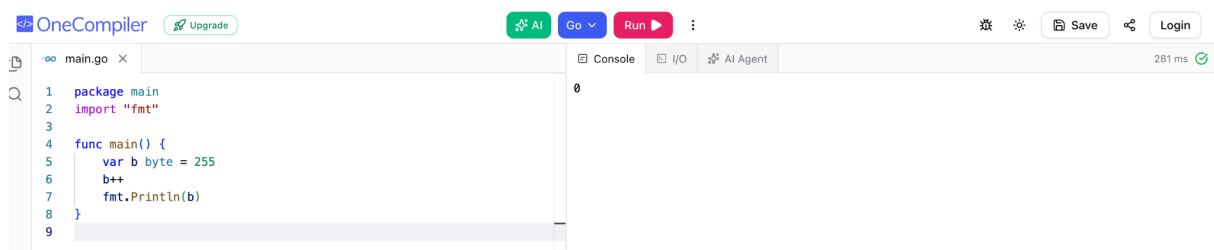

The screenshot shows the OneCompiler Go console. The code in the editor is:

```
1 package main
2 import "fmt"
3
4 func main() {
5     var b byte = 255
6     b++
7     fmt.Println(b)
8 }
9
```

The console output shows:

```
0
```

b) Nunca

Corrigido

main.go

```
1 package main
2
3 import (
4     "fmt"
5     "math"
6 )
7
8 func main() {
9     var a int = 255
10    a++
11    fmt.Println(a)
12
13    var b byte = 255
14    if b < math.MaxUint8 {
15        b++
16    } else {
17        fmt.Println("overflow evitado")
18    }
19    fmt.Println(b)
20 }
```

Console

I/O

AI Agent

281 ms

256
overflow evitado
255

4)

a)

Main.java

```
1 import java.util.*;
2
3 public class Main {
4     public static void main(String[] args) {
5         int[] v = new int[3];
6         System.out.println(v[0]);
7         System.out.println(v[3]);
8     }
9 }
```

Console

I/O

AI Agent

Exit 1

Exception in thread "main" 0
java.lang.ArrayIndexOutOfBoundsException: Index 3 out of
bounds for length 3
at Main.main(Main.java:7)

Debug this error

b) Execução

Corrigido

Main.java

```
1 public class Main {
2     public static void main(String[] args) {
3         int[] v = new int[3];
4         System.out.println(v[0]); // 0
5         System.out.println(v[v.length - 1]); // 0 (último índice válido é 2)
6     }
7 }
```

Console

I/O

AI Agent

836 ms

0
0

5)
a)

HelloWorld.rs ×

```
1 fn main() {
2   let s = String::from("oi");
3   let t = s;
4   println!("{}", s, t);
5 }
```

Console I/O AI Agent Exit 1

```
error[E0382]: borrow of moved value: `s`
--> HelloWorld.rs:4:19
|
2 | let s = String::from("oi");
|   - move occurs because `s` has type `String`, which
|   does not implement the `Copy` trait
3 | let t = s;
|   - value moved here
4 | println!("{}", s, t);
|               ^ value borrowed here after move
|
help: consider cloning the value if the performance cost is
    acceptable
3 | let t = s.clone();
|           ++++++++

error: aborting due to 1 previous error

For more information about this error, try `rustc --explain E0382`.
```

b) Compilação

Corrigido

HelloWorld.rs ×

```
1 fn main() {
2   let s = String::from("oi");
3   let t = s.clone();
4   println!("{}", s, t);
5   let s2 = String::from("oi");
6   let t2 = &s2;
7   println!("{}", s2, t2);
8 }
```

Console I/O AI Agent 281 ms ✓

```
oi oi
oi oi
```

6)
a)

Main.c × +

```
1 #include <stdio.h>
2 int main()
3 {
4   union { int i; float f; } u;
5   u.f = 1.0f;
6   printf("%d\n", u.i);
7
8 }
```

Console I/O AI Agent 167 ms ✓

```
1065353216
```

b) Nunca

Corrigido

Main.c × +

```
1 #include <stdio.h>
2
3 int main(void) {
4   union { int i; float f; } u;
5   u.f = 1.0f;
6   printf("%f\n", u.f);
7   return 0;
8 }
```

Console I/O AI Agent 207 ms ✓

```
1.000000
```

