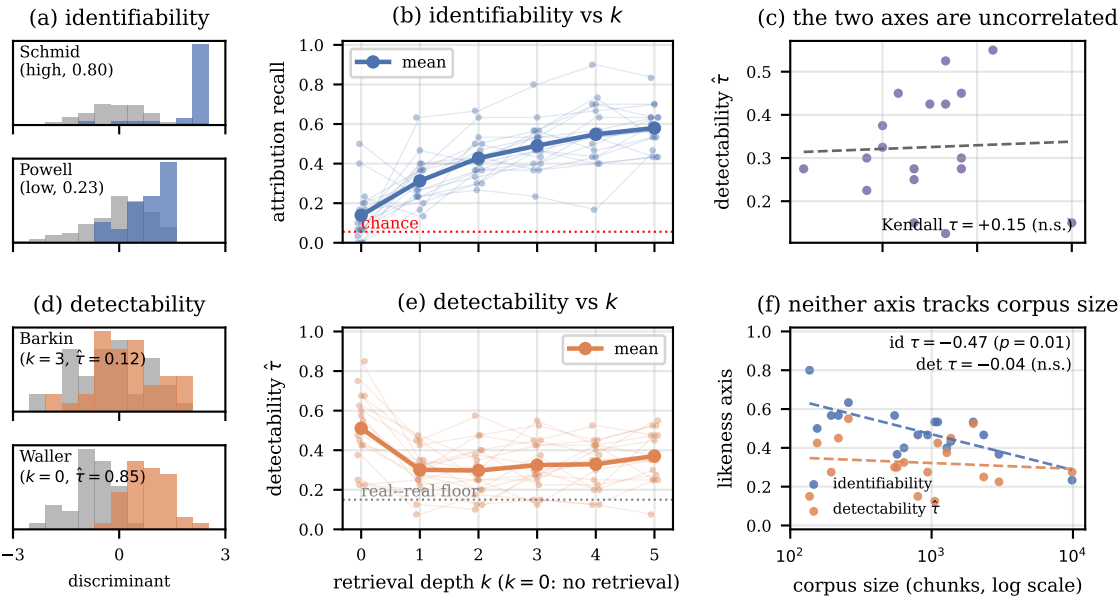
(a) identifiability
Schmid
(high, 0.80)
Powell
(low, 0.23)
(b) identifiability vs k
attribution recall
mean
chance
(c) the two axes are uncorrelated
detectability $\hat{\tau}$
Kendall $\tau = +0.15$ (n.s.)
(d) detectability
Barkin
($k = 3$, $\hat{\tau} = 0.12$)
Waller
($k = 0$, $\hat{\tau} = 0.85$)
discriminant
(e) detectability vs k
detectability $\hat{\tau}$
mean
real–real floor
retrieval depth k ($k = 0$: no retrieval)
(f) neither axis tracks corpus size
likeness axis
id $\tau = -0.47$ ($p = 0.01$)
det $\tau = -0.04$ (n.s.)
identifiability
detectability $\hat{\tau}$
corpus size (chunks, log scale)