

Question_4:

TCS Interview Question

Question description

Ravi participated in TCS off campus interview at reputed institution, one of the technical question he has to complete with in the given time, where you need to sort the array in the waveform. There might be multiple possible output of the program, the following pattern output is appreciated.

Function Description


This is a simple method of solving this question which contains basic 2 steps and they are as follow

Step : 1 – Sort the array in ascending order.



Step : 2 – Swap all adjacent elements of the array

Let us consider the input array be {3, 6, 5, 10, 7, 20}. After sorting, we get {3, 5, 6, 7, 10, 20}. After swapping adjacent elements, we get {5, 3, 7, 6, 20, 10}.

Brute Force Method : Step 1

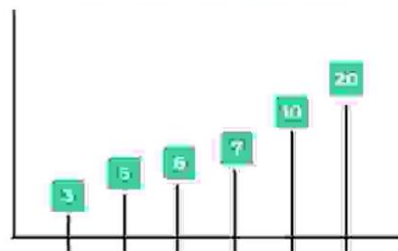

Brute Force Method : Step 2

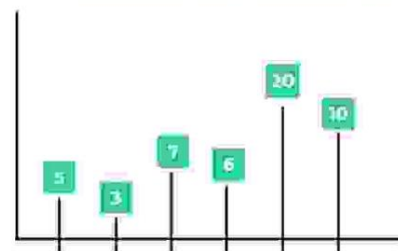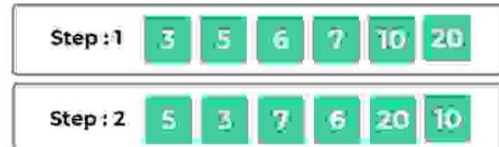

Constraints

0<=n<100

0<=arr[i]<1000

Input Format

First line contains the value of n that is the total number of elements in the array.

Second line contains the space separated elements of array.

Output Format

Output contains only one line that is only the resultant array in the wave form fashion.

Logical Test Cases

Test Case 1
INPUT (STDIN)
6
3 6 5 10 7 20
EXPECTED OUTPUT
5 3 7 6 20 10

Test Case 2
INPUT (STDIN)
8
10 5 6 3 2 20 98 80
EXPECTED OUTPUT
3 2 6 5 20 10 98 80

Mandatory Test Cases

Test Case 1
KEYWORD
int array[n]

Test Case 2
KEYWORD
for(int i=0;i<n;i++)

Test Case 3
KEYWORD
if(array[i]>array[j])

Complexity Test Cases

Test Case 1
CYCLOMATIC COMPLEXITY
7

Test Case 2
TOKEN COUNT
225

Test Case 3
NLOC
38

Code:

```
1  /*
2  Question_4:
3  Sort the array in ascending order and then swap every
4  adjacent pair of elements to form the waveform.
5  */
6
7  #include <iostream>
8  using namespace std;
9
10 int main()
11 {
12     int n;
13     cin >> n;
14     int array[n];
15
16     for(int i=0;i<n;i++)
17     {
18         cin >> array[i];
19     }
20     for(int i=0;i<n;i++)
21     {
22         for(int j=i+1;j<n;j++)
23         {
24             if(array[i]>array[j])
25             {
26                 int temp = array[i];
27                 array[i] = array[j];
28                 array[j] = temp;
29             }
30         }
31     }
```

```
32     for(int i=0;i<n-1;i+=2)
33     {
34         int temp = array[i];
35         array[i] = array[i+1];
36         array[i+1] = temp;
37     }
38     for(int i=0;i<n;i++)
39     {
40         cout << array[i];
41         if(i<n-1)
42             cout << " ";
43     }
44     return 0;
45 }
```

Output:

Test Case_1:

```
6
3 6 5 10 7 20
5 3 7 6 20 10
PS C:\Users\Prabin Yadav\
```

Test Case_2:

```
8
10 5 6 3 2 20 98 80
3 2 6 5 20 10 98 80
PS C:\Users\Prabin Yadav\
```