



Input Schema

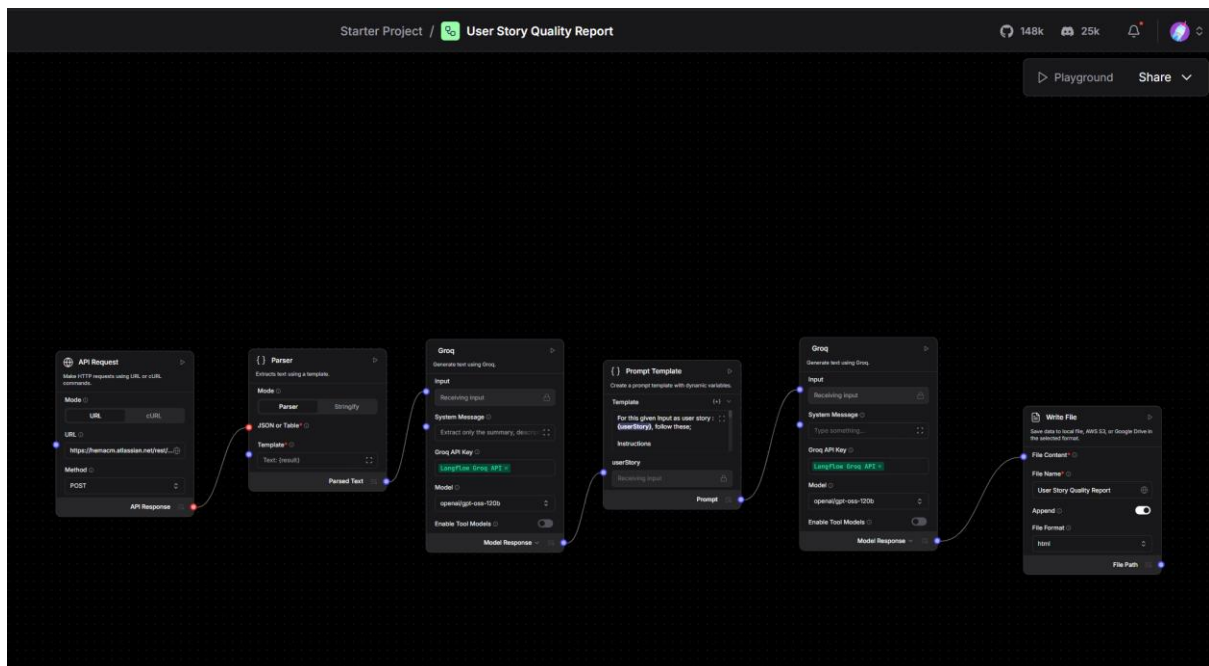

1. Click on “Share” at the top right corner -> Click “API Access” to get the below screen.

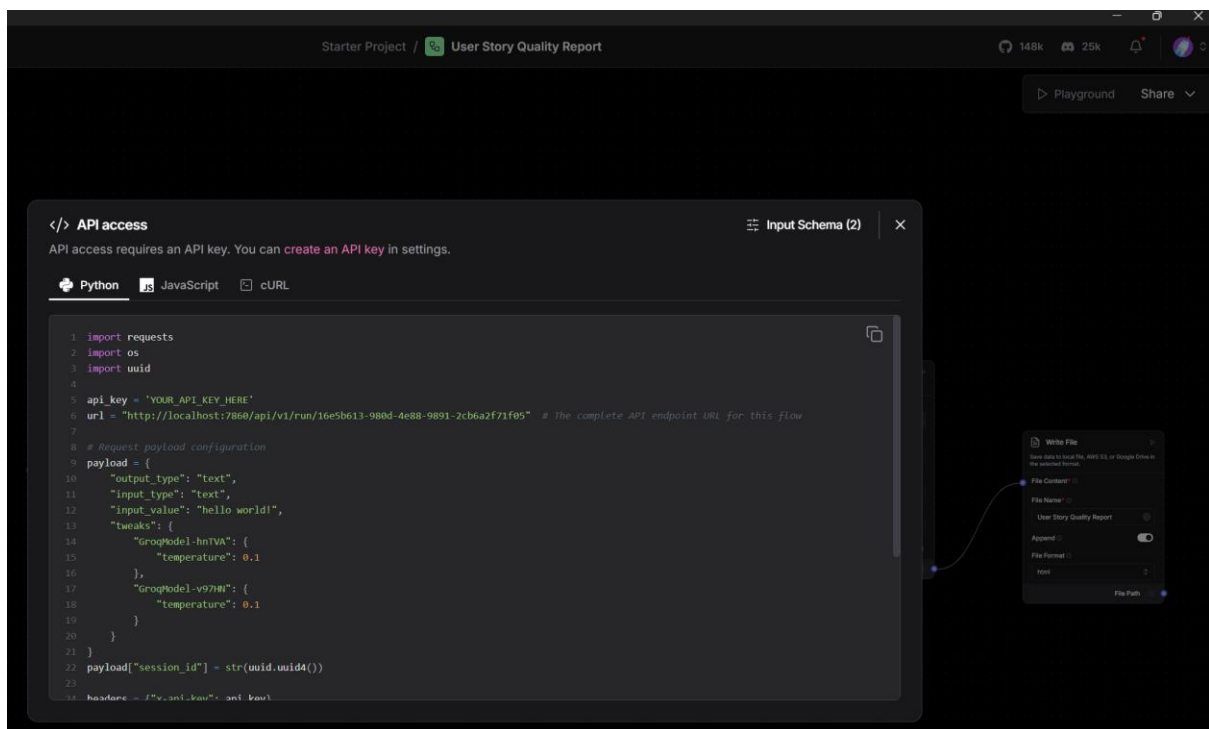

2. Click on “Input Schema” to get the below view.

 **Input Schema**

✕

Endpoint Name

An alternative name to run the endpoint

Expose API

Select which component fields to expose as inputs in this flow's API schema.

API Request

⌵

Expose Input	Field Name	Description	Current Value
	Mode	Enable cURL mode to populate fields from a cURL command.	URLcURL
	URL	Enter the URL for the request.	https://hemacm.atlassian.net/rest/api/...
	Method	The HTTP method to use.	POST⌵
	Body	The body to send with the request as a dictionary (for POST, PATCH, PUT).	 Open table
	Headers	The headers to send with the request	 Open table
	Timeout	The timeout to use for the request.	30 + -
Whether to follow HTTP redirects. WARNING: Enabling redirects			

3. Expose the input parameter of the required parameter by turning on or off the eye icon.

</> API access

Input Schema (1)



API access requires an API key. You can [create an API key](#) in settings.



Python



JavaScript



cURL

```
1 import requests
2 import os
3 import uuid
4
5 api_key = 'YOUR_API_KEY_HERE'
6 url = "http://localhost:7860/api/v1/run/16e5b613-980d-4e88-9891-2cb6a2f71f05" # The complete API endpoint URL for this flow
7
8 # Request payload configuration
9 payload = {
10     "output_type": "text",
11     "input_type": "text",
12     "input_value": "hello world!",
13     "tweaks": {
14         "APIRequest-QqTuZ": {
15             "mode": "URL"
16         }
17     }
18 }
19 payload["session_id"] = str(uuid.uuid4())
20
21 headers = {"x-api-key": api_key}
22
23 try:
24     # Send API request
```