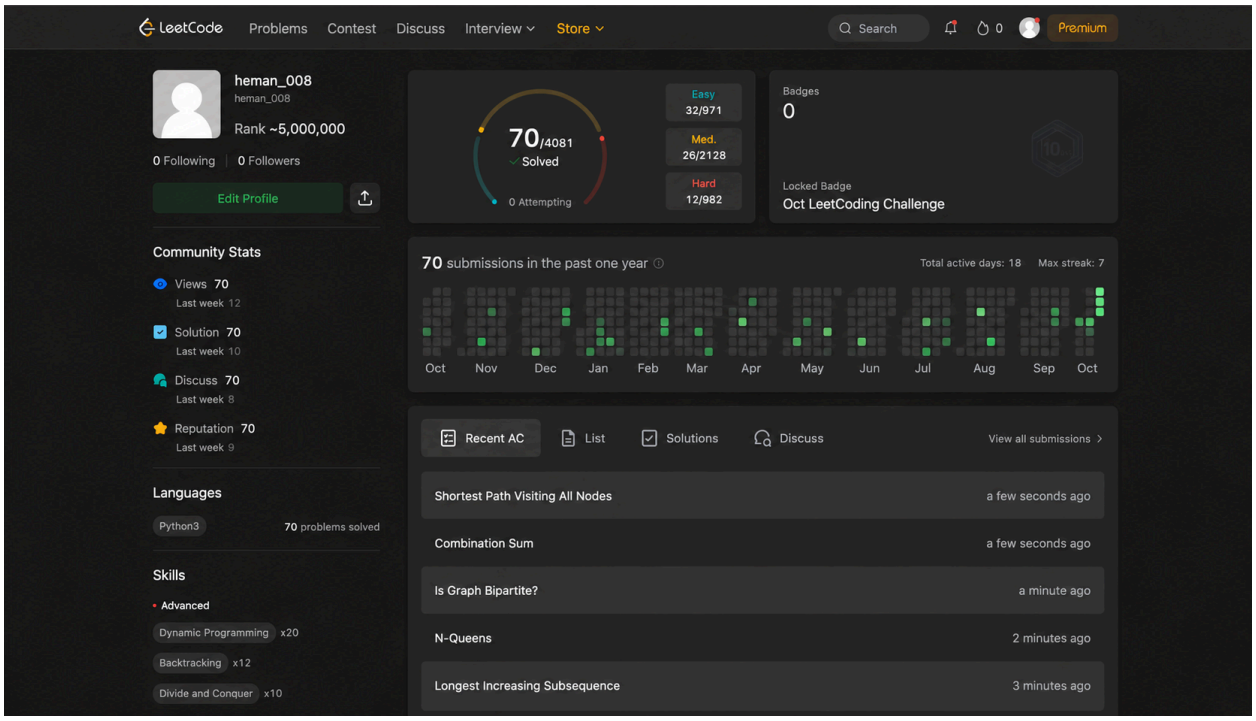
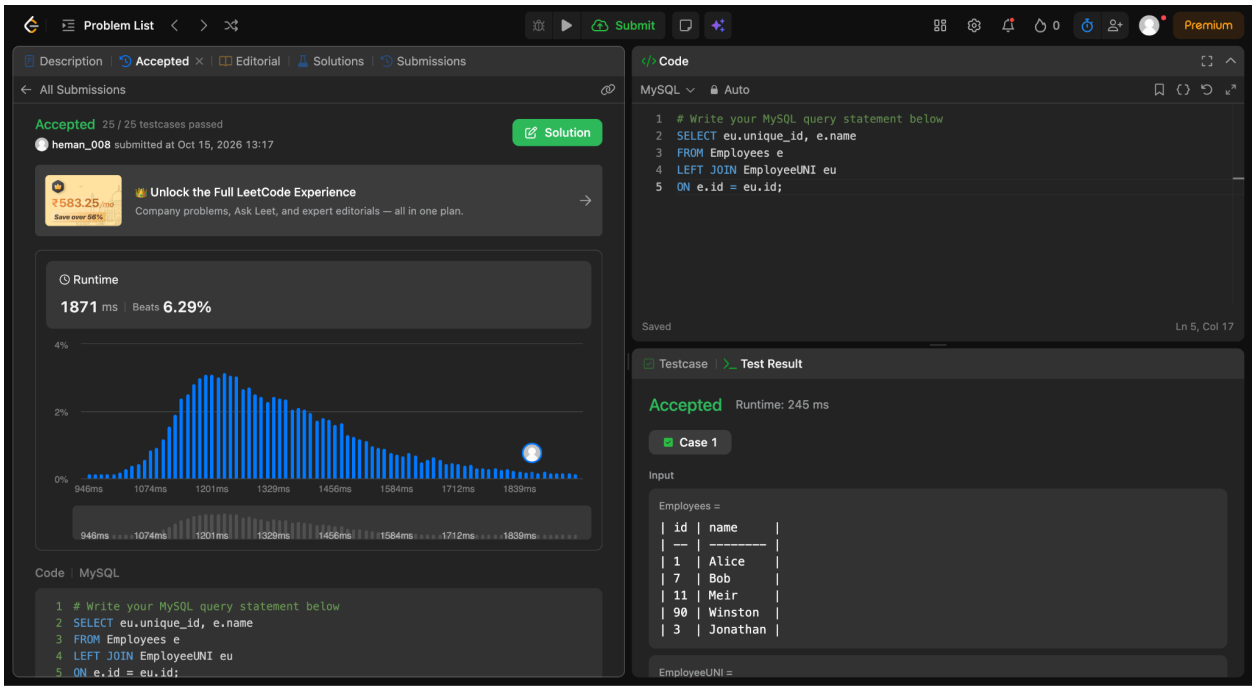
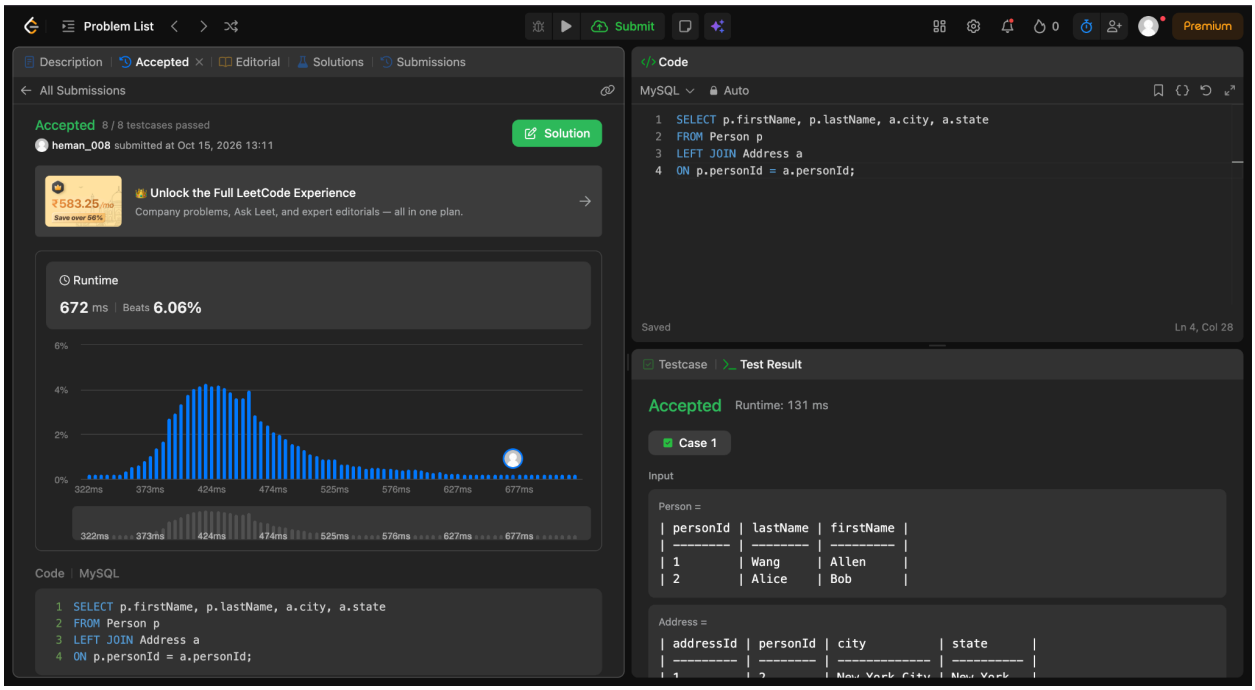
Name: Heman  Roll no.- 25WU0102097  Section: AIML Rhinos
Mail id: heman.batra_2029@woxsen.edu.in

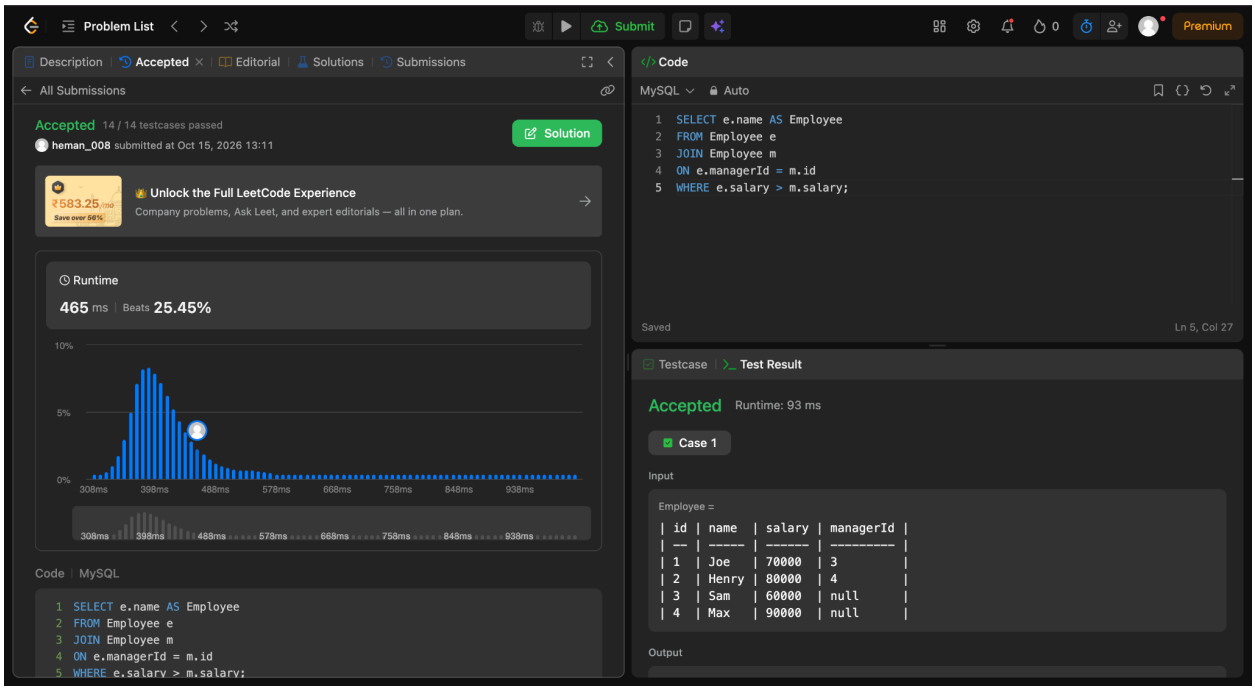
1. LeetCode Profile

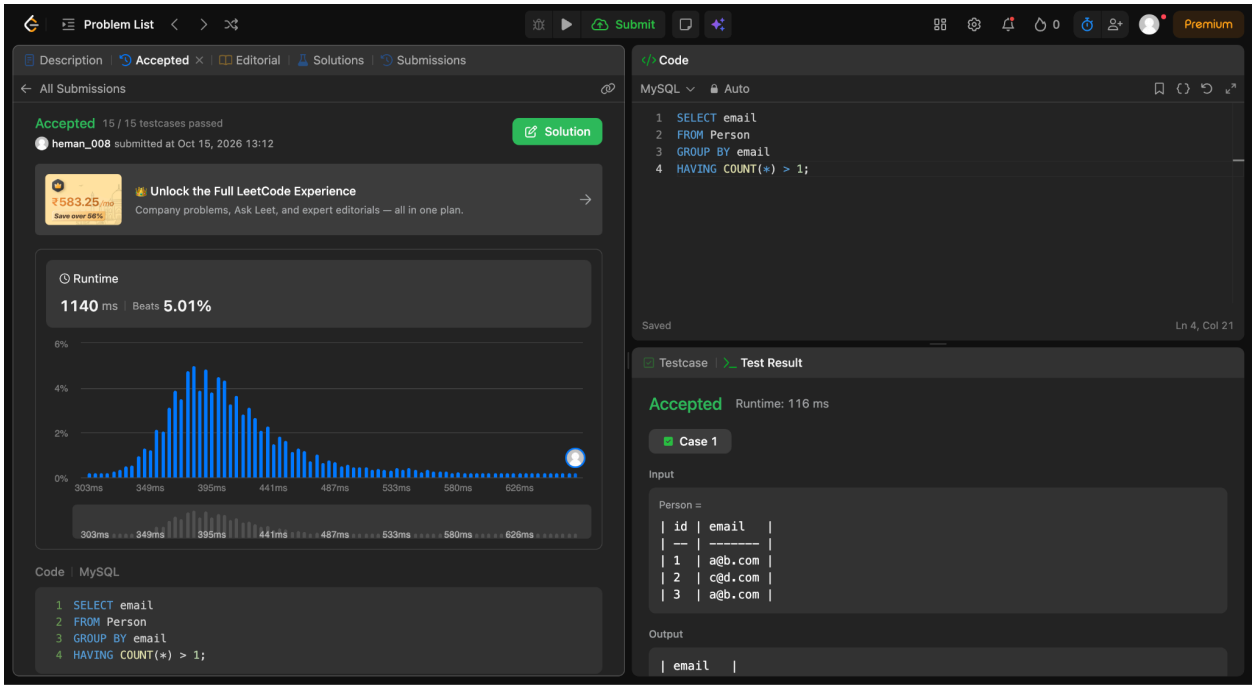


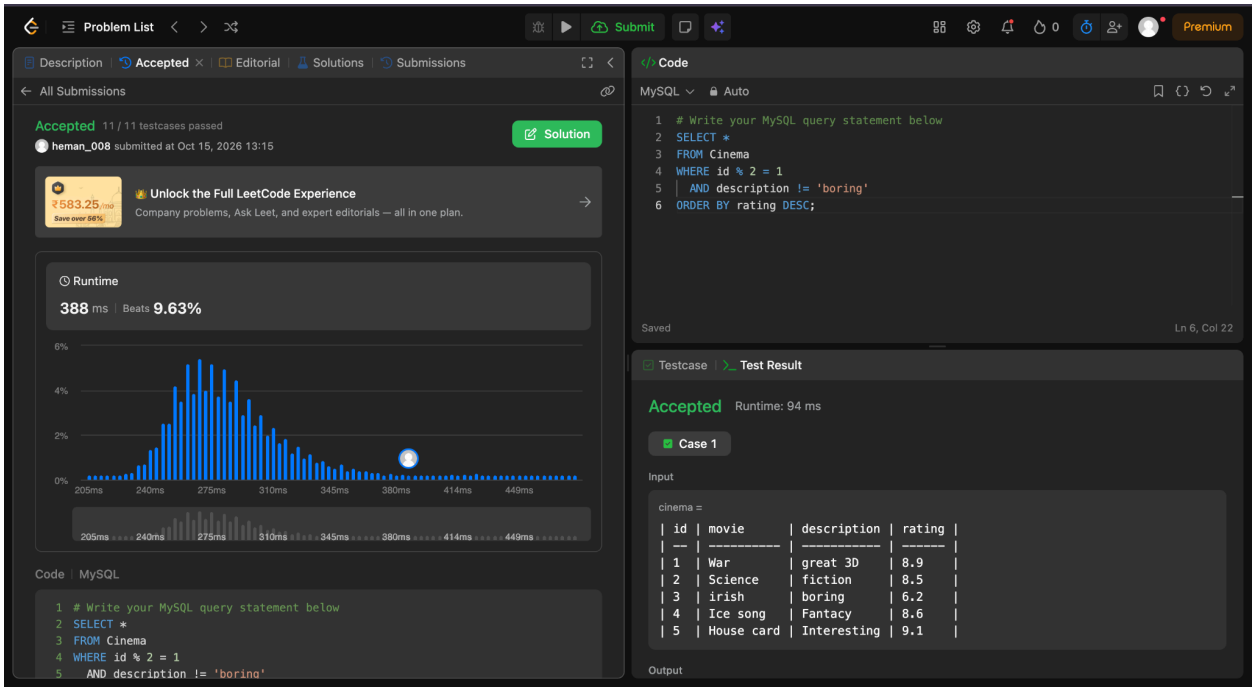

2. Solutions

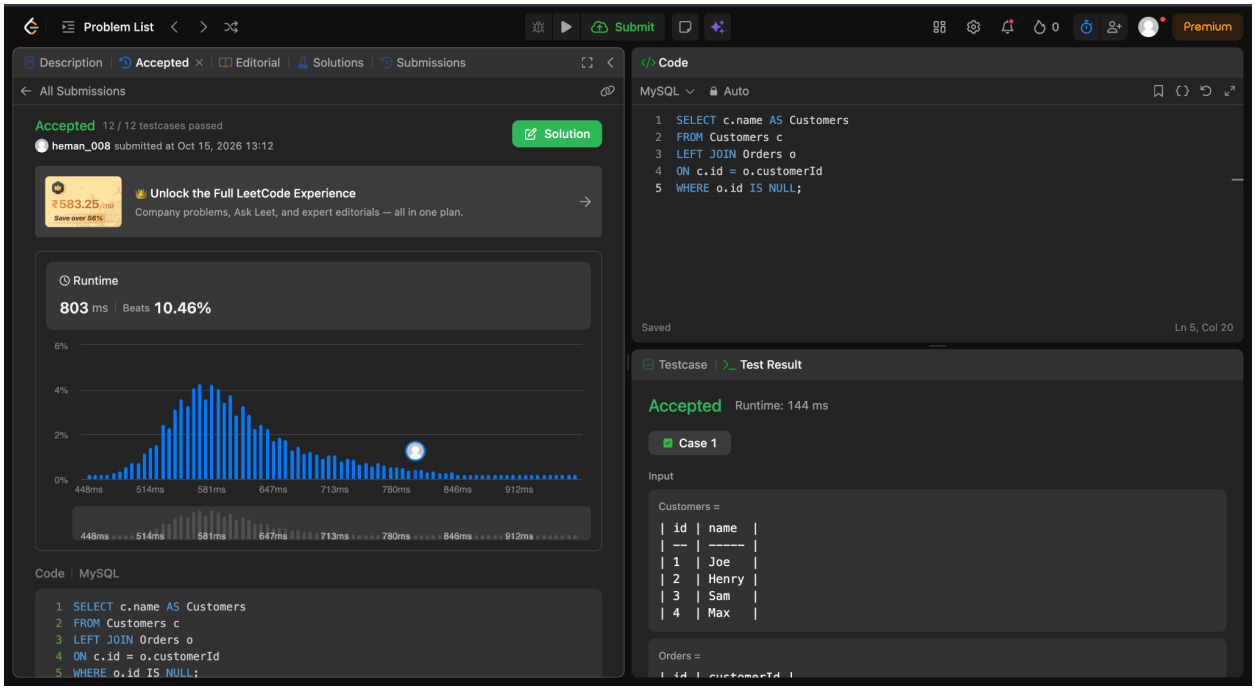


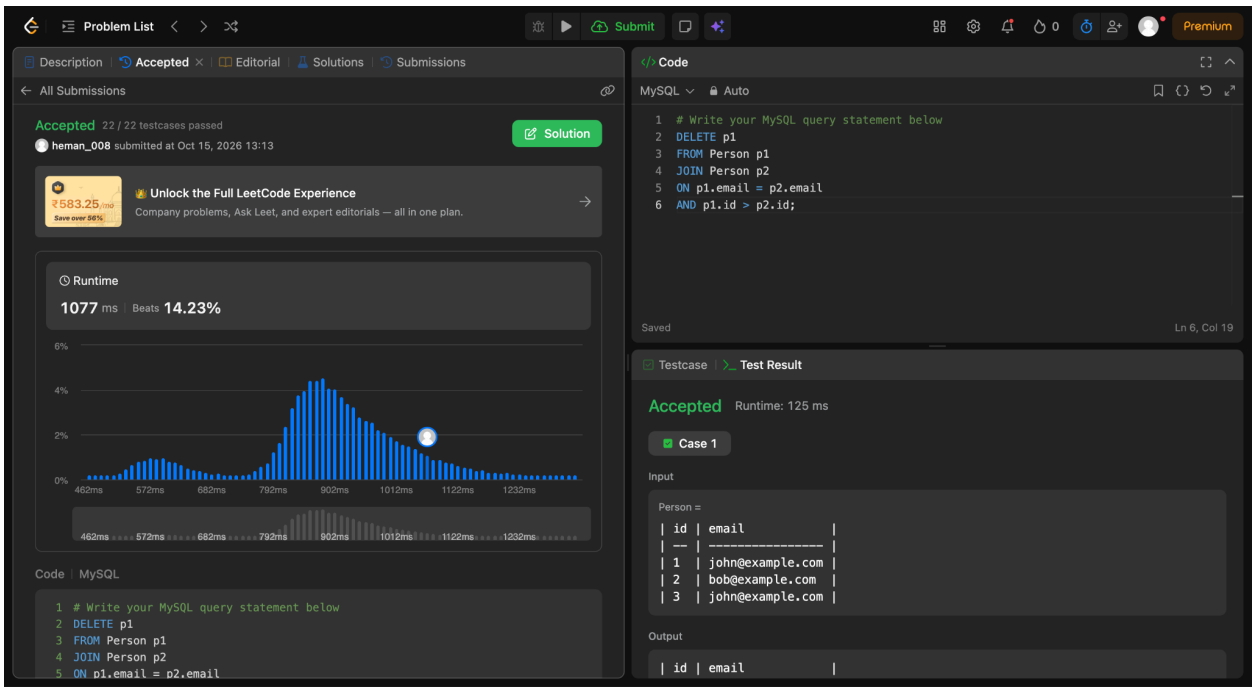

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 8 / 8 testcases passed
heman_008 submitted at Oct 15, 2026 13:11
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
672 ms | Beats 6.06%
Code | MySQL
1 SELECT p.firstName, p.lastName, a.city, a.state
2 FROM Person p
3 LEFT JOIN Address a
4 ON p.personId = a.personId;
Code
MySQL Auto
Saved
Ln 4, Col 28
Testcase | Test Result
Accepted Runtime: 131 ms
Case 1
Input
Person =
| personId | lastName | firstName |
| 1 | Wang | Allen |
| 2 | Alice | Bob |
Address =
| addressId | personId | city | state |

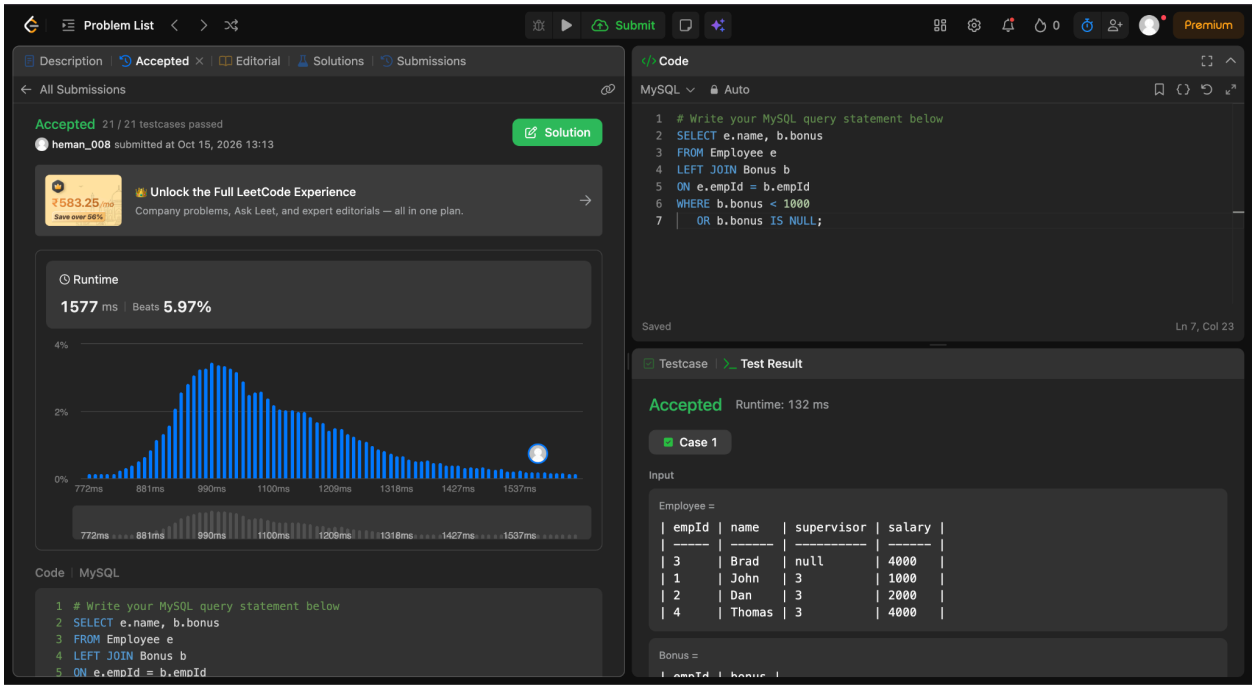

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 14 / 14 testcases passed
heman_008 submitted at Oct 15, 2026 13:11
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
465 ms | Beats 25.45%
Code | MySQL
1 SELECT e.name AS Employee
2 FROM Employee e
3 JOIN Employee m
4 ON e.managerId = m.id
5 WHERE e.salary > m.salary;
Code
MySQL Auto
Saved
Ln 5, Col 27
Testcase | Test Result
Accepted Runtime: 93 ms
Case 1
Input
Employee =
| id | name | salary | managerId |
| 1 | Joe | 70000 | 3 |
| 2 | Henry | 80000 | 4 |
| 3 | Sam | 60000 | null |
| 4 | Max | 90000 | null |
Output

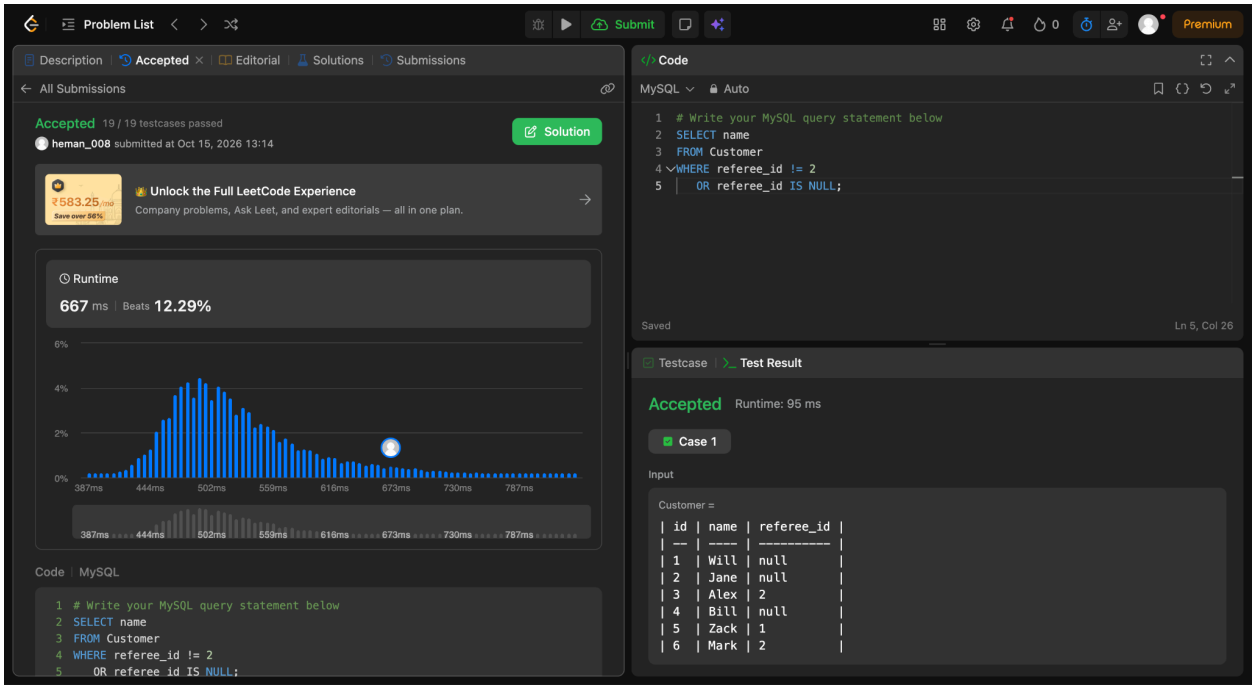

Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 15 / 15 testcases passed
heman_008 submitted at Oct 15, 2026 13:12
Solution
₹583.25/mo
Save over 56%
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1140 ms | Beats 5.01%
6%
4%
2%
0%
303ms 349ms 395ms 441ms 487ms 533ms 580ms 626ms
Code | MySQL
1 SELECT email
2 FROM Person
3 GROUP BY email
4 HAVING COUNT(*) > 1;
Code
MySQL Auto
1 SELECT email
2 FROM Person
3 GROUP BY email
4 HAVING COUNT(*) > 1;
Saved
Ln 4, Col 21
Testcase | Test Result
Accepted Runtime: 116 ms
Case 1
Input
Person =
| id | email |
| -- | ----- |
| 1 | a@b.com |
| 2 | c@d.com |
| 3 | a@b.com |
Output
| email |

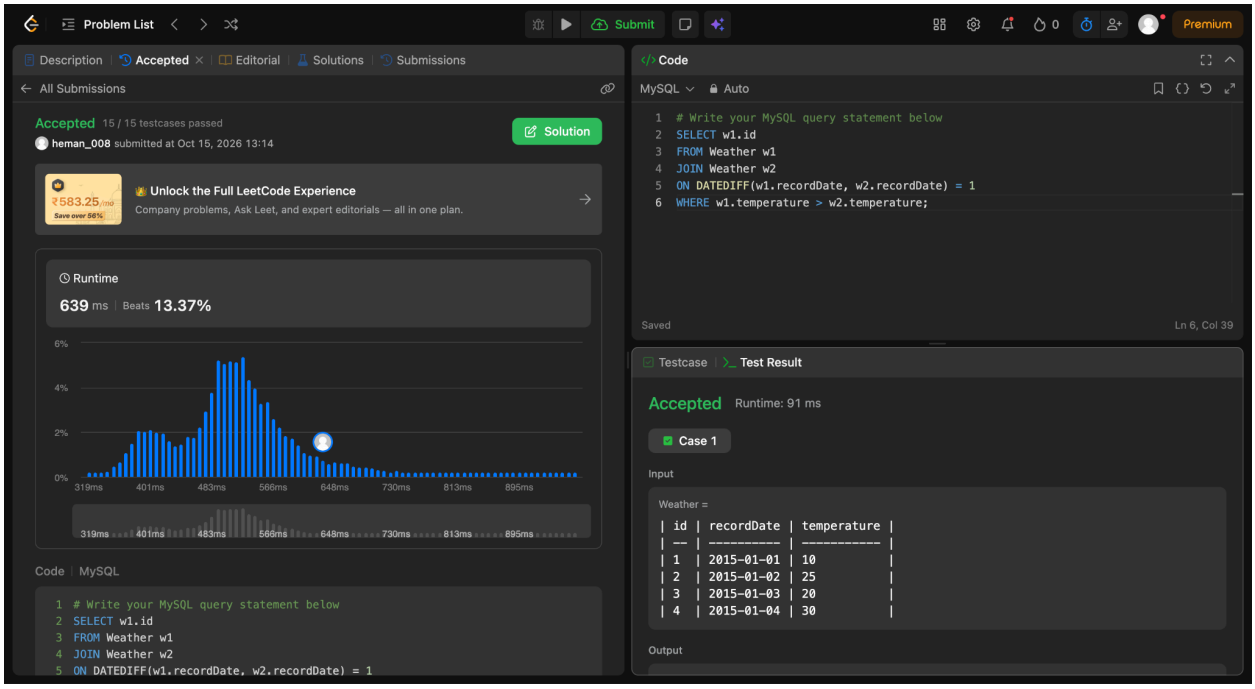

Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 11 / 11 testcases passed
heman_008 submitted at Oct 15, 2026 13:15
Solution
₹583.25/mo
Save over 56%
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
388 ms | Beats 9.63%
6%
4%
2%
0%
205ms 240ms 275ms 310ms 345ms 380ms 414ms 449ms
Code | MySQL
1 # Write your MySQL query statement below
2 SELECT *
3 FROM Cinema
4 WHERE id % 2 = 1
5 AND description != 'boring'
Code
MySQL Auto
1 # Write your MySQL query statement below
2 SELECT *
3 FROM Cinema
4 WHERE id % 2 = 1
5 AND description != 'boring'
6 ORDER BY rating DESC;
Saved
Ln 6, Col 22
Testcase | Test Result
Accepted Runtime: 94 ms
Case 1
Input
cinema =
| id | movie | description | rating |
| -- | ----- | ----------- | ------ |
| 1 | War | great 3D | 8.9 |
| 2 | Science | fiction | 8.5 |
| 3 | irish | boring | 6.2 |
| 4 | Ice song | Fantacy | 8.6 |
| 5 | House card | Interesting | 9.1 |
Output

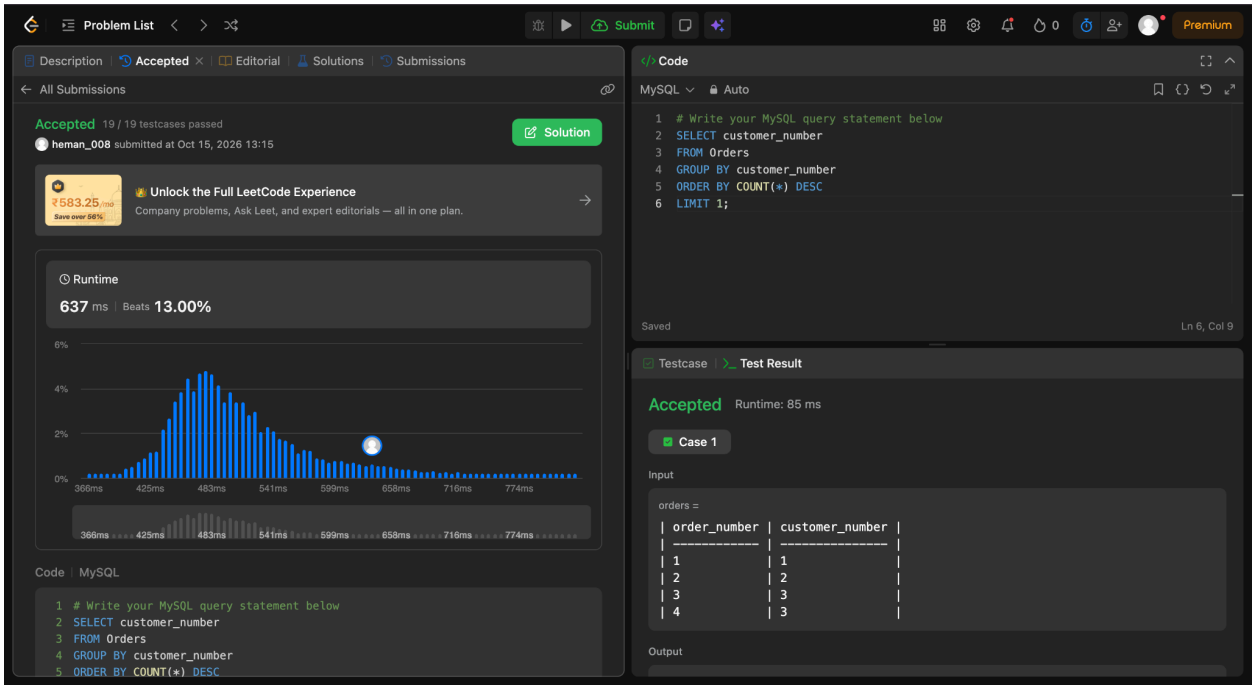

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 12 / 12 testcases passed
heman_008 submitted at Oct 15, 2026 13:12
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
803 ms | Beats 10.46%
Code | MySQL
1 SELECT c.name AS Customers
2 FROM Customers c
3 LEFT JOIN Orders o
4 ON c.id = o.customerId
5 WHERE o.id IS NULL;
Code
MySQL
Auto
Saved
Ln 5, Col 20
Testcase
Test Result
Accepted
Runtime: 144 ms
Case 1
Input
Customers =
| id | name |
| -- | ----- |
| 1 | Joe |
| 2 | Henry |
| 3 | Sam |
| 4 | Max |
Orders =

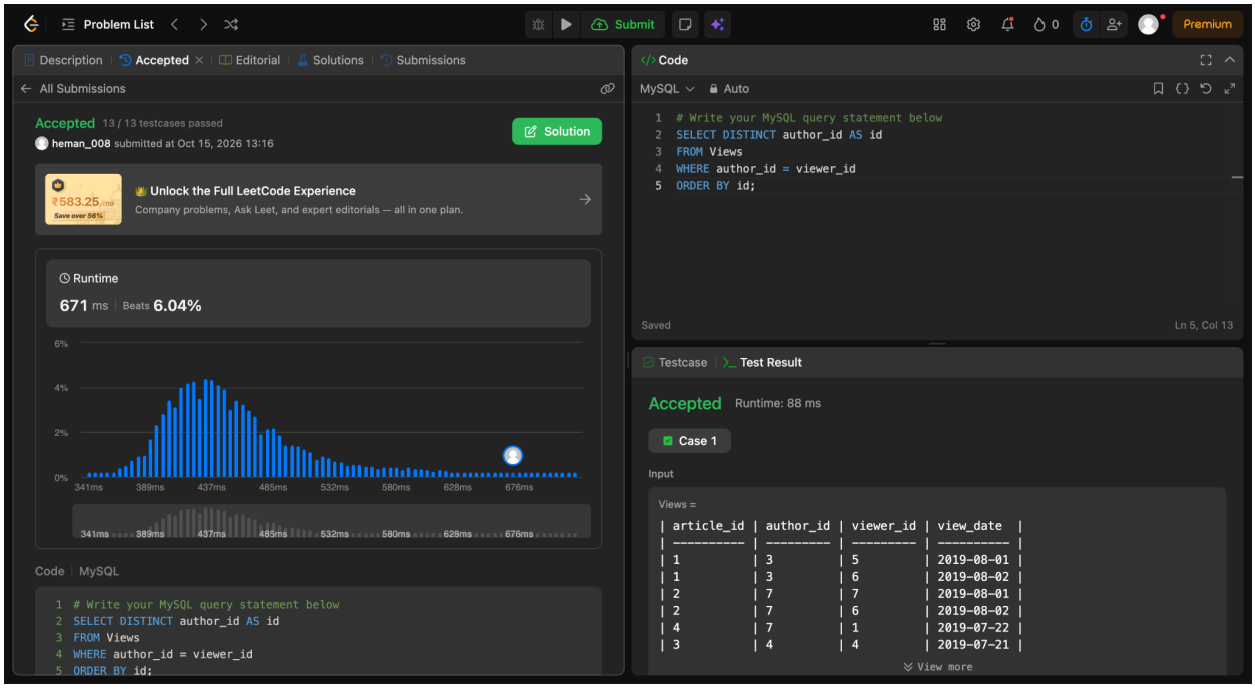

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 22 / 22 testcases passed
heman_008 submitted at Oct 15, 2026 13:13
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1077 ms | Beats 14.23%
Code | MySQL
1 # Write your MySQL query statement below
2 DELETE p1
3 FROM Person p1
4 JOIN Person p2
5 ON p1.email = p2.email
6 AND p1.id > p2.id;
Code
MySQL
Auto
Saved
Ln 6, Col 19
Testcase
Test Result
Accepted
Runtime: 125 ms
Case 1
Input
Person =
| id | email |
| -- | ---------- |
| 1 | john@example.com |
| 2 | bob@example.com |
| 3 | john@example.com |
Output
| id | email |

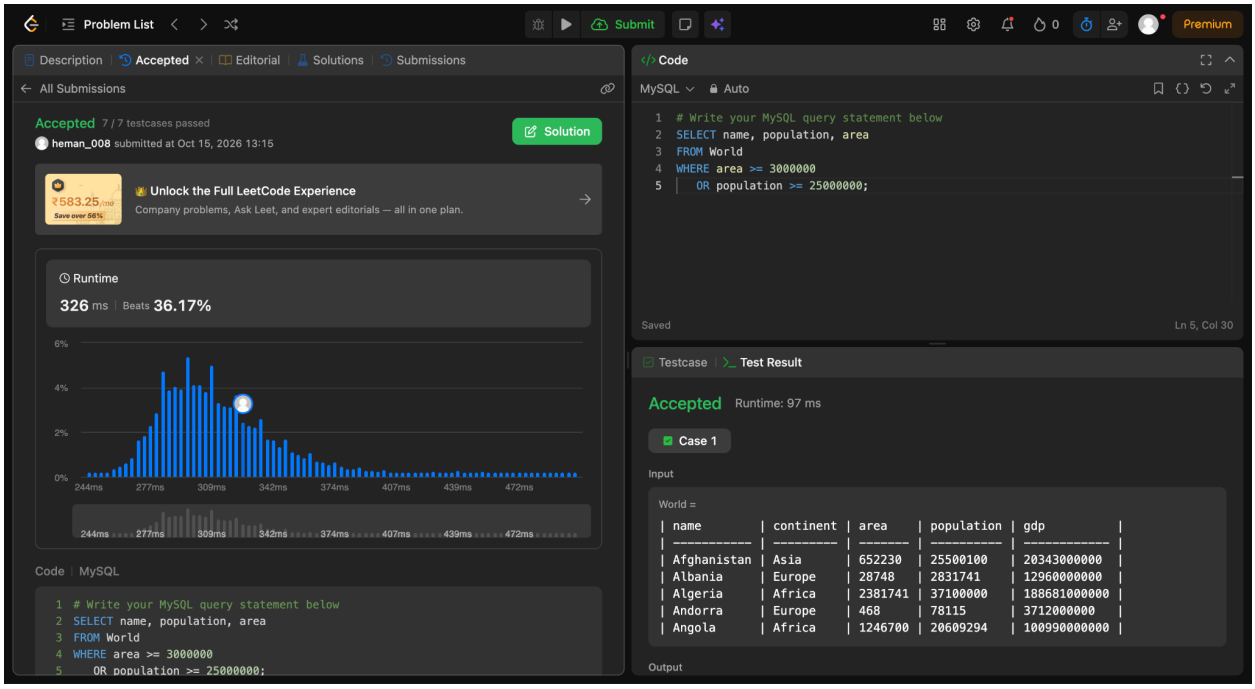

Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 21 / 21 testcases passed
heman_008 submitted at Oct 15, 2026 13:13
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1577 ms | Beats 5.97%
Code | MySQL
# Write your MySQL query statement below
SELECT e.name, b.bonus
FROM Employee e
LEFT JOIN Bonus b
ON e.empId = b.empId
Code
MySQL
Auto
# Write your MySQL query statement below
SELECT e.name, b.bonus
FROM Employee e
LEFT JOIN Bonus b
ON e.empId = b.empId
WHERE b.bonus < 1000
OR b.bonus IS NULL;
Saved
Ln 7, Col 23
Testcase | Test Result
Accepted Runtime: 132 ms
Case 1
Input
Employee =
| empId | name | supervisor | salary |
| 3 | Brad | null | 4000 |
| 1 | John | 3 | 1000 |
| 2 | Dan | 3 | 2000 |
| 4 | Thomas | 3 | 4000 |
Bonus =

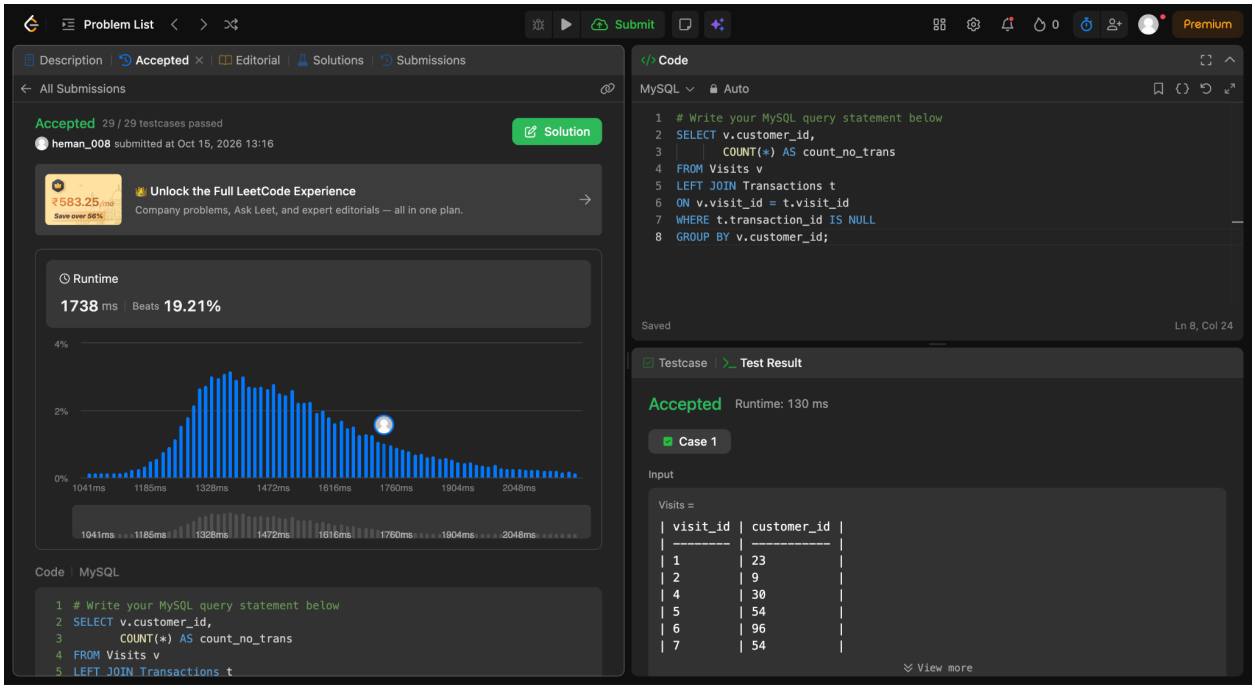

Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 19 / 19 testcases passed
heman_008 submitted at Oct 15, 2026 13:14
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
667 ms | Beats 12.29%
Code | MySQL
# Write your MySQL query statement below
SELECT name
FROM Customer
WHERE referee_id != 2
OR referee_id IS NULL;
Code
MySQL
Auto
# Write your MySQL query statement below
SELECT name
FROM Customer
WHERE referee_id != 2
OR referee_id IS NULL;
Saved
Ln 5, Col 26
Testcase | Test Result
Accepted Runtime: 95 ms
Case 1
Input
Customer =
| id | name | referee_id |
| 1 | Will | null |
| 2 | Jane | null |
| 3 | Alex | 2 |
| 4 | Bill | null |
| 5 | Zack | 1 |
| 6 | Mark | 2 |


Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 15 / 15 testcases passed
heman_008 submitted at Oct 15, 2026 13:14
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
639 ms | Beats 13.37%
Code | MySQL
# Write your MySQL query statement below
SELECT w1.id
FROM Weather w1
JOIN Weather w2
ON DATEDIFF(w1.recordDate, w2.recordDate) = 1
WHERE w1.temperature > w2.temperature;
Saved
Ln 6, Col 39
Testcase | Test Result
Accepted Runtime: 91 ms
Case 1
Input
Weather =
| id | recordDate | temperature |
| 1 | 2015-01-01 | 10 |
| 2 | 2015-01-02 | 25 |
| 3 | 2015-01-03 | 20 |
| 4 | 2015-01-04 | 30 |
Output


Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 19 / 19 testcases passed
heman_008 submitted at Oct 15, 2026 13:15
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
637 ms | Beats 13.00%
Code | MySQL
# Write your MySQL query statement below
SELECT customer_number
FROM Orders
GROUP BY customer_number
ORDER BY COUNT(*) DESC
LIMIT 1;
Saved
Ln 6, Col 9
Testcase | Test Result
Accepted Runtime: 85 ms
Case 1
Input
orders =
| order_number | customer_number |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 3 |
Output


Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 13 / 13 testcases passed
heman_008 submitted at Oct 15, 2026 13:16
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
671 ms | Beats 6.04%
6%
4%
2%
0%
341ms 389ms 437ms 485ms 532ms 580ms 628ms 676ms
Code | MySQL
1 # Write your MySQL query statement below
2 SELECT DISTINCT author_id AS id
3 FROM Views
4 WHERE author_id = viewer_id
5 ORDER BY id;
Code
MySQL
Auto
1 # Write your MySQL query statement below
2 SELECT DISTINCT author_id AS id
3 FROM Views
4 WHERE author_id = viewer_id
5 ORDER BY id;
Saved
Ln 5, Col 13
Testcase | Test Result
Accepted Runtime: 88 ms
Case 1
Input
Views =
| article_id | author_id | viewer_id | view_date |
| 1 | 3 | 5 | 2019-08-01 |
| 1 | 3 | 6 | 2019-08-02 |
| 2 | 7 | 7 | 2019-08-01 |
| 2 | 7 | 6 | 2019-08-02 |
| 4 | 7 | 1 | 2019-07-22 |
| 3 | 4 | 4 | 2019-07-21 |
View more


Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 7 / 7 testcases passed
heman_008 submitted at Oct 15, 2026 13:15
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
326 ms | Beats 36.17%
Code | MySQL
# Write your MySQL query statement below
SELECT name, population, area
FROM World
WHERE area >= 3000000
OR population >= 25000000;
Code
MySQL
Auto
Saved
Ln 5, Col 30
Testcase | Test Result
Accepted Runtime: 97 ms
Case 1
Input
World =
| name | continent | area | population | gdp |
| Afghanistan | Asia | 652230 | 25500100 | 20343000000 |
| Albania | Europe | 28748 | 2831741 | 12960000000 |
| Algeria | Africa | 2381741 | 37100000 | 188681000000 |
| Andorra | Europe | 468 | 78115 | 3712000000 |
| Angola | Africa | 1246700 | 20609294 | 100990000000 |
Output


Problem List
Submit
Premium
Description | Accepted | Editorial | Solutions | Submissions
All Submissions
Accepted 29 / 29 testcases passed
heman_008 submitted at Oct 15, 2026 13:16
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1738 ms | Beats 19.21%
Code | MySQL
# Write your MySQL query statement below
SELECT v.customer_id,
COUNT(*) AS count_no_trans
FROM Visits v
LEFT JOIN Transactions t
ON v.visit_id = t.visit_id
WHERE t.transaction_id IS NULL
GROUP BY v.customer_id;
Code
MySQL
Auto
Saved
Ln 8, Col 24
Testcase | Test Result
Accepted Runtime: 130 ms
Case 1
Input
Visits =
| visit_id | customer_id |
| 1 | 23 |
| 2 | 9 |
| 4 | 30 |
| 5 | 54 |
| 6 | 96 |
| 7 | 54 |
View more